



PARIS MGIDI HOLDINGS
Reg:2018/355022/07
Tax Number: 9624704107

PARIS MGIDI HOLDINGS

1080 Dorkley Section M Ekangala
Bronkhorstspuit
1021

Cell: 079 714 8457

E-mail: parismgidiholdings@gmail.com

To: Department of Justice

38 Kruger Street

Ekangala

Bronkhorstspuit

1020


Quotation

Quote: PMH1806/2025
Date: 2024/05/16

Item	Description	Unit	Price
1	Supply and installation of Steel Sectional Galvanised Water Tank :		R354 825.00
Item 1.1	Capacity - 21.79 kiloliters after municipality line coming into facility		R354 825.00
Item 1.2	Dimensions: Length - 3.66m (3 panels), Width - 2.22m (2 panels), Depth 2.44m (2 panels)		
Item 1.3	The water in the tank must circulate to avoid bacteria		
Item 1.4	Water pump must be connected to tank to boost with water pressure to the building specification on the water pump should be as follows :		
Item 1.4.1	Motor must have a base where it will be mounted under the water tank		
Item 1.4.2	It should be 220 Volts/9A		
Item 1.4.3	H. Max 50m		
Item 1.4.4	H. Min 22m (1.5 KW 2HP)		
Item 1.4.5	Suction H7 m (input 2.2 KW)		
Item 1.5	Pipe works should be as follows :		
Item 1.5.1	(1) One 40mm non return valve to be installed from the inlet side with by-pass from the tank		
Item 1.5.2	(1) One 40mm gate valve on the main line		
Item 1.5.3	(1) One ball valve on the inlet of the tank		
Item 1.5.4	Galvanised 40mm pipes with elbows and tees		
Item 1.6	Electrical		
Item 1.6.1	Pump Should have its own circuit break form the inlet side with by-pass from the tank		
Item 1.6.2	7 Provide the COC		
Item 1.6.3	2.5mm cable with 15A circuit breaker		
Item 1.7	The tank to be placed on the concrete plinth above ground with drain pipe		
Item 1.7.1	Casting of the foundation underground with reinforcing with Y 10MM Bar, 500mm wide x 500mm deep x 3.66m x 3 lines (ribs for support braces)		
Item 1.7.2	Casting of the concrete base above ground with continuation reinforcing from 800mm wide x 500mm high x 3 lines		
Item 1.7.3	Concrete mix strength 25 MPA		
Item 1.7.4	Concrete mix must cure for 10 days after pouring		
Item 1.8	Security		
Item 1.8.1	Install a Cage for the pump		
Item 1.8.2	fencing around the tank with 1.8m palisade fence		
		SUB TOTAL	R354 825.00
		VAT 15%	R53 223.75
		TOTAL	R408 048.75

Delivery After PO 5-7 Weeks for the complete of the Project

Quote Valid for 90 Days

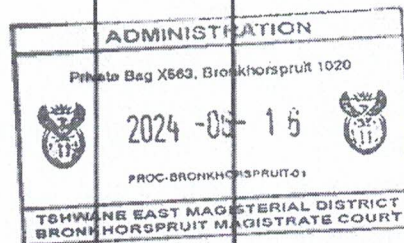

Banking Details:
Bank Name: ABSA
Account Number: 405 8176