

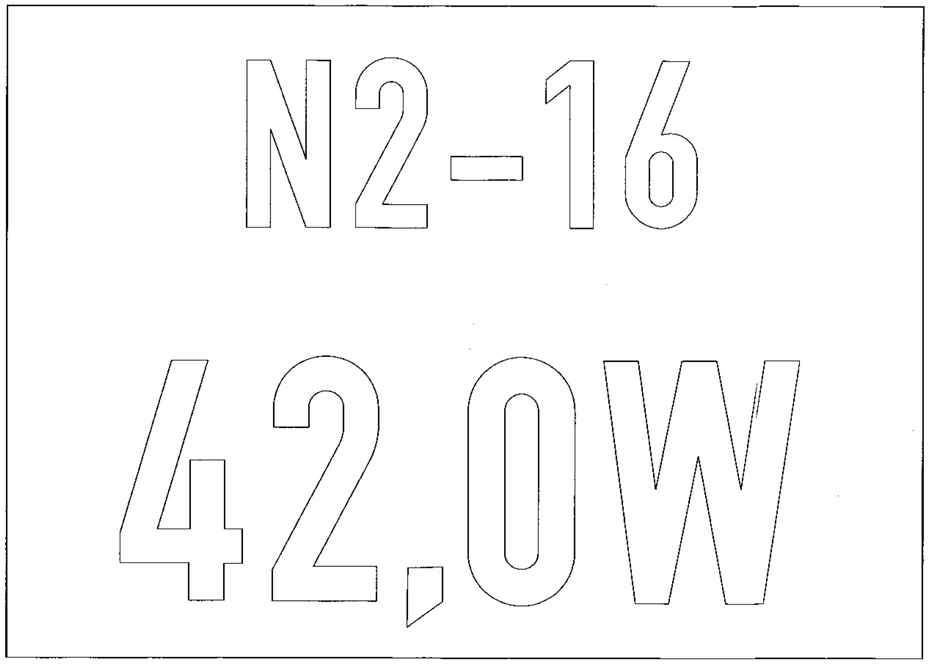


TYPE 1: REFERENCE MARKER BOARD FOR NATIONAL ROADS

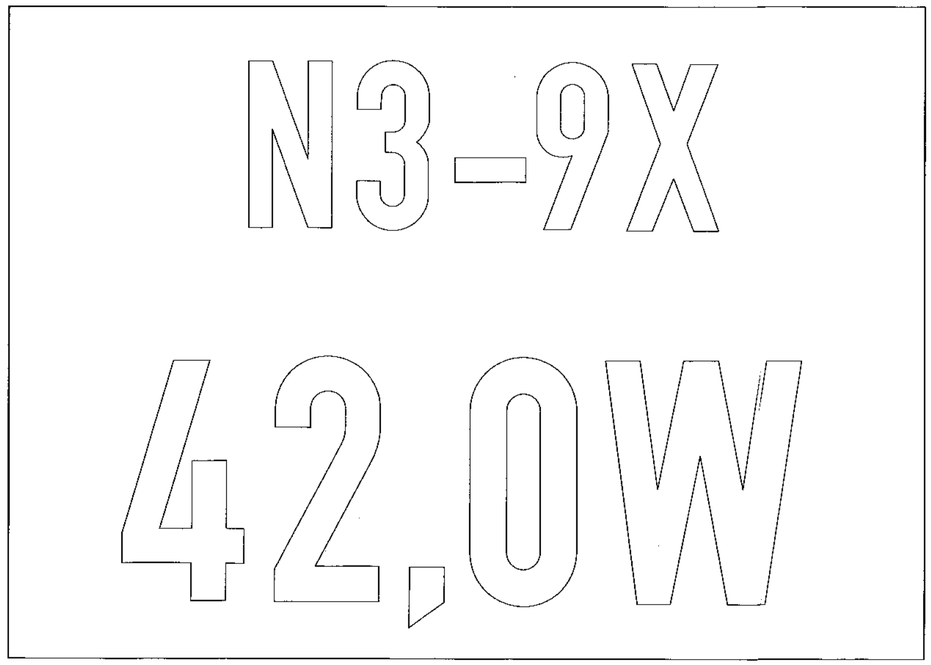

TYPE 2: REFERENCE MARKER BOARD FOR TEMPORARILY PROCLAIMED NATIONAL ROADS

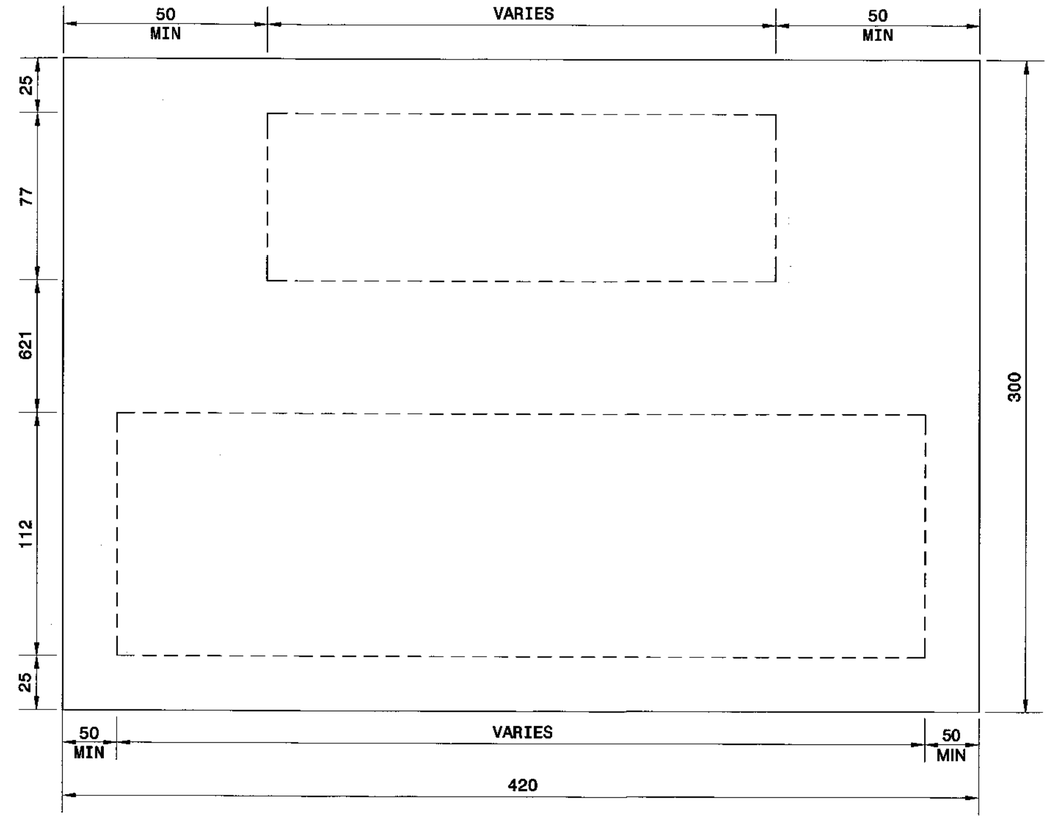

NOTES

1. FOR MOUNTING AND LOCATION DETAILS DRAWING TD-R-RS-200

2. STANDARD SIZES OF REFERENCE MARKER BOARD TO BE 420x300x1.4mm THICK PREPAINTED GALVANISED MILD STEEL PLATE.

3. ALL MARKER BOARDS SHALL BE MANUFACTURED USING CLASS 1 WHITE RETROREFLECTIVE MATERIAL ON A BLUE SEMI-MATT BACKGROUND.

4. THE LEGEND SHALL BE DIN 1451 PART 2 STYLE "A" LETTERING AND NUMBERS SO THAT THE TOP LINE IS 77mm HIGH AND THE BOTTOM LINE IS 112mm HIGH.

5. THE LEGEND SHALL BE ARRANGED AS FOLLOWS -
   TOP LINE -
   "N" FOR NATIONAL ROUTE, AND
   THE APPROPRIATE ROUTE NUMBER e.g. N2 AND
   THE APPROPRIATE SECTION NUMBER e.g. N2-16 (TYPE 1); OR
   THE APPROPRIATE SECTION NUMBER AND AN "X" SUFFIX FOR
   A TEMPORARILY PROCLAIMED NATIONAL ROUTE,
   e.g. N3-9X (TYPE 2)

   BOTTOM LINE -
   KILOMETRE DISTANCE FROM THE START OF A SECTION TO ONE DECIMAL,
   FOR EVERY 0,2km
   AND
   E FOR AN EASTBOUND CARRIAGEWAY
   W FOR A WESTBOUND CARRIAGEWAY
   N FOR A NORTHBOUND CARRIAGEWAY
   S FOR A SOUTHBOUND CARRIAGEWAY.

FOR LATEST VERSION CHECK www.nra.co.za

No.	DATE	VERSION / REVISION	APPROVED
V1	SEPT 2014	ORIGINAL VERSION	

SANRAL TYPICAL DRAWINGS

COPYRIGHT: THIS DRAWING IS PROTECTED IN TERMS OF THE COPYRIGHT ACT No. 98 OF 1978 AND MAY NOT BE REPRODUCED WITHOUT PERMISSION IN WRITING FROM SANRAL.
CONDITIONS FOR USE: CONSULTANTS APPOINTED BY SANRAL SHALL INCORPORATE THE TYPICAL DETAILS HEREON INTO THEIR SPECIFIC DESIGN FOR WHICH THEY WILL ASSUME FULL PROFESSIONAL RESPONSIBILITY. THIS TYPICAL DRAWING MAY NOT BE USED FOR TENDER PURPOSES.

THE SOUTH AFRICAN NATIONAL ROADS AGENCY SOC LTD
Reg. No. 1998/009884/30

HEAD OFFICE
48 Tambotie Avenue
Val de Grace
Pretoria
0184

PO Box 415
Pretoria 0001
South Africa

Tel: (012) 844 8000

APPROVED
DATE: 2015/06/24

TYPICAL DRAWINGS - ROADWORKS

ROAD SIGNS
REFERENCE MARKER BOARD
SHEET 1 OF 2

SANRAL DOC. No. (PDF) 1693736
SANRAL DOC. No. (DWG) 1797388
SANRAL DRAWING No. TD-R-RS-1400-V1