


## Special Notes:-

1. Any Materials, any Brick Qualities, any Expansion Allowances and installation procedures to be confirmed at final design stage.

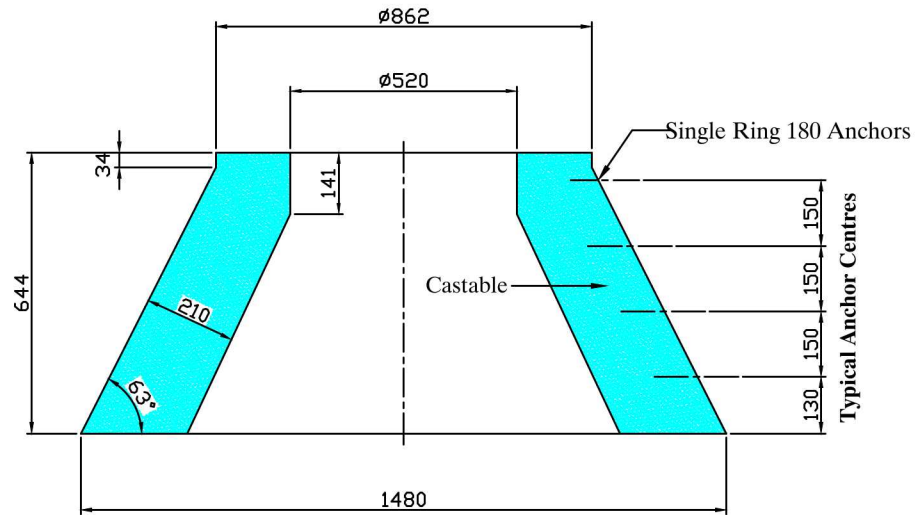

### Typical Castable

Quality=LCAST 1800  
Volume=428.516dm<sup>3</sup>

### Anchors (V Series)

Material= SS 310  $\phi 8$ mm  
Density= 16 per M<sup>2</sup>  
Length= 180  
Radial Position= Every 200mm  
No. Reqd.= 14

Material= SS 310  $\phi 8$ mm  
Density= 25 per M<sup>2</sup>  
Length= 200  
Radial Position= Every 150mm  
No. Reqd.= 66

## Cross Sectional View of Top Cone Section

Mintek TBRC 1500  
Top Cone Section

Drawn:	C.S. 25-09-23	Drawing Number
Scale:	N.T.S	MIN-TBRC-1500-05
Approved:		