











**ANNEXURE B :**  
**SANITARY FITTINGS SCHEDULE**






## BATHROOM FITTING SCHEDULE - OFFICIAL RESIDENCE

Official Residence				
S.NO.	CODE	DESCRIPTION	IMAGE	
1	Overhead Shower	<ul style="list-style-type: none"> <li>consists of: overhead shower, wall outlet</li> <li>shower head size: 360 mm</li> <li>spray type: PowderRain</li> <li>flow rate PowderRain spray at 3 bar: 21 l/min</li> <li>function from: 16,5 l/min</li> <li>maximum flow rate at 3 bar: 21 l/min</li> <li>minimum flow pressure: 2 bar</li> <li>projection: 381 mm</li> <li>middle spray disc: 205 mm</li> <li>frame: metal</li> <li>material spray disc: aluminium</li> <li>spray disc surface: graphite</li> <li>overhead shower removable for cleaning</li> <li>shower head vertically inclinable by 10-30°</li> <li>installation: wall</li> <li>connection thread: G ½</li> <li>connection dimension: DN15</li> <li>not suitable for continuous flow water heaters</li> </ul>		Bassment level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom, Guest Bathroom
2	iBox -concealed	<ul style="list-style-type: none"> <li>suitable for all new shower, bath tub and thermostat finish sets for concealed installation (ShowerSelect Comfort, DuoTurn)</li> <li>in conjunction with adapter plate (# 13588000) compatible with other concealed shower, bath tub and thermostat finish sets</li> <li>material: dezincification brass, EPP foam, heat and sound insulating</li> <li>connection thread: Rp ½</li> <li>connection dimension: DN15</li> <li>rotationally-symmetric installation</li> <li>sound-decoupled installation</li> <li>flexible mounting ring for different mounting situations</li> <li>mounting ring adjustable in 5 mm steps</li> <li>mounting ring suitable for front and rear installation</li> <li>no shortening necessary thanks to sliding sleeve</li> <li>support aid for the spirit level</li> <li>integrated spirit level for correct horizontal and vertical alignment</li> <li>sealing foil permanently fixed</li> <li>power supply: M16 flexible conduit</li> <li>minimum mounting depth: 80 mm</li> <li>maximum mounting depth: 108 mm</li> </ul>		Bassment level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom, Guest Bathroom
3	Valve for concealed installation for OHS	<ul style="list-style-type: none"> <li>3 functions</li> <li>simultaneous use of several outlets</li> <li>comfortable turning on / off of outlets with large Select-paddle</li> <li>Start/stop valve to operate the functions</li> <li>flow rate upper outlet: 26 l/min</li> <li>flow rate left and right: 26 l/min</li> <li>maximum flow rate at 3 bar: 32 l/min</li> <li>min. operating pressure: 1 bar</li> <li>max. operating pressure: 10 bar</li> <li>escutcheon can be aligned by +/- 3°</li> <li>easy installation due to pre-assembled function block</li> <li>handles always at the same height regardless of the installation depth of the basic set</li> <li>flat escutcheon for more space in the shower</li> <li>valve is delivered with buttons Rain small, Rain large, hand sower, Waterfall, bath tub</li> </ul>		Bassment level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom, Guest Bathroom
4	Thermostat for concealed installation	<ul style="list-style-type: none"> <li>temperature and water flow control</li> <li>water flow control with stop function</li> <li>thermostat cartridge</li> <li>maximum flow rate at 1 bar: 19,5 l/min</li> <li>flow rate upper outlet: 32 l/min</li> <li>flow rate lower outlet: 32 l/min</li> <li>flow rate by simultaneous use of all outlets: 34,8 l/min</li> <li>maximum flow rate at 3 bar: 34,8 l/min</li> <li>min. operating pressure: 1 bar</li> <li>max. operating pressure: 10 bar</li> <li>flat escutcheon for more space in the shower</li> <li>escutcheon can be aligned by +/- 3°</li> <li>easy installation due to pre-assembled function block</li> <li>handles always at the same height regardless of the installation depth of the basic set</li> <li>Safety stop at 40 °C</li> <li>temperature limitation adjustable</li> <li>the thermostat offers the possibility for thermal disinfection</li> <li>material handles: metal</li> </ul>		Bassment level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Guest Bathroom






## BATHROOM FITTING SCHEDULE - OFFICIAL RESIDENCE

Official Residence				
S.NO.	CODE	DESCRIPTION	IMAGE	
1	Overhead Shower	<ul style="list-style-type: none"> <li>consists of: overhead shower, wall outlet</li> <li>shower head size: 360 mm</li> <li>spray type: PowderRain</li> <li>flow rate PowderRain spray at 3 bar: 21 l/min</li> <li>function from: 16,5 l/min</li> <li>maximum flow rate at 3 bar: 21 l/min</li> <li>minimum flow pressure: 2 bar</li> <li>projection: 381 mm</li> <li>middle spray disc: 205 mm</li> <li>frame: metal</li> <li>material spray disc: aluminium</li> <li>spray disc surface: graphite</li> <li>overhead shower removable for cleaning</li> <li>shower head vertically inclinable by 10-30°</li> <li>installation: wall</li> <li>connection thread: G ½</li> <li>connection dimension: DN15</li> <li>not suitable for continuous flow water heaters</li> </ul>		Bassment level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom, Guest Bathroom
5	Bath spout	<ul style="list-style-type: none"> <li>1 function</li> <li>connection type: G ¾</li> <li>with escutcheon</li> <li>projection: 195 mm</li> <li>wall-mounted</li> <li>maximum flow rate at 3 bar: 21 l/min</li> <li>connection dimension: DN20</li> <li>spray type: normal spray</li> </ul>		Bassment level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom, Guest Bathroom
6	Hand shower	<ul style="list-style-type: none"> <li>shower head size: 132 mm</li> <li>spray type: PowderRain, Intense PowderRain, MonoRain</li> <li>convenient spray selection via Select button</li> <li>spray disc surface: easy cleanable aluminium spray disc, graphite</li> <li>QuickClean: Limescale deposits can simply be rubbed off with your finger</li> <li>maximum flow rate at 3 bar: 14 l/min</li> <li>function from: 5,7 l/min</li> <li>minimum flow pressure: 1,1 bar</li> <li>with internal water conduction</li> <li>rinseable filter washer</li> <li>connection thread: G ½</li> <li>suitable for continuous flow water heaters</li> </ul>		Bassment level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom, Guest Bathroom
7	Shower hose	<ul style="list-style-type: none"> <li>high-quality shower hose</li> <li>with plastic coating, easy to clean</li> <li>shower hose length: 1.60 m</li> <li>pivot connector prevents hose from tangling</li> <li>kink-protected</li> <li>nuts shower hose: conical nut on both ends</li> <li>connection thread: G ½</li> </ul>		Bassment level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom, Guest Bathroom
8	Shower holder	<ul style="list-style-type: none"> <li>fixed holding position</li> <li>for shower hoses with conical nut</li> <li>material: plastic</li> <li>dimensions: 53 x 37 x 50 mm (HxWxD)</li> <li>diameter drill hole: 6 mm</li> <li>2 drill holes</li> <li>conical mount</li> </ul>		Bassment level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom, Guest Bathroom
9	Wall outlet Square with non-return valve	<ul style="list-style-type: none"> <li>plastic connection angle</li> <li>material cover: plastic</li> <li>with non-return valve</li> <li>connection type: G ½</li> </ul>		Bassment level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom, Guest Bathroom






## BATHROOM FITTING SCHEDULE - OFFICIAL RESIDENCE

Official Residence																														
S.NO.	CODE	DESCRIPTION	IMAGE																											
1	Overhead Shower	<ul style="list-style-type: none"><li>consists of: overhead shower, wall outlet</li><li>shower head size: 360 mm</li><li>spray type: PowderRain</li><li>flow rate PowderRain spray at 3 bar: 21 l/min</li><li>function from: 16,5 l/min</li><li>maximum flow rate at 3 bar: 21 l/min</li><li>minimum flow pressure: 2 bar</li><li>projection: 381 mm</li><li>middle spray disc: 205 mm</li><li>frame: metal</li><li>material spray disc: aluminium</li><li>spray disc surface: graphite</li><li>overhead shower removable for cleaning</li><li>shower head vertically inclinable by 10-30°</li><li>installation: wall</li><li>connection thread: G ½</li><li>connection dimension: DN15</li><li>not suitable for continuous flow water heaters</li></ul>		Bassment level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom, Guest Bathroom																										
10	Single Lever Basin Mixer	<p><b>product features</b></p> <ul style="list-style-type: none"><li>consists of: single lever basin mixer for concealed installation wall-mounted, waste set</li><li>projection: 225 mm</li><li>handle variant: lever handle</li><li>spray type: normal spray</li><li>maximum flow rate at 3 bar: 5 l/min</li><li>ceramic cartridge</li><li>temperature limitation adjustable</li><li>suitable for continuous flow water heaters</li><li>non-closing waste set</li><li>material waste set: metal</li><li>connection type: basic set</li><li>connection dimension: DN15</li><li>handle can be positioned on the right or left, depending on the basic set installation</li><li>EU taxonomy: max. 6 l/min - Substantial Contribution (SC) possible</li></ul>		Bassment level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom, Guest Bathroom, Ground floor Powder room behind lift. First floor HIS and HER powder rooms, Terrace Powder room																										
11	Basic set for single lever basin mixer for concealed installation wall-mounted	<ul style="list-style-type: none"><li>variable positioning of the mixer system, can be left or right of the spout</li><li>easy orientation due to support surfaces for the spirit level</li><li>with building protection cover against contamination during assembly</li><li>with dimension indication for exact determination of the installation depth</li><li>with pre-mounted fastening lugs for mounting in drywall and solidwall</li><li>sound-decoupled installation</li><li>minimum mounting depth: 44 mm</li><li>maximum mounting depth: 72 mm</li></ul>		Bassment level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom, Guest Bathroom, Ground floor Powder room behind lift. First floor HIS and HER powder rooms, Terrace Powder room																										
12	Universal Taps & Fittings Siphon	<ul style="list-style-type: none"><li>variable positioning of the mixer system, can be left or right of the spout</li><li>easy orientation due to support surfaces for the spirit level</li><li>with building protection cover against contamination during assembly</li><li>with dimension indication for exact determination of the installation depth</li><li>with pre-mounted fastening lugs for mounting in drywall and solidwall</li><li>sound-decoupled installation</li><li>minimum mounting depth: 44 mm</li><li>maximum mounting depth: 72 mm</li></ul>		All Wash Basins																										
13	Surface-mounted washbasin	<table><tr><td>Ordering information</td><td>Please order non-closable drain valve separately.</td></tr><tr><td>Length in mm</td><td>360</td></tr><tr><td>Width in mm</td><td>560</td></tr><tr><td>Height in mm</td><td>145</td></tr><tr><td>Interior depth</td><td>100</td></tr><tr><td>Weight in kg</td><td>14,37</td></tr><tr><td>express delivery</td><td>No</td></tr><tr><td>Suitable for</td><td>Wall-mounted tap fittings, Matching Villeroy&amp;Boch furniture(Tap fitting with raised base</td></tr><tr><td>Material</td><td>TitanCeram</td></tr><tr><td>Surface</td><td>glossy</td></tr><tr><td>Colour name</td><td>White Alpin</td></tr><tr><td>With TitanGlaze</td><td>No</td></tr><tr><td>With overflow</td><td>No</td></tr></table>	Ordering information	Please order non-closable drain valve separately.	Length in mm	360	Width in mm	560	Height in mm	145	Interior depth	100	Weight in kg	14,37	express delivery	No	Suitable for	Wall-mounted tap fittings, Matching Villeroy&Boch furniture(Tap fitting with raised base	Material	TitanCeram	Surface	glossy	Colour name	White Alpin	With TitanGlaze	No	With overflow	No		Bassment level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom, Guest Bathroom, Ground floor Powder room behind lift. First floor HIS and HER powder rooms, Terrace Powder room
Ordering information	Please order non-closable drain valve separately.																													
Length in mm	360																													
Width in mm	560																													
Height in mm	145																													
Interior depth	100																													
Weight in kg	14,37																													
express delivery	No																													
Suitable for	Wall-mounted tap fittings, Matching Villeroy&Boch furniture(Tap fitting with raised base																													
Material	TitanCeram																													
Surface	glossy																													
Colour name	White Alpin																													
With TitanGlaze	No																													
With overflow	No																													






## BATHROOM FITTING SCHEDULE - OFFICIAL RESIDENCE

Official Residence																																				
S.NO.	CODE	DESCRIPTION	IMAGE																																	
1	Overhead Shower	<ul style="list-style-type: none"><li>consists of: overhead shower, wall outlet</li><li>shower head size: 360 mm</li><li>spray type: PowderRain</li><li>flow rate PowderRain spray at 3 bar: 21 l/min</li><li>function from: 16,5 l/min</li><li>maximum flow rate at 3 bar: 21 l/min</li><li>minimum flow pressure: 2 bar</li><li>projection: 381 mm</li><li>middle spray disc: 205 mm</li><li>frame: metal</li><li>material spray disc: aluminium</li><li>spray disc surface: graphite</li><li>overhead shower removable for cleaning</li><li>shower head vertically inclinable by 10-30°</li><li>installation: wall</li><li>connection thread: G ½</li><li>connection dimension: DN15</li><li>not suitable for continuous flow water heaters</li></ul>		Bassment level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom, Guest Bathroom																																
14	Washdown toilet, rimless	<table><tr><td>Length in mm</td><td>560</td></tr><tr><td>Width in mm</td><td>375</td></tr><tr><td>Height in mm</td><td>340</td></tr><tr><td>Weight in kg</td><td>28,20</td></tr><tr><td>Suitable for</td><td>Concealed cistern</td></tr><tr><td>Rimless</td><td>Yes</td></tr><tr><td>Innovative flushing technology (with TwistFlush)</td><td>No</td></tr><tr><td>Innovative flushing technology (with TwistFlush[e<sup>2</sup>])</td><td>No</td></tr><tr><td>Flush type</td><td>Washdown toilet</td></tr><tr><td>Flush volume l</td><td>3 / 4,5 l</td></tr><tr><td>Outlet / outlet</td><td>horizontal outlet</td></tr><tr><td>Wall-mounted - floor-standing</td><td>wall-mounted</td></tr><tr><td>Leed</td><td>4</td></tr><tr><td>Material</td><td>Sanitary ceramics</td></tr><tr><td>Surface</td><td>glossy</td></tr><tr><td>Colour name</td><td>White Alpin</td></tr></table>	Length in mm	560	Width in mm	375	Height in mm	340	Weight in kg	28,20	Suitable for	Concealed cistern	Rimless	Yes	Innovative flushing technology (with TwistFlush)	No	Innovative flushing technology (with TwistFlush[e <sup>2</sup> ])	No	Flush type	Washdown toilet	Flush volume l	3 / 4,5 l	Outlet / outlet	horizontal outlet	Wall-mounted - floor-standing	wall-mounted	Leed	4	Material	Sanitary ceramics	Surface	glossy	Colour name	White Alpin		Bassment level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Guest Bathroom, Ground floor Powder room behind lift .First floor HIS and HER powder rooms, Terrace Powder room
Length in mm	560																																			
Width in mm	375																																			
Height in mm	340																																			
Weight in kg	28,20																																			
Suitable for	Concealed cistern																																			
Rimless	Yes																																			
Innovative flushing technology (with TwistFlush)	No																																			
Innovative flushing technology (with TwistFlush[e <sup>2</sup> ])	No																																			
Flush type	Washdown toilet																																			
Flush volume l	3 / 4,5 l																																			
Outlet / outlet	horizontal outlet																																			
Wall-mounted - floor-standing	wall-mounted																																			
Leed	4																																			
Material	Sanitary ceramics																																			
Surface	glossy																																			
Colour name	White Alpin																																			
15	Toilet seat and cover	<table><tr><td>Length in mm</td><td>454</td></tr><tr><td>Width in mm</td><td>379</td></tr><tr><td>Height in mm</td><td>49</td></tr><tr><td>Weight in kg</td><td>2,69</td></tr><tr><td>Rimless</td><td>No</td></tr><tr><td>Innovative flushing technology (with TwistFlush)</td><td>No</td></tr><tr><td>Innovative flushing technology (with TwistFlush[e<sup>2</sup>])</td><td>No</td></tr><tr><td>Function</td><td><ul style="list-style-type: none"><li>with automatic lowering mechanism (SoftClosing)</li><li>with removable seat (QuickRelease)</li></ul></td></tr><tr><td>Material</td><td>Duroplast</td></tr><tr><td>Surface</td><td>glossy</td></tr><tr><td>Colour name</td><td>White Alpin</td></tr></table>	Length in mm	454	Width in mm	379	Height in mm	49	Weight in kg	2,69	Rimless	No	Innovative flushing technology (with TwistFlush)	No	Innovative flushing technology (with TwistFlush[e <sup>2</sup> ])	No	Function	<ul style="list-style-type: none"><li>with automatic lowering mechanism (SoftClosing)</li><li>with removable seat (QuickRelease)</li></ul>	Material	Duroplast	Surface	glossy	Colour name	White Alpin		Bassment level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Guest Bathroom, Ground floor Powder room behind lift .First floor HIS and HER powder rooms, Terrace Powder room										
Length in mm	454																																			
Width in mm	379																																			
Height in mm	49																																			
Weight in kg	2,69																																			
Rimless	No																																			
Innovative flushing technology (with TwistFlush)	No																																			
Innovative flushing technology (with TwistFlush[e <sup>2</sup> ])	No																																			
Function	<ul style="list-style-type: none"><li>with automatic lowering mechanism (SoftClosing)</li><li>with removable seat (QuickRelease)</li></ul>																																			
Material	Duroplast																																			
Surface	glossy																																			
Colour name	White Alpin																																			
16	Toilet installation system	<table><tr><td>Length in mm</td><td>135</td></tr><tr><td>Width in mm</td><td>525</td></tr><tr><td>Height in mm</td><td>1120</td></tr><tr><td>Weight in kg</td><td>15,80</td></tr><tr><td>Suitable for</td><td>for wall-mounted WC</td></tr><tr><td>Material</td><td>Steel</td></tr></table>	Length in mm	135	Width in mm	525	Height in mm	1120	Weight in kg	15,80	Suitable for	for wall-mounted WC	Material	Steel		All WC																				
Length in mm	135																																			
Width in mm	525																																			
Height in mm	1120																																			
Weight in kg	15,80																																			
Suitable for	for wall-mounted WC																																			
Material	Steel																																			
17	Toilet flush plate	<table><tr><td>Length in mm</td><td>10</td></tr><tr><td>Width in mm</td><td>253</td></tr><tr><td>Height in mm</td><td>145</td></tr><tr><td>Weight in kg</td><td>0,39</td></tr><tr><td>Suitable for</td><td>Dual flush</td></tr><tr><td>Material</td><td>Plastic</td></tr><tr><td>Surface</td><td>glossy</td></tr><tr><td>Colour name</td><td>Chrome</td></tr><tr><td>Activation / Flush</td><td>front/top operated</td></tr></table>	Length in mm	10	Width in mm	253	Height in mm	145	Weight in kg	0,39	Suitable for	Dual flush	Material	Plastic	Surface	glossy	Colour name	Chrome	Activation / Flush	front/top operated		All WC														
Length in mm	10																																			
Width in mm	253																																			
Height in mm	145																																			
Weight in kg	0,39																																			
Suitable for	Dual flush																																			
Material	Plastic																																			
Surface	glossy																																			
Colour name	Chrome																																			
Activation / Flush	front/top operated																																			





## BATHROOM FITTING SCHEDULE - OFFICIAL RESIDENCE

Official Residence																														
S.NO.	CODE	DESCRIPTION	IMAGE																											
1	Overhead Shower	<ul style="list-style-type: none"><li>· consists of: overhead shower, wall outlet</li><li>· shower head size: 360 mm</li><li>· spray type: PowderRain</li><li>· flow rate PowderRain spray at 3 bar: 21 l/min</li><li>· function from: 16,5 l/min</li><li>· maximum flow rate at 3 bar: 21 l/min</li><li>· minimum flow pressure: 2 bar</li><li>· projection: 381 mm</li><li>· middle spray disc: 205 mm</li><li>· frame: metal</li><li>· material spray disc: aluminium</li><li>· spray disc surface: graphite</li><li>· overhead shower removable for cleaning</li><li>· shower head vertically inclinable by 10-30°</li><li>· installation: wall</li><li>· connection thread: G ½</li><li>· connection dimension: DN15</li><li>· not suitable for continuous flow water heaters</li></ul>		Bassment level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom, Guest Bathroom																										
18	Universal Taps & Fittings Bidet spray	<table><tr><td>Length in mm</td><td>83</td></tr><tr><td>Width in mm</td><td>29</td></tr><tr><td>Height in mm</td><td>115</td></tr><tr><td>Weight in kg</td><td>0,32</td></tr><tr><td>Colour name</td><td>Chrome</td></tr><tr><td>EAN number</td><td>4051202728779</td></tr><tr><td>Flow rate hand shower in litres per minute</td><td>5,7</td></tr><tr><td>Length of shower hose</td><td>1200</td></tr><tr><td>Material</td><td>ABS</td></tr><tr><td>Volume</td><td>2,679</td></tr><tr><td>Swivel aerator</td><td>No</td></tr><tr><td>Thermostat</td><td>No</td></tr><tr><td>Cool Tap</td><td>No</td></tr></table>	Length in mm	83	Width in mm	29	Height in mm	115	Weight in kg	0,32	Colour name	Chrome	EAN number	4051202728779	Flow rate hand shower in litres per minute	5,7	Length of shower hose	1200	Material	ABS	Volume	2,679	Swivel aerator	No	Thermostat	No	Cool Tap	No		All WC
Length in mm	83																													
Width in mm	29																													
Height in mm	115																													
Weight in kg	0,32																													
Colour name	Chrome																													
EAN number	4051202728779																													
Flow rate hand shower in litres per minute	5,7																													
Length of shower hose	1200																													
Material	ABS																													
Volume	2,679																													
Swivel aerator	No																													
Thermostat	No																													
Cool Tap	No																													
19	Angle valve	<table><tr><td>Length in mm</td><td>76</td></tr><tr><td>Width in mm</td><td>54</td></tr><tr><td>Height in mm</td><td>54</td></tr><tr><td>Weight in kg</td><td>0,09</td></tr><tr><td>Colour name</td><td>Chrome</td></tr><tr><td>EAN number</td><td>4051202728786</td></tr><tr><td>Material</td><td>Brass</td></tr><tr><td>Volume</td><td>0,189</td></tr><tr><td>Swivel aerator</td><td>No</td></tr><tr><td>Thermostat</td><td>No</td></tr><tr><td>Cool Tap</td><td>No</td></tr></table>	Length in mm	76	Width in mm	54	Height in mm	54	Weight in kg	0,09	Colour name	Chrome	EAN number	4051202728786	Material	Brass	Volume	0,189	Swivel aerator	No	Thermostat	No	Cool Tap	No		All WC, sinks & geysers				
Length in mm	76																													
Width in mm	54																													
Height in mm	54																													
Weight in kg	0,09																													
Colour name	Chrome																													
EAN number	4051202728786																													
Material	Brass																													
Volume	0,189																													
Swivel aerator	No																													
Thermostat	No																													
Cool Tap	No																													
20	Drain	<table><tr><td>Colour</td><td>Matte Chrome</td></tr><tr><td>Height</td><td>7</td></tr><tr><td>Width</td><td>400</td></tr><tr><td>Depth</td><td>6</td></tr><tr><td>Packaged Product Sizes (WxDxH)</td><td>85X120X460</td></tr><tr><td>Body Material</td><td>Stainless Steel</td></tr><tr><td>Special Needs</td><td>Yes</td></tr></table>	Colour	Matte Chrome	Height	7	Width	400	Depth	6	Packaged Product Sizes (WxDxH)	85X120X460	Body Material	Stainless Steel	Special Needs	Yes		All showers												
Colour	Matte Chrome																													
Height	7																													
Width	400																													
Depth	6																													
Packaged Product Sizes (WxDxH)	85X120X460																													
Body Material	Stainless Steel																													
Special Needs	Yes																													
21	geyser	<table><tr><td>MODEL</td><td>HPI-50DJ.0BE</td></tr><tr><td>Rated volume [L]</td><td>180</td></tr><tr><td>Voltage / Frequency [V/Hz]</td><td>220 / 50</td></tr><tr><td>Rated Input power (Efficiency Mode) (W)</td><td>460</td></tr><tr><td>Rated current (A)</td><td>13.6</td></tr><tr><td>Rated output power (Efficiency Mode) [W]</td><td>1750</td></tr><tr><td>Maximum power of quick heating [A]</td><td>13.6</td></tr><tr><td>Water temperature range [°C]</td><td>35-75</td></tr><tr><td>Ambient temperature range for Efficiency [°C]</td><td>7-43</td></tr><tr><td>Tank rated pressure (bar)</td><td>10</td></tr><tr><td>Dimension A [mm]</td><td>1850</td></tr><tr><td>Diameter of Tank</td><td>Ø520</td></tr><tr><td>Weight of Tank (kg)</td><td>92</td></tr></table>	MODEL	HPI-50DJ.0BE	Rated volume [L]	180	Voltage / Frequency [V/Hz]	220 / 50	Rated Input power (Efficiency Mode) (W)	460	Rated current (A)	13.6	Rated output power (Efficiency Mode) [W]	1750	Maximum power of quick heating [A]	13.6	Water temperature range [°C]	35-75	Ambient temperature range for Efficiency [°C]	7-43	Tank rated pressure (bar)	10	Dimension A [mm]	1850	Diameter of Tank	Ø520	Weight of Tank (kg)	92		Terrace
MODEL	HPI-50DJ.0BE																													
Rated volume [L]	180																													
Voltage / Frequency [V/Hz]	220 / 50																													
Rated Input power (Efficiency Mode) (W)	460																													
Rated current (A)	13.6																													
Rated output power (Efficiency Mode) [W]	1750																													
Maximum power of quick heating [A]	13.6																													
Water temperature range [°C]	35-75																													
Ambient temperature range for Efficiency [°C]	7-43																													
Tank rated pressure (bar)	10																													
Dimension A [mm]	1850																													
Diameter of Tank	Ø520																													
Weight of Tank (kg)	92																													

## BATHROOM FITTING SCHEDULE - OFFICIAL RESIDENCE







Official Residence																																																						
S.NO.	CODE	DESCRIPTION	IMAGE																																																			
1	Overhead Shower	<ul style="list-style-type: none"><li>· consists of: overhead shower, wall outlet</li><li>· shower head size: 360 mm</li><li>· spray type: PowderRain</li><li>· flow rate PowderRain spray at 3 bar: 21 l/min</li><li>· function from: 16,5 l/min</li><li>· maximum flow rate at 3 bar: 21 l/min</li><li>· minimum flow pressure: 2 bar</li><li>· projection: 381 mm</li><li>· middle spray disc: 205 mm</li><li>· frame: metal</li><li>· material spray disc: aluminium</li><li>· spray disc surface: graphite</li><li>· overhead shower removable for cleaning</li><li>· shower head vertically inclinable by 10-30°</li><li>· installation: wall</li><li>· connection thread: G ½</li><li>· connection dimension: DN15</li><li>· not suitable for continuous flow water heaters</li></ul>		Basement level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom, Guest Bathroom																																																		
22	Capacity: 25 Ltr. (Only for bath areas)	Capacity: 25 Ltr. (Only for bath areas)		Basement level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom, Guest Bathroom																																																		
23	Toilet paper holder	<table><tr><td>Colour</td><td>Chrome</td></tr><tr><td>Height</td><td>55</td></tr><tr><td>Width</td><td>55</td></tr><tr><td>Depth</td><td>45</td></tr><tr><td>Guarantee</td><td>5</td></tr><tr><td>Finish</td><td>Chrome</td></tr><tr><td>Material</td><td>Chrome</td></tr><tr><td>Mounting type</td><td>Wall Mounted</td></tr><tr><td>Special Needs</td><td>Yes</td></tr><tr><td>Packaged Product Sizes (WxDxH)</td><td>195X155X90</td></tr></table>	Colour	Chrome	Height	55	Width	55	Depth	45	Guarantee	5	Finish	Chrome	Material	Chrome	Mounting type	Wall Mounted	Special Needs	Yes	Packaged Product Sizes (WxDxH)	195X155X90		All WC																														
Colour	Chrome																																																					
Height	55																																																					
Width	55																																																					
Depth	45																																																					
Guarantee	5																																																					
Finish	Chrome																																																					
Material	Chrome																																																					
Mounting type	Wall Mounted																																																					
Special Needs	Yes																																																					
Packaged Product Sizes (WxDxH)	195X155X90																																																					
24	Robe hooks	Supply of C.P. brass robe hook approved quality and direction of Engineer-in-charge.		All toilets																																																		
25	Bath Tub	<table><tr><td>Product designation</td><td>Back-to-wall bath for left corner installation</td></tr><tr><td>Collection</td><td>Collaro</td></tr><tr><td>Assembly / Assembly type</td><td>Corner installation, on left</td></tr><tr><td>Assembly instructions</td><td>Central positioning of the tap fitting is not possible.</td></tr><tr><td>Scope of delivery</td><td>1 x offset bath , 1 x matching outlet and overflow 2 x frames with 2 feet</td></tr><tr><td>Length in mm</td><td>1790</td></tr><tr><td>Width in mm</td><td>790</td></tr><tr><td>Height in mm</td><td>630</td></tr><tr><td>Installation height</td><td>Bath with panel: 630 mm</td></tr><tr><td>Interior depth</td><td>470</td></tr><tr><td>Weight in kg</td><td>43,00</td></tr><tr><td>Outlet / outlet</td><td>central outlet</td></tr><tr><td>Material</td><td>Acrylic</td></tr><tr><td>Colour name</td><td>White Alpin</td></tr><tr><td>With feet/base</td><td>Yes</td></tr><tr><td>With panel</td><td>Yes</td></tr><tr><td>Other material</td><td>Waste/overflow combination: Plastic Outlet cover: Plastic</td></tr><tr><td>Other surfaces</td><td>Waste/overflow combination: glossy Outlet cover: glossy</td></tr><tr><td>With overflow</td><td>Yes</td></tr><tr><td>With bath support</td><td>No</td></tr><tr><td>Capacity</td><td>218</td></tr><tr><td>Number of people</td><td>2</td></tr><tr><td>For handle mounting</td><td>No</td></tr><tr><td>Anti-slip class</td><td>Anti-slip class A</td></tr><tr><td>Seat unit</td><td>2</td></tr></table>	Product designation	Back-to-wall bath for left corner installation	Collection	Collaro	Assembly / Assembly type	Corner installation, on left	Assembly instructions	Central positioning of the tap fitting is not possible.	Scope of delivery	1 x offset bath , 1 x matching outlet and overflow 2 x frames with 2 feet	Length in mm	1790	Width in mm	790	Height in mm	630	Installation height	Bath with panel: 630 mm	Interior depth	470	Weight in kg	43,00	Outlet / outlet	central outlet	Material	Acrylic	Colour name	White Alpin	With feet/base	Yes	With panel	Yes	Other material	Waste/overflow combination: Plastic Outlet cover: Plastic	Other surfaces	Waste/overflow combination: glossy Outlet cover: glossy	With overflow	Yes	With bath support	No	Capacity	218	Number of people	2	For handle mounting	No	Anti-slip class	Anti-slip class A	Seat unit	2		Master Bathroom, Guest bathroom
Product designation	Back-to-wall bath for left corner installation																																																					
Collection	Collaro																																																					
Assembly / Assembly type	Corner installation, on left																																																					
Assembly instructions	Central positioning of the tap fitting is not possible.																																																					
Scope of delivery	1 x offset bath , 1 x matching outlet and overflow 2 x frames with 2 feet																																																					
Length in mm	1790																																																					
Width in mm	790																																																					
Height in mm	630																																																					
Installation height	Bath with panel: 630 mm																																																					
Interior depth	470																																																					
Weight in kg	43,00																																																					
Outlet / outlet	central outlet																																																					
Material	Acrylic																																																					
Colour name	White Alpin																																																					
With feet/base	Yes																																																					
With panel	Yes																																																					
Other material	Waste/overflow combination: Plastic Outlet cover: Plastic																																																					
Other surfaces	Waste/overflow combination: glossy Outlet cover: glossy																																																					
With overflow	Yes																																																					
With bath support	No																																																					
Capacity	218																																																					
Number of people	2																																																					
For handle mounting	No																																																					
Anti-slip class	Anti-slip class A																																																					
Seat unit	2																																																					

## BATHROOM FITTING SCHEDULE - OFFICIAL RESIDENCE



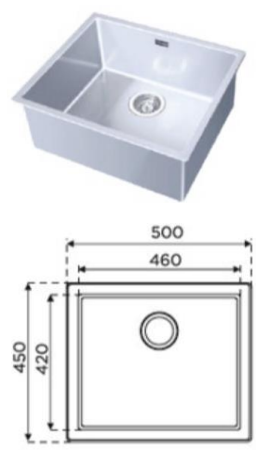

Official Residence				
S.NO.	CODE	DESCRIPTION	IMAGE	
1	Overhead Shower	<ul style="list-style-type: none"> <li>consists of: overhead shower, wall outlet</li> <li>shower head size: 360 mm</li> <li>spray type: PowderRain</li> <li>flow rate PowderRain spray at 3 bar: 21 l/min</li> <li>function from: 16,5 l/min</li> <li>maximum flow rate at 3 bar: 21 l/min</li> <li>minimum flow pressure: 2 bar</li> <li>projection: 381 mm</li> <li>middle spray disc: 205 mm</li> <li>frame: metal</li> <li>material spray disc: aluminium</li> <li>spray disc surface: graphite</li> <li>overhead shower removable for cleaning</li> <li>shower head vertically inclinable by 10-30°</li> <li>installation: wall</li> <li>connection thread: G ½</li> <li>connection dimension: DN15</li> <li>not suitable for continuous flow water heaters</li> </ul>		Basement level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom, Guest Bathroom
26	Bath filler	<ul style="list-style-type: none"> <li>projection 192 mm</li> <li>2 functions</li> <li>simultaneous utilization of 2 functions</li> <li>Select push-button on/off control for 2 outlets</li> <li>CoolContact thermostat: Prevents the housing from heating up, making showering even safer</li> <li>thermostat cartridge, Start/stop valve to operate the functions</li> <li>maximum flow rate at 3 bar: 20 l/min</li> <li>flow rate for bath spout at 3 bar: 20 l/min</li> <li>flow rate of hand shower at 3 bar: 16 l/min</li> <li>min. operating pressure: 1 bar</li> <li>max. operating pressure: 10 bar</li> <li>Safety stop at 40 °C</li> <li>temperature limitation adjustable</li> <li>with isolated water conduction</li> <li>non-return valve</li> <li>protected against backflow, according to DIN EN 1717</li> <li>with silencer</li> <li>material handles: metal</li> <li>shelf made of safety glass</li> <li>surface shelf: mirror glass</li> <li>connection dimension: DN15</li> <li>connection type: G ½</li> <li>centre distance: 150 ± 12 mm</li> <li>dirt filter included</li> <li>thermostat is delivered with buttons hand shower and bath tub</li> </ul>		Master Bathroom, Guest bathroom
27	Towel Rack	<p><b>product features</b></p> <ul style="list-style-type: none"> <li>wall-mounted</li> <li>material: brass</li> <li>holder material: metal</li> <li>length: 644 mm</li> <li>with mounting material</li> <li>drilling distance: 600 mm</li> <li>diameter drill hole: 6 mm</li> <li>concealed fastening</li> </ul>		Basement level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom, Guest Bathroom,
28	towel holder	<p><b>product features</b></p> <ul style="list-style-type: none"> <li>wall-mounted</li> <li>material: brass</li> <li>holder material: metal</li> <li>length: 644 mm</li> <li>with mounting material</li> <li>drilling distance: 600 mm</li> <li>diameter drill hole: 6 mm</li> <li>concealed fastening</li> </ul>		Basement level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom, Guest Bathroom,







## BATHROOM FITTING SCHEDULE - OFFICIAL RESIDENCE

Official Residence																																
S.NO.	CODE	DESCRIPTION	IMAGE																													
1	Overhead Shower	<ul style="list-style-type: none"><li>consists of: overhead shower, wall outlet</li><li>shower head size: 360 mm</li><li>spray type: PowderRain</li><li>flow rate PowderRain spray at 3 bar: 21 l/min</li><li>function from: 16,5 l/min</li><li>maximum flow rate at 3 bar: 21 l/min</li><li>minimum flow pressure: 2 bar</li><li>projection: 381 mm</li><li>middle spray disc: 205 mm</li><li>frame: metal</li><li>material spray disc: aluminium</li><li>spray disc surface: graphite</li><li>overhead shower removable for cleaning</li><li>shower head vertically inclinable by 10-30°</li><li>installation: wall</li><li>connection thread: G ½</li><li>connection dimension: DN15</li><li>not suitable for continuous flow water heaters</li></ul>		Bassment level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom, Guest Bathroom																												
29	Kitchen Faucet	<div><div>Description</div><div><b>product features</b><ul style="list-style-type: none"><li>consists of: single lever kitchen mixer, hose box</li><li>ComfortZone 160</li><li>swivel range adjustable in 2 steps to 110° or 150°</li><li>laminar spray, shower spray</li><li>lockable shower spray, spray returns through pressing spray diverter</li><li>MagFit magnetic shower support</li><li>connection dimension: DN15</li><li>maximum flow rate at 3 bar: 9 l/min</li><li>ceramic cartridge</li><li>connection type: G ¾ hose connections</li><li>temperature limitation adjustable</li><li>integrated non-return valve</li><li>suitable for continuous flow water heaters</li><li>sBox for quiet, smooth and protected hose guidance in the cabinet, under the countertop</li><li>extension length up to 76 cm</li></ul></div></div>	<div><div>Product image</div><div>Scale drawing</div></div>	House Kitchen, Skullery, Laundry & Basement																												
30	Kitchen Faucet	<div><div><div>Product Information</div><table><tr><td>Spout version</td><td>Low Spout</td></tr><tr><td>Color</td><td>Chrome</td></tr><tr><td>Type of material</td><td>Brass</td></tr><tr><td>Flexible pullout hose material</td><td>Nylon grey</td></tr><tr><td>Shower material</td><td>ABS plastic</td></tr></table><div>Dimensions</div><table><tr><td>Tap hole diameter</td><td>35 mm</td></tr><tr><td>Cartridge dimension</td><td>40 mm</td></tr></table><div>Installation</div><table><tr><td>Installation type</td><td>1 bolt</td></tr><tr><td>Water supply hose connection</td><td>3/8"</td></tr><tr><td>Water supply hose length</td><td>450 mm</td></tr></table><div>Product specifications</div><table><tr><td>Pressure</td><td>High Pressure</td></tr><tr><td>Version</td><td>Spray</td></tr><tr><td>Tap operation</td><td>Hot lever</td></tr><tr><td>Tap rotation</td><td>120°</td></tr></table></div></div>	Spout version	Low Spout	Color	Chrome	Type of material	Brass	Flexible pullout hose material	Nylon grey	Shower material	ABS plastic	Tap hole diameter	35 mm	Cartridge dimension	40 mm	Installation type	1 bolt	Water supply hose connection	3/8"	Water supply hose length	450 mm	Pressure	High Pressure	Version	Spray	Tap operation	Hot lever	Tap rotation	120°	 	Staff Kitchen
Spout version	Low Spout																															
Color	Chrome																															
Type of material	Brass																															
Flexible pullout hose material	Nylon grey																															
Shower material	ABS plastic																															
Tap hole diameter	35 mm																															
Cartridge dimension	40 mm																															
Installation type	1 bolt																															
Water supply hose connection	3/8"																															
Water supply hose length	450 mm																															
Pressure	High Pressure																															
Version	Spray																															
Tap operation	Hot lever																															
Tap rotation	120°																															
31	Kitchen Sink	<table><tr><td>Overall Size (Inch/mm)</td><td>61 x 20 1550 x 510</td></tr><tr><td>Bowl Size (Inch/mm)</td><td>18 x 16 x 09 460 x 405 x 225</td></tr><tr><td>Material</td><td>AISI-304 (18/8) Stainless Steel / Thickness : 1mm</td></tr><tr><td>Finish/Colors</td><td>Glossy &amp; Matt</td></tr><tr><td>Description</td><td>Double Bowl Kitchen Sink Single Drain Board</td></tr></table> <p>Including Waste system</p>	Overall Size (Inch/mm)	61 x 20 1550 x 510	Bowl Size (Inch/mm)	18 x 16 x 09 460 x 405 x 225	Material	AISI-304 (18/8) Stainless Steel / Thickness : 1mm	Finish/Colors	Glossy & Matt	Description	Double Bowl Kitchen Sink Single Drain Board		Main Kitchen																		
Overall Size (Inch/mm)	61 x 20 1550 x 510																															
Bowl Size (Inch/mm)	18 x 16 x 09 460 x 405 x 225																															
Material	AISI-304 (18/8) Stainless Steel / Thickness : 1mm																															
Finish/Colors	Glossy & Matt																															
Description	Double Bowl Kitchen Sink Single Drain Board																															








## BATHROOM FITTING SCHEDULE - OFFICIAL RESIDENCE

Official Residence				
S.NO.	CODE	DESCRIPTION	IMAGE	
1	Overhead Shower	<ul style="list-style-type: none"> <li>consists of: overhead shower, wall outlet</li> <li>shower head size: 360 mm</li> <li>spray type: PowderRain</li> <li>flow rate PowderRain spray at 3 bar: 21 l/min</li> <li>function from: 16,5 l/min</li> <li>maximum flow rate at 3 bar: 21 l/min</li> <li>minimum flow pressure: 2 bar</li> <li>projection: 381 mm</li> <li>middle spray disc: 205 mm</li> <li>frame: metal</li> <li>material spray disc: aluminium</li> <li>spray disc surface: graphite</li> <li>overhead shower removable for cleaning</li> <li>shower head vertically inclinable by 10-30°</li> <li>installation: wall</li> <li>connection thread: G ½</li> <li>connection dimension: DN15</li> <li>not suitable for continuous flow water heaters</li> </ul>		Bassment level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom, Guest Bathroom
32	Kitchen Sink	Finish Same as above including waste system		Staff Kitchen
33	Kitchen Sink	<p>Dimension: (LxW) mm / (inch)</p> <p>500 x 450 / 20x18</p> <p>Bowl Size: (LxWxD)mm</p> <p>460 x 420 x 210</p> <p>Including Waste system</p>		Laundry, Main kitchen
34	Garbage Crusher	<p>Horsepower 0.75 HP</p> <p>Motor RPM 2700 RPM</p> <p>Amps 3.25</p> <p>Motor Type Permanent</p> <p>Grinding Ring Stainless Steel</p> <p>Swivel Impellers Cast SS</p> <p>Turntable Stainless Steel</p> <p>Weight in Kgs 5.23</p> <p>Type Air Switch Included</p>		Skullery







## BATHROOM FITTING SCHEDULE - OFFICIAL RESIDENCE

Official Residence																																				
S.NO.	CODE	DESCRIPTION	IMAGE																																	
1	Overhead Shower	<ul style="list-style-type: none"><li>consists of: overhead shower, wall outlet</li><li>shower head size: 360 mm</li><li>spray type: PowderRain</li><li>flow rate PowderRain spray at 3 bar: 21 l/min</li><li>function from: 16,5 l/min</li><li>maximum flow rate at 3 bar: 21 l/min</li><li>minimum flow pressure: 2 bar</li><li>projection: 381 mm</li><li>middle spray disc: 205 mm</li><li>frame: metal</li><li>material spray disc: aluminium</li><li>spray disc surface: graphite</li><li>overhead shower removable for cleaning</li><li>shower head vertically inclinable by 10-30°</li><li>installation: wall</li><li>connection thread: G ½</li><li>connection dimension: DN15</li><li>not suitable for continuous flow water heaters</li></ul>		Bassment level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom, Guest Bathroom																																
35	Water Closet, trimless	<table><tr><td>Length in mm</td><td>595</td></tr><tr><td>Width in mm</td><td>360</td></tr><tr><td>Height in mm</td><td>404</td></tr><tr><td>Weight in kg</td><td>23,00</td></tr><tr><td>Suitable for</td><td>Concealed cistern</td></tr><tr><td>Rimless</td><td>Yes</td></tr><tr><td>Innovative flushing technology (with TwistFlush)</td><td>No</td></tr><tr><td>Innovative flushing technology (with TwistFlush[e<sup>2</sup>])</td><td>No</td></tr><tr><td>Flush type</td><td>Washdown toilet</td></tr><tr><td>Flush volume l</td><td>3 / 6 l</td></tr><tr><td>Outlet / outlet</td><td>horizontal outlet</td></tr><tr><td>Wall-mounted - floor-standing</td><td>wall-mounted</td></tr><tr><td>Lead</td><td>2</td></tr><tr><td>Material</td><td>Sanitary ceramics</td></tr><tr><td>Surface</td><td>glossy</td></tr><tr><td>Colour name</td><td>White Alpin</td></tr></table>	Length in mm	595	Width in mm	360	Height in mm	404	Weight in kg	23,00	Suitable for	Concealed cistern	Rimless	Yes	Innovative flushing technology (with TwistFlush)	No	Innovative flushing technology (with TwistFlush[e <sup>2</sup> ])	No	Flush type	Washdown toilet	Flush volume l	3 / 6 l	Outlet / outlet	horizontal outlet	Wall-mounted - floor-standing	wall-mounted	Lead	2	Material	Sanitary ceramics	Surface	glossy	Colour name	White Alpin		Guard toilet & kitchen toilet & Staff room toilet
Length in mm	595																																			
Width in mm	360																																			
Height in mm	404																																			
Weight in kg	23,00																																			
Suitable for	Concealed cistern																																			
Rimless	Yes																																			
Innovative flushing technology (with TwistFlush)	No																																			
Innovative flushing technology (with TwistFlush[e <sup>2</sup> ])	No																																			
Flush type	Washdown toilet																																			
Flush volume l	3 / 6 l																																			
Outlet / outlet	horizontal outlet																																			
Wall-mounted - floor-standing	wall-mounted																																			
Lead	2																																			
Material	Sanitary ceramics																																			
Surface	glossy																																			
Colour name	White Alpin																																			
36	Toilet Seat	<table><tr><td>Length in mm</td><td>438</td></tr><tr><td>Width in mm</td><td>354</td></tr><tr><td>Height in mm</td><td>42</td></tr><tr><td>Weight in kg</td><td>0,94</td></tr><tr><td>Rimless</td><td>No</td></tr><tr><td>Innovative flushing technology (with TwistFlush)</td><td>No</td></tr><tr><td>Innovative flushing technology (with TwistFlush[e<sup>2</sup>])</td><td>No</td></tr><tr><td>Material</td><td>Duroplast</td></tr><tr><td>Surface</td><td>glossy</td></tr><tr><td>Colour name</td><td>White Alpin</td></tr></table>	Length in mm	438	Width in mm	354	Height in mm	42	Weight in kg	0,94	Rimless	No	Innovative flushing technology (with TwistFlush)	No	Innovative flushing technology (with TwistFlush[e <sup>2</sup> ])	No	Material	Duroplast	Surface	glossy	Colour name	White Alpin	REFER TO IMAGE OF WATER CLOSET	Guard toilet & kitchen toilet & Staff room toilet												
Length in mm	438																																			
Width in mm	354																																			
Height in mm	42																																			
Weight in kg	0,94																																			
Rimless	No																																			
Innovative flushing technology (with TwistFlush)	No																																			
Innovative flushing technology (with TwistFlush[e <sup>2</sup> ])	No																																			
Material	Duroplast																																			
Surface	glossy																																			
Colour name	White Alpin																																			
37	Washbasin	<table><tr><td>Length in mm</td><td>460</td></tr><tr><td>Width in mm</td><td>650</td></tr><tr><td>Height in mm</td><td>175</td></tr><tr><td>Interior depth</td><td>125</td></tr><tr><td>Weight in kg</td><td>20,30</td></tr><tr><td>Number of tap holes punched through</td><td>1</td></tr><tr><td>Number of tap holes pre-drilled</td><td>2</td></tr><tr><td>Position of drill hole</td><td>central tap hole punched out</td></tr><tr><td>express delivery</td><td>No</td></tr><tr><td>Suitable for</td><td>3-hole mixer</td></tr><tr><td>Material</td><td>Sanitary ceramics</td></tr><tr><td>Surface</td><td>glossy</td></tr><tr><td>Colour name</td><td>White Alpin</td></tr><tr><td>With TitanGlaze</td><td>No</td></tr><tr><td>With overflow</td><td>No</td></tr></table>	Length in mm	460	Width in mm	650	Height in mm	175	Interior depth	125	Weight in kg	20,30	Number of tap holes punched through	1	Number of tap holes pre-drilled	2	Position of drill hole	central tap hole punched out	express delivery	No	Suitable for	3-hole mixer	Material	Sanitary ceramics	Surface	glossy	Colour name	White Alpin	With TitanGlaze	No	With overflow	No		Guard toilet & kitchen toilet		
Length in mm	460																																			
Width in mm	650																																			
Height in mm	175																																			
Interior depth	125																																			
Weight in kg	20,30																																			
Number of tap holes punched through	1																																			
Number of tap holes pre-drilled	2																																			
Position of drill hole	central tap hole punched out																																			
express delivery	No																																			
Suitable for	3-hole mixer																																			
Material	Sanitary ceramics																																			
Surface	glossy																																			
Colour name	White Alpin																																			
With TitanGlaze	No																																			
With overflow	No																																			
38	Wall Mounted Sensor Tap	<table><tr><td>Product</td><td>Wall Mounted Sensor Tap</td></tr><tr><td>Operation</td><td>Automatic Infra-Red Sensor</td></tr><tr><td>Power</td><td>Electrical (AC 220V/50Hz)</td></tr><tr><td>Inlet Water Pressure</td><td>0.2-0.8 MPa</td></tr><tr><td>Material</td><td>Brass</td></tr><tr><td>Finish</td><td>Chrome-plated</td></tr><tr><td>Sensing Range</td><td>06 - 12cm</td></tr><tr><td>Recommended Installation Height From Basin</td><td>12 inches</td></tr><tr><td>Product Warranty</td><td></td></tr><tr><td>Sensor Faucets Body</td><td>10 Years</td></tr><tr><td>Sensor Faucets/ Electronic Parts/ Solenoid Valve</td><td>1 Years</td></tr></table>	Product	Wall Mounted Sensor Tap	Operation	Automatic Infra-Red Sensor	Power	Electrical (AC 220V/50Hz)	Inlet Water Pressure	0.2-0.8 MPa	Material	Brass	Finish	Chrome-plated	Sensing Range	06 - 12cm	Recommended Installation Height From Basin	12 inches	Product Warranty		Sensor Faucets Body	10 Years	Sensor Faucets/ Electronic Parts/ Solenoid Valve	1 Years		Guard toilet & kitchen toilet										
Product	Wall Mounted Sensor Tap																																			
Operation	Automatic Infra-Red Sensor																																			
Power	Electrical (AC 220V/50Hz)																																			
Inlet Water Pressure	0.2-0.8 MPa																																			
Material	Brass																																			
Finish	Chrome-plated																																			
Sensing Range	06 - 12cm																																			
Recommended Installation Height From Basin	12 inches																																			
Product Warranty																																				
Sensor Faucets Body	10 Years																																			
Sensor Faucets/ Electronic Parts/ Solenoid Valve	1 Years																																			






## BATHROOM FITTING SCHEDULE - CHANCERY

Chancery Toilet																																				
S.NO.	Name	DESCRIPTION	IMAGE	LOCATIONS																																
1	Water Closet	<table><tr><td>Length in mm</td><td>530</td></tr><tr><td>Width in mm</td><td>370</td></tr><tr><td>Height in mm</td><td>316</td></tr><tr><td>Weight in kg</td><td>22.25</td></tr><tr><td>Suitable for</td><td>Concealed cistern</td></tr><tr><td>Rimless</td><td>Yes</td></tr><tr><td>Innovative flushing technology (with TwistFlush®)</td><td>No</td></tr><tr><td>Innovative flushing technology (with TwistFlush®e)</td><td>No</td></tr><tr><td>Flush type</td><td>Washdown toilet</td></tr><tr><td>Flush volume l</td><td>3 / 4.5 l</td></tr><tr><td>Outlet / outlet</td><td>horizontal outlet</td></tr><tr><td>Wall-mounted - floor-standing</td><td>wall-mounted</td></tr><tr><td>Lead</td><td>4</td></tr><tr><td>Material</td><td>Sanitary ceramics</td></tr><tr><td>Surface</td><td>glossy</td></tr><tr><td>Colour name</td><td>White Alpin</td></tr></table>	Length in mm	530	Width in mm	370	Height in mm	316	Weight in kg	22.25	Suitable for	Concealed cistern	Rimless	Yes	Innovative flushing technology (with TwistFlush®)	No	Innovative flushing technology (with TwistFlush®e)	No	Flush type	Washdown toilet	Flush volume l	3 / 4.5 l	Outlet / outlet	horizontal outlet	Wall-mounted - floor-standing	wall-mounted	Lead	4	Material	Sanitary ceramics	Surface	glossy	Colour name	White Alpin		Ground floor Public toilets, Conference Room Toilet, Visa Section toilets, First floor Public toilets, First floor change rooms, Second Floor Public Floors, Third floor Public toilets, Chief Director Bathroom
Length in mm	530																																			
Width in mm	370																																			
Height in mm	316																																			
Weight in kg	22.25																																			
Suitable for	Concealed cistern																																			
Rimless	Yes																																			
Innovative flushing technology (with TwistFlush®)	No																																			
Innovative flushing technology (with TwistFlush®e)	No																																			
Flush type	Washdown toilet																																			
Flush volume l	3 / 4.5 l																																			
Outlet / outlet	horizontal outlet																																			
Wall-mounted - floor-standing	wall-mounted																																			
Lead	4																																			
Material	Sanitary ceramics																																			
Surface	glossy																																			
Colour name	White Alpin																																			
2	Toilet Seat	<table><tr><td>Length in mm</td><td>438</td></tr><tr><td>Width in mm</td><td>354</td></tr><tr><td>Height in mm</td><td>42</td></tr><tr><td>Weight in kg</td><td>0.94</td></tr><tr><td>Rimless</td><td>No</td></tr><tr><td>Innovative flushing technology (with TwistFlush®)</td><td>No</td></tr><tr><td>Innovative flushing technology (with TwistFlush®e)</td><td>No</td></tr><tr><td>Material</td><td>Duroplast</td></tr><tr><td>Surface</td><td>glossy</td></tr><tr><td>Colour name</td><td>White Alpin</td></tr></table>	Length in mm	438	Width in mm	354	Height in mm	42	Weight in kg	0.94	Rimless	No	Innovative flushing technology (with TwistFlush®)	No	Innovative flushing technology (with TwistFlush®e)	No	Material	Duroplast	Surface	glossy	Colour name	White Alpin	REFER TO IMAGE OF WATER CLOSET	Ground floor Public toilets, Ground Floor Powder rooms, First floor Public toilets, First floor change rooms, Second Floor Public Floors, Third floor Public toilets, Chief Director Bathroom												
Length in mm	438																																			
Width in mm	354																																			
Height in mm	42																																			
Weight in kg	0.94																																			
Rimless	No																																			
Innovative flushing technology (with TwistFlush®)	No																																			
Innovative flushing technology (with TwistFlush®e)	No																																			
Material	Duroplast																																			
Surface	glossy																																			
Colour name	White Alpin																																			
3	Undercounter washbasin	<table><tr><td>Length in mm</td><td>350</td></tr><tr><td>Width in mm</td><td>495</td></tr><tr><td>Height in mm</td><td>200</td></tr><tr><td>Interior depth</td><td>135</td></tr><tr><td>Weight in kg</td><td>12.26</td></tr><tr><td>express delivery</td><td>No</td></tr><tr><td>Material</td><td>Sanitary ceramics</td></tr><tr><td>Surface</td><td>glossy</td></tr><tr><td>Colour name</td><td>White Alpin</td></tr><tr><td>With TitanGlaze</td><td>No</td></tr><tr><td>With overflow</td><td>Yes</td></tr></table>	Length in mm	350	Width in mm	495	Height in mm	200	Interior depth	135	Weight in kg	12.26	express delivery	No	Material	Sanitary ceramics	Surface	glossy	Colour name	White Alpin	With TitanGlaze	No	With overflow	Yes		Ground floor Public toilets, Ground Floor Powder rooms, First floor Public toilets, First floor change rooms, Second Floor Public Floors, Third floor Public toilets, Chief Director Bathroom										
Length in mm	350																																			
Width in mm	495																																			
Height in mm	200																																			
Interior depth	135																																			
Weight in kg	12.26																																			
express delivery	No																																			
Material	Sanitary ceramics																																			
Surface	glossy																																			
Colour name	White Alpin																																			
With TitanGlaze	No																																			
With overflow	Yes																																			
4	Wall Mounted Sensor Tap	<table><tr><td>Product</td><td>Wall Mounted Sensor Tap</td></tr><tr><td>Operation</td><td>Automatic Infra-Red Sensor</td></tr><tr><td>Power</td><td>Electrical (AC 220V/50Hz)</td></tr><tr><td>Inlet Water Pressure</td><td>0.2-0.6 MPa</td></tr><tr><td>Material</td><td>Brass</td></tr><tr><td>Finish</td><td>Chrome plated</td></tr><tr><td>Sensing Range</td><td>06 - 12cm</td></tr><tr><td>Recommended installation Height From Basin</td><td>12 inches</td></tr><tr><td>Product Warranty</td><td></td></tr><tr><td>Sensor Faucets Body</td><td>10 Years</td></tr><tr><td>Sensor Faucets Electronic Parts/ Solenoid Valve</td><td>1 Years</td></tr></table>	Product	Wall Mounted Sensor Tap	Operation	Automatic Infra-Red Sensor	Power	Electrical (AC 220V/50Hz)	Inlet Water Pressure	0.2-0.6 MPa	Material	Brass	Finish	Chrome plated	Sensing Range	06 - 12cm	Recommended installation Height From Basin	12 inches	Product Warranty		Sensor Faucets Body	10 Years	Sensor Faucets Electronic Parts/ Solenoid Valve	1 Years		Ground floor Public toilets, Ground Floor Powder rooms, First floor Public toilets, Second Floor Public Floors, Third floor Public toilets, Chief Director Bathroom										
Product	Wall Mounted Sensor Tap																																			
Operation	Automatic Infra-Red Sensor																																			
Power	Electrical (AC 220V/50Hz)																																			
Inlet Water Pressure	0.2-0.6 MPa																																			
Material	Brass																																			
Finish	Chrome plated																																			
Sensing Range	06 - 12cm																																			
Recommended installation Height From Basin	12 inches																																			
Product Warranty																																				
Sensor Faucets Body	10 Years																																			
Sensor Faucets Electronic Parts/ Solenoid Valve	1 Years																																			
5	Toilet installation system	<table><tr><td>Length in mm</td><td>135</td></tr><tr><td>Width in mm</td><td>525</td></tr><tr><td>Height in mm</td><td>1120</td></tr><tr><td>Weight in kg</td><td>15.80</td></tr><tr><td>Suitable for</td><td>for wall-mounted WC</td></tr><tr><td>Material</td><td>Steel</td></tr></table>	Length in mm	135	Width in mm	525	Height in mm	1120	Weight in kg	15.80	Suitable for	for wall-mounted WC	Material	Steel		Ground floor Public toilets, Ground Floor Powder rooms, First floor Public toilets, First floor change rooms, Second Floor Public Floors, Third floor Public toilets, Chief Director Bathroom																				
Length in mm	135																																			
Width in mm	525																																			
Height in mm	1120																																			
Weight in kg	15.80																																			
Suitable for	for wall-mounted WC																																			
Material	Steel																																			
6	Toilet flush plate	<table><tr><td>Length in mm</td><td>10</td></tr><tr><td>Width in mm</td><td>253</td></tr><tr><td>Height in mm</td><td>145</td></tr><tr><td>Weight in kg</td><td>0.39</td></tr><tr><td>Suitable for</td><td>Dual flush</td></tr><tr><td>Material</td><td>Plastic</td></tr><tr><td>Surface</td><td>glossy</td></tr><tr><td>Colour name</td><td>Chrome</td></tr><tr><td>Activation / Flush</td><td>front/top operated</td></tr></table>	Length in mm	10	Width in mm	253	Height in mm	145	Weight in kg	0.39	Suitable for	Dual flush	Material	Plastic	Surface	glossy	Colour name	Chrome	Activation / Flush	front/top operated		Ground floor Public toilets, Ground Floor Powder rooms, First floor Public toilets, First floor change rooms, Second Floor Public Floors, Third floor Public toilets, Chief Director Bathroom														
Length in mm	10																																			
Width in mm	253																																			
Height in mm	145																																			
Weight in kg	0.39																																			
Suitable for	Dual flush																																			
Material	Plastic																																			
Surface	glossy																																			
Colour name	Chrome																																			
Activation / Flush	front/top operated																																			
7	Bidet spray	<table><tr><td>Length in mm</td><td>83</td></tr><tr><td>Width in mm</td><td>29</td></tr><tr><td>Height in mm</td><td>115</td></tr><tr><td>Weight in kg</td><td>0.32</td></tr><tr><td>Colour name</td><td>Chrome</td></tr><tr><td>EAN number</td><td>4051202728779</td></tr><tr><td>Flow rate hand shower in litres per minute</td><td>5,7</td></tr><tr><td>Length of shower hose</td><td>1200</td></tr><tr><td>Material</td><td>ABS</td></tr><tr><td>Volume</td><td>2,679</td></tr><tr><td>Swivel aerator</td><td>No</td></tr><tr><td>Thermostat</td><td>No</td></tr><tr><td>Cool Tap</td><td>No</td></tr></table>	Length in mm	83	Width in mm	29	Height in mm	115	Weight in kg	0.32	Colour name	Chrome	EAN number	4051202728779	Flow rate hand shower in litres per minute	5,7	Length of shower hose	1200	Material	ABS	Volume	2,679	Swivel aerator	No	Thermostat	No	Cool Tap	No		Ground floor Public toilets, Ground Floor Powder rooms, First floor Public toilets, First floor change rooms, Second Floor Public Floors, Third floor Public toilets, Chief Director Bathroom						
Length in mm	83																																			
Width in mm	29																																			
Height in mm	115																																			
Weight in kg	0.32																																			
Colour name	Chrome																																			
EAN number	4051202728779																																			
Flow rate hand shower in litres per minute	5,7																																			
Length of shower hose	1200																																			
Material	ABS																																			
Volume	2,679																																			
Swivel aerator	No																																			
Thermostat	No																																			
Cool Tap	No																																			
8	Angle valve	<table><tr><td>Length in mm</td><td>76</td></tr><tr><td>Width in mm</td><td>54</td></tr><tr><td>Height in mm</td><td>54</td></tr><tr><td>Weight in kg</td><td>0.09</td></tr><tr><td>Colour name</td><td>Chrome</td></tr><tr><td>EAN number</td><td>4051202728786</td></tr><tr><td>Material</td><td>Brass</td></tr><tr><td>Volume</td><td>0.189</td></tr><tr><td>Swivel aerator</td><td>No</td></tr><tr><td>Thermostat</td><td>No</td></tr><tr><td>Cool Tap</td><td>No</td></tr></table>	Length in mm	76	Width in mm	54	Height in mm	54	Weight in kg	0.09	Colour name	Chrome	EAN number	4051202728786	Material	Brass	Volume	0.189	Swivel aerator	No	Thermostat	No	Cool Tap	No		Ground floor Public toilets, Ground Floor Powder rooms, First floor Public toilets, First floor change rooms, Second Floor Public Floors, Third floor Public toilets, Chief Director Bathroom										
Length in mm	76																																			
Width in mm	54																																			
Height in mm	54																																			
Weight in kg	0.09																																			
Colour name	Chrome																																			
EAN number	4051202728786																																			
Material	Brass																																			
Volume	0.189																																			
Swivel aerator	No																																			
Thermostat	No																																			
Cool Tap	No																																			

## BATHROOM FITTING SCHEDULE - CHANCERY

Chancery Toilet																															
S.NO.	Name	DESCRIPTION	IMAGE	LOCATIONS																											
9	Drain	<table><tr><td>Colour</td><td>Matte Chrome</td></tr><tr><td>Height</td><td>7</td></tr><tr><td>Width</td><td>400</td></tr><tr><td>Depth</td><td>6</td></tr><tr><td>Packaged Product Sizes (WxDxH)</td><td>85X120X460</td></tr><tr><td>Body Material</td><td>Stainless Steel</td></tr><tr><td>Special Needs</td><td>Yes</td></tr></table>	Colour	Matte Chrome	Height	7	Width	400	Depth	6	Packaged Product Sizes (WxDxH)	85X120X460	Body Material	Stainless Steel	Special Needs	Yes		Change rooms on First floor													
Colour	Matte Chrome																														
Height	7																														
Width	400																														
Depth	6																														
Packaged Product Sizes (WxDxH)	85X120X460																														
Body Material	Stainless Steel																														
Special Needs	Yes																														
10	Urinals with sensor	<p><b>Material:</b> Sanitary ceramics</p> <p><b>Surface:</b> Glossy</p> <p><b>Width:</b> 335 mm</p> <p><b>Length:</b> 320 mm</p> <p><b>Height:</b> 560 mm</p> <p><b>Suitable for:</b> Installation without lid</p> <p><b>Delivery contents:</b> 1 x siphonic urinal</p>		<p>HIS Public Washrooms on Ground, First, without cover, concealed water inlet, 335 x 320 mm, White Alpine</p> <p><b>Color:</b> White</p> <ul style="list-style-type: none"><li>• Modern urinal with clean design</li><li>• Ideal for highly frequented sanitary spaces</li><li>• The rimless generation of toilets - top cleanliness and perfect design</li><li>• Spray-preventing urinal for optimum hygiene</li><li>• Sanitary ceramic is especially long-lasting and e</li></ul>																											
11	Urinals sensor	<table><tr><td>Mounting</td><td>-</td><td>Recessed</td></tr><tr><td>Operation</td><td>-</td><td>Self Flush Infra-Red Sensor</td></tr><tr><td>Working Water Pressure</td><td>-</td><td>0.1 MPa - 0.7 MPa</td></tr><tr><td>Sensing Range</td><td>-</td><td>65 cm</td></tr><tr><td>Power</td><td>-</td><td>Electrical (AC 220V, 50Hz)</td></tr><tr><td>Dia of Inlet/Outlet Pipe</td><td>-</td><td>Dn 15 (G1/2")</td></tr><tr><td>Pressure</td><td>-</td><td>1 Bar      2 Bar      3 Bar</td></tr><tr><td>Water Discharge</td><td>-</td><td>0.22L      0.33L      0.40L</td></tr><tr><td>Product Warranty</td><td>-</td><td>1 Year</td></tr></table>	Mounting	-	Recessed	Operation	-	Self Flush Infra-Red Sensor	Working Water Pressure	-	0.1 MPa - 0.7 MPa	Sensing Range	-	65 cm	Power	-	Electrical (AC 220V, 50Hz)	Dia of Inlet/Outlet Pipe	-	Dn 15 (G1/2")	Pressure	-	1 Bar      2 Bar      3 Bar	Water Discharge	-	0.22L      0.33L      0.40L	Product Warranty	-	1 Year		HIS Public Washrooms on Ground, First, Second and Third floor
Mounting	-	Recessed																													
Operation	-	Self Flush Infra-Red Sensor																													
Working Water Pressure	-	0.1 MPa - 0.7 MPa																													
Sensing Range	-	65 cm																													
Power	-	Electrical (AC 220V, 50Hz)																													
Dia of Inlet/Outlet Pipe	-	Dn 15 (G1/2")																													
Pressure	-	1 Bar      2 Bar      3 Bar																													
Water Discharge	-	0.22L      0.33L      0.40L																													
Product Warranty	-	1 Year																													
12	P Traps	<table><tr><td>Colour</td><td>Shiny Chrome</td></tr><tr><td>Height</td><td>90</td></tr><tr><td>Width</td><td>195</td></tr><tr><td>Depth</td><td>155</td></tr><tr><td>Designer</td><td>VitrA Design Team</td></tr><tr><td>Guarantee</td><td>2</td></tr><tr><td>Body Material</td><td>Stainless Steel</td></tr><tr><td>Special Needs</td><td>Yes</td></tr><tr><td>Packaged Product Sizes (WxDxH)</td><td>195X155X90</td></tr></table>	Colour	Shiny Chrome	Height	90	Width	195	Depth	155	Designer	VitrA Design Team	Guarantee	2	Body Material	Stainless Steel	Special Needs	Yes	Packaged Product Sizes (WxDxH)	195X155X90		Ground floor Public toilets, Ground Floor Powder rooms, First floor Public toilets, First floor change rooms, Second Floor Public Floors, Third floor Public toilets, Chief Director Bathroom									
Colour	Shiny Chrome																														
Height	90																														
Width	195																														
Depth	155																														
Designer	VitrA Design Team																														
Guarantee	2																														
Body Material	Stainless Steel																														
Special Needs	Yes																														
Packaged Product Sizes (WxDxH)	195X155X90																														
13	Toilet paper holder	<table><tr><td>Colour</td><td>Chrome</td></tr><tr><td>Height</td><td>55</td></tr><tr><td>Width</td><td>55</td></tr><tr><td>Depth</td><td>45</td></tr><tr><td>Guarantee</td><td>5</td></tr><tr><td>Finish</td><td>Chrome</td></tr><tr><td>Material</td><td>Chrome</td></tr><tr><td>Mounting type</td><td>Wall Mounted</td></tr><tr><td>Special Needs</td><td>Yes</td></tr><tr><td>Packaged Product Sizes (WxDxH)</td><td>195X155X90</td></tr></table>	Colour	Chrome	Height	55	Width	55	Depth	45	Guarantee	5	Finish	Chrome	Material	Chrome	Mounting type	Wall Mounted	Special Needs	Yes	Packaged Product Sizes (WxDxH)	195X155X90		Ground floor Public toilets, Ground Floor Powder rooms, First floor Public toilets, First floor change rooms, Second Floor Public Floors, Third floor Public toilets, Chief Director Bathroom							
Colour	Chrome																														
Height	55																														
Width	55																														
Depth	45																														
Guarantee	5																														
Finish	Chrome																														
Material	Chrome																														
Mounting type	Wall Mounted																														
Special Needs	Yes																														
Packaged Product Sizes (WxDxH)	195X155X90																														
14	Robe hooks	Supply of C.P. brass robe hook approved quality and direction of Engineer-in-charge.		Ground floor Public toilets, Ground Floor Powder rooms, First floor Public toilets, First floor change rooms, Second Floor Public Floors, Third floor Public toilets, Chief Director Bathroom																											

## BATHROOM FITTING SCHEDULE - CHANCERY

Chancery Toilet																																				
S.NO.	Name	DESCRIPTION	IMAGE	LOCATIONS																																
15	Soap dispenser	<table><tr><td>Colour</td><td>Chrome</td></tr><tr><td>Height</td><td>210</td></tr><tr><td>Width</td><td>120</td></tr><tr><td>Depth</td><td>117</td></tr><tr><td>Designer</td><td>Vitra Design Team</td></tr><tr><td>Guarantee</td><td>5</td></tr><tr><td>Finish</td><td>Stainless steel</td></tr><tr><td>Material</td><td>Stainless steel</td></tr><tr><td>Mounting type</td><td>Wall Mounted</td></tr><tr><td>Packaged Product Sizes (WxDxH)</td><td>125X215X130</td></tr><tr><td>Body Material</td><td>Stainless Steel</td></tr><tr><td>Marketing Measure (cm)</td><td>9 CM</td></tr></table>	Colour	Chrome	Height	210	Width	120	Depth	117	Designer	Vitra Design Team	Guarantee	5	Finish	Stainless steel	Material	Stainless steel	Mounting type	Wall Mounted	Packaged Product Sizes (WxDxH)	125X215X130	Body Material	Stainless Steel	Marketing Measure (cm)	9 CM		Ground floor Public toilets, Ground Floor Powder rooms, First floor Public toilets, First floor change rooms, Second Floor Public Floors, Third floor Public toilets, Chief Director Bathroom								
Colour	Chrome																																			
Height	210																																			
Width	120																																			
Depth	117																																			
Designer	Vitra Design Team																																			
Guarantee	5																																			
Finish	Stainless steel																																			
Material	Stainless steel																																			
Mounting type	Wall Mounted																																			
Packaged Product Sizes (WxDxH)	125X215X130																																			
Body Material	Stainless Steel																																			
Marketing Measure (cm)	9 CM																																			
16	Universal Taps & Fittings Siphon	<ul style="list-style-type: none"><li>variable positioning of the mixer system, can be left or right of the spout</li><li>easy orientation due to support surfaces for the spirit level</li><li>with building protection cover against contamination during assembly</li><li>with dimension indication for exact determination of the installation depth</li><li>with pre-mounted fastening lugs for mounting in drywall and solidwall</li><li>sound-decoupled installation</li><li>...</li><li>minimum mounting depth: 44 mm</li><li>maximum mounting depth: 72 mm</li></ul>		Ground floor Public toilets, Ground Floor Powder rooms, First floor Public toilets, First floor change rooms, Second Floor Public Floors, Third floor Public toilets, Chief Director Bathroom																																
17	Sanitary Napkin Dispenser	<p>Combination : Sanitary Napkin Dispenser / Toilet Paper Holder / Disposable Bag Dispenser / Waste Receptacle</p> <p>Material : 304 Grade Stainless Steel</p> <p>Sanitary Napkin Capacity : 20-25 Pcs</p> <p>Waste Receptacle Capacity : 4.6 Litre</p> <p>Equipped With Full-length Stainless Steel Piano Flap</p> <p>Disposable Bags Capacity: 50 bags</p>		Female Public Toilets																																
18	Washroom Panel(Hand Dryer + Tissue Dispenser + Waste Receptacle)	<table><tr><td colspan="2">KEY FEATURES</td></tr><tr><td>Mounting</td><td>Recessed</td></tr><tr><td>Construction</td><td>304 Grade Stainless Steel</td></tr><tr><td>Finish</td><td>Stainless Steel Brush</td></tr><tr><td>Paper Dispenser Capacity</td><td>6000 C-Roll or 3600 Multi-Pull Paper Towel</td></tr><tr><td>Waste Receptacle Capacity</td><td>20 Litres</td></tr><tr><td>Hand Dryer Power</td><td>1500W</td></tr><tr><td>Water Speed</td><td>25,000 RPM</td></tr><tr><td>Blowing Volume</td><td>&gt; 270 m³/h</td></tr><tr><td>Air Speed</td><td>85 m/s</td></tr><tr><td>Sensor Range</td><td>10 cm - 15 cm</td></tr><tr><td>Protection Class</td><td>IP65</td></tr><tr><td>Wall Opening Required</td><td>85mm (W) x 160mm (H) x 50mm (D)</td></tr><tr><td>Hand Dryer Motor</td><td>Brushless</td></tr><tr><td>Warranty on Brushless Motor</td><td>2 year</td></tr><tr><td>Product Warranty</td><td>1 year</td></tr></table>	KEY FEATURES		Mounting	Recessed	Construction	304 Grade Stainless Steel	Finish	Stainless Steel Brush	Paper Dispenser Capacity	6000 C-Roll or 3600 Multi-Pull Paper Towel	Waste Receptacle Capacity	20 Litres	Hand Dryer Power	1500W	Water Speed	25,000 RPM	Blowing Volume	> 270 m³/h	Air Speed	85 m/s	Sensor Range	10 cm - 15 cm	Protection Class	IP65	Wall Opening Required	85mm (W) x 160mm (H) x 50mm (D)	Hand Dryer Motor	Brushless	Warranty on Brushless Motor	2 year	Product Warranty	1 year		Male & Female Public Toilets
KEY FEATURES																																				
Mounting	Recessed																																			
Construction	304 Grade Stainless Steel																																			
Finish	Stainless Steel Brush																																			
Paper Dispenser Capacity	6000 C-Roll or 3600 Multi-Pull Paper Towel																																			
Waste Receptacle Capacity	20 Litres																																			
Hand Dryer Power	1500W																																			
Water Speed	25,000 RPM																																			
Blowing Volume	> 270 m³/h																																			
Air Speed	85 m/s																																			
Sensor Range	10 cm - 15 cm																																			
Protection Class	IP65																																			
Wall Opening Required	85mm (W) x 160mm (H) x 50mm (D)																																			
Hand Dryer Motor	Brushless																																			
Warranty on Brushless Motor	2 year																																			
Product Warranty	1 year																																			
19	Toilet Seat Dispenser	<p>Material : Stainless Steel #304, Satin Finish</p> <p>Unit Dimensions : W-940 mm x H-585 mm</p> <p>Depth (Closed) : 104 mm</p> <p>Extension (Open) : 495mm</p> <p>Maximum Load : 25 Kgs</p> <p>*Equipped With Safety Belt To Secure Baby When Changing Diapers</p> <table><tr><td colspan="2">KEY FEATURES</td></tr><tr><td>Mounting</td><td>Recessed</td></tr><tr><td>Cabinet</td><td>304 Stainless Steel</td></tr><tr><td>Capacity</td><td>250 Seat Covers</td></tr><tr><td>Application</td><td>New WC Area to dispenser seat and covers</td></tr></table>	KEY FEATURES		Mounting	Recessed	Cabinet	304 Stainless Steel	Capacity	250 Seat Covers	Application	New WC Area to dispenser seat and covers		Ground floor Public toilets, Ground Floor Powder rooms, First floor Public toilets, First floor change rooms, Second Floor Public Floors, Third floor Public toilets																						
KEY FEATURES																																				
Mounting	Recessed																																			
Cabinet	304 Stainless Steel																																			
Capacity	250 Seat Covers																																			
Application	New WC Area to dispenser seat and covers																																			

## BATHROOM FITTING SCHEDULE - CHANCERY





Chancery Toilet				
S.NO.	Name	DESCRIPTION	IMAGE	LOCATIONS
20	Bathroom Cubicle	<p>Material : Compact Laminate in panels. Made from solid grade compact high-pressure laminate as per IS:2046 and EN438- manufactured under high specific pressure &gt; 5 MPa and temperature 120°C with bunch of kraft papers impregnated with thermosetting phenolic resin and decorative papers made of cellulose fibre impregnated with thermosetting melamine resin which provide superior scratch, abrasion, heat, chemical, impact, graffiti &amp; moisture resistance along with anti-bacterial properties. Panels have a black core that when machined, presents a distinctive black edge. All doors will be of single colour and made of 12 mm thick HPL compact panel. The doors will have chamfered edges. Each door will be supported by 3 stainless steel made hinges affixed to the pilasters. Stainless steel made coat hook and lock set are provided with each door.</p> <p>All pilasters will be made of 12 mm thick Merino HPL compact panel with chamfered edge and completed with stainless steel made thumb turn Lock set (comprised of Thumb turn and occupancy indicator). Aluminium made door stopper profiles with rubber linings for dampening the noise while door closing will be provided at the vertical ends of the pilasters. All intermediate partitions or dividers will be made of 12 mm thick Merino HPL compact laminate panels. They are affixed with stainless steel made U-channel at their ends for ultimate stability of the system.</p>		Ground floor Public toilets, First floor Public toilets, Second Floor Public Floors, Third floor Public toilets
		<p>Hardware and accessories in Stainless Steel</p> <p>Semi-spherical (Top) head frame structure for surface protection. Size to be 50mm x 32mm x 1.8mm. Corner joinery section, Size to be 40mm x 16.5mm x 1.8mm. U-Channel Wall joinery section, Size to be 22mm x 16mm x 1.8mm. Door stopper section, Size to be 21mm x 12.5mm x 1.6mm. Adjustable Palm Design Pedestal Footing of base diameter 60mm made from Stainless steel grade 316 giving a clearance height of 150 mm. Surface finish to be Lacquer type.</p> <p>Spring loaded Butt Hinges made from Stainless steel grade 304. Surface finish to be matt type. Covers to be Lacquer coated.</p> <p>Coat hook with rubber stopper made from Stainless steel grade 304. Surface finish to be matt type.</p> <p>Round Door knob diameter 30 mm with grooves for better hand grip made from Stainless steel grade 304. Surface finish to be matt type.</p> <p>Rotating Thumb-turn locking system with privacy indicator made from Stainless steel grade 304. Surface finish to be matt type.</p> <p>Stainless steel grade 304 screws.</p> <p>Anti-rotation Nylon polyamide grade6- expandable wall plugs.</p> <p>The Work shall complete as per drawing, under supervision of engineer in charge and company experts</p> <p>Extruded grade aluminium alloy and epoxy powder coated (colour as per specifications)</p>		SECTION - X

## BATHROOM FITTING SCHEDULE - CHANCERY







Chancery Toilet				
S.NO.	Name	DESCRIPTION	IMAGE	LOCATIONS
				ELEVATION - A
21	Mirror	Backlit framelss mirrors with 12mm prelamated backing ply with 6mm Mirror pasted with silicon adhesive. Mirror shall have a back mounting framework in aluminium tubes with separate panels for concealing IP-65 led strip light @ 10W per RM. The mirror shall have a 20mm frosted portion that would allow the LED strips to light up the front		Ground floor Public toilets, First floor Public toilets, Second Floor Public Floors, Third floor Public toilets
22	Mirror	Backlit framelss mirrors with 12mm prelamated backing ply with 6mm Mirror pasted with silicon adhesive. Mirror shall have a back mounting framework in aluminium tubes with separate panels for concealing IP-65 led strip light @ 10W per RM. The mirror shall have a 65mm frosted portion that would allow the LED strips to light up the front		Ground floor Public toilets, First floor Public toilets, Second Floor Public Floors, Third floor Public toilets










## BATHROOM FITTING SCHEDULE - CHANCERY

Chancery Toilet				
S.NO.	Name	DESCRIPTION	IMAGE	LOCATIONS
23	Overhead Shower	<ul style="list-style-type: none"> <li>consists of: overhead shower, wall outlet</li> <li>shower head size: 360 mm</li> <li>spray type: PowderRain</li> <li>flow rate PowderRain spray at 3 bar: 21 l/min</li> <li>function from: 16,5 l/min</li> <li>maximum flow rate at 3 bar: 21 l/min</li> <li>minimum flow pressure: 2 bar</li> <li>projection: 381 mm</li> <li>middle spray disc: 205 mm</li> <li>frame: metal</li> <li>material spray disc: aluminium</li> <li>spray disc surface: graphite</li> <li>overhead shower removable for cleaning</li> <li>shower head vertically inclinable by 10-30°</li> <li>installation: wall</li> <li>connection thread: G ½</li> <li>connection dimension: DN15</li> <li>not suitable for continuous flow water heaters</li> </ul>		Change rooms on First floor
24	iBox -concealed	<ul style="list-style-type: none"> <li>suitable for all new shower, bath tub and thermostat finish sets for concealed installation (ShowerSelect Comfort, DuoTurn)</li> <li>in conjunction with adapter plate (# 13588000) compatible with other concealed shower, bath tub and thermostat finish sets</li> <li>material: dezincification brass, EPP foam, heat and sound insulating</li> <li>connection thread: Rp ½</li> <li>connection dimension: DN15</li> <li>rotationally-symmetric installation</li> <li>sound-decoupled installation</li> <li>flexible mounting ring for different mounting situations</li> <li>mounting ring adjustable in 5 mm steps</li> <li>mounting ring suitable for front and rear installation</li> <li>no shortening necessary thanks to sliding sleeve</li> <li>support aid for the spirit level</li> <li>integrated spirit level for correct horizontal and vertical alignment</li> <li>sealing foil permanently fixed</li> <li>power supply: M16 flexible conduit</li> <li>minimum mounting depth: 80 mm</li> <li>maximum mounting depth: 108 mm</li> </ul>		Bassment level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom Guest Bathroom
25	Valve for concealed installation for OHS	<ul style="list-style-type: none"> <li>3 functions</li> <li>simultaneous use of several outlets</li> <li>comfortable turning on / off of outlets with large Select-paddle</li> <li>Start/stop valve to operate the functions</li> <li>flow rate upper outlet: 26 l/min</li> <li>flow rate left and right: 26 l/min</li> <li>maximum flow rate at 3 bar: 32 l/min</li> <li>min. operating pressure: 1 bar</li> <li>max. operating pressure: 10 bar</li> <li>escutcheon can be aligned by +/- 3°</li> <li>easy installation due to pre-assembled function block</li> <li>handles always at the same height regardless of the installation depth of the basic set</li> <li>flat escutcheon for more space in the shower</li> <li>valve is delivered with buttons Rain small, Rain large, hand sower, Waterfall, bath tub</li> </ul>		Bassment level bathroom, Master Bathroom, Bathroom 1,2 and 3 , Staff Bathroom Guest Bathroom
26	Bath spout	<ul style="list-style-type: none"> <li>1 function</li> <li>connection type: G ¾</li> <li>with escutcheon</li> <li>projection: 195 mm</li> <li>wall-mounted</li> <li>maximum flow rate at 3 bar: 21 l/min</li> <li>connection dimension: DN20</li> <li>spray type: normal spray</li> </ul>		Change rooms on First floor






## BATHROOM FITTING SCHEDULE - CHANCERY

Chancery Toilet				
S.NO.	Name	DESCRIPTION	IMAGE	LOCATIONS
27	Hand shower	<ul style="list-style-type: none"> <li>shower head size: 132 mm</li> <li>spray type: PowderRain, Intense PowderRain, MonoRain</li> <li>convenient spray selection via Select button</li> <li>spray disc surface: easy cleanable aluminium spray disc, graphite</li> <li>QuickClean: Limescale deposits can simply be rubbed off with your finger</li> <li>maximum flow rate at 3 bar: 14 l/min</li> <li>function from: 5,7 l/min</li> <li>minimum flow pressure: 1,1 bar</li> <li>with internal water conduction</li> <li>rinseable filter washer</li> <li>connection thread: G ½</li> <li>suitable for continuous flow water heaters</li> </ul>		Change rooms on First floor
28	Shower hose	<ul style="list-style-type: none"> <li>high-quality shower hose</li> <li>with plastic coating, easy to clean</li> <li>shower hose length: 1.60 m</li> <li>pivot connector prevents hose from tangling</li> <li>kink-protected</li> <li>nuts shower hose: conical nut on both ends</li> <li>connection thread: G ½</li> </ul>		Change rooms on First floor
29	Shower holder	<ul style="list-style-type: none"> <li>fixed holding position</li> <li>for shower hoses with conical nut</li> <li>material: plastic</li> <li>dimensions: 53 x 37 x 50 mm (HxWxD)</li> <li>diameter drill hole: 6 mm</li> <li>2 drill holes</li> <li>conical mount</li> </ul>		Change rooms on First floor
30	Wall outlet Square with non-return valve	<ul style="list-style-type: none"> <li>plastic connection angle</li> <li>material cover: plastic</li> <li>with non-return valve</li> <li>connection type: G ½</li> </ul>		Change rooms on First floor
31	Single Lever Basin Mixer	<p><b>product features</b></p> <ul style="list-style-type: none"> <li>consists of: single lever basin mixer for concealed installation wall-mounted, waste set</li> <li>projection: 225 mm</li> <li>handle variant: lever handle</li> <li>spray type: normal spray</li> <li>maximum flow rate at 3 bar: 5 l/min</li> <li>ceramic cartridge</li> <li>temperature limitation adjustable</li> <li>suitable for continuous flow water heaters</li> <li>non-closing waste set</li> <li>material waste set: metal</li> <li>connection type: basic set</li> <li>connection dimension: DN15</li> <li>handle can be positioned on the right or left, depending on the basic set installation</li> <li>EU taxonomy: max. 6 l/min - Substantial Contribution (SC) possible</li> </ul>		Change rooms on First floor
32	Basic set for single lever basin mixer for concealed installation wall-mounted	<ul style="list-style-type: none"> <li>variable positioning of the mixer system, can be left or right of the spout</li> <li>easy orientation due to support surfaces for the spirit level</li> <li>with building protection cover against contamination during assembly</li> <li>with dimension indication for exact determination of the installation depth</li> <li>with pre-mounted fastening lugs for mounting in drywall and solidwall</li> <li>sound-decoupled installation</li> <li>minimum mounting depth: 44 mm</li> <li>maximum mounting depth: 72 mm</li> </ul>		Change rooms on First floor






## BATHROOM FITTING SCHEDULE - CHANCERY

Chancery Toilet																																						
S.NO.	Name	DESCRIPTION	IMAGE	LOCATIONS																																		
33	Towel Rack	<b>product features</b> <ul style="list-style-type: none"><li>· wall-mounted</li><li>· material: brass</li><li>· holder material: metal</li><li>· length: 644 mm</li><li>· with mounting material</li><li>· drilling distance: 600 mm</li><li>· diameter drill hole: 6 mm</li><li>· concealed fastening</li></ul>		Change rooms on First floor																																		
34	towel holder	<b>product features</b> <ul style="list-style-type: none"><li>· wall-mounted</li><li>· material: brass</li><li>· holder material: metal</li><li>· length: 644 mm</li><li>· with mounting material</li><li>· drilling distance: 600 mm</li><li>· diameter drill hole: 6 mm</li><li>· concealed fastening</li></ul>		Change rooms on First floor																																		
35	Kitchen Sink	<p><b>Bowl Size: (LxWxD)mm</b> <b>503x425x200</b></p> <div><div><p><b>Properties</b></p><ul style="list-style-type: none"><li> <b>Water proof</b> (Pressure &lt; 10 bar) (Temperature up to 120°C)</li><li> <b>Water proof</b> (Pressure &lt; 10 bar) (Temperature up to 120°C)</li><li> <b>Water proof</b> (Pressure &lt; 10 bar) (Temperature up to 120°C)</li><li> <b>Water proof</b> (Pressure &lt; 10 bar) (Temperature up to 120°C)</li><li> <b>Water proof</b> (Pressure &lt; 10 bar) (Temperature up to 120°C)</li><li> <b>Water proof</b> (Pressure &lt; 10 bar) (Temperature up to 120°C)</li></ul></div><div></div></div>		Kitchenette																																		
36	Kitchen Faucets	<table><tr><td colspan="2"><b>Product Information</b></td></tr><tr><td>Spout version</td><td>Low Spout</td></tr><tr><td>Color</td><td>Chrome</td></tr><tr><td>Type of material</td><td>Brass</td></tr><tr><td>Flexible pullout hose material</td><td>Nylon grey</td></tr><tr><td>Shower material</td><td>ABS plastic</td></tr><tr><td colspan="2"><b>Dimensions</b></td></tr><tr><td>Tap hole diameter</td><td>35 mm</td></tr><tr><td>Cartridge dimension</td><td>40 mm</td></tr><tr><td colspan="2"><b>Installation</b></td></tr><tr><td>Fixation type</td><td>1 bolt</td></tr><tr><td>Water supply hose connection</td><td>3/8"</td></tr><tr><td>Water supply hose length</td><td>450 mm</td></tr><tr><td colspan="2"><b>Product specifications</b></td></tr><tr><td>Pressure</td><td>High Pressure</td></tr><tr><td>Version</td><td>Spray</td></tr><tr><td>Tap operation</td><td>top lever</td></tr></table>	<b>Product Information</b>		Spout version	Low Spout	Color	Chrome	Type of material	Brass	Flexible pullout hose material	Nylon grey	Shower material	ABS plastic	<b>Dimensions</b>		Tap hole diameter	35 mm	Cartridge dimension	40 mm	<b>Installation</b>		Fixation type	1 bolt	Water supply hose connection	3/8"	Water supply hose length	450 mm	<b>Product specifications</b>		Pressure	High Pressure	Version	Spray	Tap operation	top lever	 	Kitchenette
<b>Product Information</b>																																						
Spout version	Low Spout																																					
Color	Chrome																																					
Type of material	Brass																																					
Flexible pullout hose material	Nylon grey																																					
Shower material	ABS plastic																																					
<b>Dimensions</b>																																						
Tap hole diameter	35 mm																																					
Cartridge dimension	40 mm																																					
<b>Installation</b>																																						
Fixation type	1 bolt																																					
Water supply hose connection	3/8"																																					
Water supply hose length	450 mm																																					
<b>Product specifications</b>																																						
Pressure	High Pressure																																					
Version	Spray																																					
Tap operation	top lever																																					
Disabled Friendly Washroom																																						
S.NO.	NAME	DESCRIPTION	IMAGE																																			
1	Water Closet, trimless	<table><tr><td>Length in mm</td><td>595</td></tr><tr><td>Width in mm</td><td>360</td></tr><tr><td>Height in mm</td><td>404</td></tr><tr><td>Weight in kg</td><td>23,00</td></tr><tr><td>Suitable for</td><td>Concealed cistern</td></tr><tr><td>Rimless</td><td>Yes</td></tr><tr><td>Innovative flushing technology (with TwistFlush)</td><td>No</td></tr><tr><td>Innovative flushing technology (with TwistFlush(e))</td><td>No</td></tr><tr><td>Flush type</td><td>Washdown toilet</td></tr><tr><td>Flush volume l</td><td>3 / 6 l</td></tr><tr><td>Outlet / outlet</td><td>horizontal outlet</td></tr><tr><td>Wall-mounted - floor-standing</td><td>wall-mounted</td></tr><tr><td>Lead</td><td>2</td></tr><tr><td>Material</td><td>Sanitary ceramics</td></tr><tr><td>Surface</td><td>glossy</td></tr><tr><td>Colour name</td><td>White Alpin</td></tr></table>	Length in mm	595	Width in mm	360	Height in mm	404	Weight in kg	23,00	Suitable for	Concealed cistern	Rimless	Yes	Innovative flushing technology (with TwistFlush)	No	Innovative flushing technology (with TwistFlush(e))	No	Flush type	Washdown toilet	Flush volume l	3 / 6 l	Outlet / outlet	horizontal outlet	Wall-mounted - floor-standing	wall-mounted	Lead	2	Material	Sanitary ceramics	Surface	glossy	Colour name	White Alpin		Disable friendly Bathroom on Ground Floor, First Floor, second Floor, and Third Floor		
Length in mm	595																																					
Width in mm	360																																					
Height in mm	404																																					
Weight in kg	23,00																																					
Suitable for	Concealed cistern																																					
Rimless	Yes																																					
Innovative flushing technology (with TwistFlush)	No																																					
Innovative flushing technology (with TwistFlush(e))	No																																					
Flush type	Washdown toilet																																					
Flush volume l	3 / 6 l																																					
Outlet / outlet	horizontal outlet																																					
Wall-mounted - floor-standing	wall-mounted																																					
Lead	2																																					
Material	Sanitary ceramics																																					
Surface	glossy																																					
Colour name	White Alpin																																					








## BATHROOM FITTING SCHEDULE - CHANCERY

Chancery Toilet																																		
S.NO.	Name	DESCRIPTION	IMAGE	LOCATIONS																														
2	Toilet Seat	<table><tr><td>Length in mm</td><td>438</td></tr><tr><td>Width in mm</td><td>354</td></tr><tr><td>Height in mm</td><td>42</td></tr><tr><td>Weight in kg</td><td>0,94</td></tr><tr><td>Rimless</td><td>No</td></tr><tr><td>Innovative flushing technology (with TwistFlush)</td><td>No</td></tr><tr><td>Innovative flushing technology (with TwistFlush[e<sup>ff</sup>])</td><td>No</td></tr><tr><td>Material</td><td>Duroplast</td></tr><tr><td>Surface</td><td>glossy</td></tr><tr><td>Colour name</td><td>White Alpin</td></tr></table>	Length in mm	438	Width in mm	354	Height in mm	42	Weight in kg	0,94	Rimless	No	Innovative flushing technology (with TwistFlush)	No	Innovative flushing technology (with TwistFlush[e <sup>ff</sup> ])	No	Material	Duroplast	Surface	glossy	Colour name	White Alpin	REFER TO IMAGE OF WATER CLOSET	Disable friendly Bathroom on Ground Floor,First Floor, second Floor, and Third Floor										
Length in mm	438																																	
Width in mm	354																																	
Height in mm	42																																	
Weight in kg	0,94																																	
Rimless	No																																	
Innovative flushing technology (with TwistFlush)	No																																	
Innovative flushing technology (with TwistFlush[e <sup>ff</sup> ])	No																																	
Material	Duroplast																																	
Surface	glossy																																	
Colour name	White Alpin																																	
3	Washbasin	<table><tr><td>Length in mm</td><td>460</td></tr><tr><td>Width in mm</td><td>650</td></tr><tr><td>Height in mm</td><td>175</td></tr><tr><td>Interior depth</td><td>125</td></tr><tr><td>Weight in kg</td><td>20,30</td></tr><tr><td>Number of tap holes punched through</td><td>1</td></tr><tr><td>Number of tap holes pre-drilled</td><td>2</td></tr><tr><td>Position of drill hole</td><td>central tap hole punched out</td></tr><tr><td>express delivery</td><td>No</td></tr><tr><td>Suitable for</td><td>3-hole mixer</td></tr><tr><td>Material</td><td>Sanitary ceramics</td></tr><tr><td>Surface</td><td>glossy</td></tr><tr><td>Colour name</td><td>White Alpin</td></tr><tr><td>With TitanGlaze</td><td>No</td></tr><tr><td>With overflow</td><td>No</td></tr></table>	Length in mm	460	Width in mm	650	Height in mm	175	Interior depth	125	Weight in kg	20,30	Number of tap holes punched through	1	Number of tap holes pre-drilled	2	Position of drill hole	central tap hole punched out	express delivery	No	Suitable for	3-hole mixer	Material	Sanitary ceramics	Surface	glossy	Colour name	White Alpin	With TitanGlaze	No	With overflow	No		Disable friendly Bathroom on Ground Floor,First Floor, second Floor, and Third Floor
Length in mm	460																																	
Width in mm	650																																	
Height in mm	175																																	
Interior depth	125																																	
Weight in kg	20,30																																	
Number of tap holes punched through	1																																	
Number of tap holes pre-drilled	2																																	
Position of drill hole	central tap hole punched out																																	
express delivery	No																																	
Suitable for	3-hole mixer																																	
Material	Sanitary ceramics																																	
Surface	glossy																																	
Colour name	White Alpin																																	
With TitanGlaze	No																																	
With overflow	No																																	
4	Wall Mounted Sensor Tap	<table><tr><td>Product</td><td>Wall Mounted Sensor Tap</td></tr><tr><td>Operation</td><td>Automatic Infra-Red Sensor</td></tr><tr><td>Power</td><td>Electrical (AC 220V/50Hz)</td></tr><tr><td>Inlet Water Pressure</td><td>0.2-0.6 MPa</td></tr><tr><td>Material</td><td>Brass</td></tr><tr><td>Finish</td><td>Chrome-plated</td></tr><tr><td>Sensing Range</td><td>98 - 12cm</td></tr><tr><td>Recommended Installation Height From Basin</td><td>12 inches</td></tr><tr><td>Product Warranty</td><td></td></tr><tr><td>Sensor Faucets Body</td><td>10 Years</td></tr><tr><td>Sensor Faucets/ Electronic Parts/ Solenoid Valve</td><td>1 Years</td></tr></table>	Product	Wall Mounted Sensor Tap	Operation	Automatic Infra-Red Sensor	Power	Electrical (AC 220V/50Hz)	Inlet Water Pressure	0.2-0.6 MPa	Material	Brass	Finish	Chrome-plated	Sensing Range	98 - 12cm	Recommended Installation Height From Basin	12 inches	Product Warranty		Sensor Faucets Body	10 Years	Sensor Faucets/ Electronic Parts/ Solenoid Valve	1 Years		Ground floor Public toilets, Ground Floor Powder rooms, First floor Public toilets, First floor change rooms, Second Floor Public Floors, Third floor Public toilets, Chief Director Bathroom								
Product	Wall Mounted Sensor Tap																																	
Operation	Automatic Infra-Red Sensor																																	
Power	Electrical (AC 220V/50Hz)																																	
Inlet Water Pressure	0.2-0.6 MPa																																	
Material	Brass																																	
Finish	Chrome-plated																																	
Sensing Range	98 - 12cm																																	
Recommended Installation Height From Basin	12 inches																																	
Product Warranty																																		
Sensor Faucets Body	10 Years																																	
Sensor Faucets/ Electronic Parts/ Solenoid Valve	1 Years																																	
5	Toilet installation system	<table><tr><td>Length in mm</td><td>135</td></tr><tr><td>Width in mm</td><td>525</td></tr><tr><td>Height in mm</td><td>1120</td></tr><tr><td>Weight in kg</td><td>15,80</td></tr><tr><td>Suitable for</td><td>for wall-mounted WC</td></tr><tr><td>Material</td><td>Steel</td></tr></table>	Length in mm	135	Width in mm	525	Height in mm	1120	Weight in kg	15,80	Suitable for	for wall-mounted WC	Material	Steel		Disable friendly Bathroom on Ground Floor,First Floor, second Floor, and Third Floor																		
Length in mm	135																																	
Width in mm	525																																	
Height in mm	1120																																	
Weight in kg	15,80																																	
Suitable for	for wall-mounted WC																																	
Material	Steel																																	
6	Toilet flush plate	<table><tr><td>Length in mm</td><td>10</td></tr><tr><td>Width in mm</td><td>253</td></tr><tr><td>Height in mm</td><td>145</td></tr><tr><td>Weight in kg</td><td>0,39</td></tr><tr><td>Suitable for</td><td>Dual flush</td></tr><tr><td>Material</td><td>Plastic</td></tr><tr><td>Surface</td><td>glossy</td></tr><tr><td>Colour name</td><td>Chrome</td></tr><tr><td>Activation / Flush</td><td>front/top operated</td></tr></table>	Length in mm	10	Width in mm	253	Height in mm	145	Weight in kg	0,39	Suitable for	Dual flush	Material	Plastic	Surface	glossy	Colour name	Chrome	Activation / Flush	front/top operated		Disable friendly Bathroom on Ground Floor,First Floor, second Floor, and Third Floor												
Length in mm	10																																	
Width in mm	253																																	
Height in mm	145																																	
Weight in kg	0,39																																	
Suitable for	Dual flush																																	
Material	Plastic																																	
Surface	glossy																																	
Colour name	Chrome																																	
Activation / Flush	front/top operated																																	
7	Bidet spray	<table><tr><td>Length in mm</td><td>83</td></tr><tr><td>Width in mm</td><td>29</td></tr><tr><td>Height in mm</td><td>115</td></tr><tr><td>Weight in kg</td><td>0,32</td></tr><tr><td>Colour name</td><td>Chrome</td></tr><tr><td>EAN number</td><td>4051202728779</td></tr><tr><td>Flow rate hand shower in litres per minute</td><td>5,7</td></tr><tr><td>Length of shower hose</td><td>1200</td></tr><tr><td>Material</td><td>ABS</td></tr><tr><td>Volume</td><td>2,679</td></tr><tr><td>Swivel aerator</td><td>No</td></tr><tr><td>Thermostat</td><td>No</td></tr><tr><td>Cool Tap</td><td>No</td></tr></table>	Length in mm	83	Width in mm	29	Height in mm	115	Weight in kg	0,32	Colour name	Chrome	EAN number	4051202728779	Flow rate hand shower in litres per minute	5,7	Length of shower hose	1200	Material	ABS	Volume	2,679	Swivel aerator	No	Thermostat	No	Cool Tap	No		Disable friendly Bathroom on Ground Floor,First Floor, second Floor, and Third Floor				
Length in mm	83																																	
Width in mm	29																																	
Height in mm	115																																	
Weight in kg	0,32																																	
Colour name	Chrome																																	
EAN number	4051202728779																																	
Flow rate hand shower in litres per minute	5,7																																	
Length of shower hose	1200																																	
Material	ABS																																	
Volume	2,679																																	
Swivel aerator	No																																	
Thermostat	No																																	
Cool Tap	No																																	




## BATHROOM FITTING SCHEDULE - CHANCERY

Chancery Toilet																																
S.NO.	Name	DESCRIPTION	IMAGE	LOCATIONS																												
8	Angle valve	<table><tr><td>Length in mm</td><td>76</td></tr><tr><td>Width in mm</td><td>54</td></tr><tr><td>Height in mm</td><td>54</td></tr><tr><td>Weight in kg</td><td>0.09</td></tr><tr><td>Colour name</td><td>Chrome</td></tr><tr><td>EAN number</td><td>4051202728786</td></tr><tr><td>Material</td><td>Brass</td></tr><tr><td>Volume</td><td>0.189</td></tr><tr><td>Swivel aerator</td><td>No</td></tr><tr><td>Thermostat</td><td>No</td></tr><tr><td>Cool Tap</td><td>No</td></tr></table>	Length in mm	76	Width in mm	54	Height in mm	54	Weight in kg	0.09	Colour name	Chrome	EAN number	4051202728786	Material	Brass	Volume	0.189	Swivel aerator	No	Thermostat	No	Cool Tap	No		All WC, sinks & geysers						
Length in mm	76																															
Width in mm	54																															
Height in mm	54																															
Weight in kg	0.09																															
Colour name	Chrome																															
EAN number	4051202728786																															
Material	Brass																															
Volume	0.189																															
Swivel aerator	No																															
Thermostat	No																															
Cool Tap	No																															
9	P Traps	<table><tr><td>Colour</td><td>Shinny Chrome</td></tr><tr><td>Height</td><td>90</td></tr><tr><td>Width</td><td>195</td></tr><tr><td>Depth</td><td>155</td></tr><tr><td>Designer</td><td>VitrA Design Team</td></tr><tr><td>Guarantee</td><td>2</td></tr><tr><td>Body Material</td><td>Stainless Steel</td></tr><tr><td>Special Needs</td><td>Yes</td></tr><tr><td>Packaged Product Sizes (WxDxH)</td><td>195X155X90</td></tr></table>	Colour	Shinny Chrome	Height	90	Width	195	Depth	155	Designer	VitrA Design Team	Guarantee	2	Body Material	Stainless Steel	Special Needs	Yes	Packaged Product Sizes (WxDxH)	195X155X90		Disable friendly Bathroom on Ground Floor,First Floor, second Floor, and Third Floor										
Colour	Shinny Chrome																															
Height	90																															
Width	195																															
Depth	155																															
Designer	VitrA Design Team																															
Guarantee	2																															
Body Material	Stainless Steel																															
Special Needs	Yes																															
Packaged Product Sizes (WxDxH)	195X155X90																															
10	90° Grab bar	<table><tr><td>Colour</td><td>Chrome</td></tr><tr><td>Height</td><td>630</td></tr><tr><td>Width</td><td>630</td></tr><tr><td>Depth</td><td>117</td></tr><tr><td>Designer</td><td>VitrA Design Team</td></tr><tr><td>Guarantee</td><td>5</td></tr><tr><td>Finish</td><td>Chrome</td></tr><tr><td>Material</td><td>Chrome</td></tr><tr><td>Mounting type</td><td>Wall Mounted</td></tr><tr><td>Packaged Product Sizes (WxDxH)</td><td>690X170X75</td></tr><tr><td>Badge Diameter</td><td>D85</td></tr><tr><td>Body Material</td><td>Stainless Steel</td></tr><tr><td>Marketing Measure (cm)</td><td>9 CM</td></tr><tr><td>Special Needs</td><td>Yes</td></tr></table>	Colour	Chrome	Height	630	Width	630	Depth	117	Designer	VitrA Design Team	Guarantee	5	Finish	Chrome	Material	Chrome	Mounting type	Wall Mounted	Packaged Product Sizes (WxDxH)	690X170X75	Badge Diameter	D85	Body Material	Stainless Steel	Marketing Measure (cm)	9 CM	Special Needs	Yes		Disable friendly Bathroom on Ground Floor,First Floor, second Floor, and Third Floor
Colour	Chrome																															
Height	630																															
Width	630																															
Depth	117																															
Designer	VitrA Design Team																															
Guarantee	5																															
Finish	Chrome																															
Material	Chrome																															
Mounting type	Wall Mounted																															
Packaged Product Sizes (WxDxH)	690X170X75																															
Badge Diameter	D85																															
Body Material	Stainless Steel																															
Marketing Measure (cm)	9 CM																															
Special Needs	Yes																															
11	Hinged arm grab rail	<table><tr><td>Colour</td><td>Chrome</td></tr><tr><td>Height</td><td>300</td></tr><tr><td>Width</td><td>100</td></tr><tr><td>Depth</td><td>800</td></tr><tr><td>Designer</td><td>VitrA Design Team</td></tr><tr><td>Guarantee</td><td>5</td></tr><tr><td>Finish</td><td>Chrome</td></tr><tr><td>Material</td><td>Chrome</td></tr><tr><td>Mounting type</td><td>Wall Mounted</td></tr><tr><td>Packaged Product Sizes (WxDxH)</td><td>1100X305X110</td></tr><tr><td>Body Material</td><td>Stainless Steel</td></tr><tr><td>Marketing Measure (cm)</td><td>9 CM</td></tr><tr><td>Special Needs</td><td>Yes</td></tr><tr><td>Special Solutions</td><td>Health&amp;Care</td></tr></table>	Colour	Chrome	Height	300	Width	100	Depth	800	Designer	VitrA Design Team	Guarantee	5	Finish	Chrome	Material	Chrome	Mounting type	Wall Mounted	Packaged Product Sizes (WxDxH)	1100X305X110	Body Material	Stainless Steel	Marketing Measure (cm)	9 CM	Special Needs	Yes	Special Solutions	Health&Care		Disable friendly Bathroom on Ground Floor,First Floor, second Floor, and Third Floor
Colour	Chrome																															
Height	300																															
Width	100																															
Depth	800																															
Designer	VitrA Design Team																															
Guarantee	5																															
Finish	Chrome																															
Material	Chrome																															
Mounting type	Wall Mounted																															
Packaged Product Sizes (WxDxH)	1100X305X110																															
Body Material	Stainless Steel																															
Marketing Measure (cm)	9 CM																															
Special Needs	Yes																															
Special Solutions	Health&Care																															
10	Toilet paper holder	<table><tr><td>Colour</td><td>Chrome</td></tr><tr><td>Height</td><td>55</td></tr><tr><td>Width</td><td>55</td></tr><tr><td>Depth</td><td>45</td></tr><tr><td>Guarantee</td><td>5</td></tr><tr><td>Finish</td><td>Chrome</td></tr><tr><td>Material</td><td>Chrome</td></tr><tr><td>Mounting type</td><td>Wall Mounted</td></tr><tr><td>Special Needs</td><td>Yes</td></tr><tr><td>Packaged Product Sizes (WxDxH)</td><td>195X155X90</td></tr></table>	Colour	Chrome	Height	55	Width	55	Depth	45	Guarantee	5	Finish	Chrome	Material	Chrome	Mounting type	Wall Mounted	Special Needs	Yes	Packaged Product Sizes (WxDxH)	195X155X90		Disable friendly Bathroom on Ground Floor,First Floor, second Floor, and Third Floor								
Colour	Chrome																															
Height	55																															
Width	55																															
Depth	45																															
Guarantee	5																															
Finish	Chrome																															
Material	Chrome																															
Mounting type	Wall Mounted																															
Special Needs	Yes																															
Packaged Product Sizes (WxDxH)	195X155X90																															

## BATHROOM FITTING SCHEDULE - CHANCERY

Chancery Toilet																																				
S.NO.	Name	DESCRIPTION	IMAGE	LOCATIONS																																
13	Recess Moounted Tissue Dispenser + Waste Receptacle	<p>KEY FEATURES</p> <p>Mounting : Recessed</p> <p>Construction : 304 Grade Stainless Steel</p> <p>Finish : Steel, Satin Finish</p> <p>Paper Dispenser Capacity : 600 C-Fold or 800 Multi Fold Paper Towel</p> <p>Waste Receptacle Capacity : 12 Litres</p> <p>Wall Opening Required : 310mm (W) x 668mm (H) x 100mm (D)</p> <p>Warranty : 1 year</p> 		Ground floor Public toilets, Ground Floor Powder rooms, First floor Public toilets, First floor change rooms, Second Floor Public Floors, Third floor Public toilets																																
14	Recess Mounted hand dryer	 <p>KEY FEATURES</p> <table><tr><td>Coating</td><td>Stainless Steel # 304 Grade</td></tr><tr><td>Mounting</td><td>Recessed</td></tr><tr><td>Operation</td><td>Touch-Free Infra-Red activation</td></tr><tr><td>Hand Dry Time</td><td>16 secs</td></tr><tr><td>Auto CutOff</td><td>60 seconds</td></tr><tr><td>Motor</td><td>Brush Type</td></tr><tr><td>Speed</td><td>26000 RPM</td></tr><tr><td>Rated Power</td><td>400W-180W</td></tr><tr><td>Protection Class</td><td>IPX4</td></tr><tr><td>Blowing Volume</td><td>180m<sup>3</sup>/hr</td></tr><tr><td>Air Speed</td><td>100m/s</td></tr><tr><td>Dimensions</td><td>352(W) x 495(H) x 104(D)</td></tr><tr><td>Warranty</td><td></td></tr><tr><td>PCB</td><td>1 Year</td></tr><tr><td>Heating Element</td><td>3 Year</td></tr><tr><td>Brush Motor</td><td>1 Year</td></tr></table> 	Coating	Stainless Steel # 304 Grade	Mounting	Recessed	Operation	Touch-Free Infra-Red activation	Hand Dry Time	16 secs	Auto CutOff	60 seconds	Motor	Brush Type	Speed	26000 RPM	Rated Power	400W-180W	Protection Class	IPX4	Blowing Volume	180m <sup>3</sup> /hr	Air Speed	100m/s	Dimensions	352(W) x 495(H) x 104(D)	Warranty		PCB	1 Year	Heating Element	3 Year	Brush Motor	1 Year		Ground floor Public toilets, Ground Floor Powder rooms, First floor Public toilets, First floor change rooms, Second Floor Public Floors, Third floor Public toilets
Coating	Stainless Steel # 304 Grade																																			
Mounting	Recessed																																			
Operation	Touch-Free Infra-Red activation																																			
Hand Dry Time	16 secs																																			
Auto CutOff	60 seconds																																			
Motor	Brush Type																																			
Speed	26000 RPM																																			
Rated Power	400W-180W																																			
Protection Class	IPX4																																			
Blowing Volume	180m <sup>3</sup> /hr																																			
Air Speed	100m/s																																			
Dimensions	352(W) x 495(H) x 104(D)																																			
Warranty																																				
PCB	1 Year																																			
Heating Element	3 Year																																			
Brush Motor	1 Year																																			
15	Diaper changing station	<p>Material : Stainless Steel #304, Satin Finish</p> <p>Unit Dimensions : W-940 mm x H-585 mm</p> <p>Depth (Closed) : 104 mm</p> <p>Extension (Open) : 495mm</p> <p>Maximum Load : 25 Kgs</p> <p>*Equipped With Safety Belt To Secure Baby When Changing Diapers</p>		Female Public Toilets																																
16	Sanitary Napkin Dispenser	<p>Combination : Sanitary Napkin Dispenser / Toilet Paper Holder / Disposable Bag Dispenser / Waste Receptacle</p> <p>Material : 304 Grade Stainless Steel</p> <p>Sanitary Napkin Capacity : 20-25 Pcs</p> <p>Waste Receptacle Capacity : 4.6 Litre</p> <p>Equipped With Full-length Stainless Steel Piano Flap</p> <p>Disposable Bags Capacity: 50 bags</p>		Female Public Toilets																																
17	Robe hooks	Supply of C.P. brass robe hook approved quality and direction of Engineer-in-charge.		Disable friendly Bathroom on Ground Floor, First Floor, second Floor, and Third Floor																																

## BATHROOM FITTING SCHEDULE - CHANCERY

Chancery Toilet				
S.NO.	Name	DESCRIPTION	IMAGE	LOCATIONS
18	Soap dispenser	<p> <b>Colour</b> Chrome  <b>Height</b> 210  <b>Width</b> 120  <b>Depth</b> 117  <b>Designer</b> VibrA Design Team  <b>Guarantee</b> 5  <b>Finish</b> Stainless steel  <b>Material</b> Stainless steel                 </p> <p> <b>Mounting type</b> Wall Mounted  <b>Packaged Product</b> 125X215X130  <b>Sizes (WxDxH)</b>  <b>Body Material</b> Stainless Steel  <b>Marketing Measure (cm)</b> 9 CM                 </p>		Disable friendly Bathroom on Ground Floor, First Floor, second Floor, and Third Floor
19	Universal Taps & Fittings Siphon	<ul style="list-style-type: none"> <li>variable positioning of the mixer system, can be left or right of the spout</li> <li>easy orientation due to support surfaces for the spirit level</li> <li>with building protection cover against contamination during assembly</li> <li>with dimension indication for exact determination of the installation depth</li> <li>with pre-mounted fastening lugs for mounting in drywall and solidwall</li> <li>sound-decoupled installation</li> <li>...</li> <li>minimum mounting depth: 44 mm</li> <li>maximum mounting depth: 72 mm</li> </ul>		Disable friendly Bathroom on Ground Floor, First Floor, second Floor, and Third Floor
20	Mirror	 <p> <b>PLAN</b>                      450/600                      20mm wide Frosted Glass with Light Behind                      Clear mirror 6mm thick pasted on 15mm waterproof pre-laminated commercial ply  <b>ELEVATION</b> </p>		Ground floor Public toilets, First floor Public toilets, Second Floor Public Floors, Third floor Public toilets