


LEDnova-midi

Mounting Options

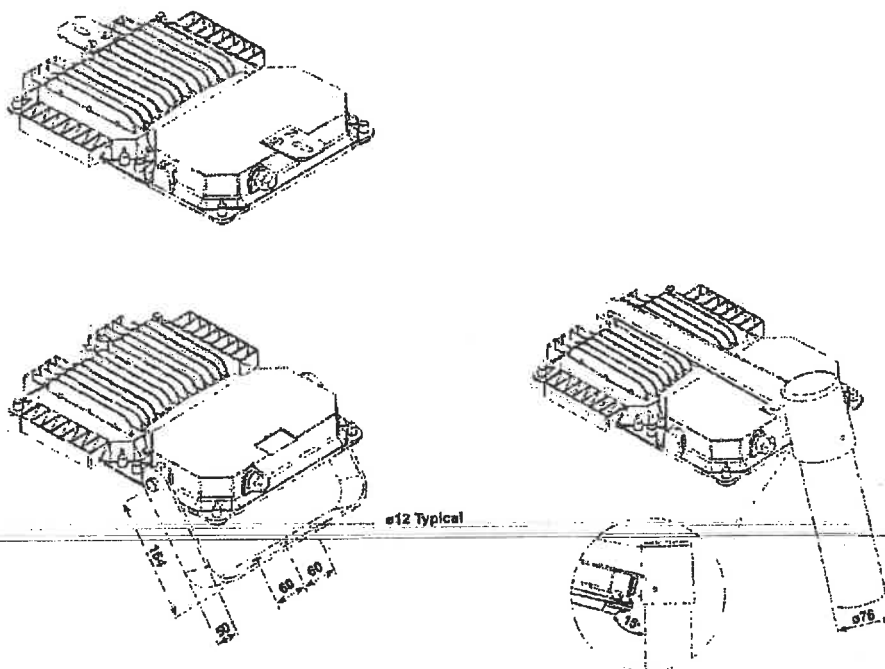

LEDnova

Robust and Highly Reliable LED Bulkhead




The LEDnova offers optimal photometric performance and high reliability to reduce energy consumption and maintenance in all types of lighting applications.

FEATURES

- Designed to operate LED light sources of up to 81W without reducing the useful lifetime of up to 100 000 hours, at a lumen depreciation of not more than 30% (L70)
- Ta of up to 45° C (Not applicable to all configuration)
- Slim, aesthetical design optimised for LED characteristics
- Designed to replace conventional HID and CFL bulkhead luminaires
- Easy to install

LEDnova

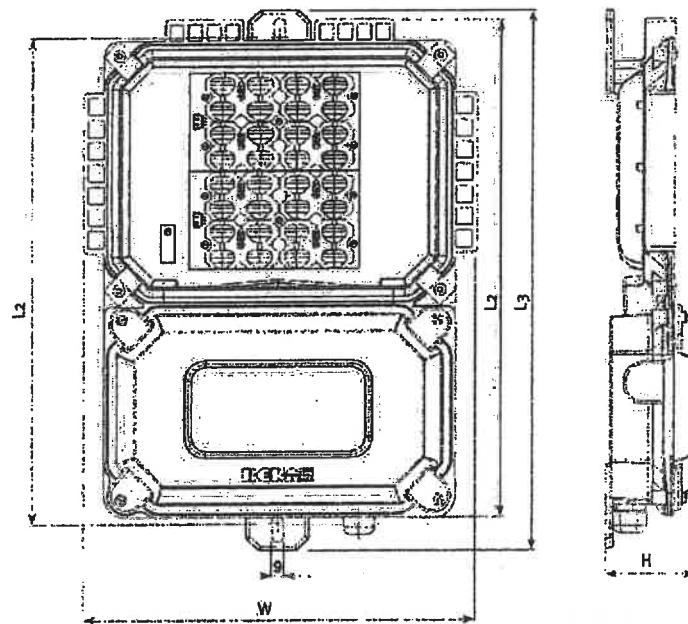

	LEDnova-mini	LEDnova-midi
L1	372mm	406mm
L2	396mm	396mm
L3	460mm	442mm
W	249mm	317mm
H	63mm	73mm
KG	3.8k	4.2kg
CIS	0.09m²	0.33 m²

