
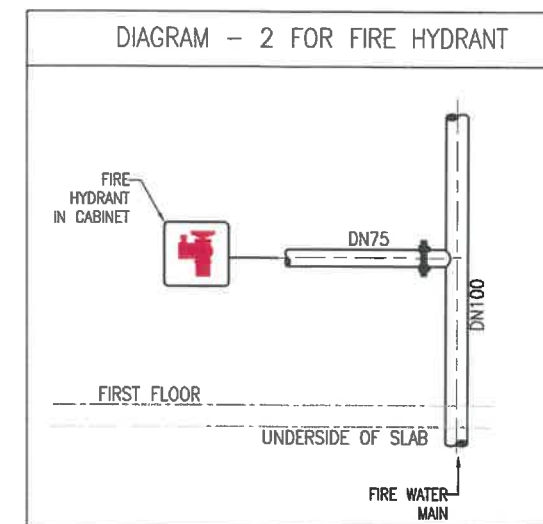


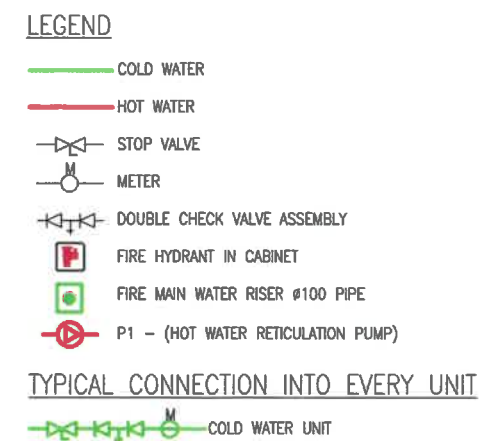


1. WHERE PIPING RUNS ACROSS THE DOOR, IT MUST RUN ON THE FLOOR OR FLOOR SLAB AND BE COVERED BY FLOOR SCREED TO BE PROVIDED BY THE BUILDER.
2. ALL GEYSERS MUST BE OF THE SLIM LIME TYPE.

TYPE J: FIRST FLOOR PLAN
SCALE 1:100

[illegible]

PO BOX 221
BLAINFORTH
2000



Brewing Title
**FIRST FLOOR HOT & COLD WATER
RETICULATION-TYPE J**

ALL RIGHTS ON THIS DRAWING REST AT ANY TIME WITH LITE CONSULTING,
WITHOUT WHOSE WRITTEN CONSENT IT MAY NOT BE COPIED, REPRODUCED,
COMMUNICATED OR RENDERED ACCESSIBLE TO THIRD PARTIES.

E405-MEC-07-2

8