



TYP. SECTIONAL ELEVATION

NOTE:
ALL CONDUITS WITH CABLES
MUST BE ENCASED IN CONCRETE
SEE TYP. TRENCH DRAWING
2894358-C-PL-O-CP-DD-010

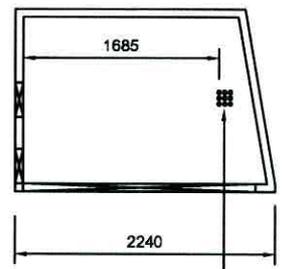


SECTION AA


6 - DIA. 30 VENTILATION HOLES
ON OPPOSITE WALLS
WITH S/S SLEEVES
AT 50 C/C CAST-IN
WITH INSECT PROOF MESH

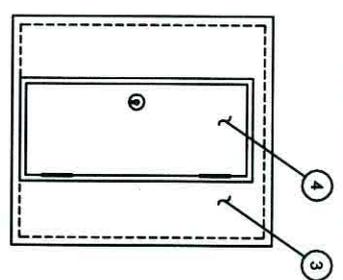

ELEVATION BB

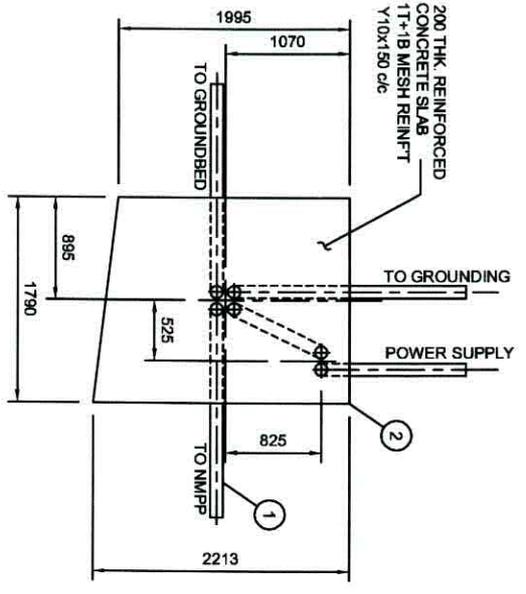

PLAN ON SLAB

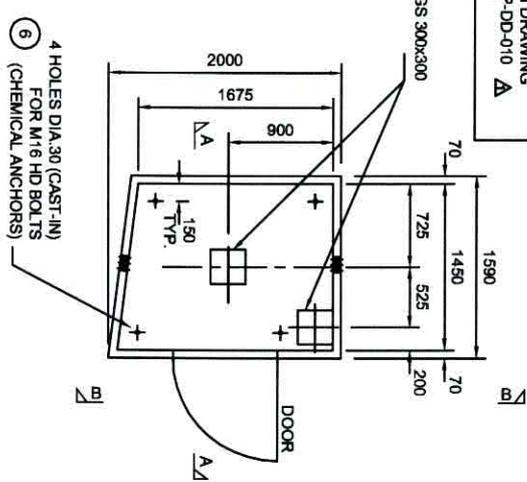

ENCLOSURE PLAN VIEW

4 HOLES DIA. 30 (CAST-IN)
FOR M16 HD BOLTS
(CHEMICAL ANCHORS)

NOTE:
1. SEE TYP. CABLE TRENCH DETAILS DRG. 2894358-C-PL-O-CP-DD-010
FOR INSTALLATION OF CONDUITS.
3. CONCRETE COVER TO REINFORCING TYPICALLY 30mm

ITEM	QTY.	DESCRIPTION	MATERIAL
1	14m	RIPPLEFLEX CONDUIT 110Ø	PVC
2	0.72m ³	CONCRETE SLAB - REINFORCED	30 MPA CONCRETE
3	1	ROOLA CUBICLE	PRE-CAST CONCRETE
4	1	STANDARD SAFE DOOR	STEEL
5	1 m ³	MASS CONCRETE	20 MPA CONCRETE
6	4	M16 HD BOLTS CW 2650 WASHER	S/S CHEMICAL ANCHOR

Stamp: 10-06-2009

REV	DATE	STATUS	REVISION DESCRIPTION
0	10.06.09	ISSUED FOR CONSTRUCTION	
1	31.10.09	REVISED WORKING NOTES	



INSTALLATION DETAILS - CATHODIC PROTECTION
TRU ENCLOSURE DETAIL

NO.	DATE	BY	CHKD.	APP'D.
1	11.10.09			
2	11.10.09			
3	11.10.09			
4	11.10.09			
5	11.10.09			
6	11.10.09			
7	11.10.09			
8	11.10.09			
9	11.10.09			
10	11.10.09			

