




**DETAIL A**

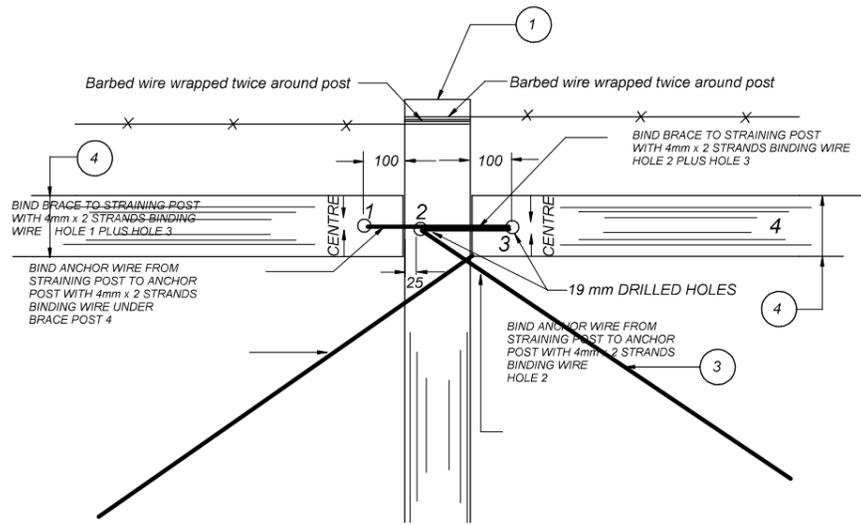


**DETAIL B**

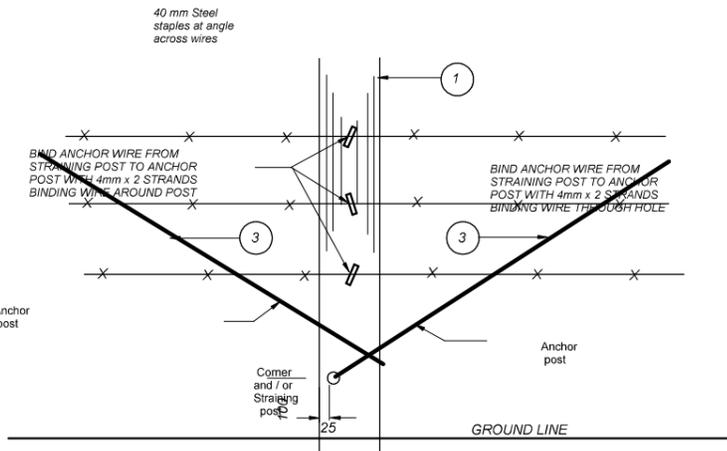

**DETAIL C**

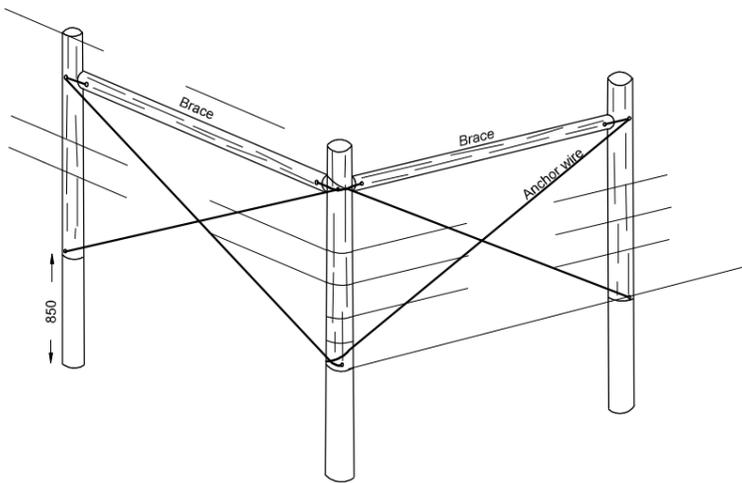

**CORNER WITH BOX ANCHOR**

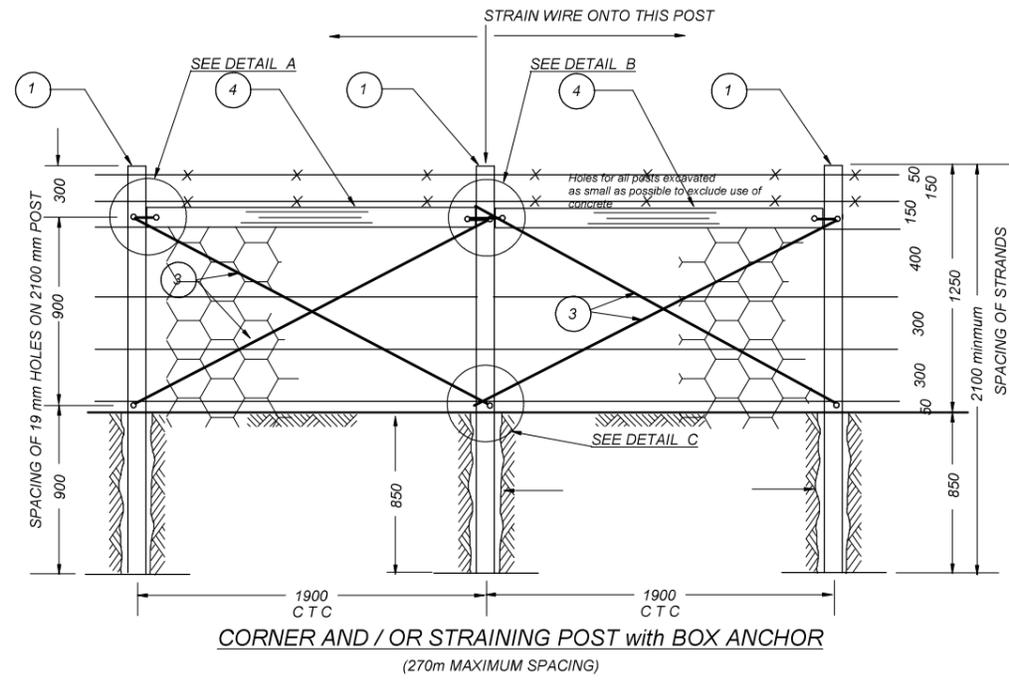

**LEGEND**

1

125 - 150mm TOP DIAMETER x 2100 mm TREATED TIMBER POST  
CORNER, STRAINING AND ANCHOR POSTS

3

4mm x 4 STRANDS TWISTED SOFT GALVANISED BINDING WIRE

4

100 - 125mm TOP DIAMETER x 1800 mm TREATED TIMBER POST  
BRACES IN BOX ANCHORS

**NOTES:**

1. 40 mm STAPLES REQUIRED FOR CORNER POSTS  
and STRAINING POSTS

2. THIS DRAWING TO BE READ IN CONJUNCTION  
WITH THE PROJECT PARTICULAR SPECIFICATIONS  
FOR FENCES

NGL NATURAL GROUND LEVEL

NO.	SPECIAL NOTES:	JPJ KOCH (CHIEF ENGINEER)	DEPARTMENT OF RURAL DEVELOPMENT AND AGRARIAN REFORM PROVINCE OF THE EASTERN CAPE	STANDARD VERMIN PROOF FENCE	SCALE NTS	INDEX NO. SCMM-02/19/01					
							ENGINEERING SERVICES PRIVATE BAG X015 DOHNE ADI STUTTERHEIM 4930	1,2m HIGH - VERMIN PROOF FENCE	A3 ORIGINAL	PLAN NO. SHEET 1 OF 6	