


*15MPa concrete on all Corner, straining and gate posts if so ordered by the Engineer, and quantified in Bill of Quantities

FARM GATES

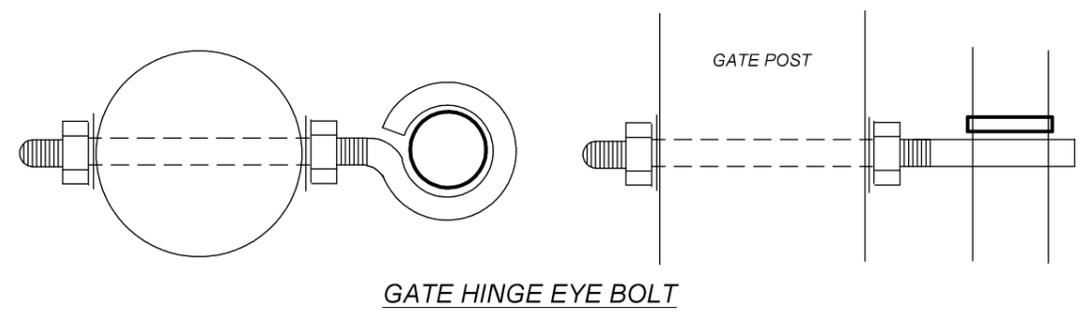

LEGEND

- ① — 125 - 150mm TOP DIAMETER x 2400 mm TREATED TIMBER POST
CORNER, STRAINING AND ANCHOR POSTS
- ③ — 4mm x 4 STRANDS TWISTED SOFT GALVANISED BINDING WIRE
- ④ — 100 - 125mm TOP DIAMETER x 1800 mm TREATED TIMBER POST
BRACES IN BOX ANCHORS

NGL NATURAL GROUND LEVEL

NOTES: 1. 40 mm STAPLES REQUIRED FOR CORNER POSTS and STRAINING POSTS

2. THIS DRAWING TO BE READ IN CONJUNCTION WITH THE PROJECT PARTICULAR SPECIFICATIONS FOR FENCES

NO.	SPECIAL NOTES:	S KONDLO (CHIEF ENGINEER)	DEPARTMENT OF RURAL DEVELOPMENT AND AGRARIAN REFORM PROVINCE OF THE EASTERN CAPE	SCALE NTS	INDEX NO. SCMM-03/19/03
		OCTOBER 2024 (DATE APPROVED)	ENGINEERING SERVICES PRIVATE BAG X015 DOHNE ADI STUTTERHEIM 4930	STANDARD VERMIN PROOF FENCE	
				1,4m HIGH - VERMIN PROOF FENCE	PLAN NO. A3 ORIGINAL SHEET 3 OF 5