



public works,  
roads & transport

MPUMALANGA PROVINCE  
REPUBLIC OF SOUTH AFRICA

Rhino Building; No. 7, Government Boulevard, Riverside Park, Ext. 2, Mbombela, 1200,  
Mpumalanga Province  
Private Bag X11310, Mbombela, 1200, Mpumalanga Province  
Tel: +27 (13) 766 6554,

Litiko Letemisebenti Yemphakatsi,  
Temigwaco Netekutfutsa

Departement van Openbare Werke,  
Paaie en Vervoer

UmNyango wezemisebenzi yomPhakathi,  
zeeNdlela nezokuThutha

Eng: KM Dolamo  
Tel: 013 766 6877

## ADDENDUM 1

### **ADDENDUM 1: PWRT/2432/23/MP – REHABILITATION OF COAL HAUL P182/1 (PHASE 3) FROM P52/2 R38 TOWARDS P30/01 (R35) (12 KM) IM NKANGALA REGION OF THE MPUMALANGA PROVINCE)**



Further to invitation to bid number as indicated above: REHABILITATION OF COAL HAUL P182/1 (PHASE 3) FROM P52/2 R38 TOWARDS P30/01 (R35) (12 KM) IM NKANGALA REGION OF THE MPUMALANGA PROVINCE) as, advertised in the Mpumalanga Provincial Supply Chain Management Bid Bulletin: Volume No. 323 of 07 July 2023, tenderers are advised of the following changes:

- 1) Annexure C will now form part of the Compulsory returnable schedules
- 2) As mandated by DTI and SABS only locally manufactured or produced goods with a stipulated minimum threshold for local production and content will be considered (see annexure for designated items “industrial procurement” found under [www.thedtic.gov.za](http://www.thedtic.gov.za)).
- 3) Further, note that the original closing date of the bid is 11 AUGUST 2023.
- 4) The extended closing date of the bid will be 18<sup>th</sup> of AUGUST 2023
- 5) Further, note the CIDB grading is 8CE or higher

This Addendum shall form part of the contract, therefore, shall affix to “Record of Addenda” to tender documents

Yours Faithfully,

MR. MC. MOROALO  
HEAD OF DEPARTMENT  
DATE: 08/08/23

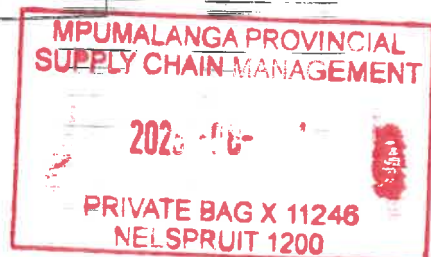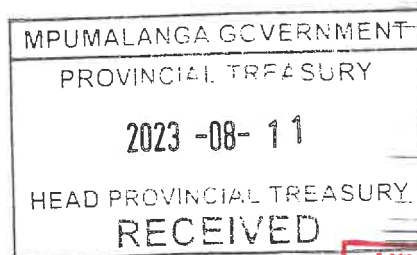



Rhino Building; No. 7, Government Boulevard, Riverside Park, Ext. 2, Mbombela, 1200,  
Mpumalanga Province  
Private Bag X11310, Mbombela, 1200, Mpumalanga Province  
Tel: +27 (13) 766 6554,

Litiko Letemisebenti Yemphakatsi,  
Temigwaco Netekutfutsa

Departement van Openbare Werke,  
Paaie en Vervoer



UmNyango wezemiSebenzi yomPhakathi,  
zeeNdlela nezokuThutha

Enq: KM Dolamo  
Tel: 013 766 6877

## ADDENDUM 2

### ADDENDUM 2: PWRT/2432/23/MP – REHABILITATION OF COAL HAUL P182/1 (PHASE 3) FROM P52/2 R38 TOWARDS P30/01 (R35) (12 KM) IM NKANGALA REGION OF THE MPUMALANGA PROVINCE)

Further to invitation to bid number as indicated above: REHABILITATION OF COAL HAUL P182/1 (PHASE 3) FROM P52/2 R38 TOWARDS P30/01 (R35) (12 KM) IM NKANGALA REGION OF THE MPUMALANGA PROVINCE) as, advertised in the Mpumalanga Provincial Supply Chain Management Bid Bulletin: Volume No. 323 of 07 July 2023, tenderers are advised of the following changes:

#### 1.0 PART C2.2. BILL OF QUANTITIES.

##### SECTION 1500: ACCOMMODATION OF TRAFFIC:

*"Add the following items B15.14 (a)"*

Item	Unit
B15.14 Maintenance on the provincial route as instructed by the engineer	
(a) Provisional sum for routine maintenance on the provincial routes for the duration of the project.....: Prov. Sum	

Item No.	Description	Unit	Quantity	Rate	Amount
B15.14	Maintenance on the provincial route as instructed by the engineer				
	(a) Provisional sum for routine maintenance on the provincial routes for the duration of the project	Prov. Sum	1	37 000 000	R 37 000 000.00

**ADDENDUM 2: PWRT/2432/23/MP – REHABILITATION OF COAL HAUL P182/1 (PHASE 3) FROM P52/2 R38 TOWARDS P30/01 (R35) (12 KM) IM NKANGALA REGION OF THE MPUMALANGA PROVINCE)**

---

**SECTION 3400: PAVEMENT OF GRAVEL MATERIAL:**

**Item 34.01:**

*"Amend item 34.01 (d) to read as follows"*

(c) Gravel subbase (**unstabilized gravel**) compacted to 95% of modified AASHTO density of 150mm layer thickness.

**Item 34.04:**

*"Mark item 34.04 with the prefix B to read as follows"*

**B34.04** In-situ reconstruction of pavement layers as:

*"Add in brackets: unstabilized gravel in item B34.04 (c) to read as follows"*

(c) Gravel subbase layer (**unstabilized gravel**) compacted to 95% of modified AASHTO density, using:

**Item 34.05:**

*"omit/delete item 34.05 in its entirety"*

**Item 34.09:**

*"Delete 3,975 in the Quantity Column"*

**SECTION 3600: CRUSHED-STONE BASE:**

**Item 36.06:**

*"omit/delete item 36.06 in its entirety"*

**Item 36.10:**

*"omit/delete item 36.10 in its entirety"*

**2.0 PART B1: PROJECT SPECIFICATIONS RELATING TO THE STANDARD SPECIFICATIONS AND OTHER ADDITIONAL SPECIFICATIONS.**

**SECTION 1500: ACCOMMODATION OF TRAFFIC:**

**3517: MEASUREMENT AND PAYMENTS**

Item	Unit
B15.14 Maintenance on the provincial route as instructed by the engineer	
(a) Provisional sum for routine maintenance on the provincial routes for the duration of the project.....	Prov. Sum

**SECTION 3400: PAVEMENT LAYERS OF GRAVEL MATERIAL**

**3407: MEASUREMENT AND PAYMENTS**

Item	Unit
B34.04 In situ reconstruction of existing pavement layers as:	
(c) Gravel subbase layer (unstabilized gravel) compacted to 95% modified AASHTO density, using:	
(i) Non-cemented material of 180mm layer thickness.....	m <sup>3</sup>

*"Delete the last paragraph and replace with the following paragraph"*

The unit measurement shall be the cubic metre of stabilized material, the quantity of which shall be determined in accordance with the authorized dimensions of the layers treated as instructed by the engineer.

The tendered rates for chemical stabilization shall be paid as extra over the rates tendered for constructing the unstabilized layers. The tendered rates shall therefore include full compensation for spreading and mixing the stabilizing agent, curing the stabilized sections, any extra water required, and all materials, supervision, labour, plant, equipment, tools and incidentals (extra over those provided for in the rates tendered for constructing the unstabilized layer) necessary for completing the specified work, but excluding the cost of supplying the stabilizing agent. No distinction will be made in respect of the type of stabilizing agent used, the time for completion or the specific layer being stabilized, and the extra over rate tendered shall apply to any combination thereof.

The engineer reserves to vary the thickness of the layer to be stabilized by up to 20mm, and the contract rate for this shall not be amended by such change.

**ADDENDUM 2: PWRT/2432/23/MP – REHABILITATION OF COAL HAUL P182/1 (PHASE 3) FROM P52/2 R38 TOWARDS P30/01 (R35) (12 KM) IM NKANGALA REGION OF THE MPUMALANGA PROVINCE)**

---

**SECTION 3500: STABILIZATION**

**3410: MEASUREMENT AND PAYMENTS**

*"Replace ,200 mm thick in item B35.01 b) with 150 mm thick to read as follows".*

Item

Unit

B35.01: Extra over item 34.01 c) for chemical stabilization over unstabilized compacted layers:

b) Gravel subbase, **150 mm** thick.

This Addendum shall form part of the contract, therefore, shall affix to "Record of Addenda" to tender documents

Yours Faithfully,



**MR. MC. MOROLO**  
**HEAD OF DEPARTMENT**  
DATE: 08/08/23

Rhino Build: No. 7, Government Boulevard, Riverside Park, Ext. 2, Mbombela, 1200,  
Mpumalanga Province  
Private Bag X11310, Mbombela, 1200, Mpumalanga Province  
Tel: +27 (13) 766 6554,

Litiko Letemisebenti Yemphakatsi,  
Temigwaco Netekutfutea

Departement van Openbare Werke,  
Paaie en Vervoer

UmNyango wezemiSebenzi yomPhakathi,  
zeeNdiela nezokuThutha

Enq: KM Dolamo  
Tel: 013 766 6877

### ADDENDUM 3

#### **ADDENDUM 3: PWRT/2432/23/MP – REHABILITATION OF COAL HAUL P182/1 (PHASE 3) FROM P52/2 R38 TOWARDS P30/01 (R35) (12 KM) IM NKANGALA REGION OF THE MPUMALANGA PROVINCE)**

Further to invitation to bid number as indicated above: REHABILITATION OF COAL HAUL P182/1 (PHASE 3) FROM P52/2 R38 TOWARDS P30/01 (R35) (12 KM) IM NKANGALA REGION OF THE MPUMALANGA PROVINCE) as, advertised in the Mpumalanga Provincial Supply Chain Management Bid Bulletin: Volume No. 323 of 07 July 2023, tenderers are advised of the following changes:

#### **1.0 PART C2.2. RETURNABLE SCHEDULES.**


*“Insert the following schedule G1. Schedule of the Tenderer’s Experience attached here-with as Annexure A)”*

This Addendum shall form part of the contract, therefore, shall affix to “Record of Addenda” to tender documents

Yours Faithfully,



MR. MC. MOROLO  
HEAD OF DEPARTMENT  
DATE: 08/08/23

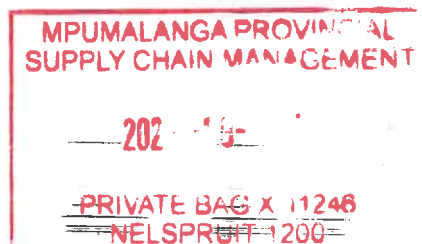

**G1: SCHEDULE OF THE TENDERER'S EXPERIENCE**

The tenderer is to provide the following information regarding the seven largest relevant projects of similar nature **(Road Construction)** completed by the tenderer during the last ten years, in order of contract price. Only experience by the tendering entity, and not by staff members, shall be taken into account in awarding functionality points. **Only projects listed in the table below will be considered for acquiring points.**

Employer: Contact Person and Telephone Number	Consulting Engineer: Contact Person and Telephone Number	Nature of Work	Value of Work (inclusive of VAT)	Date Completed or Expected to be Completed

SIGNATURE: .....  
(of person authorised to sign on behalf of the Tenderer)

DATE: .....