
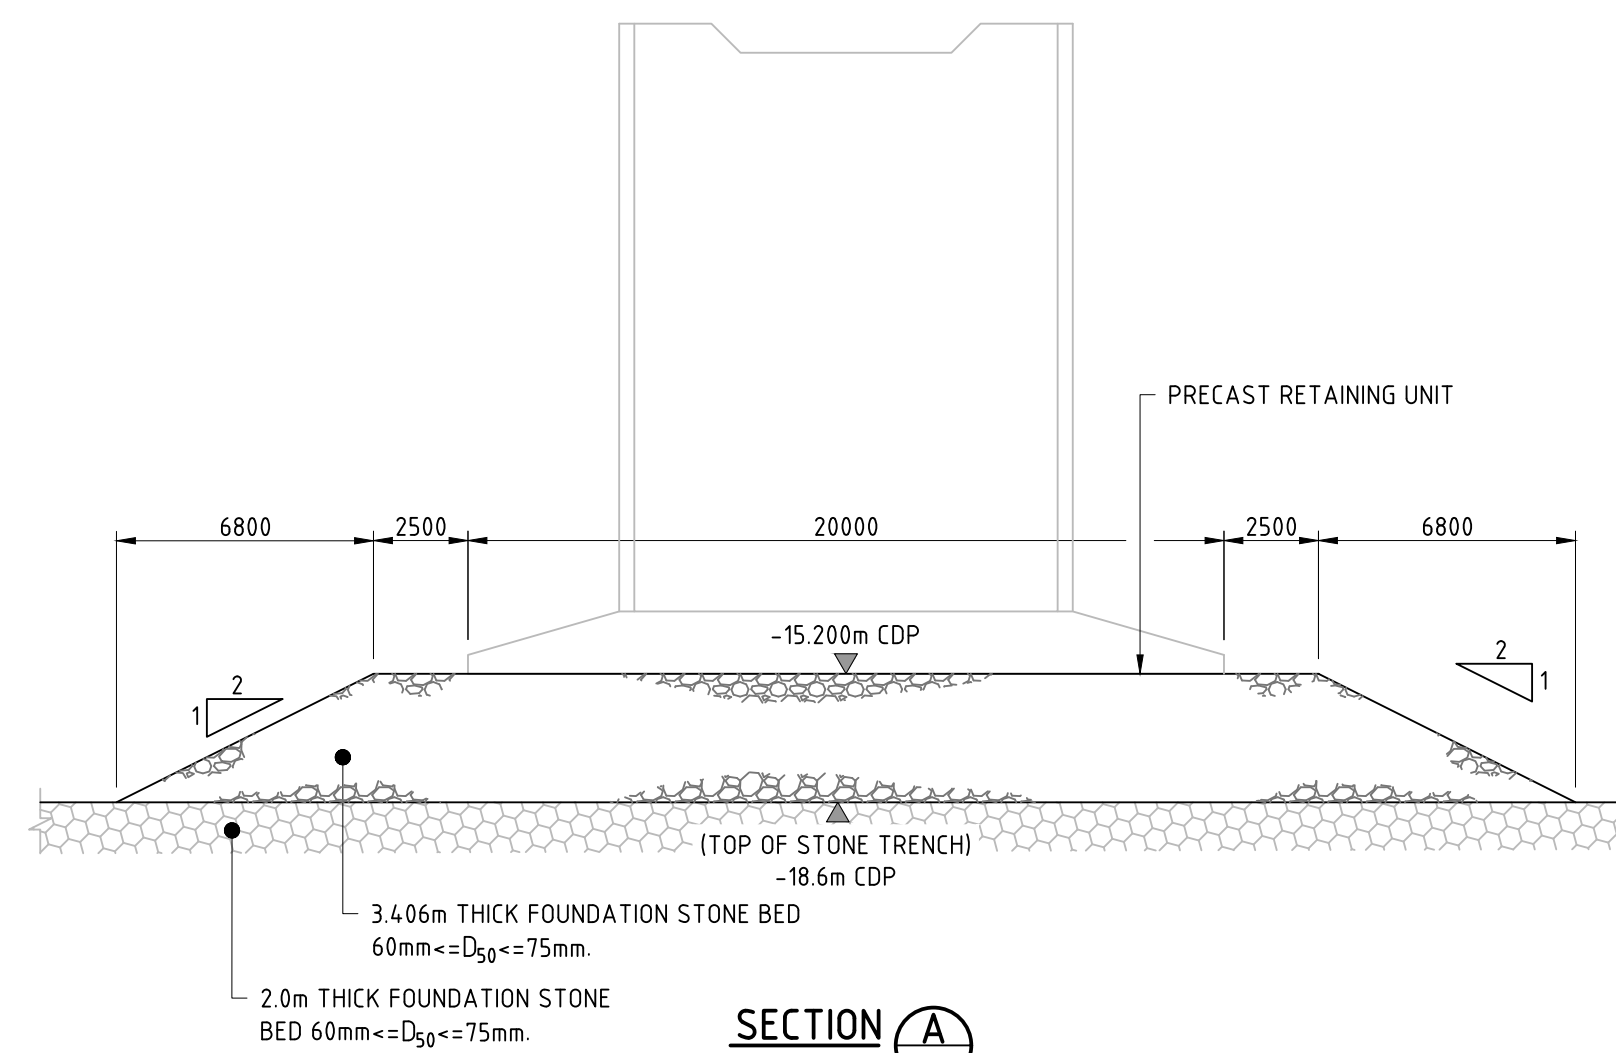
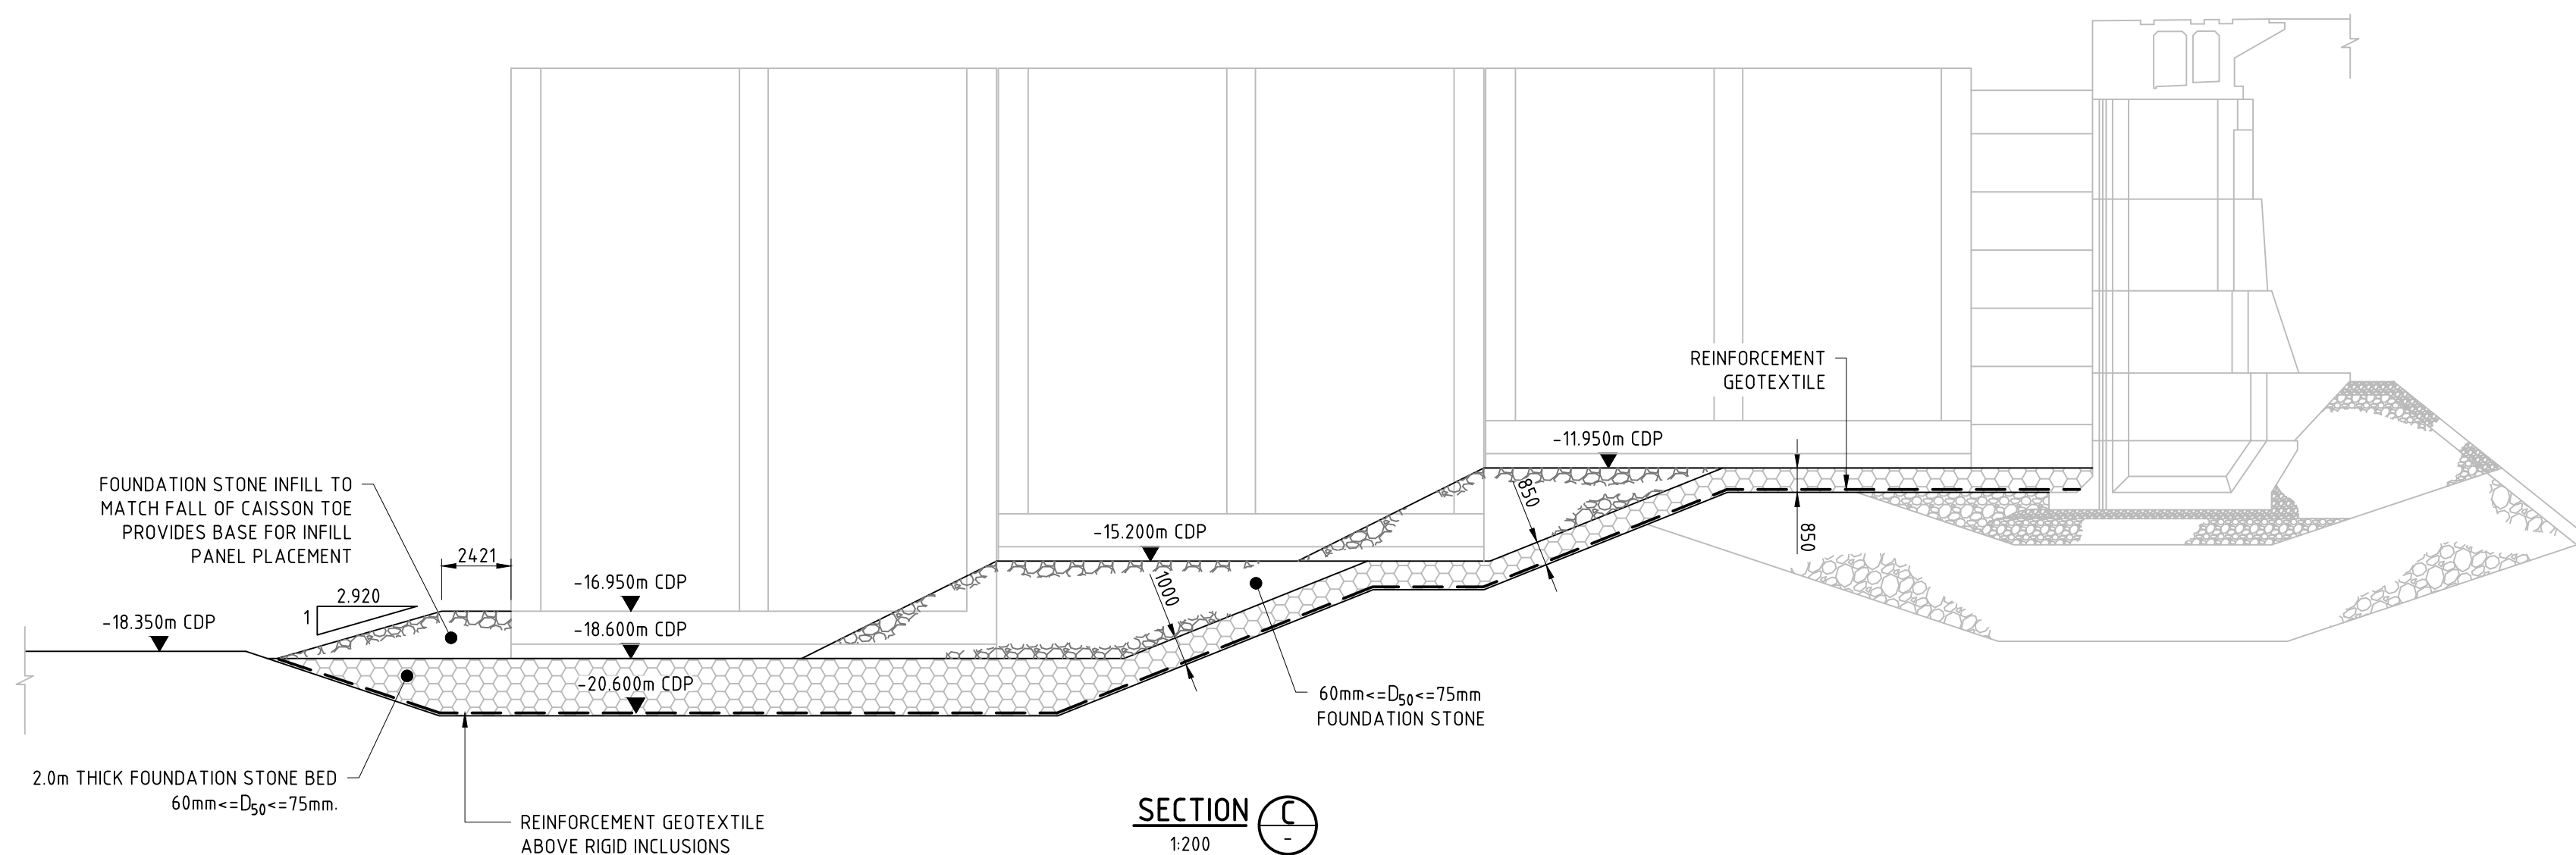


PLAN: STONE BED PLACEMENT FOR PHASE 3 TIE IN
1:250

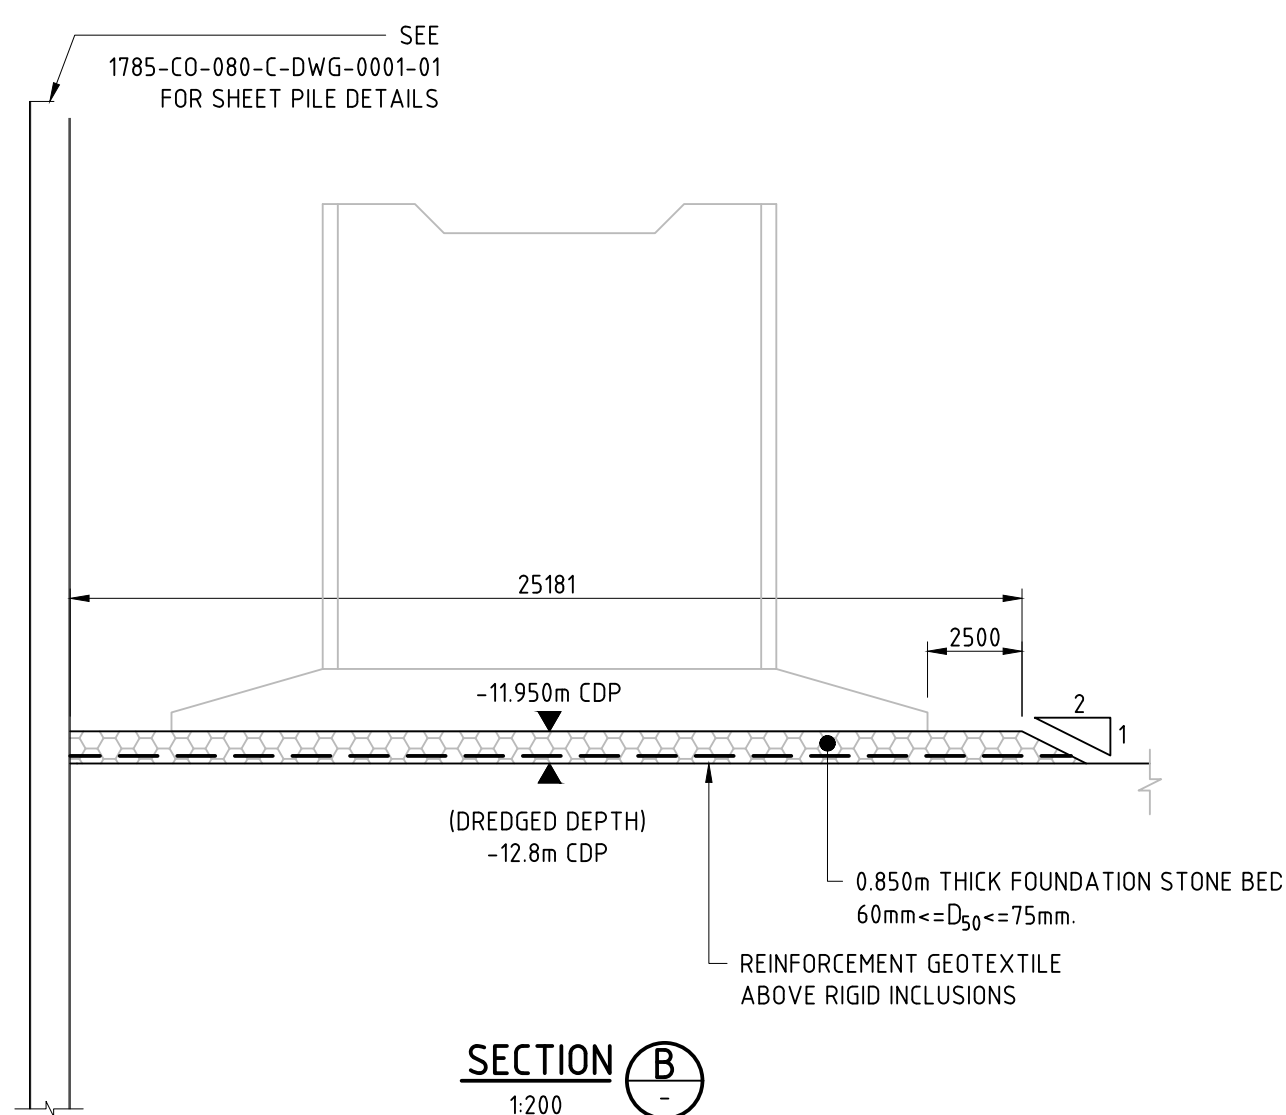

- ### CONSTRUCTION SEQUENCE:
1. PLACE STONE FILL FOR CAISSON 75 TO A LEVEL OF -18.6m CDP
 2. PLACE CAISSON 75
 3. PLACE STONE FOR INFILL PANEL PLATFORM BETWEEN CAISSON 74 & 75. THE SLOPE OF THE STONE INFILL IS TO FOLLOW THE SLOPE OF THE CAISSON TOES
 4. PLACE INFILL PANELS
 5. PLACE STONE FOR RETURN CAISSON 76 TO FORM PLATFORM AT A LEVEL OF -15.2m CDP
 6. PLACE CAISSON 76
 7. PLACE STONE FOR RETURN CAISSON 77 TO FORM PLATFORM AT A LEVEL OF -11.95m CDP
 8. PLACE CAISSON 77

[illegible]