1 **SITE PLAN (Flagpole Positions)**
1 : 50

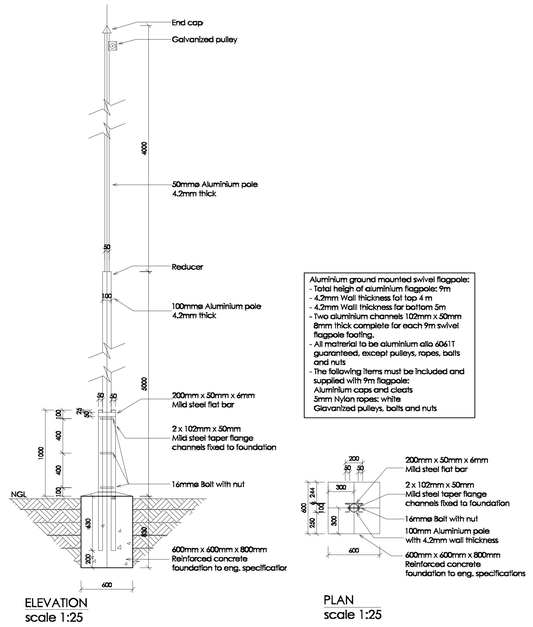

Aluminium ground mounted swivel flagpole:
- Total heigh of aluminium flagpole: 9m
- 4.2mm Wall thickness fot top 4 m
- 4.2mm Wall thickness for bottom 5m
- Two aluminium channels 102mm x 50mm 8mm thick complete for each 9m swivel flagpole footing.
- All matrerial to be aluminium allo 6061T guaranteed, except pulleys, ropes, bolts and nuts
- The following items must be included and supplied with 9m flagpole:
  Aluminium caps and cleats
  5mm Nylon ropes: white
  Glavanized pulleys, bolts and nuts

2 **FLAGPOLE DETAIL**
1 : 25

REV	WORKS DESCRIPTION	DATE
B	STAGE 4.2 ISSUED FOR TENDER SUBMISSION	2025.09.12
A	STAGE 4.2 ISSUANCE	2025.03.07

REVISION SCHEDULE

FOR TENDER

A0

CLIENT / SERVICE :
..\..\..\MariteSAPS-SAPS-60ROM.jpg

BLOCK A, 4TH FLOOR, ROOM 545
THE DIVISIONAL COMMISIONER
SA POLICE SERVICE
117 CRESSWELL ROAD
SILVERTON
PRETORIA
0184
TEL: +27-12-845-8678

CONSULTANTS
..\..\..\..\MariteSAPS-Picture1-609626.jpg

SUITE 16C, FIRST FLOOR,
HEUWEISIG OFFICE PARK
6763
SEEDCRACKER STREET
HEUWEISIG ESTATE
CENTURION

TEL: +27-12-656-8179

COPYRIGHT
THIS DRAWING IS PRIVATE PROPERTY AND MAY NOT BE COPIED OR REPRODUCED IN ANY MANNER WHATSOEVER WITHOUT THE OWNER'S WRITTEN CONSENT

DESCRIPTION :
PROPOSED NEW MARITE SAPS ON REMAINING EXTENT OF PORTION 1 OF THE FARM WATERVAL 273 KU

PROJECT NUMBER	19/1/9/1/72TB(22)	PROJECT NAME	MARITE SAPS	DRAWING NUMBER	A-950
CLIENT NAME	SAPS	DRAWING NAME	FLAGPOLE DETAIL	DRAWING SCALE	AS INDICATED
WORK STAGE	4.2	BUILDING NAME	A-MARITE SAPS-STATION BUILDING	DRAWING REVISION	B
DRAWING AUTHOR	VIM	PROJECT LEADER	KSP	DRAWING DATE	2025.09.12