


SETTING OUT CO-ORDINATES		
POINT	Y CO-ORDINATES	X CO-ORDINATES
CONSTANT	+ 0.000	+ 3 290 000.000
CP01	-19.033	360.659
CP02	-28.163	361.943
CP03	-36.399	358.34
CP04	-66.366	388.428
CP05	-57.455	391.568
CP06	-53.807	396.372


NOTE:
ALL CO-ORDINATES TO BE CONFIRMED ON SITE PRIOR TO COMMENCEMENT OF ANY WORK


SCHEDULE OF DRAWINGS		
DRAWING NO.	SHEET NO.	DESCRIPTION
48918	1	GENERAL ARRANGEMENT SHEET 1
	2	GENERAL ARRANGEMENT SHEET 2
	3	CULVERT CONCRETE DETAILS
	4	PRECAST POLYCRETE PEDESTRIAN HANDRAIL DETAILS
	5	TRAFFIC BARRIER CONCRETE DETAILS
	6	BRT BARRIER CONCRETE DETAILS

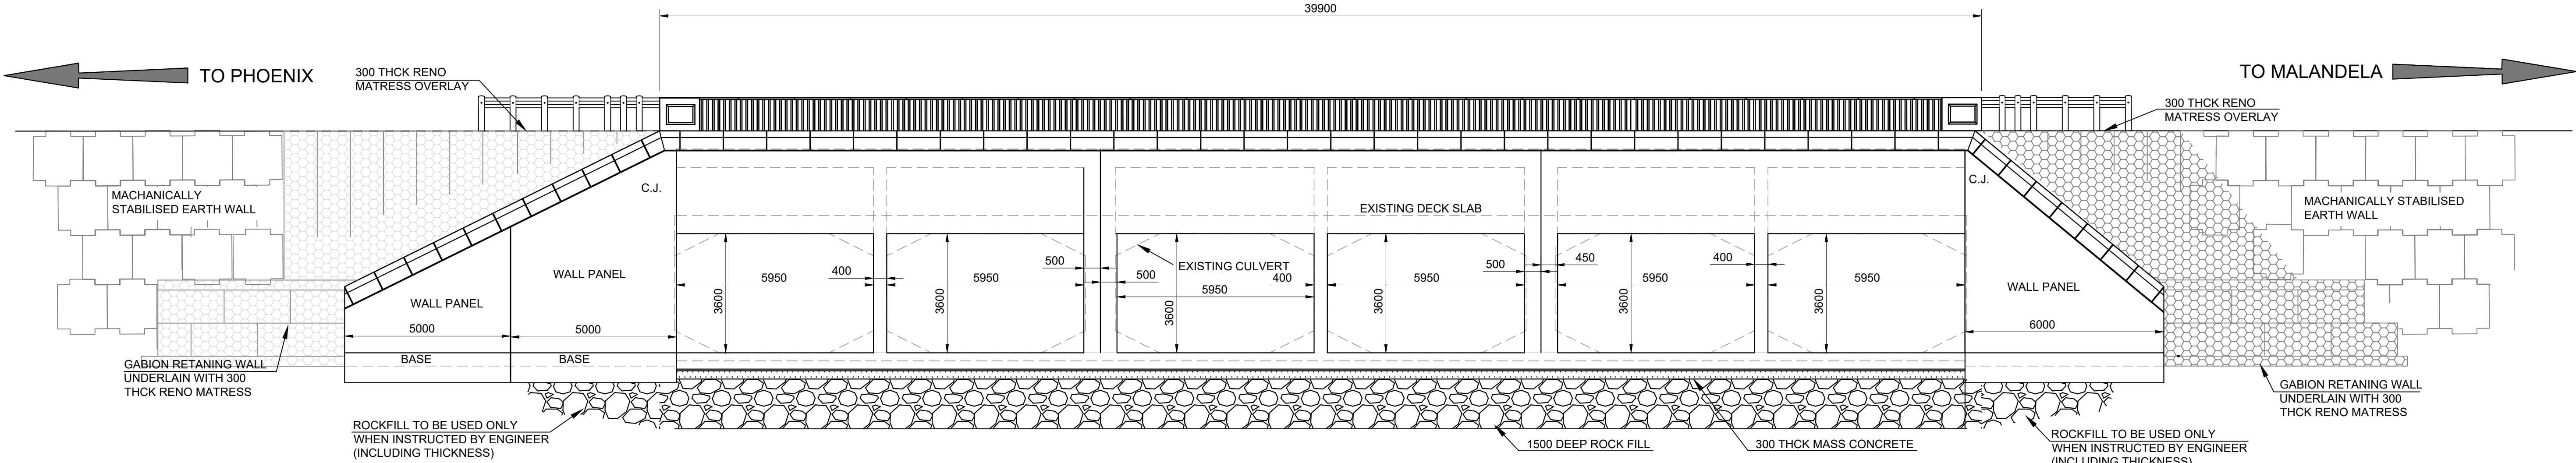

SECTION A-A
(TYPICAL ELEVATION OF CULVERT)
1:100

FOR TENDER PURPOSES ONLY
NB: FINISHED CONCRETE LEVELS
SUBJECT TO CHANGE

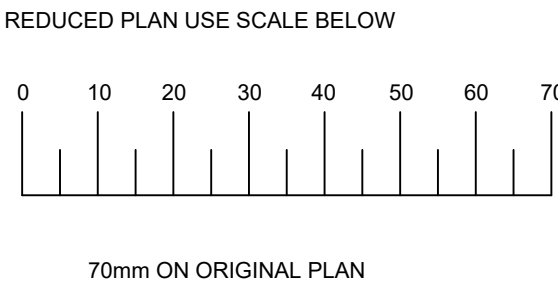

V1	06/08/2021	ISSUED FOR TENDER
Revision	Date	Description
NOTE: No construction work to commence until land and servitude acquisitions have been completed		
Acquisitions completed:		
Date	Engineer	
UNDERGROUND SERVICES CHECKED		
SERVICE	DATE	SIGNATURE
S.W DRAINS		
SEWERS		
WATER MAINS		
G.P.O CABLES		
ELECTRIC CABLES		
S.A.R. CABLES		
E.S.C. CABLES		
OIL PIPE LINE		
NOTE: Only underground services affected by new construction work are shown. Care must be taken during excavations for road foundations, kerbs etc. to avoid damage to underground services such as sewers, drains, cables, water mains and connections. Whenever possible these must be located before work proceeds.		

Contract No. 1T-47319
Project Title
IRPTN - C3 CORRIDOR:
CROSSROADS CONSTRUCTION
AND CULVERT WIDENING
OVER PIESANG RIVER

Drawing Title
CULVERT EXTENSION
ACROSS PIESANG RIVER
GENERAL ARRANGEMENT
(SHEET 1 OF 2)

SCALES	AS SHOWN	Date:	14/06/2021
Designed:	H. MBINA	Checked:	P. FENTON
Drawn:	H. MBINA	Surveyed:	SURVEY DEPT.
Manager: Structures			
Deputy Head : Roads Provision			

G. EVANS	HEAD : ENGINEERING		
Drawing No.	48918	Sheet of	01 of 06 Rev. V1