


CENTLEC (Pty) Ltd




VIEW




SECTION A - A









PICK-UP HOOK



BOW CLIP IN STEELTHRUSSES

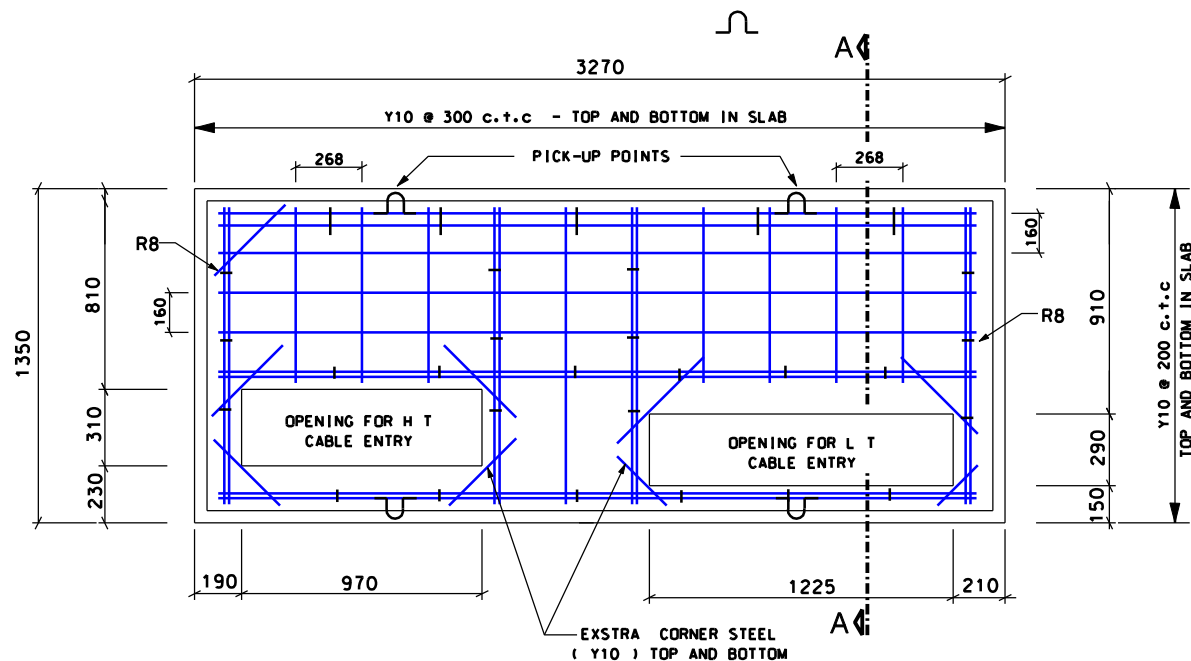

PLAN

QUANTITY	TYPE	CUT LENGTH in mm	DIAGRAM
18	Y10	3300	
18	Y10	1450	
8	Y10	1010	
6	Y10	910	
18	Y10	520	
30	R8	640	
4	Y16	700	

NOTES

1. CONCRETE STRENGTH : 25 MPA / 28 DAYS
2. FINISH TOLERANCE : $\pm$ 3 mm ALONG DIAGONAL (max.)
3. BOXING SUFFICIENT STRENGTH TO ENSURE PLINTH CORRESPOND TO MEASUREMENTS. NO PLASTERING IS ALLOWED
4. TOP OF PLINTH FINISH WITH WOODEN TROWEL.
5. ALL VISIBLE ANGLES FINISH AT 45°

REVISION DATE : 2004 - 06 - 22

CENTLEC (Pty) Ltd <i>Reg No 2003/00652/01</i> PRIVATE BAG X14, BRANDHOF 9324 Tel: 051 - 4082238 Fax: 051 - 4082388	DESIGNED	ONTWERP	DATE	DATUM	FIRST DRG. MAN	EERSTE TEKENAAR	CHECKED	NAGESIEN	UTILIZATION	BENUTTING	REGIONAL SERVICES	STREKS- DIENSTE	TITLE	TITEL		
	K BOOYSEN		2003 - 05 - 14		A C DE WET				B.DE JAGER		X.FAKU		STEEL REINFORCING FOR CONCRETE PLINTH OF 315 /500 & 630 kVA MINIATURE SUBSTATION			
	DRAWN	GETEKEN	SCALE	SKAAL	CHECKED	NAGESIEN	DESIGN & DEVELOPMENT	ONTWERP & ONTWIKKELING	CUSTOMER SERVICES	KLIENTEDIENS	EXECUTIVE MANAGER ENGINEERING	UITVOERENDE BESTUURDER INGENIEURSWES	DRAWING N ^o .	TEKENING N ^o .	REV.	VERWYS
	N VERMEULEN		N T S			A.MGOOI		K V/D BERG		L KRITZINGER			TS - 6 - 1.1			

THE C.A.D. REFERENCE NUMBER IS: TS - 6 - 1.1

A4 SHEET