
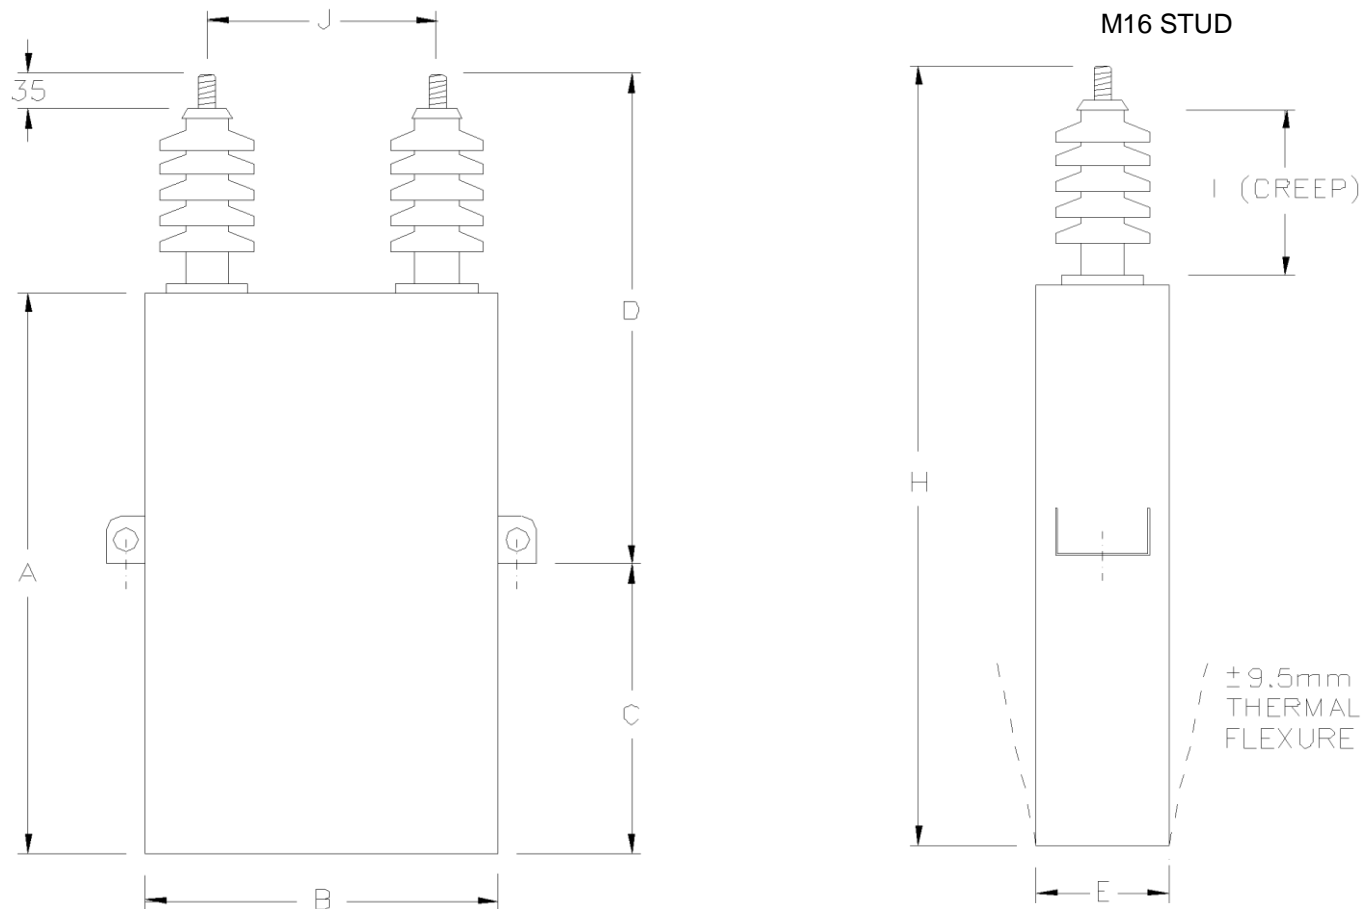


WORKS ORDER	03ZN	CAPACITANCE	19.7 μ F	TEMP CAT	-25/+50
CUSTOMER	ESKOM-TR	RATED VOLTAGE	6351 V	A =	820
ORDER NUMBER	VARIOUS	RATED OUTPUT	250 kVAr	B =	343
ORDER DATE	09-Mar-00	UNIT WEIGHT	57 kG	C =	450
DELIVERY DATE	26-May-00	INSULATION	28 / 95 kV	D =	605
QUANTITY	12	PHASES	1	E =	138
SPARES	0	BUSHINGS	2	F =	433
STYLE NUMBER	UMA822H	INTERNAL CONN.	I (1 PHASE)	G =	397
TOLERANCE	-5.0/+5.0 %	DISCHARGE RES.	1.8 MOHM	H =	1055
IMPREGNANT	NON PCB	SERIES GROUPS	4	I =	300
DIELECTRIC	ALL FILM	PARALLEL GROUPS	12	J =	220
FUSES	INTERNAL	SPECIFICATION	IEC 871-1	K =	

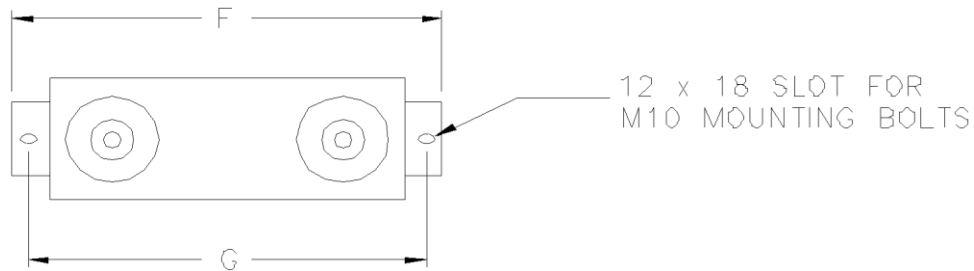

CAPACITOR DATA SHEET AND OUTLINE DRAWING No: 03ZN