

PROVINCIAL ADMINISTRATION OF KWAZULU-NATAL
DEPARTMENT OF PUBLIC WORKS



KWAZULU-NATAL PROVINCE

PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

BILLS OF QUANTITIES

with GCC for Construction Works - Second Edition 2010

CONTRACTUAL SECTION

ONE VOLUME APPROACH

SECTION 2

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO
STORM DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-
NATAL: NORTH COAST REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL -
OPEN BIDS**

Engineer/Principal Agent

Naidu Consulting (Pty) Ltd
P.O. Box 2796
Westville
Durban
3635
031 265 6007 - Tel Number
N/A - Fax Number
Sherwyn.Bhana@naiduconsulting.com

Employer:

Head: Public Works
KZN Department of Public Works
Private Bag X 9041
PIETERMARITZBURG
3200

Tel Number: 033 - 355 5569

Fax Number: N/A

Quantity Surveyor

LDM Quantity Surveyors (Pty) Ltd
P.O. Box 19233
Dormerton
Durban
4015
031 207 1340 - Tel Number
031 209 9441 - Fax Number
ssirputh@ldm.co.za

Region:

Head Public Works: Operations
KZN Department of Public Works
X9041
PIETERMARITZBURG
3200

Tel Number: 033 - 355 5569

Fax Number: N/A

Tender Number: ZNTU04215W
CIDB Grading: 5GB OR HIGHER
ECDP Number: N/A

Project Code: 065986
Document Date: 2-Jun-2023
Contract Period: 12 Calendar Months

Contracting Party:

CIDB Registration number:

Central Suppliers Database Registration Number:

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**



KWAZULU-NATAL PROVINCE
PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

THE CONTRACT

3. PART C1: AGREEMENT AND CONTRACT DATA

C1.1	Form of Offer and Acceptance	1
C1.2	Contract Data	8
C1.3	Form of Guarantee (C1.3)	3

4. PART C2: PRICING DATA

C2.1	Pricing Instructions	4
C2.2	Preliminaries for GCC 2010 for Construction Works - 2nd Edition 2010	41
C2.3	Bill of Quantities	67

5. PART C3: SCOPE OF WORKS

C3.1	Scope of Works	7
C3.2	Specification for HIV/AIDS awareness	3
C3.3	HIV/STI Compliance report	2

6. PART C4: SITE INFORMATION

C4.1	Site Information	1
------	------------------	---

7. DRAWINGS

C5.1	List of Drawings	1
C5.2	Provisional Site Plan (for information purposes)	1
C5.3	Tabulated Scope of Works	2

8. ANNEXURES

Annexure 1	ASAQS Model Preambles for Trades 2008	51
Annexure 2	General Electrical Specifications	21
Annexure 3	Lightning Protection Specifications	6
Annexure 4	Map of Tender Submission Location	1
Annexure 5	Joint Venture Agreement	7
Annexure 6	Project Specific Health and Safety Specification	23
Annexure 7	Health and Safety Bill of Quantities	2
Annexure 8	Builders Lien Agreement	1
Annexure 9	Geotechnical Investigation Report - (If applicable)	1
Annexure 10	EPWP Employment Contract and EPWP Specification/Checklist	13
Annexure 11	Attendance Register - Infrastructure and Other Projects	1
Annexure 12	EPWP Data Collection tool for Phase 3 System	6



KWAZULU-NATAL PROVINCE
PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

THE CONTRACT



KWAZULU-NATAL PROVINCE
PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

C1 - AGREEMENT AND CONTRACT DATA



KWAZULU-NATAL PROVINCE

PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

FORM OF OFFER AND ACCEPTANCE

FORM OF OFFER AND ACCEPTANCE

Tender No - ZNTU04215W



KWAZULU-NATAL PROVINCE
PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM DAMAGED
SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST REGION: CLUSTER 69:
UQWEQWE SECONDARY SCHOOL - OPEN BIDS

C.1.1 - FORM OF OFFER AND ACCEPTANCE

THE OFFER AND ACCEPTANCE FORM IS BOUND INTO **SECTION 1** (See end of Returnable Documents) OF THIS DOCUMENT AS PART OF THE RETURNABLE DOCUMENTS. ONCE A CONTRACT IS CONCLUDED WITH A SUCCESSFUL TENDERER, THIS PAGE WILL BE REPLACED WITH THE FILLED AND SIGNED OFFER AND SIGN ACCEPTANCE BY THE EMPLOYER AND IT WILL BECOME PART OF THE CONTRACT.

PLEASE SUBMIT THE OFFER AND ACCEPTANCE FORM WITH THE OTHER
RETURNABLE DOCUMENTS.



**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

C1.2 - CONTRACT DATA

C 1.2 CONTRACT DATA: with GCC for Construction Works - Second Edition 2010	
CONTRACT DATA FOR:	
PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS	
Tender no:	ZNTU04215W
	The General Conditions of Contract are the clauses contained in the General Conditions of Contract (2010) (Second Edition) published by the South African Institution of Civil Engineering. Copies of these conditions of contract may be obtained through most regional offices of the South African Institution of Civil Engineering, telephone number 011 805 5947 or by visiting their website at www.saice.org.za .
	CONTRACT SPECIFIC DATA The following contract specific data are applicable to this contract:
	CONTRACT VARIABLES This schedule contains all variables specific to this document and is divided into pre-tender and post-tender categories. The pre-tender category must be completed in full and included in the tender documents. Both the pre-tender and post-tender categories form part of this agreement. Spaces requiring information must be filled in, shown as 'not applicable' or deleted <u>but not left blank</u> . Where choices are offered, the non-applicable items are to be deleted. Where insufficient space is provided the information should be annexed hereto and cross referenced to the applicable clause of the schedule. Key cross reference clauses are italicised in [] brackets. The Engineer/Principal Agent, in accordance with Clause 1.1.1.16, shall obtain the specific approval from the Employer before executing any of his functions according to the "Conditions under which Consultants are appointed", or in the event where an employee of the Employer represents the Employer, the relevant General Delegations applicable at the time of executing his/her duties as described in Clause 3.1.2.
Part 1: CONTRACT DATA PROVIDED BY THE EMPLOYER:	
PRE-TENDER INFORMATION	
CONTRACTING AND OTHER PARTIES	
[1.1.1.15]	Employer: Head: Public Works (KZN Department of Public Works: Province of KwaZulu-Natal) Postal address: <i>Private Bag X 9041</i> PIETERMARITZBURG 3200 Tel: <i>N/A</i> Fax: 033 - 355 5569
[1.2.1.2]	Physical address: 191 Prince Alfred Street PIETERMARITZBURG 3200
[1.1.1.16]	Employers Agent 1 <i>Naidu Consulting (Pty) Ltd</i> Agent's service: <i>Principal Agent</i> Postal address: <i>P.O. Box 2796</i> Westville 3635 Tel: 031 265 6007 Fax: <i>N/A</i>
	Employers Agent 2 <i>LDM Quantity Surveyors (Pty) Ltd</i> Agent's service: <i>Quantity Surveyor</i> Postal address: <i>P.O. Box 19233</i> Dormerton 4015 Tel: 031 207 1340 Fax: 031 209 9441
	Employers Agent 3 <i>Naidu Consulting (Pty) Ltd</i> Agent's service: <i>Civil and Structural Engineer</i> Postal address: <i>P.O. Box 2796</i> Westville 3635 Tel: 031 265 6007 Fax: <i>N/A</i>
	Employers Agent 4 <i>[Agents Name]</i> Agent's service: <i>[Identify Agent's Service, eg. Engineer]</i> Postal address: <i>[P.O. Box number]</i> <i>[Name of town]</i> <i>[Code]</i> Tel: <i>[Tel Number including Area Code]</i> Fax: <i>[Fax Number including Area Code]</i>

Tender no: ZNTU04215W	
	Employers Agent 5 <i>[Agents Name]</i> Agent's service: <i>[Identify Agent's Service, eg. Engineer]</i> Postal address: <i>[P.O. Box number]</i> <i>[Name of town]</i> <i>[Code]</i> Tel: insert <i>[Tel Number including Area Code]</i> Fax: <i>[Fax Number including Area Code]</i>
	Employers Agent 6 <i>[Agents Name]</i> Agent's service: <i>[Identify Agent's Service, eg. Engineer]</i> Postal address: <i>[P.O. Box number]</i> <i>[Name of town]</i> <i>[Code]</i> Tel: insert <i>[Tel Number including Area Code]</i> Fax: <i>[Fax Number including Area Code]</i>
	Employers Agent 7 <i>[Agents Name]</i> Agent's service: <i>[Identify Agent's Service, eg. Engineer]</i> Postal address: <i>[P.O. Box number]</i> <i>[Name of town]</i> <i>[Code]</i> Tel: insert <i>[Tel Number including Area Code]</i> Fax: <i>[Fax Number including Area Code]</i>
	Employers Agent 8 <i>[Agents Name]</i> Agent's service: <i>[Identify Agent's Service, eg. Engineer]</i> Postal address: <i>[P.O. Box number]</i> <i>[Name of town]</i> <i>[Code]</i> Tel: insert <i>[Tel Number including Area Code]</i> Fax: <i>[Fax Number including Area Code]</i>
PART 1: DATA PROVIDED BY THE EMPLOYER	
[1.1.1.13]	Defects Liability Period The defects liability period is: A time measured from the date of the Certificate of Completion. Defects Liability Period is 6 Months for the whole of the Works
Latent Defect Period	
[5.16.3]	The latent defect period is: 5 years after the Final Approval Certificate
Documentation required before Commencement of the Works:	
[5.3.1]	The documentation required before commencement with the Works execution are;
[4.3]	Health and Safety Plan <div style="border: 1px solid black; padding: 2px;">The Contractor shall deliver his Health and Safety Plan of the Works within 14 calendar days after notice from the Employer, prior to the Commencement Date.</div>
[5.6]	Initial Programme <div style="border: 1px solid black; padding: 2px;">The Contractor shall deliver his programme of work within 14 calendar days after notice from the Employer, prior to the Commencement Date.</div>
[6.2]	Guarantee <div style="border: 1px solid black; padding: 2px;">The Contractor shall deliver his chosen Guarantee (security) for this Works within 14 calendar days after notice from the Employer, prior to the Commencement Date.</div>
[8.6]	Insurance <div style="border: 1px solid black; padding: 2px;">The Contractor shall deliver his insurance for the Works within 14 calendar days after notice from the Employer, prior to the Commencement Date.</div>
	Cash flow by contractor <div style="border: 1px solid black; padding: 2px;">The Contractor shall deliver his Cash flow for the Works within 14 calendar days after notice from the Employer, prior to the Commencement Date.</div>
	Priced Bill of Quantity <div style="border: 1px solid black; padding: 2px;">The Contractor shall deliver his Priced Bill of Quantities on the Flash Drive submitted with this tender.</div>
	Programme <div style="border: 1px solid black; padding: 2px;">The Contractor is required to submit his Programme of Works in terms of Clause 5.6.1 and 5.3.1 and the Principal Agent is required to approve this within 7 days in terms of Clause 5.6.3</div>
	Other requirements <div style="border: 1px solid black; height: 20px;"></div>
[5.3.2]	The time to submit the documentation required before commencement with Works execution is: 14 calendar days

<p>[5.8.1]</p> <p>[5.8.1]</p>	<p>Non-Working days</p> <p>Non-Working days Special non- working days</p> <p>Sundays All Nationally Recognized Public Holidays and the year end break</p> <p>First Year end break - commences ends on Second Year end break - commences ends on Third Year end break - commences ends on Fourth Year end break - commences ends on</p> <p>18-Dec-23 8-Jan-24 16-Dec-24 13-Jan-25 N/A N/A N/A N/A</p>										
<p>[3.1.3]</p>	<p>Engineer/Principal Agent to consult with Employer</p> <p>The Engineer shall obtain the specific approval from the Employer before executing any of his functions according to the "Conditions under which Consultants are appointed", or in the event where an employee of the Employer represents the Employer, the relevant General Delegations applicable at the time of executing his/her duties.</p>										
<p>[6.2.1]</p> <p>[6.2.1]</p>	<p>Security</p> <p>The time to deliver the deed of guarantee is Prior to site hand over in terms of clause 5.3.1 and 5.3.2.</p> <p>Please see CONTRACT DATA - below to select Guarantee Option</p>										
	<p>Commencement Date</p> <p>Commencement date means the date of Site Hand over that should not occur prior to the tenderer receiving one fully signed copy of the Offer and Acceptance in terms of the Form of Offer and Acceptance.</p>										
	<p>The Agreement comes into effect on the date when; The tenderer receives one fully completed original copy of this document, including the Schedule of Deviations (if any)</p> <p>The agreement ("this document") consists of; 1. Agreement and Conditions of Contract. 2. Form of Offer and Acceptance. 3. Contract Data. 4. Scope of Works. 5. Site Information. 6. Drawings & documents referred to in the 1 to 4 above.</p> <p>(See Form of Offer and Acceptance)</p>										
<p>[5.3.1]</p>	<p>The contractor shall commence executing the Works within 7 calendar days from the Commencement Date.</p>										
<p>[5.4.1]</p>	<p>Possession of the site will be given within 10 calendar days after the contractor has fulfilled the conditions (4.3, 5.6, 6.2, 8.6) and received the notification from the Employer of Site Hand Over where the contractor will receive one fully signed copy of the Form of Offer and Acceptance from the employer.</p>										
<p>[5.6.1]</p>	<p>The Contractor shall deliver his programme of work within 14 calendar days after notice from the Employer, prior to the Commencement Date.</p>										
	<p>CONTRACT DETAILS</p>										
<p>[1.1.1.33]</p>	<p>Works description: Refer to document C3 – Scope of Work.</p>										
<p>[1.1.1.30]</p>	<p>Site description: Refer to document C4 – Site Information.</p>										
	<p>Specific options that are applicable to a State organ only Where so :</p>										
<p>[6.10.6.2]</p>	<p>1) Interest rate legislation: (a) in respect of interest owed by the employer, the interest rate as determined by the Minister of Justice and Constitutional Development from time to time, in terms of section 1(2) of the Prescribed Rate of Interest Act, 1975 (Act No. 55 of 1975), will apply; and (b) in respect of interest owed to the employer, the interest rate as determined by the Minister of Finance, from time to time, in terms of section 80(1)(b) of the Public Finance Management Act, 1999 (Act No. 1 of 1999), will apply</p> <p>2) Lateral support insurance to be effected by the contractor:</p> <table border="1"> <tr> <td>Yes</td> <td>No</td> <td>X</td> </tr> </table> <p>3) Payment will be made for materials and goods</p> <table border="1"> <tr> <td>Yes</td> <td>X</td> <td>No</td> </tr> </table> <p>4) Dispute resolution by litigation</p> <table border="1"> <tr> <td>Yes</td> <td>No</td> <td>X</td> </tr> </table> <p>5) Extended defects liability period applicable to the following elements:</p> <table border="1"> <tr> <td>N/A</td> </tr> </table>	Yes	No	X	Yes	X	No	Yes	No	X	N/A
Yes	No	X									
Yes	X	No									
Yes	No	X									
N/A											
<p>[8.6.1.1.2]</p>	<p>The Value of material, supplied by the Employer, and not included in the Contract Price, is: R0.00</p>										
<p>[8.6.1.1.3]</p>	<p>The amount to cover Professional Fees, not included in the Contract Price, for repairing damage and loss to be included in the insurance: 30% of the Contract Price</p>										
<p>[8.6.1.3]</p>	<p>The limit for indemnity for liable insurance is: R10 Million (minimum)</p>										
<p>[6.5.1.2.3]</p>	<p>The percentage allowance to cover overhead charges for contractor and subcontractors, is: 10.00%</p>										
<p>[1.1.1.14]</p>	<p>Practical Completion Date</p> <p>The Practical Completion date is: 12 calendar months after date of formal site handover.</p>										
<p>[5.5.1]</p> <p>[5.13.1]</p>	<p>For the works as a whole: The whole of the works shall be completed within: 12 Months (which shall be deemed to include all Non – Working Days, Special Non – Working Days and the year-end Builders Annual Industry Holiday Periods).</p> <p>The date for practical completion shall be 12 calendar months after date of formal site handover</p> <p>The penalty per calendar day shall be : 0.04% of the Contract Price, rounded to the nearest R10</p>										

	For the works in sections:
	The date for practical completion from the commencement date and the penalty per calendar day:
[5.5.1]	Portion 1:
[5.13.1]	N/A
	0.04% of the Contract Price, rounded to the nearest R10
[5.5.1]	Portion 2:
[5.13.1]	N/A
	0.04% of the Contract Price, rounded to the nearest R10
[5.5.1]	Portion 3:
[5.13.1]	N/A
	0.04% of the Contract Price, rounded to the nearest R10
[5.5.1]	Portion 4:
[5.13.1]	N/A
	0.04% of the Contract Price, rounded to the nearest R10
[5.5.1]	Portion 5:
[5.13.1]	N/A
	0.04% of the Contract Price, rounded to the nearest R10
[5.5.1]	Portion 6:
[5.13.1]	N/A
[1.3.2]	0.04% of the Contract Price, rounded to the nearest R10
[1.3.2]	The law applicable to this agreement shall be that of the: Republic of South Africa
[6.10.1.5]	The percentage advance on materials not yet built into the Permanent Works is: 80.00%
[6.10.3]	Percentage retention on amounts due to contractor is: The Percentage retention is 10%. 10% Retention will be deducted per Payment Certificate up to maximum of 10% of the Contract Value and 5% will be released at Works Completion Stage and the last 5% released at Final Completion Stage.
	Maximum retention is: 10.00% of the Contract Price
[6.8.1]	Notwithstanding anything to the contrary contained in the General conditions of Contract and Preliminaries, this contract could only, when the construction period exceeds 6 months and the contract exceeds R1,000,000.00, be subject to a Contract Price Adjustment Factor.
[6.8.2]	Clause 6.8.2 the last part of the sentence saying "calculated according to the formula and the conditions set out in the Contract Price Adjustment Schedule."
[6.8.3]	must be replaced by "calculated according to the Contract Price Adjustment Provisions (CPAP) Indices Application Manual for use with P0151 indices (Revised 1 January 2013)" as published by Statistics South Africa. The Contract Price Adjustment Provision (CPAP) will be subject to the most recently released indices by Statistic South Africa. Tenderers are advised that with reference to Clause 3.4.6 of the Contract Price Adjustment Provisions (CPAP) Indices Applications Manual, the Head: Public Works will not accept the submission by Tenderers of lists of additional items."
[6.8.2]	Where this contract is a Lump Sum contract, the contract will only be subject to Contract Price Adjustment Provisions (CPAP)(Revised 1 January 2013) where the contract period equals or exceeds 6 calendar months. The applicable work group shall be WG 180 for domestic buildings or WG 181 for commercial and industrial buildings only.
[6.8.3]	
[5.14.5]	The following clause must be added to clause 5.14.5:
	[5.14.5.6] The employers agent shall submit the final account within 3 calendar months to the principal agent.
[10.5]	The determinations of disputes shall be by ARBITRATION ONLY.
[10.5.3]	The number of Arbitration Board Members to be appointed is: One
[10.9.1]	Replace the last part of the clause with the following: "...on the application of either party, by the Chairman, or his nominee of the Association of Arbitrators."
	Where CPAP is applicable, the contract sum will be adjusted in accordance with the Contract Price Adjustment Provisions (CPAP) as set out in the CPAP Indices Application Manual as published by Statistics South Africa, dated 1 January 2013 and any amendments thereto:
	1) Glass etc. measured in specialist section Metalwork, will be adjusted in terms of the index for that work group unless specifically stated otherwise in the bills of quantities.
	2) In case of uninterruptible power supplies, elevators, escalators and hoists, generating sets, motor-alternator sets and intercommunication systems shall be adjusted in accordance with Work Group 170.
	3) Further to clause 3.4.6 of the CPAP Indices Application Manual, the listing of additional items for exclusion by Tenderer's, will not be permitted.
	Alternative Indices: Not Applicable
	Details of changes made to the General Conditions of Contract for construction works (2010) Second Edition
[1.1]	Clause
[1.1.1.5]	COMMENCEMENT DATE – means the actual date of Site Hand over that should not occur prior to the Tenderer receiving one fully signed copy of the Offer and Acceptance in terms of the Form of Offer and Acceptance.
[5.12.2.2]	ABNORMAL CLIMATIC CONDITIONS - means conditions over and above what could reasonably be expected for the specific locality where the Works are being executed and include inter alia excessive rain, heat, cold, wind and any other climatic condition that would not normally be experienced during the season that the Works are executed in that area. The South African Weather Service's (http://www.weathersa.co.za) 10 year average climatic conditions statistics would be what could be reasonably expected for the specific locality where the Works are executed.
[6.2.1]	CONSTRUCTION GUARANTEE – means an on demand guarantee at call obtained by the contractor from an institution approved by the employer in terms of the employer's construction guarantee form as selected in the Offer and Acceptance Form and the contract data.
	CONSTRUCTION PERIOD – means the period commencing on the commencement date and ending on the date of due completion date. This period will be deemed to commence on actual site hand over date to the contractor and end on the date of practical completion and shall include all annual industrial holiday periods, Sundays and public holidays.
	CORRUPT PRACTICE – means the offer, giving, receiving, or soliciting of anything of value to influence the action of a public official in the procurement process or in contract execution.
	FINAL ACCOUNT - The document prepared by the principal agent, which reflects the contract value of the works at final approval or termination.
	FRAUDULENT PRACTICE – means a misrepresentation of facts in order to influence a procurement process or the execution of a contract to the detriment of any tenderer and includes collusive practise among tenderers (prior to or after the tender submission) designed to establish tender prices at artificial non-competitive levels and to deprive the tenderer of the benefits of free and open competition.

	<p>INTEREST – the interest rates applicable on this contract, whether specifically indicated in the relevant clauses or not, will be in terms of the legislation of the Republic of South Africa, and in particular:</p> <p>(a) in respect of interest owed by the employer, the interest rate as determined by the Minister of Justice and Constitutional Development from time to time, in terms of section 1(2) of the Prescribed Rate of Interest Act, 1975 (Act No. 55 of 1975), will apply; and</p> <p>(b) in respect of interest owed to the employer, the interest rate as determined by the Minister of Finance, from time to time, in terms of section 80(1)(b) of the Public Finance Management Act, 1999 (Act No. 1 of 1999), will apply</p>
	<p>[1.1.1.16] ENGINEER/PRINCIPAL AGENT – means the person or entity appointed by the Employer and named in the Contract Data as the Engineer /Principal Agent to act as agent of the Employer. In the event of an Engineer/Principal Agent not being appointed, then all the duties and obligations of an Engineer/Principal Agent as detailed in the Contract shall be fulfilled by a representative of the Employer as named in the Contract Data. (Hereafter referred to as Engineer)</p> <p>[1.1.1.21] GENERAL ITEMS - or preliminaries means items stipulated in the Pricing Data relating to general obligations, site services, facilities and/or items that cover elements of the cost of the work which are not considered as proportional to the quantities of the Permanent Works.</p>
	<p>[4.4.1] Add the following to the clause 4.4.1: "The Contractor shall only use subcontractors who are duly registered with the CIDB and who has an ACTIVE status at the time of submitting the tender"</p> <p>[6.2.1] Refer to Offer and Acceptance form for the various options that the contractor may choose from in providing a form of Guarantee under "GUARANTEE OPTIONS".</p> <p>[6.10.6.2] Replace "at the prime overdraft rate, as charged by the Contractor's Bank," with "...at the interest rate as determined by the Minister of Justice and Constitutional Development from time to time, in terms of section 1(2) of the Prescribed Rate of Interest Act, 1975 (Act No. 55 of 1975)." Omit "on all overdue payments from the date on which the same should have been paid..." and replace with "only after 30 calendar days from receiving written notice from the Contractor that the amount is overdue..."</p>
[5.12.3]	<p>SPECIAL CONDITIONS OF CONTRACT</p> <p>Omit clause 5.12.3 and add the following:</p> <p>"5.12.3. If an extension of time is granted, the Contractor shall be paid such additional time-related General Items, including for special non-working days, if applicable as are appropriate regarding to any other compensation which may already have been granted in respect of the circumstances concerned. The reasons for extension of time that would invoke payment of time related General Items are inter alia;</p> <p>5.12.3.1 Failure to give possession of the site to the contractor.</p> <p>5.12.3.2 Making good physical loss and repairing damage to the works where the contractor is not at risk.</p> <p>5.12.3.3 Contract instructions not occasioned by default by the contractor.</p> <p>5.12.3.4 Failure to issue construction information timeously or the late issue of a contract instruction following a request from the contractor.</p> <p>5.12.3.5 Late acceptance by the principal agent of a design undertaken by a selected subcontractor where the contractor's obligations have been met.</p> <p>5.12.3.6 Suspension or cancellation termination invoked by a nominated or selected n/s subcontractor due to default by the employer or the principal agent.</p> <p>5.12.3.7 Insolvency of a nominated subcontractor.</p> <p>5.12.3.8 A direct contractor.</p> <p>5.12.3.9 Opening up and testing of work and materials and goods where such work is according to in accordance with the contract documents.</p> <p>5.12.3.10 The execution of additional work for which the quantity included in the bills of quantities is not sufficiently accurate.</p> <p>5.12.3.11 Late or failure to supply materials and goods for which the employer is responsible.</p> <p>5.12.3.12 Suspension of the works."</p>
[5.14.5.1]	Omit entire clause 5.14.5.1
[5.16.4]	Add the following new clause "5.16.4. Upon the issue of a Final Approval Certificate, unless otherwise provided in the Contract: <p>5.16.4.1. The performance Guarantee (if any) shall be returned within 14 days to the guarantor in terms of Clause 7."</p>
[6.2.2]	Replace the following "...it shall be deemed that the Contractor has selected a security of ten percent retention of the value of the Works." with "...it shall be deemed that the Contractor has selected a security of a bank or insurance guarantee of 5% of the value of the Works and a payment reduction of 5% of the value certified in the payment certificate excluding value added tax."
[6.2.3]	Add to clause 6.2.3 the following "The Contractor shall provide proof of paid-up premium payments to accompany his payment certificate as proof that his performance guarantee has not expired yet. The Contractor will not receive payment without proof of the validity of their performance
[9.3.2.2]	Omit "without prejudice to the exercise of any lien the Contractor may have acquired over the Employer's property." <p>Duties and functions of the Engineer requiring the specific approval of the Employer BEFORE execution of any part of these duties are as follows:</p> <p>(a) Determinations of contractors claims for extension of time (revision of the contract completion date). All claims for extension of time shall be submitted by the Engineer, together with the Engineer's recommendations, to the Employer for determination. Omit "Engineer" in clause 42.2</p> <p>(b) Drawings, instructions or communications of any kind requiring variations of the works and involving EXTRA's shall NOT be given effect by the Contractor UNTIL BOTH the "Official Variation Order" and the "Financial Request for Variation Order and Additional Funds" form, as issued by the Department of Public Works, have been approved and signed by the Employer.</p> <p>(c) Insurance policies to be approved by the Employer within 21 days of the date of the Commencement of the Works.</p> <p>(d) Any notice of disagreement raised by the Contractor or written Dispute Notice given by the Contractor to the Engineer shall be submitted by the Engineer, together with the Engineer's recommendations, to the Employer for determination.</p> <p>(e) The issue of the certificate of practical completion, certificate of completion and the final approval certificate shall be signed and submitted by the Engineer, to the Employer for final approval and signature. The certificates shall not be considered as officially issued until signed by the</p>
	<p>MANAGING PROJECT DURATION</p> <p>(a) The Contractor shall co-ordinate his programme with all other contractors whose work may precede or be executed simultaneously to his own. The Contractor will be called upon to plan and control the project using the Project Evaluation and Review Technique (PERT) or other approved Critical Path Method (CPM) network analysis of his events and activities and those of the sub-contractors in his employ and must co-ordinate his planning with any other contractor employed on the project. A fortnightly project control report will be expected from the Contractor in writing, evaluating any gains or delays against the critical path and he should allow for all costs involved in planning reviewing and updating the programme to the satisfaction of the Principal Agent against this item.</p> <p>(b) Activity-and total float shall belong to the Employer.</p> <p>(c) The Contractor shall deliver his programme of work within 14 calendar days after notice from the Employer, prior to the Commencement Date. It is a condition of this contract that, the contractor submit to the Engineer/principal agent a detailed CPM Programme which shall be to the approval of the Engineer/principal agent. In this regard tenderers are advised to consult with the Engineer/Principal Agent as to the format and requirements of the programme as no claim whatsoever will entertained should the programme fail to meet the requirements of the Engineer/Principal Agent. Failure to submit the programme within the stipulated time may result in the contractor being held in breach of contract.</p> <p>The approved programme will form the basis of time management of the project and extension of time will not be guaranteed unless the Contractor has strictly complied with this provision.</p> <p>The programme shall make allowance for rain and the number of rain days allowed within the critical path shall be on the provisions of the clause dealing with inclement weather and claiming for delays in performance in this bill.</p> <p>Allowance for the above must be made under this item as no claims for failing to comply with this precondition will later be entertained.</p>

INCLEMENT WEATHER AND CLAIMS FOR DELAYS IN PERFORMANCE

- (a) The Contract Sum includes a monthly allowance of 3 working days inclement weather during which rainfall exceeds 10mm per day for months as indicated in the Scope of Works. These days shall be reflected on the critical path of the Contractor's programme as specified in MANAGING PROJECT DURATION above.
- (b) Claims for delays in performance due to inclement weather shall be calculated separately for each calendar month and for the project as a whole. Delays or gains to the critical path shall be reflected in all revisions of the programme. An extension of time will only be granted where the following conditions are met:
- The criteria to be used for WORK stoppages shall be for safety hazards or poor quality of work.
 - The Employer's site representative or the Employer's Principal Agent, if the site representative is not available shall be notified when the Contractor stops the work and intends to claim performance delays. The Employer representative shall inspect the situation together with the Contractor and give an immediate decision.
- The stoppage claimed must cause a delay in the Completion Date of work. If the critical activities can proceed and a non-critical activity is delayed due to inclement weather no claims for delay shall be granted.
 - No claims for stoppages less than 2(two) hours per day shall be considered.
 - Claims granted for more than 2 (two) hours, but less than 10 (ten) hour (lunch included) day, shall be added together and expressed as full days.
 - All claims shall be submitted in writing to the Principal Agent within one working day of the actual stoppage.
 - The total delay in performance granted to the Contractor expressed in days shall be added to the contractual Completion Date of each section of the Works. The contractual penalty clause shall only come into effect after this newly arrived date.
 - Total delays (in hours) will be rounded up or down to the nearest integer for the calculation of Working Days. The total hours (including lunch) per Working Day shall be 10 unless otherwise indicated on the Contractor's programme.
 - Where the programmed delays for inclement weather exceed the actual delays incurred the Completion Date(s) will not be adjusted.

- Where the project includes builder's holidays the programmed durations for inclement weather shall be adjusted pro-rate to the actual Working Days.
- The total of all monthly delays due to inclement weather shall be calculated in accordance with the example given below:

Description		Months					Total
		Sept	Oct	Nov	Dec	Jan	
	Hours	Hours	Hours	Hours	Hours	Hours	Hours
Programmed	Rain days	0	30	30	15	15	90
Actual	Rain days	16	22	35	15	18	106
Difference		-16	8	-5	0	-3	-16
Estimated Extension of time - in working days							2

8 hrs/day*

See point 5.2 in the Scope of Works for the specific days the tenderer must allow for in this contract.

Tender no: ZNTU04215W Part 2: CONTRACT DATA PROVIDED BY THE CONTRACTOR:

POST-TENDER INFORMATION

Note: All information for this section requires consultation with the Contractor. The Engineer/Principal Agent shall not pre-select any of the alternatives available to the Contractor.

1 CONTRACT DETAILS

[1.1.1.9] Contractor Name:

[1.2.1.2] Postal address:

Tel no

Fax no

Tax / VAT Registration No:

e-mail address

Physical address:

[1.1.1.10] The accepted contract price inclusive of tax is R :

[Amount in words]

Payment Of Preliminaries (Clause 6.7, 6.8, 6.10 and 6.11)

The preliminaries amounts shall be paid in terms of:

*Alternative A

Yes

**Alternative B

N/A

* Assessed by the Engineer/Principal Agent as an amount prorated to the value of the Work duly executed in the same ratio as the Preliminaries bears to the Contract Price excluding VAT, Preliminary amount, Contingencies and any CPAP.

** Calculated from the priced Bill of Quantity/Lump Sum document. The Contractor and the Engineer/Principal Agent shall agree on a division of the priced Preliminaries items into: initial establishment charge, monthly charge and final disestablishment charge.

If the Contractor and the Engineer/Principal Agent can not agree, within 10 Working Days from the Commencement Date, on such a division then the Engineer/Principal Agent shall make a division of the Preliminaries to be incorporated in the valuations for each monthly payment certificate as follows;

10% of the General Items/Preliminaries amount shall not be varied

15% of the General Items/Preliminaries shall only be varied in proportion of the Contract Price to the Contract Sum

75% of the General Items/Preliminaries shall be varied in proportion to the revised Construction Period compared with the initial Construction Period.

Adjustment of Preliminaries (Clause 6.7, 6.8, 6.10 and 6.11)

Alternative A

For the adjustment of Preliminaries both the Contract Sum and the Contract Value (including tax) shall exclude the amount of Preliminaries, all Contingency Sum(s) and any provision for Cost Price Adjustment Provisions:-

- An amount which shall not be varied.

- An amount varied in proportion to the contract value as compared to the Contract Sum.

- An amount varied in proportion to the Construction Period as compared to the initial Construction Period (excluding revisions to the Construction Period to which the Contractor is not entitled) to adjustment of the Contract Value in terms of the agreement.

The Contractor shall provide a breakdown of charges (including tax) within 15 working days of the date of acceptance of tender and, where applicable, an apportionment of Preliminaries per section

	<p>If the Contractor and the Principal Agent cannot agree, within ten (10) Working Days from the Commencement Date, on such a division then the Principal Agent shall make a division of the Preliminaries to be incorporated in the valuations for each monthly payment certificate as follows;</p> <p style="margin-left: 40px;">10% of the amount shall not be varied</p> <p style="margin-left: 40px;">15% varied in proportion of the Contract Value to the Contract Sum</p> <p style="margin-left: 40px;">75% varied in proportion to the revised Construction period compared with the initial Construction Period</p> <p>Sectional Completion : Subdivision of Preliminaries Costs</p> <p>For the adjustment of preliminaries for sections of the work the value of fixed, value, and time related amounts of the preliminaries for each section is required. The contractor is to provide such information within fifteen (15) working days of taking possession of the site, failing which the categorised preliminaries amounts shall be prorated to the value of each section.</p> <p>The above shall apply equally for projects where sectional completion was not contemplated at tender stage but subsequently occurred on an adhoc basis during construction of the works as agreed between the client and the employer. The original priced categorised amounts for fixed, value, and time related amounts shall be prorated to the value of each section.</p>	
	<p>When an extension of time has been granted in terms of the GCC and the preliminaries require to be adjusted accordingly, the pertinent sectional (subdivided) categorised preliminaries amounts shall be utilised, where applicable and not the overall preliminary amounts.</p> <p>Where sectional completion is required in terms of the agreement, the Contractor shall provide the Principal Agent with the division of the above categorized amounts into sections. Should the Contractor fail to provide such information within the period stipulated the categorized amounts shall be prorated to the value of each section.</p> <div style="text-align: right;"> <input type="text" value="YES"/> <small>yes / no</small> </div> <p>or</p>	
Alternative B	<p>The Contractor shall within 15 working days of the date of possession of the site provide the Principal Agent with a detailed breakdown of Preliminaries amounts for the works as a whole, or per section where applicable, including administrative and supervisory staff charges and for the use of construction equipment in terms of the programme.</p> <div style="text-align: right;"> <input type="text" value="NO"/> <small>yes / no</small> </div>	
<p>The contractor is informed that only alternative 'A' shall apply</p>		
<p>2 DOCUMENTS</p>		
	<p>Contract documents marked and annexed hereto:</p> <p>Priced Bills of Quantities:</p> <div style="display: flex; justify-content: space-between;"> Yes <input type="text" value="X"/> No <input type="text"/> </div> <p>Lump Sum document: :</p> <div style="display: flex; justify-content: space-between;"> Yes <input type="text"/> No <input type="text" value="X"/> </div> <p>Guarantee Options:</p> <p>Not applicable</p> <p style="margin-left: 40px;">2.2 DESIGN BRIEF</p> <div style="display: flex; justify-content: space-between; margin-left: 100px;"> Not Applicable <input type="text" value="YES"/> </div> <p style="margin-left: 40px;">2.3 DRAWINGS</p> <div style="display: flex; justify-content: space-between; margin-left: 100px;"> See list of Drawings/Annexures attached to this document. <input type="text" value="YES"/> </div> <p style="margin-left: 40px;">2.4 DESIGN PROCEDURES</p> <div style="display: flex; justify-content: space-between; margin-left: 100px;"> Not applicable <input type="text" value="YES"/> </div> <p>Contract drawings:</p> <div style="display: flex; justify-content: space-between;"> Yes <input type="text" value="X"/> No <input type="text"/> </div> <p>Other documents:</p>	
	<p>Waiver of the Contractors lien or right of continuing possession is required.</p> <div style="text-align: right;"> <input type="text" value="YES"/> </div>	

GUARANTEE OPTIONS

The Tenderer agrees to provide a bank or insurance guarantee in accordance with clause 6.2.3 of the Conditions of the GCC2010 Contract within the period stated in the Contract Data. This guarantee shall be for a sum equal to an amount stated in the Contract Data.

Guarantees submitted must be issued by either an insurance company duly registered in terms of the Insurance Act (Long Term Insurance Act No 52 of 1998 or Short Term Insurance Act No 53 of 1998) or by a bank duly registered in terms of the Banks Act No 94 of 1990, on the pro-forma referred to above. No alterations or amendments of the wording of the pro-forma will be accepted.

(a) the tenderer accepts that in respect of contracts up to R1 million, a payment reduction of 5% of the contract value will be applicable and will be reduced by the Employer in terms of the applicable conditions of contract.

(b) in respect of contracts above R1 million, the Tenderer offers to provide security as indicated below: select one option

(i) cash deposit of 10 % of the Contract Price	NO
(ii) bank or insurance Performance Guarantee of 10 % of the Contract Price	NO
(iii) cash deposit of 5% of the Contract Price and a payment reduction of 5% of the value certified in the payment certificate (excluding VAT)	NO
(iv) bank or insurance guarantee of 5% of the Contract Price and a payment reduction of 5% of the value certified in the payment certificate (excluding VAT)	NO
(v) a payment reduction of 10% of the payment value certified in the payment certificate (excluding VAT) up to a maximum of 10% of the Contract Value (excluding VAT)	YES

NOTE: Where the Tenderer has not selected one of the guarantee options above, the default option will be as if the Tenderer has selected a security of a bank or insurance guarantee of 5% of the value of the Works and a payment reduction of 5% of the value certified in the payment certificate excluding value added tax. - See GCC2010 clause 6.2.2 as amended in Contract Data.

3 SIGNATURES OF THE CONTRACTING PARTIES

Thus done and signed at on of 20.....

Name of signatory

for and behalf of the **Employer** who by signature hereof

Capacity
of signatory

as Witness.

Thus done and signed at on of 20.....

Name of signatory

for and behalf of the **Contractor** who by signature hereof

Capacity of signatory

as Witness.



KWAZULU-NATAL PROVINCE
PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

C1.3 - FORM OF GUARANTEE

C1.3 PERFORMANCE GUARANTEE - GCC FOR CONSTRUCTION WORKS (2nd Edition - 2010)

Head: Public Works
KZN Department of Public Works:
Private Bag X 9041
PIETERMARITZBURG
3200

Sir,

ON DEMAND PERFORMANCE GUARANTEE

Tender Number ZNTU04215W

Project Code 065986

For use with the General Conditions of Contract for Construction Works, Second Edition, 2010.

GUARANTOR DETAILS AND DEFINITIONS

"Guarantor" means: _____

Physical Address: _____

"Employer" means: The Provincial Administration of KwaZulu-Natal in its Department of Public Works

"Contractor" means: _____

"Engineer" means: _____

N/A

"Works" means:

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND
RENOVATIONS TO STORM DAMAGED SCHOOLS THROUGHOUT THE
PROVINCE OF KWAZULU-NATAL: NORTH COAST REGION: CLUSTER
69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

"Site" means: _____

"Contract" means: The Agreement made in terms of the Form of Offer and Acceptance and such amendments or additions to the Contract as may be agreed in writing between the parties.

"Contract Sum" means: The accepted amount inclusive of tax of: _____

Amount in Words:

"Guaranteed Sum" means: The maximum aggregate amount of: 10% _____
Of Contract Sum

Amount in Words: _____

"Expiry Date" means: _____

CONTRACT DETAILS

Engineer Issues: Interim Payment Certificates, Final Payment Certificates and the Certificate Completion of the Works as defined in the Contract.

PERFORMANCE GUARANTEE

- 1 The Guarantor's liability shall be limited to the amount of the Guaranteed Sum.
- 2 The Guarantor's period of liability shall be from and including the date of issue of this Performance Guarantee and up to and including the Expiry Date or the date of issue by the Engineer of the Certificate of Completion of the Works or the date of payment in full of the Guaranteed Sum, whichever occurs first. The Engineer and/or the Employer shall advise the Guarantor in writing of the date on which the Certificate of Completion of the Works has been issued.
- 3 The Guarantor hereby acknowledges that:
 - 3.1 any reference in this Performance Guarantee to the Contract is made for the purpose of convenience and shall not be construed as any intention whatsoever to create an accessory obligation or any intention whatsoever to create a suretyship;
 - 3.2 its obligation under the Performance Guarantee is restricted to the payment of money.
- 4 Subject to the Guarantor's maximum liability referred to in 1, the Guarantor hereby undertakes to pay the Employer the sum certified upon receipt of the documents identified in 4.1 to 4.3:
 - 4.1 A copy of a first written demand issued by the Employer to the Contractor stating that payment of a sum certified by the Engineer in an Interim or Final Payment Certificate has not been made in terms of the Contract and failing such payment within seven (7) calendar days, the Employer intends to call upon the Guarantor to make payment in terms of 4.2;
 - 4.2 A first written demand issued by the Employer to the Guarantor at the Guarantor's physical address with a copy to the Contractor stating that a period of seven (7) days has elapsed since the first written demand in terms of 4.1 and the sum certified has still not been paid;
 - 4.3 A copy of the aforesaid payment certificate which entitles the Employer to receive payment in terms of the Contract of the sum Certified in 4.
- 5 Subject to the Guarantor's maximum liability referred to in 1, the Guarantor undertakes to pay to the Employer the Guaranteed Sum or the full outstanding balance upon receipt of a first written demand from the employer to the Guarantor at the Guarantor's physical address calling up this Performance Guarantee, such demand stating that:
 - 5.1 the Contract has been terminated due to the Contractor's default and that this Performance Guarantee is called up in terms of 5; or
 - 5.2 a provisional or final sequestration or liquidation court order has been granted against the Contractor and that the Performance Guarantee is called up in terms of 5; and
 - 5.3 the aforesaid written demand is accompanied by a copy of the notice of termination and/or the provisional/final sequestration and/or the provisional liquidation court order.
- 6 It is recorded that the aggregate amount of payments required to be made by the Guarantor in terms of 4 and 5 shall not exceed the Guarantor's maximum liability in terms of 1.
- 7 Where the Guarantor has made payments in terms of 5, the Employer shall upon the date of issue of the Final Payment Certificate submit an expense account to the Guarantor showing how all monies received in terms of this Payment Guarantee have been expended and shall refund to the Guarantor any resulting surplus. All monies refunded to the Guarantor in terms of this Performance Guarantee shall bear interest at the prime overdraft rate of the Employer's bank compounded monthly and calculated from the date payment was made by the Guarantor to the Employer until the date of refund.
- 8 Payment by the Guarantor in terms of 4 or 5 shall be made with seven (7) calendar days upon receipt of the first written demand to the Guarantor.
- 9 Payment by the Guarantor in terms of 5 will only be made against the return of the original Performance Guarantee by the Employer.

- 10 The Employer shall have the absolute right to arrange his affairs with the Contractor in any manner which the Employer may deem fit and the Guarantor shall not have the right to claim his release from this Performance Guarantee on account of any conduct alleged to be prejudicial to the Guarantor.
- 11 The Guarantor chooses the physical address as stated above for the service of all notices for all purposes in connection herewith.
- 12 This Performance Guarantee is neither negotiable nor transferable and shall expire in terms of 2, where after no claims will be considered by the Guarantor. The original of this Guarantee shall be returned to the Guarantor after it has expired.
- 13 This Performance Guarantee, with the required demand notices in terms of 4 or 5, shall be regarded as a liquid document for the purposes of obtaining a court order.
- 14 Where this Performance Guarantee is issued in the Republic of South Africa the Guarantor hereby consents in terms of Section 45 of the Magistrate's Court Act No 32 of 1944 as amended, to this jurisdiction of the Magistrate's Court of any district having jurisdiction in terms of Section 28 of the said Act, notwithstanding that the amount of the claim may exceed the jurisdiction of the Magistrate's Court.

Signed at

Date

Guarantor's signatory (1)

Capacity

Guarantor's signatory (2)

Capacity

Witness signatory (1)

Witness signatory (2)

C2.1 PRICING INSTRUCTIONS

GCC FOR CONSTRUCTION WORKS (Second Edition 2010)

Project title:	PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS		
Tender no:	ZNTU04215W	Project Code:	065986

C2.1 Pricing Instructions

	<p>Where any item is not relevant to this specific contract, such item is marked N/A (signifying "not applicable")</p> <p>The adjustment of the preliminaries each item priced is to be allocated to one or more of the three categories by insertion of "F", "V", "T" as the case may be against the price in the "rate" column immediately preceding the "amount" column, where "F" denotes a fixed amount (amount not varied), "V" denotes an amount variable in proportion to value and "T" denotes an amount variable in proportion to time.</p>
1	<p>MASSES AND MEASURING UNITS</p> <p>These shall be in accordance with the Measuring Units and National Measuring Standards Act No. 76 of 1973 and amendments thereto.</p> <p>The pages of each of these documents are numbered consecutively and before the Tenderer submits his tender he should check the number of pages, and if any are found missing or duplicated, or the figures or writing indistinct, or the documents contain any obvious error, he should apply to the Head : Public Works AT ONCE and have same rectified as no liability whatsoever will be admitted by the Administration in respect of errors in Tender due to the foregoing.</p>
2	<p>PRICES FOR VARIATIONS</p> <p>Where prices or quotations for variations are submitted by the Contractor during the currency of the Contract, it is to be clearly understood that these are for the purpose of consideration by the Head : Public Works and that there is no assumption of acceptance. The Contractor will be notified of acceptance of prices or quotations either by insertion of the amount on the variation order or by written intimation.</p>
3	<p>SCALE</p> <p>The scale to which the Drawings are made is only to be made use of when no figured dimensions are given either on the Drawings or in the tender documents and the figured dimensions are always to be followed though they may not coincide with the scale of the Drawings, but dimensions where possible are to be taken from the buildings.</p>
4	<p>PROVISIONAL ITEMS</p> <p>All items described as "Provisional" shall be used as directed by the Employer and measured and valued or paid for.</p> <p>No work for which "Provisional" items are allowed shall be commenced without written instructions from the Head : Public Works.</p>

5	<p>TIMELY ORDERING OF MATERIALS</p> <p>The Contractor is warned to place all orders for materials or special articles as early as possible, as he will be held solely responsible for any delay in the delivery of such goods. Nevertheless this tender is conditional upon no liability being attached to the Contractor if delivery of materials is rendered impossible by reason of any act of the Government.</p>
6	<p>ELECTRICAL LIGHTING, POWER AND WATER</p> <p>The Contractor shall provide any artificial lighting which may be necessary or required for the proper execution of the works, and provide electric power and water required by all Sub-Contractors, Nominated Sub-Contractors and Sub-Contractors appointed directly by the Employer.</p> <p>The Contractor shall give all notices and pay all fees in connection with temporary electrical and water connections and shall connect temporary Electrical and Water meters for and pay for all current and water consumed.</p> <p>Tenderers are advised that the permanent light fittings and water points of any kind installed in the Works are not to be used to provide temporary lighting and supplement water requirements for construction purposes.</p>
7	<p>IMPORT PERMITS, DUTIES AND SURCHARGES.</p> <p>All tenders by means of which imported products are being called for, must use the rate of exchange 14 days prior to the closing date indicated in the tender documents. If this day falls on a weekend or public holiday, the next working day must be used.</p> <p>Furthermore, Tenderers must submit documentary proof (in the form of a certified copy) from their bank or legally recognised financial institution, clearly indicating what the rate of exchange was 14 days prior to the closing date, as mentioned above.</p> <p>Together with this, the Tenderer must confirm that the tender price relating to an imported product, was based on the rate of exchange 14 days prior to the closing date as mentioned above.</p>
8	<p>STANDARD SYSTEM OF MEASUREMENT WHERE BILLS OF QUANTITIES FORM PART OF THE TENDER DOCUMENTS</p> <p>The work executed under this Contract has been measured in accordance with the;</p> <p style="text-align: center;">Standard System of Measuring Builders Work (7th Edition)</p> <p>including all amendments unless descriptions of items indicate a deviation and it shall be understood that the system of measurement which is herein adopted is the only system of measurement which will be recognised in connection with this contract. Any contradictions to this system of measurement contained in the "ASAQS Model Preambles for Trades 2008" shall be disregarded (unless same have been accommodated in the system of measurement) but applicable rates shall be included for all requirements stated and not measured separately in compliance with this system.</p>
9	<p>PRICING OF ROCK EXCAVATIONS</p> <p>It is a condition of this tender that should the tenderer elect to price the Rock Excavation included in this tender, the rates must be market related and should be identically priced for the same classification of excavations and not vary for similar billed items in the different sections.</p>

10	<p>BROAD BASED BLACK ECONOMIC EMPOWERMENT</p> <ol style="list-style-type: none"> 1. It is the deliberate policy of the Provincial Administration of KwaZulu-Natal to foster and to encourage the economic empowerment of Black South Africans. This policy will be implemented without prescription and without prejudicing the principles and the integrity of the Provincial Administration of KwaZulu-Natal. Subject to these constraints and also subject to good business practice and commercial consideration, it is therefore considered appropriate that the Provincial Administration of KwaZulu-Natal should encourage business relationships with companies which actively pursue Affirmative Action and Black Economic Empowerment Programmes. 2. In responding to this tender you are therefore encouraged to devote attention to these two subjects of Affirmative Action and Economic Empowerment. In addition, in considering the appointment of sub-contractors, you are requested to extend the spirit of these policies. 3. The foregoing enunciations of this policy are not intended to be prescriptive nor to preclude any individual or operation from responding to this tender. 				
11	<p>REGISTRATION ON THE CENTRAL SUPPLIERS DATABASE</p> <ol style="list-style-type: none"> 1. In terms of the Public Finance Management Act (PFMA), 1999 (Act No 1 of 1999) Section 38 (1) (a) (iii) and 51 (1) (iii) and Section 76 (4) of PFMA National Treasury developed a single platform, The Central Supplier Database (CSD) for the registration of prospective suppliers including the verification functionality of key supplier information. 2. Prospective suppliers will be able to self - register on the CSD website: www.csd.gov.za 3. Once the supplier information has been verified with external data sources by National Treasury a unique supplier number and security code will be allocated and communicated to the supplier. Suppliers will be required to keep their data updated regularly and should confirm at least once a year that their data is still current and updated. 4. Suppliers can provide their CSD supplier number and unique security code to organs of state to view their verified CSD information. 5. Tenderers are required to fill in clearly, legibly, in bold print and black ink their CSD supplier number in the space hereunder: <table border="1" data-bbox="175 1288 1444 1429"> <tr> <td data-bbox="175 1288 662 1355">Name of Supplier</td><td data-bbox="662 1288 1444 1355"></td></tr> <tr> <td data-bbox="175 1355 662 1429">Central Supplier Database (CSD) Supplier Number:</td><td data-bbox="662 1355 1444 1429"></td></tr> </table>	Name of Supplier		Central Supplier Database (CSD) Supplier Number:	
Name of Supplier					
Central Supplier Database (CSD) Supplier Number:					
12	<p>TAX CLEARANCE REQUIREMENTS</p> <p>It is a condition of tender that the taxes of the successful tenderer must be in order, or that satisfactory arrangements have been made with South African Revenue Service (SARS) to meet the Tenderer's tax obligations. It is a condition of this Offer of Commission that your practice remains in good standing with SARS (South African Revenue Services) in terms of its tax clearance, during the project, which is required to process your payment certificates.</p> <ol style="list-style-type: none"> 1. In order to meet this requirement tenderers are required to apply via e-filing at any SARS branch office nationally. The Tax Compliance Status (TCS) requirements are also applicable to foreign Tenderers / individuals who wish to submit Tenders. 2. SARS will then furnish the Tenderer with a Tax Compliance Status (TCS) PIN that will be valid for a period of 1 (one) year from the date of approval. 3. In tenders where Consortia / Joint Ventures / Sub-contractors are involved, each party must submit a separate Tax Compliance Status (TCS) PIN. 4. Application for Tax Compliance Status (TCS) PIN can be done via e-filing at any SARS branch office nationally or on the website www.sars.gov.za. 				

	<p>5 Tax Clearance Certificates may be printed via eFiling. In order to use this provision, taxpayers will need to register with SARS as eFilers through the website www.sars.gov.za.</p> <p>6 Tax Clearance Certificates may be printed via eFiling. In order to use this provision, taxpayers will need to register with SARS as eFilers through the website www.sars.gov.za.</p>	
	Security PIN Number	
	Company / Entity Tax Reference Number	
13	<p>BILLS OF QUANTITIES/LUMP SUM DOCUMENT</p> <p>The Bills of Quantities document forms part of and must be read and priced in conjunction with all the other documents forming part of the contract documents, the Standard Conditions of Tender, Conditions of Contract, Standard Preambles to all Trades, Specifications, Drawings and all other relevant documentation.</p>	
14	<p>VALUE ADDED TAX</p> <p>The tender price must include for Value Added Tax (VAT). All rates, provisional sums, etc. in the Bills of Quantities must however be net (exclusive of VAT) with VAT calculated and added to the Total Value thereof in the Final Summary.</p>	
15	<p>FIXED PRICE CONTRACT</p> <p>Should the Bills of Quantities/Lump Sum Document be a fixed price contract, the following clause must be inserted in the Pricing Instructions:</p> <p>Tenderers are to take note that the contract price adjustments are not applicable to this contract. Tenderers should therefore make provision in the Contract Sum, schedule of rates, etc. for possible price increases during the contract period, as no claims in this regard shall be entertained.</p>	



KWAZULU-NATAL PROVINCE
PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM DAMAGED
SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST REGION: CLUSTER
69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

C2.2 - Preliminaries for GCC for Construction works - 2nd Edition 2010

Item No	Quantity	Rate	Amount
<u>SECTION NO. 1</u>			
<u>BILL NO. 1</u>			
<u>PRELIMINARY AND GENERAL</u>			
<u>(PROVISIONAL) (CPAP WORK GROUP NO.</u>			
<u>190 UNLESS OTHERWISE STATED)</u>			
<u>NOTES</u>			
<p>i) The agreement is to be the General Conditions of Contract for Works of Civil Engineering Construction (2010) (Second Edition), published by the S. A. Institution Of Civil Engineering.</p> <p>ii) The Preliminaries are to be the Construction and management requirements for works contracts - Part 1: General engineering and construction works (SANS 1921-1: 2004 Edition 1) prepared by Standards South Africa and shall be deemed to be incorporated herein.</p> <p>iii) Tenderers are referred to the abovementioned documents for the full intent and meaning of each clause thereof (hereinafter referred to by heading and clause number only) for which such allowance must be made as may be considered necessary.</p> <p>iv) Where standard clauses or alternatives are not entirely applicable to this contract such modifications, corrections or supplements as will apply are given under each relevant clause heading.</p> <p>v) Where any item is not relevant to this specific contract such item is marked N/A (signifying "not applicable").</p>			
Carried to Collection			
Section No. 1 Bill No. 1 Preliminaries LDM QUANTITY SURVEYORS (PTY) LTD			R

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

- vi) Adjustment of the preliminaries: each item priced, is to be allocated to one or more of the three categories, where "F" denotes a fixed amount (amount not to be varied), "V" denotes an amount variable in proportion to value and "T" denotes an amount in proportion to time.
- vii) Time (T) related Preliminaries will only be adjusted for omissions or additions, issued by the Employer, or delays caused by the Employer, for which variation and extension of time has been granted.

SECTION A: GENERAL CONDITIONS OF CONTRACT

- 1 **A1** General (clause 1)
 F: _____ V: _____ T: _____
- 2 **A2** Basis of Contract (clause 2)
 F: _____ V: _____ T: _____
- 3 **A3** Engineer (clause 3)
 F: _____ V: _____ T: _____
- 4 **A4** Contractors general obligations (clause 4)
 F: _____ V: _____ T: _____
- 5 **A5** Time and related matters (clause 5) - As referred to in the Contract Data under Special Condition of Contract. The Contract Period shall be deemed to include all Non - Working Days, Special Non - Working Days and the year-end Builders Annual Industry Holiday Periods.
 F: _____ V: _____ T: _____

Item

Item

Item

Item

Item

Carried to Collection

R

Section No. 1
 Bill No. 1
 Preliminaries
LDM QUANTITY SURVEYORS (PTY) LTD

6	A6 Payment and related matters (clause 6) F:_____ V:_____ T:_____	Item		
7	A7 Quality and related matters (clause 7) F:_____ V:_____ T:_____	Item		
8	A8 Risks and related matters (clause 8) F:_____ V:_____ T:_____	Item		
9	A9 Terminations of Contract (clause 9) F:_____ V:_____ T:_____	Item		
10	A10 Claims and disputes (clause 10) F:_____ V:_____ T:_____	Item		
<u>SECTION B: SANS 1921-1:2004 (Edition 1): CONSTRUCTION AND MANAGEMENT REQUIREMENTS FOR WORKS CONTRACTS: PART 1</u> Refer to the SCOPE OF WORK for detail requirements:				
11	B1 Scope F:_____ V:_____ T:_____	Item		
12	B2 Normative references F:_____ V:_____ T:_____	Item		
Carried to Collection			R	
Section No. 1 Bill No. 1 Preliminaries LDM QUANTITY SURVEYORS (PTY) LTD				

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

13	B3 Definitions	F:_____ V:_____ T:_____	Item		
14	B4 Requirements for construction and management	F:_____ V:_____ T:_____	Item		
15	B4.1 General	F:_____ V:_____ T:_____	Item		
16	B4.2 Responsibilities for design and construction	F:_____ V:_____ T:_____	Item		
17	B4.3 Planning, programme and method statements	F:_____ V:_____ T:_____	Item		
18	B4.4 Quality assurance	F:_____ V:_____ T:_____	Item		
19	B4.5 Setting out	F:_____ V:_____ T:_____	Item		
20	B4.6 Management and disposal of water	F:_____ V:_____ T:_____	Item		
Carried to Collection				R	
Section No. 1 Bill No. 1 Preliminaries LDM QUANTITY SURVEYORS (PTY) LTD					

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

21	B4.7 Blasting	F:_____ V:_____ T:_____	Item	
22	B4.8 Works adjacent to services and structures	F:_____ V:_____ T:_____	Item	
23	B4.9 Management of the Works and site	F:_____ V:_____ T:_____	Item	
24	B4.10 Earthworks	F:_____ V:_____ T:_____	Item	
25	B4.11 Testing	F:_____ V:_____ T:_____	Item	
26	B4.12 Materials, samples and fabrication drawings	F:_____ V:_____ T:_____	Item	
27	B4.13 Equipment	F:_____ V:_____ T:_____	Item	
28	B4.14 Site establishment	F:_____ V:_____ T:_____	Item	
29	B4.15 Survey control	F:_____ V:_____ T:_____	Item	
Carried to Collection				
Section No. 1				
Bill No. 1				
Preliminaries				
LDM QUANTITY SURVEYORS (PTY) LTD				

30	B4.16 Temporary works F:_____ V:_____ T:_____	Item		
31	B4.17 Existing services F:_____ V:_____ T:_____	Item		
32	B4.18 Health and safety F:_____ V:_____ T:_____	Item		
33	B4.19 Environmental requirements F:_____ V:_____ T:_____	Item		
34	B4.20 Alterations, additions, extensions and modifications to existing works F:_____ V:_____ T:_____	Item		
35	B4.21 Inspection of adjoining structures, services, buildings and property F:_____ V:_____ T:_____	Item		
36	B4.22 Attendance on nominated and selected Sub- contractors F:_____ V:_____ T:_____	Item		
<u>SECTION C: SCOPE OF WORK IN ACCORDANCE WITH SANS 10403</u>				
<i>(The reference to Clauses refer to Table B.1 of SANS 1921-1:2004)</i>				
			Carried to Collection	R
Section No. 1 Bill No. 1 Preliminaries LDM QUANTITY SURVEYORS (PTY) LTD				

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

37	C.1 Certification by recognised bodies (clause 4.4) F: _____ V: _____ T: _____	Item		
38	C.2 Agrément certificates (clause 4.5) F: _____ V: _____ T: _____	N/A		
39	C.3 Other services and facilities (clause 4.8) F: _____ V: _____ T: _____	Item		
40	C.4 Recording of weather (clause 5.2) F: _____ V: _____ T: _____	Item		
41	C.5 Management meetings (clause 5.3) F: _____ V: _____ T: _____	Item		
42	C.6 Daily records (clause 5.6) F: _____ V: _____ T: _____	Item		
43	C.7 Bond and guarantees (clause 5.7) F: _____ V: _____ T: _____	Item		
44	C.8 Permits (clause 5.9) F: _____ V: _____ T: _____	Item		
Carried to Collection			R	
Section No. 1 Bill No. 1 Preliminaries LDM QUANTITY SURVEYORS (PTY) LTD				

45 C.9 Proof of compliance with the law (clause 5.10)

F:_____ V:_____ T:_____

Item

SECTION D: SPECIFICATION DATA
ASSOCIATED WITH SANS 1921-1:2004
(Table A.1)

46 D.1 Requirements for drawings, information and calculations for which the Contractor is responsible (clause 4.1.7)

F:_____ V:_____ T:_____

Item

47 D.2 The responsibility strategy assigned to the Contractor for the works (clause 4.2.1)

F:_____ V:_____ T:_____

Item

48 D.3 The planning, programme and method statements (clause 4.3)

F:_____ V:_____ T:_____

Item

49 D.4 Samples of materials, workmanship and finishes (clause 4.12.1)

F:_____ V:_____ T:_____

Item

50 D.5 Fabrication drawings that the Contractor is to provide and deliver to the Employer (clause 4.12.2)

F:_____ V:_____ T:_____

Item

Carried to Collection

R

Section No. 1
Bill No. 1
Preliminaries
LDM QUANTITY SURVEYORS (PTY) LTD

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

51	D.6 Office for the Foreman (clause 4.14.3) F: _____ V: _____ T: _____	Item	
52	D.7 Telephone (clause 4.14.3) F: _____ V: _____ T: _____	Item	
53	D.8 Office for inspector of works (clause 4.14.3) F: _____ V: _____ T: _____	Item	
54	D.9 Telephone in office for inspector of works (clause 4.14.3) F: _____ V: _____ T: _____	Item	
55	D.10 Sheds (clause 4.14.3) F: _____ V: _____ T: _____	Item	
56	D.11 Provision and erection of signboards (clause 4.14.6) F: _____ V: _____ T: _____	Item	
57	D.12 Termination, diversion or maintenance of existing services (clause 4.17.1) F: _____ V: _____ T: _____	Item	
Carried to Collection			R
Section No. 1 Bill No. 1 Preliminaries LDM QUANTITY SURVEYORS (PTY) LTD			

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

58 **D.13** Services which are known to exist (clause 4.17.3)

F: _____ V: _____ T: _____

Item

59 **D.14** Detection apparatus (clause 4.17.4)

F: _____ V: _____ T: _____

Item

60 **D.15** Additional health and safety requirements (clause 4.18)

F: _____ V: _____ T: _____

Item

Carried to Collection

R

Section No. 1
Bill No. 1
Preliminaries
LDM QUANTITY SURVEYORS (PTY) LTD

SECTION E: SPECIFIC PRELIMINARIES

Section E contains Specific Preliminary items which apply to this contract except where "N/A" (Not Applicable) appears against the item.

- 61 **E1 PROPRIETARY BRANDED PRODUCTS**
- The Contractor shall take delivery of, handle, store, use apply and/or fix all proprietary branded products in strict accordance with the manufacturers' instruction after consultation with the manufacturer's authorised representative.
- F: _____ V: _____ T: _____

Item

- 62 **E2 OVERTIME**
- Should overtime be required to be worked for any reason whatsoever, the costs of such overtime are to be borne by the Contractor unless the Engineer/Principal Agent has specifically authorised in writing, prior to the execution thereof, that costs for such overtime are to be borne by the Employer.
- F: _____ V: _____ T: _____

Item

- 63 **E3 AS BUILT DRAWINGS**
- The position of construction breaks and the extent of individual concrete pours are to be recorded by the Contractor on the Structural Engineer's drawings and are to be submitted to the Engineer/Principal Agent and the Structural Engineer for their records.
- F: _____ V: _____ T: _____

Item

Carried to Collection

R

Section No. 1
Bill No. 1
Preliminaries
LDM QUANTITY SURVEYORS (PTY) LTD

64	<p>E4 SITE INSTRUCTIONS</p> <p>Site instructions issued on site are to be recorded in triplicate in a site instruction book which is to be maintained on site by the Contractor.</p> <p>F: _____ V: _____ T: _____</p>	Item		
65	<p>E5 LABOUR RECORD</p> <p>At the end of each week, the Contractor shall provide the Engineer/Principal Agent with a written record, in schedule form, reflecting the number and description of tradesmen and labourers employed by him and all Sub-contractors on the works each day.</p> <p>F: _____ V: _____ T: _____</p> <p><i>Note: In the event that the contractor fails to satisfy the requirements of this specification, the Employer (Head: Public Works) may apply any of the sanctions provided in the contract. Sanctions may include the application of a financial penalty of .04% of the Contract Sum per calendar day of which the required report has not been submitted.</i></p>	Item		
66	<p>E6 PLANT RECORD</p> <p>At the end of each week the Contractor shall provide the Engineer/Principal Agent with a written record, in schedule form, reflecting the number, type and capacity of all plant, excluding hand tools, currently used on the works.</p> <p>F: _____ V: _____ T: _____</p>	Item		
<p style="text-align: right;">Carried to Collection</p> <p>Section No. 1 Bill No. 1 Preliminaries LDM QUANTITY SURVEYORS (PTY) LTD</p>			R	

67 **E7 NON CESSION OF MONIES**

The Contractor shall not cede nor assign his rights or claims to any monies due or to become due under this contract.

F: _____ V: _____ T: _____

Item

68 **E8 SECTIONAL COMPLETION**

When it is required that the contract be executed in sections or portions, the Tenderer shall allow for all costs in this regard as no claim for additional costs will be entertained.

F: _____ V: _____ T: _____

Item

Carried to Collection

R

Section No. 1
Bill No. 1
Preliminaries
LDM QUANTITY SURVEYORS (PTY) LTD

69

E9

LOCAL LABOUR

It is a general requirement of this contract that persons normally resident in the locality of the works (local labour) or unemployed parents whose children attend the specific school be given preference for employment on the contract. Provided, however, that should adequate and appropriate labour not be available within the locality, others may be employed subject to satisfactory proof being provided that every reasonable endeavour has been made to employ local labour. The Contractor shall identify the local community leaders with the purpose of negotiating with them regarding the utilization of local labour in the construction process. In this regard, the Contractor shall furthermore give preference, wherever possible to the employment of single heads of households, women and youth and preference should be given to parents of those children that are enrolled in the school whom are not currently employed. The Contractor shall, in general, maximize the involvement of the local labour and it is required that 100% of unskilled labour should be from the local community. All standard local labour employment forms (EPWP local labour forms) together with the supporting documentation (certified ID copies, Employee details, wage rates, proof of payment, period of employment, employment contracts, etc.) must be submitted with the monthly payment certificates and issued to the Engineer.

F: _____ V: _____ T: _____

Item

Carried to Collection

R

Section No. 1

Bill No. 1

Preliminaries

LDM QUANTITY SURVEYORS (PTY) LTD

70 **E10 IMPORT PERMITS AND DUTIES**

The responsibility for obtaining the necessary import permits shall rest with the successful Tenderer. No foreign exchange will be arranged or provided by the Administration. Tenderers are to allow in their tenders and pay the ordinary levy imposed on imported items in terms of item 196.10 of Part 8 of Schedule No. 1 of the Customs and Excise Act, 1964 with effect from 1 October 1989.

F: _____ V: _____ T: _____

Item

71 **E11 CONTRACT PRICE ADJUSTMENT PROVISIONS (CPAP)**

Notwithstanding anything to the contrary contained in the GCC for Construction Works 2010 2nd Edition, this Contract shall only when the Construction Period exceeds 6 months and the Contract sum exceeds R1,000,000,00 be subject to the Contract Price Adjustment Provisions Indices Application Manual for use with P0151 indices (CPAP) (Revised 1 January 2013) as published by Statistics South Africa. Tenderers are advised that with reference to Clause 3.4.6 of the Contract Price Adjustment Provisions (CPAP) Indices Applications Manual, the Head: Public Works will not accept the submission by Tenderers of lists of additional items.

Where this contract is a Lump Sum contract, the contract will be subject to Contract Price Adjustment Provisions (CPAP) only where the contract period equals or exceeds 6 calendar months. The applicable work group shall be WG 180 for domestic buildings or WG 181 for commercial and industrial buildings.

F: _____ V: _____ T: _____

Item

Carried to Collection

R

Section No. 1
Bill No. 1
Preliminaries
LDM QUANTITY SURVEYORS (PTY) LTD

**E12 EXPANDED PUBLIC WORKS PROGRAMME
 (EPWP) CONDITIONS AND SPECIFICATIONS**

Refer to clause E9.

12.1 EMPLOYMENT TARGETS

E12.1 a. Employment Targets

The Contractor needs to provide a realistic estimate on the number of jobs that the project has the potential to create throughout the project duration as the project will be implemented using labour intensive construction methods on elements where it is economical and feasible for this construction method.

No of jobs to be created = [Contractor to fill in an estimated number]

F: _____ V: _____ T: _____

Carried to Collection

Section No. 1
 Bill No. 1
 Preliminaries
LDM QUANTITY SURVEYORS (PTY) LTD

R

E12.1 b. Employment Requirements

Tenderers are advised that this contract will be subject to the Expanded Public Works Program (EPWP) aimed at alleviating and reducing unemployment.

Tenderers must allow for any costs for the following employment requirements of the EPWP;

1. 55% of unskilled labour to be women
2. 55% of the unskilled labour to be youth aged between 18 and 35 years
3. 2% of the unskilled labour to be people with disabilities
4. 100% Unskilled labour utilised must reside within the boundaries of the Municipality ward where this contract is executed, with preference to the local community closest or at a walking distance to the contract site. Wherever possible, local skilled tradesmen are to be employed on this contract with the view to maximize utilization of local resources.

F: _____ V: _____ T: _____

E12.1 c. Labour Rate and Payment Intervals

The Contractor should ensure that labour rate paid to unskilled local labour is commensurate to the daily task. When determining the rate, consideration should be given to that EPWP beneficiaries are mostly bread winners in their families, as the program intends alleviating poverty. There should also be consideration that the labour rate promotes creation of expanded number of jobs created and person days of work.

Contractors should make endeavours to ensure that labourers, particularly unskilled are remunerated on a fortnight basis and prior notification be made should there be a shortfall on their wages.

The labour rate for local unskilled shall also be determined in consideration of the location of the project, i.e. projects implemented in urbanized municipalities will not be the same as that for rural municipalities.

F: _____ V: _____ T: _____

Carried to Collection

Section No. 1
Bill No. 1
Preliminaries
LDM QUANTITY SURVEYORS (PTY) LTD

R

12.2 LABOUR INTENSIVE CONSTRUCTION METHOD

E12.2 a Labour Intensive Construction (LIC) Method

On site there must a person(s) having competency in managing and implementing LIC methods.

*Foreman @ NQF Level 4 the Unit Standard on Implementing LIC methods on site.

*Site Agent/ Managers @ NQF level 5 the Unit Standard on Manage Labour-Intensive Skills Programme both must be CETA accredited.

F: _____ V: _____ T: _____

E12.2 b Labour Intensive Construction Method

Those parts of the contract to be constructed using Labour Intensive methods will be marked in the BoQ with letter LI (indicating Labour Intensive) against every item so designated. Such works will only be constructed using method so indicated.

Reference to be made to Guidelines for the implementation of Labour Intensive Infrastructure projects under EPWP. "Scope of Work in Respect of Work Relating to the Expanded Public Works Programme (EPWP)"

F: _____ V: _____ T: _____

E12.3 RECORD KEEPING

12.3.1 Every Employer must keep in the project site office the following; minutes of site progress meetings; Contractors' monthly site progress reports; accurately recorded attendance register; proof of payment as means to verify authenticity of data in the EPWP beneficiary form submitted with payment certificates. Copies of submitted EPWP beneficiary data forms should also be kept in the site office.

F: _____ V: _____ T: _____

Carried to Collection

Section No. 1

Bill No. 1

Preliminaries

LDM QUANTITY SURVEYORS (PTY) LTD

R

12.3.2 The Employer must keep this record for a period of at least three (3) years after the completion of the project in his/her office as the project site office would have been relocated.

This should be safely kept for job creation data verifications and periodical audits on projects conducted by National and Provincial Department of Public Works after one (1) or two (2) quarters of submitting captured EPWP data to the National EPWP co-ordinating Department.

F:_____ V:_____ T:_____

Carried to Collection

Section No. 1
Bill No. 1
Preliminaries
LDM QUANTITY SURVEYORS (PTY) LTD

R

E12.4 EPWP MONTHLY REPORTING DOCUMENTS

At the end of each month as part of site progress report ar every contractors' progress payment certificate; the contra the principal agent & Public Works with a written records, form; which will be reflecting, beneficiaries full name & suri description of labour employed by main contractor and sub At the end of each month the contractor must submit the to be attached to the Progress payment certificate:

1. EPWP monthly data collection form
2. Worker monthly payment upload
3. Worker monthly proof of payment i.e
 - 3.1 Acknowledgement of receipt of payment or
 - 3.2 Payslips
 - 3.3 Bank statement highlighted the workers paid
4. Worker monthly training form
5. Monthly attendance register
6. Certified copies of ID's (once off)
7. ID size photos (once off)
8. Proof of UIF
9. Proof of COIDA

F:_____ V:_____ T:_____

Carried to Collection

Section No. 1
Bill No. 1
Preliminaries
LDM QUANTITY SURVEYORS (PTY) LTD

R

E12.5 EPWP PROMOTION

12.5.1. EPWP signage board

- 72 EPWP Program at the project level shall always be promoted through have the projects signage board that embrace EPWP logo at the bottom, correct measurement for this signage board will be provided by the project leader during the site handing over meeting. the standard "HELVETIVA MEDUIM " letters are to be used . Professional title to be 10 mm above line . Line thickness to be 8 mm thick . Space between bottom of the line and bottom of the lettering below the line has to be 100 mm. Letter sizes are as follows : Helvetica meduim 100 mm black upper case to be for project name and owner . Helvetica meduim 75mm black upper case only to be used for professional titles. Project name and owner shall be black lettering on white background. Board sizes are as follows : Board to be minimum 2000mm from ground level and to be constructed from reinforced formed chromadek panels minimum 0,6mm thick chromadek. The contractor is responsible for ensuring that the project board remains neatly and safely erected for the full duration including maintenance period,after which the project board and post are to be dismantled and handed to the client in good order.

F:_____ V:_____ T:_____

N/A

12.5.2 Branding of labour apparel

- 73 Contractor & Sub-contractors' labourers shall be provided with EPWP branded Personal Protective Equipment (PPE), reflector vest with EPWP acronym at the back as an ideal and cost effective means of promoting program on site.

The Contractor is advised to price for both items 12.5.1 and 12.5.2

F:_____ V:_____ T:_____

N/A

Carried to Collection

R

Section No. 1
Bill No. 1
Preliminaries
LDM QUANTITY SURVEYORS (PTY) LTD

E12.6 COMMUNITY LIAISON OFFICER (CLO)

UTILISATION OF A COMMUNITY LIAISON OFFICER

In addition to the requirements of Clause E9, contained in this document;

The Contractor shall allow for and pay any and all costs necessary for the engagement of the services of a Community Liaison Officer (CLO) for the full duration of this contract.

In the interest of providing a sound service to both the community and the Contractor, a CLO may only manage one project at a given time.

A CLO will be identified by the local structures of the ward areas and appointed following fair and transparent interviewing process, to be conducted in the presence of local structures and the contractor representative, in order to assist the Contractor in the procurement of any local labour, etc. required for this project. The Contractor is to liaise with the CLO and afford him any assistance needed in ensuring sound working relations with the local community.

Carried to Collection

Section No. 1
Bill No. 1
Preliminaries
LDM QUANTITY SURVEYORS (PTY) LTD

R

Key responsibilities of the CLO are envisaged to include and not necessarily be limited to:

1. Assisting local leadership in conducting skills and resources audit which facilitates sourcing labour from within the ward or targeted areas for employment, as required by Contractor.
2. Assisting in sourcing labour-only domestic Sub-contractors and the procurement of materials from local resources, as required by the Contractor.
3. Assisting the Contractor by identifying areas of potential conflict and or threats to the project or to stakeholders in the project and recommend appropriate action to the Contractor.
4. Assisting Contractor and stakeholders in the project in the resolution of any conflicts which may arise.
5. Establishing and ensuring that sufficient and open communication channels between the Contractor and the work force are maintained.
6. Establish and ensuring that efficient and open communication channels between the Contractor and the community are maintained.
7. Identifying and reporting to the Contractor regarding issues where communication between stakeholder is necessary, recommend courses of action and facilitate such communications.
8. Assisting the Contractor and the workforce in the establishment of grievance procedures and necessary recommendations to the Contractor regarding the grievances and solution thereto.
9. Attending to site meetings and project implementation meetings as required by the Contractor and preparing periodic reports as may be required by the Contractor, from time to time.
10. Attending to such other duties which are consistent with the functions of a CLO, as may be required by the Contractor, from time to time.

Carried to Collection

R

Section No. 1
Bill No. 1
Preliminaries

LDM QUANTITY SURVEYORS (PTY) LTD

Tenderers are to price twice the rate of unskilled local labour rate for the Community Liason Officer (CLO) against this item for any and all costs arising out of compliance with the foregoing and in the event of a Tenderer failing to price against this item or making inadequate financial provision against this item for compliance as aforesaid, then no claim for costs or additional cost incurred will be entertained by the Head: Public Works.

F: _____ V: _____ T: _____

E12.7 SKILLS DEVELOPMENT ON SITE

74 The Contractor in conforming to the objectives of EPWP if his beneficiaries are capacitated with skills that will render them employable in the future. It is then the responsibility of the Contractor that mandatory life skills are provided to 100% of workforce on site and on the job training to labourers from whom the potential for further development has been identified. The latter is not mandatory to all as it covers technical skills.

The Contractor should also make provision for the possibility that there might be local youth that will need to be placed on the project with an intention to be provided support towards improving their level of competency and productivity.

The Contractor shall also provide all necessary on-the-job training to targeted labour to enable such labour to master and advance on techniques required to undertake the work in accordance with requirements of the contract in a manner that does not compromise workers health and safety.

F: _____ V: _____ T: _____

N/A

Carried to Collection

R

Section No. 1
Bill No. 1
Preliminaries
LDM QUANTITY SURVEYORS (PTY) LTD

**E12.8 LABOUR ONLY SUB-CONTRACTING FOR
LOCAL EMERGING ENTERPRISES**

Tenderer's are advised that this contract is subject to the Expanded Public Works Programme (EPWP) and the following criteria will apply:

75 African Equity Ownership

- a) The Tenderer is to allow for 5% of the total value of works to be undertaken by a Priority Population Group. This percentage excludes the costs of employing local unskilled labour. The allocation of this percentage from the Project, the screening of people, the selection of skills, will be for the Contractor to adjudicate.
- b) The Priority Population Group consists of women, youth and disabled people.
- c) The Contractor is to give first option for prospective PPG's from the surrounding areas of the Project. Should there be insufficient suitable people fitting the criteria of PPG's, the Contractor may hire people from further afield. This is to be done only after consultation with the Department of Works EPWP Co-ordinator and the Community Liaison Officer (CLO).
- d) A Mentor is to be employed by the Contractor, in consultation with the Department of Works for the purposes of quality control and liaison between the Contractor and the selected PPG's on site. The mentor will be responsible for ensuring an acceptable level of quality workmanship and that such work carried out by the PPG's is executed within the time frames stipulated. In so far as possible, the Contractor is encouraged to expand the PPG's skills, knowledge and performance levels.

F: _____ V: _____ T: _____

N/A

Carried to Collection

R

Section No. 1
Bill No. 1
Preliminaries
LDM QUANTITY SURVEYORS (PTY) LTD

76

TENDERER'S TO NOTE CONDITIONS

- a) The contract to be entered into between the Contractor and the PPG's will be a LABOUR ONLY sub-contract.
- b) The Contractor will be responsible for ensuring that all materials for use by the PPG's in the works are to be on site timeously. The Contractor shall liaise with the Mentor and PPG to determine the nature and extent of materials required and the lead time necessary.
- c) The Contractor shall be responsible for the overall programming of the Works and he is to allow for monitoring the PPG's programme and progress.
- d) In conjunction with the Mentor, he is to allow for the supervision and mentoring (where necessary) of the PPG to ensure quality and adherence to standard building practice.
- e) The Contractor is to allow for extra storage facilities on site for the PPG's tools and equipment.
- f) Basic tools shall be provided by the PPG's and where these are not available, the Contractor will supply him with the necessary tools and equipment and deduct the costs thereof from the interim claims made by the PPG.
- g) Work requiring specialized tools will be provided free of charge by the Contractor with the provision that these be returned upon completion of the Work.

CO-ORDINATION

The Contractor is to co-ordinate the work of all the PPG's, Sub-Contractors and Nominated Sub-Contractors appointed direct by the Employer in such a manner and at all times as will suit the building programme and he is to allow adequate access, for the PPG's, where required, to carry out their work in an efficient manner as no claims for extras in this connection will be entertained.

F: _____ V: _____ T: _____

N/A

Carried to Collection

R

Section No. 1
Bill No. 1
Preliminaries

LDM QUANTITY SURVEYORS (PTY) LTD

77 ATTENDANCE

The Contractor may allow for attendance upon the PPG's concerned to execute the work. The Contractor is to allow the PPG's the use of any scaffolding belonging to him while it remains so erected on the site.

Where scaffolding is necessary for the use by any PPG and the Contractor has not erected any for his own use or has removed same after his own use, the Contractor shall supply sufficient scaffolding to the PPG to be erected and dismantled by the PPG and returned to the Contractor.

This attendance upon PPG's to execute the work is to include for the scaffolding provisions as aforesaid and, in addition, is to include for co-operating to the fullest extent with all the parties, attending on off-loading materials, providing suitable storage for tools and materials used by the PPG's, use of general facilities such as latrines, etc., supply and cost of power, lighting, water and the like.

F: _____ V: _____ T: _____

N/A

Carried to Collection

R

Section No. 1
Bill No. 1
Preliminaries
LDM QUANTITY SURVEYORS (PTY) LTD

<p>E12.9 EPWP CONTRACT FOR LABOUR</p> <p>78 It is compulsory that shortly after the contractor and or sub appointed local labour, the employment contract should be parties, prior to commencement with works on site. The er forms part of the Ministerial Determination or from the regi Each contract will lapse at the end of each financial year the Contractor to do a renewal of each contract should the employment still exist for that particular labourer.</p> <p>F:_____ V:_____ T:_____</p>	<p>N/A</p>		
<p>E12.10 EPWP SCOPE OF WORKS</p> <p>79 Note: Contractors are to price any item on the Bill of Quantities highlighted below, bearing in mind that they are regarded as main sources of job creation, whether Sub-contracted or undertaken by the Main Contractor.</p> <p>Elements on the scope of work where the application of Labour Intensive Construction methods are indicated with letters (LI) are as follows:</p> <p>i) Excavating trenches for foundations and any other civil works with the depth not more than 1.5 m ii) All masonry works which include concrete mixing on site; brickwork; plastering; screed works; jointing; etc. iii) Painting, Plumbing, Ironmongery; roof cladding; glazing; tilling; carpentry; flooring; waterproofing; etc. iv) External works such as landscaping; cleaning; paving; fencing; tarmac; etc.</p> <p>F:_____ V:_____ T:_____</p>	<p>N/A</p>		
<p>80 It is a general requirement of this contract that persons normally resident in the ward of the works (local labour) be given preference for employment on the contract. Provided, however, that should adequate and appropriate labour not be available within the ward, others may be employed subject to satisfactory proof being provided that every reasonable endeavour has been made to employ local labour (Local Sub-contractor(s); Skilled; Semi-Skilled and Unskilled).</p>			
<p style="text-align: right;">Carried to Collection</p>		<p>R</p>	
<p>Section No. 1 Bill No. 1 Preliminaries LDM QUANTITY SURVEYORS (PTY) LTD</p>			

The contractor shall in consultation with the local community leaders with the purpose of negotiating with them regarding the utilization of local resources in the construction process. In this regard, the contractor shall furthermore give preference, wherever possible to the employment of single heads of households, women and youth as well as families declared as most indigent by War on Poverty/ Sukuma Sakhe program profiling process. The contractor should aim, in general, to maximise the involvement of the local community, however workers from other communities should not exceed 20% of all persons working on the project, where local employees possess skills at level of competency that meet contractors requirements.

Payment for the labour-intensive component of the works

Payment for works identified in the Scope of Work as being labour-intensive shall only be made in accordance with the provisions of the Contract if the works are constructed strictly in accordance with the provisions of the Scope of Work. Any non-payment for such works shall not relieve the Contractor in any way from his obligations either in contract or in delict.

Linkage of payment for labour-intensive component of works to submission of project data

The Contractor's payment invoices shall be accompanied by labour information for the corresponding period in a format specified by the employer. If the contractor chooses to delay submitting payment invoices, labour returns shall still be submitted as per frequency and timeframe stipulated by the Employer. The contractor's invoices shall not be paid until all pending labour information has been submitted.

Applicable labour laws

The current Ministerial Determination (also downloadable at www.epwp.gov.za) Expanded Public Works Programmes, issued in terms of the Basic Conditions of Employment Act of 1997 by the Minister of Labour in Government Notice , shall apply to works described in the scope of work as being labour-intensive and which are undertaken by unskilled or semi-skilled workers.

F: _____ V: _____ T: _____

N/A

Carried to Collection

R

Section No. 1

Bill No. 1

Preliminaries

LDM QUANTITY SURVEYORS (PTY) LTD

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

81	<p>E13 HIV/AIDS AWARENESS</p> <p>Tenderers are to price against the following items for compliance with the SPECIFICATION FOR HIV/AIDS AWARENESS bound into this document (The clauses referred to are those of the Specification for HIV/AIDS)</p> <p>E13.1 Provide and maintain a condom dispenser in terms of Clause 5.1a</p> <p>F: _____ V: _____ T: _____</p>	Item		
82	<p>E13.2 Provide and maintain HIV/AIDS awareness posters terms of Clause 5.1b</p> <p>F: _____ V: _____ T: _____</p>	Item		
83	<p>E13.3 HIV /Aids Awareness Programme on Site for not less than 90% of workers inclusive of all direct and indirect costs; Engage a qualified service provider as described in the scope of works to conduct an HIV Awareness Programme in terms of Clause 5.2.1a</p> <p>F: _____ V: _____ T: _____</p>	Item		
84	<p>E13.4 Arrange for workers to attend the HIV Awareness Programme in terms of Clause 5.2.1b</p> <p>F: _____ V: _____ T: _____</p>	Item		
Carried to Collection			R	
Section No. 1 Bill No. 1 Preliminaries LDM QUANTITY SURVEYORS (PTY) LTD				

85 **E13.5 REPORTING**

Prepare and attach to claims for payment a brief report in terms of Clause 5.3 (see also HIV/STI Compliance Report (included with this document)).

F: _____ V: _____ T: _____

Item

Note: In the event that the Contractor fails to satisfy the requirements of this specification, the Employer (Head: Public Works) may apply any of the sanctions provided for in the contract. Sanctions may include the application of a financial penalty of .04% of the Contract Sum per calendar day of which the required reports has not been submitted.

86 **E14 OCCUPATIONAL HEALTH AND SAFETY ACT NO. 85 OF 1993**

Tenderers are to allow for costs in providing a project specific 'Construction Phase Safety, Health and Environmental Plan' in accordance with "Section 2 - Specification Data associated with SANS 1921-1:2004" clause C4.18 in "Part C3 - Scope of Work".

The Contractor must also allow for the screening of employees and visitors for COVID-19 as well as COVID-19 related PPE such as:

Infra red- Non Contact Thermometer
3 Layer material face masks
Face Shields
Latex gloves
Hand Sanitisers

as deemed necessary

F: _____ V: _____ T: _____

Item

Carried to Collection

R

Section No. 1
Bill No. 1
Preliminaries™
LDM QUANTITY SURVEYORS (PTY) LTD

87	<p>E15 NOTICE BOARD, SITE OFFICE, ETC.</p> <p>Bidders are to allow for the provision and removal of a project notice board and a site office in accordance with the Principal Agent's requirements.</p> <p>F: _____ V: _____ T: _____</p>	Item		
88	<p>E16 IMPORTED MATERIALS AND EQUIPMENT</p> <p>Where imported items are listed in the tender documents, the tenderer shall provide all information called for, failing which the price of any such item, material or equipment shall be excluded from currency fluctuations. (Refer to T2.14 - Schedule of Imported Materials and Equipment.</p> <p>F: _____ V: _____ T: _____</p>	Item		
89	<p>E17 CONTRACT DOCUMENTS</p> <p>The drawings issued with these Bid documents do not comprise the complete set but serves as a guide only for Biding purposes and for indicating the scope of works to enable the Bidder to acquaint him with the nature and extent of the works and the manner in which they are to be executed.</p> <p>Should any part of the drawings not be clearly legible to the Bidder he shall, before submitting his Bid, obtain clarification in writing from the Principal Agent.</p> <p>F: _____ V: _____ T: _____</p>	Item		
Carried to Collection			R	
Section No. 1 Bill No. 1 Preliminaries LDM QUANTITY SURVEYORS (PTY) LTD				

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

90 **E18 GENERAL PREAMBLES**

The Document Preambles will be the "ASAQS Model Preambles for Trades - 2008" and is obtainable from the various Regional Office's of the Department of Public Works and shall be read in conjunction with the Bills of Quantities and be referred to for the full descriptions of work to be done and materials to be used.

F: _____ V: _____ T: _____

Item

91 **E19 TRADE NAMES**

Wherever a Trade Name for any product has been described in the Bills of Quantities the Bidder's attention is drawn to the fact that any other product of equal quality may be used subject to the written approval of the Principal Agent being obtained prior to the closing date for submission of Bids.

F: _____ V: _____ T: _____

Item

92 **E20 EXISTING PREMISES OCCUPIED**

Refer to Scope of Works Part C3 of this Bid Document for information on the occupation of existing buildings

F: _____ V: _____ T: _____

Item

Carried to Collection

R

Section No. 1
 Bill No. 1
 Preliminaries
LDM QUANTITY SURVEYORS (PTY) LTD

93	<p>E21 INACCURATE AND DEFECTIVE WORK EXECUTED UNDER PREVIOUS CONTRACT</p> <p>The Contractor shall, after taking possession of the site and before commencing the work, check all levels, liners, profiles and the like and satisfy himself as to the dimensional accuracy of all work executed under the previous contract which may affect his work.</p> <p>Should any inaccurate or defective work be found, the Contractor shall immediately notify the Principal Agent in writing requesting his instructions with regard thereto and afford every facility to those rectifying such inaccurate or defective work.</p> <p>F: _____ V: _____ T: _____</p>				
		Item			
94	<p>E22 VIEWING THE SITE IN SECURITY AREAS</p> <p>If the site is situated in a security area, the Bidder must arrange with the Authorities to obtain permission to enter the site for Bidding purposes.</p> <p>F: _____ V: _____ T: _____</p>				
		Item			
95	<p>E23 COMMENCEMENT OF WORKS IN SECURITY AREAS</p> <p>If the works falls within a security area, the Contractor must arrange with the Authorities and give the necessary notices before commencement of the works. Should the Contractor fail to make such arrangements, admission to the site may be refused and any additional costs will be for the Contractor's account.</p> <p>F: _____ V: _____ T: _____</p>				
		Item			
<p style="text-align: right;">Carried to Collection</p> <p>Section No. 1 Bill No. 1 Preliminaries LDM QUANTITY SURVEYORS (PTY) LTD</p>					R

96 **E24 ENTRANCE PERMITS TO SECURITY AREAS**

If the works fall within a security area, the Contractor shall obtain entrance permits for his personnel and workmen entering the area and shall comply with all regulations and instructions which may be issued from time to time regarding the protection of persons and property under control of the Authority.

F: _____ V: _____ T: _____

Item

97 **E25 SECURITY CHECK OF PERSONNEL**

The Principal Agent may require the Contractor to have his personnel and workmen, or a certain number of them, security classified.

In the event of the Principal Agent requesting the removal of a person or persons from the works for security reasons, the Contractor shall do so forthwith and shall thereafter ensure that such person or persons are denied access to the works and the site and/or to any document or information relating to the works.

F: _____ V: _____ T: _____

Item

Carried to Collection

R

Section No. 1
Bill No. 1
Preliminaries
LDM QUANTITY SURVEYORS (PTY) LTD

98 E26 PROHIBITION ON TAKING PHOTOGRAPHS

In terms of article 119 of the Defence Act, 44 of 1957, it is prohibited to sketch or to take photographs of any military site or installation or any building or civil works thereon or to be in possession of a camera or other apparatus used for taking photographs, except when authorised thereto by or on behalf of the Minister."

The same prohibition is also applicable to all Correctional Institutions in terms of article 44.1(e) of the Correctional Services Act 8 of 1959.

F: _____ V: _____ T: _____

Item

Carried to Collection

R

Section No. 1
Bill No. 1
Preliminaries
LDM QUANTITY SURVEYORS (PTY) LTD

99

E27 MANAGEMENT OF WATER

Water for Construction purposes must be obtained from alternative water sources (i.e. supply other than water that is produced and distributed by a regulated water service authority from a licensed water treatment works for human consumption), eg. dams, rivers, boreholes, springs, rainwater harvesting, recycled sewerage water, etc. The alternative water source shall not be of an inferior quality / standard than that required for construction purposes. The client reserves the right through his agents to test such supplies or request certificates confirming the grade and nature of the water supply. Relevant knowledge of the respective area will be an advantage.

The Contractor is to ensure that an adequate and consistent water supply is accessible in areas wherein there are constant water disruptions and/or no water at all.

Any costs associated with ensuring the constant supply of water should be priced under this item as no claims will be entertained during construction.

F: _____ V: _____ T: _____

Item

Carried to Collection

R

Section No. 1
Bill No. 1
Preliminaries
LDM QUANTITY SURVEYORS (PTY) LTD

100

E28 MANAGEMENT OF ELECTRICITY

The Contractor will be responsible to remunerate the school with an amount of R 1,200.00/month for the electricity used on the site during the construction period, from site handover until works completion is achieved.

Therefore the Contractor must make an allowance in his Preliminaries for such payments to the school on a monthly basis and provide proof of payment to the school with each payment certificate, failing which, the amounts will be deducted from the Final Account.

The Contractor is to ensure that a back up generator is also made available for the purposes of construction in the event of power outages.

Any costs associated with ensuring the this should be priced under this item as no claims will be entertained during construction.

F: _____ V: _____ T: _____

Item

SUMMARY OF CATEGORIES

Category : Fixed R _____

Category : Value R _____

Category : Time R _____

Carried to Collection

R

Section No. 1

Bill No. 1

Preliminaries

LDM QUANTITY SURVEYORS (PTY) LTD



KWAZULU-NATAL PROVINCE

PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

PART C2.3 BILL OF QUANTITIES

Item No	Quantity	Rate	Amount
<u>SECTION NO. 2</u>			
<u>BILL NO. 1</u>			
<u>ALTERATIONS AND DEMOLITIONS</u>			
<u>(PROVISIONAL) (CPAP WORK GROUP NO. 102 UNLESS OTHERWISE STATED)</u>			
The Tenderer is referred to the relevant Clauses in the separate document Model Preambles for Trades (2008 Edition)			
<u>NOTE:</u> For the purposes of tendering, only the total quantity shall be used in calculating the amount for inclusion in the tender at the tendered rate. The quantities in the description column immediately below the item represents the quantities per section for information and administration only, and is as follows:			
A - Block A - 1 Classroom Block			
B - Block B - Admin Block			
C - Block C - 3 Classroom Block			
D - Block D - Kitchen and Classroom Block			
F - Block F - Classroom Block			
H - Block H - 7 Classroom Block			
I - Block I - 1 Classroom Block			
<u>SUPPLEMENTARY PREAMBLES</u>			
Carried to Collection			R
Section No. 2 Bill No. 1 Alterations and Demolitions (Provisional) LDM QUANTITY SURVEYORS (PTY) LTD			

View site

Before submitting his tender the contractor shall visit the site and satisfy himself as to the nature and extent of the work to be done and the value of the materials contained in the buildings or portions of the buildings to be demolished. No claim for any variations of the contract sum in respect of the nature and extent of the work or of inferior or damaged materials will be entertained

Explosives

No explosives whatsoever may be used for demolition purposes unless otherwise stated

Taking Out and Removal of Asbestos

Taking out and removing asbestos roof, gutters, underlay, fibreglass, downpipes, etc. must be in strict accordance with health and occupational safety regulations and a specialist firm must be contracted to dispose of the material and the required asbestos safe disposal certificates must be provided after disposal to the Principal Agent

General

Descriptions of taking out shall be deemed to include carting away from site to a dump ground to be found by the contractor

The contractor shall carry out the whole of the works with as little mess and noise as possible and with a minimum of disturbance to adjoining premises and their tenants. He shall provide proper protection and provide, erect and remove when directed, any temporary tarpaulins that may be necessary during the progress of the works, all to the satisfaction of the principal agent

Water supply pipes and other piping that may be encountered and found necessary to disconnect or cut, shall be effectually stopped off or grubbed up and removed, and any new connections that may be necessary shall be made with proper fittings, to the satisfaction of the principal agent

Carried to Collection

Section No. 2

Bill No. 1

Alterations and Demolitions (Provisional)

LDM QUANTITY SURVEYORS (PTY) LTD

R

Doors, fanlights, fittings, frames, linings, etc which are to be re-used shall be thoroughly overhauled before refixing including taking off, easing and rehangng, cramping up, re-wedging as required and making good cramps, dowels, etc, and easing, oiling, adjusting and repairing ironmongery as necessary, replacing any glass damaged in removal or subsequently and stopping up all nail and screw holes with tinted plastic wood to match timber, unless otherwise described. Re-painting or re-varnishing is given separately

Prices for taking out of doors, windows, etc shall include for removal of all beads, architraves, ironmongery, etc

With regard to building up of openings in existing walls, cement screeds and pavings, granolithic, tops of walls, etc, shall be levelled and prepared for raising of blockwork

Making good of finishes shall include making good of the block and concrete surfaces onto which the new finishes are applied, where necessary

The contractor will be required to take all dimensions affecting the existing buildings on the site and he will be held solely responsible for the accuracy of all such dimensions where used in the manufacture of new items (doors, windows, fittings, etc)

The Contractor to acknowledge that sequencing of the work will be necessary to accomodate the operational aspects of the school. The Contractor to accordingly factor the above requirement in the construction programme and pricing

DEMOLITIONS, ETC

Breaking up and removing

1	150mm Thick reinforced concrete surface bed	m2	622
	A : 144 B : 128 C : 0 D : 0		
	F : 0 H : 330 I : 20		
2	120mm Thick reinforced concrete v-drain channel	m2	201
	A : 25 B : 24 C : 43 D : 45		
	F : 18 H : 30 I : 16		

REMOVAL OF EXISTING WORK

Carried to Collection

R

Section No. 2

Bill No. 1

Alterations and Demolitions (Provisional)

LDM QUANTITY SURVEYORS (PTY) LTD

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

<u>Breaking down and removing blockwork, etc.</u>					
3	190mm Block walls in beamfilling A : 0 B : 0 C : 33 D : 0 F : 13 H : 45 I : 12	m2	103		
<u>Taking out and removing doors, windows, etc from blockwork</u>					
4	Timber single door 813 x 2032mm high overall from existing door frame A : 2 B : 0 C : 0 D : 3 F : 0 H : 7 I : 0	No	12		
<u>Taking out and removing ironmongery</u>					
5	Existing damaged chalkboard 4800 x 1140mm A : 1 B : 0 C : 3 D : 0 F : 1 H : 1 I : 1	No	7		
6	Carefully take-out window casement including making good existing surfaces, remove window stays and window handle, window casement to be re-installed (supply and installation of new window mechanisms elsewhere measured) A : 0 B : 0 C : 0 D : 0 F : 0 H : 5 I : 5	No	10		
<u>Taking down and removing roofs, floors, panelling ceilings, partitions, etc completely (new work elsewhere measured) including carting away</u>					
7	Corrugated roof sheeting including purlins, etc. complete A : 0 B : 300 C : 0 D : 0 F : 0 H : 821 I : 0	m2	1 121		
8	Fibre cement fascia boards and fixings A : 38 B : 48 C : 66 D : 56 F : 18 H : 112 I : 20	m	358		
9	Fibre cement barge boards and fixings A : 24 B : 32 C : 30 D : 26 F : 18 H : 26 I : 18	m	174		
Carried to Collection					
Section No. 2 Bill No. 1 Alterations and Demolitions (Provisional) LDM QUANTITY SURVEYORS (PTY) LTD				R	

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

10	uPVC rainwater gutters and fixings A : 38 B : 48 C : 66 D : 56 F : 18 H : 112 I : 20	m	358		
11	uPVC rainwater downpipes and fixings A : 18 B : 18 C : 24 D : 18 F : 12 H : 42 I : 12	m	144		
<u>Hacking up/off and removing granolithic, screeds, plaster, etc from concrete or blockwork and preparing surfaces for new screeds, plaster, etc</u>					
12	Average 25mm screed from floors A : 0 B : 120 C : 165 D : 182 F : 0 H : 328 I : 49	m2	844		
13	Internal plaster from walls in patches A : 46 B : 150 C : 210 D : 0 F : 0 H : 190 I : 79	m2	675		
14	External plaster from walls in patches A : 77 B : 150 C : 210 D : 0 F : 0 H : 190 I : 79	m2	706		
<u>Taking out and removing glass, mirror, etc</u>					
15	Glass from steel windows including cleaning out rebates and preparing for new glass (new glass elsewhere measured) A : 15 B : 20 C : 0 D : 25 F : 10 H : 30 I : 0	m2	100		
<u>REPAIRS AND PREPARATORY WORK TO EXISTING SERVICES</u>					
16	Make good to damaged parts, knock out dents, etc., to existing steel door frames, clean down and prepare for new paint by all removing loose flaking paint, dirt, grease, grime, etc. (new paint elsewhere measured) A : 2 B : 0 C : 0 D : 3 F : 0 H : 7 I : 0	No	12		

Carried to Collection

R

Section No. 2
Bill No. 1
Alterations and Demolitions (Provisional)
LDM QUANTITY SURVEYORS (PTY) LTD

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

17	Clean down and make good to existing metal roof sheeting by sealing overlaps, refix into position, new hurricane clips, installation of 8mm roof screws and 26mm washers, prepare for new paint by pressure cleaning all loose flaking paint, dirt, grime, etc. (new paint elsewhere measured)	m2	1 312
	A : 180 B : 0 C : 413 D : 455 F : 141 H : 0 I : 124		

Repairs to structural cracks, etc

18	Rake out existing major structural crack in blockwork, remove all debris/loose material including embedding steel rods, cutting or drilling slots (60mm deep) in blockwork at 250mm centres to embed 8mm mild steel bars fixed between mortar joints with injected epoxy resin	m	85
	A : 20 B : 0 C : 10 D : 10 F : 15 H : 20 I : 10		

SERVICE

Steel Windows

19	Service window including lubricating ironmongery and leave in workable condition (replacement of damaged/missing ironmongery measured elsewhere)	No	147
	A : 14 B : 21 C : 28 D : 21 F : 7 H : 49 I : 7		

OPENINGS THROUGH EXISTING WALLS, ETC.

Breaking down and removing blockwork, etc

20	Breaking out for and forming openings through one brick walls for roller shutter door, overall size 1200 x 2000mm high, including pre-stressed concrete lintels, making good cement plaster on both sides and into reveals and with sloping fibre-cement sills on outside and flat fibre-cement sills on inside (new door and making good paintwork elsewhere)	No	1
	A : 0 B : 0 C : 0 D : 1 F : 0 H : 0 I : 0		

Carried to Collection

Section No. 2
Bill No. 1
Alterations and Demolitions (Provisional)
LDM QUANTITY SURVEYORS (PTY) LTD

R

22	Allow for covering and maintaining existing roofs in watertight conditions during alterations by means of uPVC underlay or tarpaulins protection, properly secured and maintained in position for the approval of the Employer and make good all work damaged or disturbed after completion, approximately 820m2 (Block H)	Item
----	--	------

It is envisaged that the uPVC underlay or tarpaulin protection will be removed and re-used on all blocks that have roof repairs/replacement on this project. Hence, it is expected that the uPVC underlay or tarpaulin protection planning will follow the scheduled programme for the repairs/replacement of roofs and the Contractor to sequence the execution of same in a logical manner. The Contractor to price for the largest roof structure (820m²) and thereafter include a cost of the removal and re-use of the uPVC underlay or tarpaulin protection for the balance of the roof structures which equivalent to 301m² as a single line item.

R

-48-

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

	<u>Provide temporary accommodation units (park homes) for Educational Facilities during construction in phases as herewith measured including leveling of area, positioning on site and connected electrical supply including issue of electrical compliance certificate. Park homes to be standard size class room size and needs to be minimum 7 x 7m or nearest standard size</u>				
23	Rental of temporary accommodation approximate size 7 x 7m wide, including standard windows, burglar bars, curtains and tracks, two tier steps for access, light fittings, electrical certificate of compliance, transportation and establishment on site and de-establishment on completion for a period of twelve (12) calendar months (costs associated with establishment and de-establishment on completion measured elsewhere)	No	7		
	A : 0 B : 0 C : 0 D : 0 F : 0 H : 7 I : 0				
24	Allow a sum for transportation and establishment on site of temporary accommodations			SUM	
	A : 0 B : 0 C : 0 D : 0 F : 0 H : 7 I : 0				
25	Allow a sum for de-establishment of temporary accommodations on completion			SUM	
	A : 0 B : 0 C : 0 D : 0 F : 0 H : 7 I : 0				
Carried to Collection					R
Section No. 2 Bill No. 1 Alterations and Demolitions (Provisional) LDM QUANTITY SURVEYORS (PTY) LTD					

[illegible]

Item No	Quantity	Rate	Amount
<u>SECTION NO. 2</u>			
<u>BILL NO. 2</u>			
<u>NEW WORK TO EXISTING BUILDINGS</u>			
The Tenderer is referred to the relevant Clauses in the separate document Model Preambles for Trades (2008 Edition)			
<u>EARTHWORKS (PROVISIONAL)(CPAP WORK GROUP NO. 104 UNLESS OTHERWISE STATED)</u>			
<u>EXCAVATION, FILLING, ETC. OTHER THAN BULK</u>			
<u>Excavation in earth not exceeding 2m deep</u>			
1	Reduced levels under floors. A : 43 B : 38 C : 0 D : 0 F : 0 H : 99 I : 6	m3	186
2	Bases A : 0 B : 1 C : 0 D : 0 F : 0 H : 2 I : 0	m3	3
<u>CARTING AWAY</u>			
<u>Extra over all excavations for loading, carting and dumping surplus excavated material (no allowance made for increase in bulk)</u>			
3	Off site to be located by the contractor A : 43 B : 38 C : 0 D : 0 F : 0 H : 99 I : 6	m3	186
Carried to Collection			R
Section No. 2 Bill No. 2 New Work to Existing Buildings (Provisional) LDM QUANTITY SURVEYORS (PTY) LTD			

KEEPING EXCAVATIONS FREE OF WATER

Keeping excavations free of water

- 4 Keeping excavations free of all water other than subterranean water.
- A : 1.00 B : 0.00 C : 0.00 D : 0.00
F : 0.00 H : 0.00 I : 0.00

Item

FILLING, ETC

Earth filling supplied by the contractor under floors, etc.

- 5 150mm G5 Material in accordance with SABS 1200 DM compacted to 98% Mod. AASHTO density.
- A : 22 B : 19 C : 0 D : 0
F : 0 H : 50 I : 3

m3

93

Compaction of surfaces

- 6 Compaction of ground surface under floors, etc. including scarifying for a depth of 150mm, breaking down oversize material, adding suitable material where necessary and compacting to 98% Mod. AASHTO density.
- A : 144 B : 128 C : 0 D : 0
F : 0 H : 330 I : 20

m2

622

Prescribed density tests on filling

- 7 "Modified AASHTO Density" test.
- A : 1 B : 1 C : 0 D : 0
F : 0 H : 1 I : 1
- 8 "Field Density" test including "Optimum Moisture Content" (four readings per test).
- A : 1 B : 1 C : 0 D : 0
F : 0 H : 1 I : 1

No

4

No

4

Carried to Collection

R

Section No. 2
Bill No. 2
New Work to Existing Buildings (Provisional)
LDM QUANTITY SURVEYORS (PTY) LTD

SOIL POISONING

Soil Insecticide in accordance with SANS 5859

9	Under floors, etc. including forming and poisoning shallow furrows against foundation walls, etc., filling in furrows and ramming.	m2	622		
	A : 144 B : 128 C : 0 D : 0				
	F : 0 H : 330 I : 20				

CONCRETE, FORMWORK AND REINFORCEMENT (PROVISIONAL) (CPAP WORK GROUP NO. 110 UNLESS OTHERWISE STATED)

REINFORCED CONCRETE CAST ON/IN FORMWORK

25MPa/19mm Concrete

10	Surface beds	m3	93		
	A : 22 B : 19 C : 0 D : 0				
	F : 0 H : 50 I : 3				
11	Bases	m3	3		
	A : 0 B : 1 C : 0 D : 0				
	F : 0 H : 2 I : 0				

TEST BLOCKS

Test blocks

12	Prepare a set of six concrete cubes each cube size 150 x 150 x 150mm for strength cubes and deliver to an approved laboratory for testing and pay all charges in connection therewith	Sets	16.00		
	A : 4.00 B : 3.00 C : 0.00 D : 0.00				
	F : 0.00 H : 8.00 I : 1.00				

Carried to Collection

R

Section No. 2
Bill No. 2
New Work to Existing Buildings (Provisional)
LDM QUANTITY SURVEYORS (PTY) LTD

CONCRETE SUNDRIES

Finishing top surfaces of concrete smooth with power float

13	Surface beds, slabs, etc.	m2	622
	A : 144 B : 128 C : 0 D : 0		
	F : 0 H : 330 I : 20		

ROUGH FORMWORK (DEGREE OF ACCURACY II) (PROVISIONAL) (CPAP WORK GROUP NO. 111 UNLESS OTHERWISE STATED)

Rough formwork to sides

14	Edges, risers, ends and reveals not exceeding 300mm high or wide	m	188
	A : 48 B : 48 C : 0 D : 0		
	F : 0 H : 74 I : 18		

CONCRETE SUNDRIES

Structural epoxy adhesive

15	Apply non-sag epoxy adhesive, grouted into existing brickwork, 10mm deep x 8mm wide to secure rebar (elsewhere measured)	m	85
	A : 20 B : 0 C : 10 D : 10		
	F : 15 H : 20 I : 10		

MOVEMENT JOINTS, ETC.

Expansion joints with 10mm polystyrene between vertical concrete and block surfaces

16	10mm Joints not exceeding 300mm high	m	188
	A : 48 B : 48 C : 0 D : 0		
	F : 0 H : 74 I : 18		

Saw-cut joints

17	3 x 40mm Saw-cut joints including reaming out 8 x 35mm in top of concrete.	m	103
	A : 24 B : 21 C : 0 D : 0		
	F : 0 H : 55 I : 3		

Carried to Collection

Section No. 2

Bill No. 2

New Work to Existing Buildings (Provisional)

LDM QUANTITY SURVEYORS (PTY) LTD

R

<u>REINFORCEMENT (PROVISIONAL) (CPAP WORK GROUP NO. 114 UNLESS OTHERWISE STATED)</u>					
<u>Mild steel reinforcement to repairs to existing structural crack</u>					
18	8mm Diameter bars A : 0.20 B : 0.00 C : 0.10 D : 0.10 F : 0.15 H : 0.20 I : 0.10	t	0.85		
<u>Fabric reinforcement</u>					
19	Type 193 fabric reinforcement in concrete surface beds, slabs, etc A : 144 B : 128 C : 0 D : 0 F : 0 H : 330 I : 20	m2	622		
<u>MASONRY (PROVISIONAL) (CPAP WORK GROUP NO. 116 UNLESS OTHERWISE STATED)</u>					
<u>SUPERSTRUCTURE BLOCKWORK</u>					
<u>Blockwork of M190 cement blocks in class II mortar</u>					
20	Block wall in beamfilling A : 0 B : 0 C : 33 D : 0 F : 13 H : 45 I : 12	m2	103		
<u>BLOCKWORK SUNDRIES</u>					
<u>Blockwork reinforcement</u>					
21	150mm Wide reinforcement built in horizontally A : 0 B : 0 C : 174 D : 0 F : 70 H : 176 I : 63	m	483		
<u>Galvanised hoop iron cramps, ties, etc</u>					
22	30 x 3mm Roof tie 1,6m long with one end fixed to timber and other end built into blockwork, including "FSBHG12100" M12 galvanised screwbolts A : 0 B : 0 C : 59 D : 0 F : 20 H : 96 I : 200	No	375		
Carried to Collection				R	
Section No. 2					
Bill No. 2					
New Work to Existing Buildings (Provisional)					
LDM QUANTITY SURVEYORS (PTY) LTD					

<u>Prestressed fabricated lintels</u>			
23	Prestressed fabricated lintels 90 x 115mm in lengths not exceeding 3m A : 0 B : 0 C : 0 D : 2 F : 0 H : 0 I : 0	m	2
<u>WATERPROOFING(CPAP WORK GROUP NO. 120 UNLESS OTHERWISE STATED)</u>			
<u>DAMP-PROOFING OF WALLS AND FLOORS</u>			
<u>One layer of 250 micron "Consol Plastic Gunplas USB Green" or equal and approved waterproof sheeting Type C, sealed at laps with "Gunplas Pressure Sensitive Tape"</u>			
24	Under surface beds, slabs, etc (LI) A : 144 B : 128 C : 0 D : 0 F : 0 H : 330 I : 20	m2	622
<u>JOINT SEALANTS, ETC.</u>			
<u>"ABE Flexothane" or equal approved two-part grey polysulphide sealing compound including backing cord, bond breaker, primer, etc.</u>			
25	In 3 x 40mm Saw-cut joints A : 24 B : 21 C : 0 D : 0 F : 0 H : 55 I : 3	m	103
Carried to Collection			
Section No. 2 Bill No. 2 New Work to Existing Buildings (Provisional) LDM QUANTITY SURVEYORS (PTY) LTD			R

ROOF COVERINGS, ETC (PROVISIONAL)
(CPAP WORK GROUP NO. 124 UNLESS
OTHERWISE STATED)

PROFILED METAL SHEETING AND
ACCESSORIES

0,55mm Zinal AZ 150 corrugated sheeting and accessories with "Colorplus" finish (colour : Standard colour on one side and CoolGrey backing to other), in long lengths fixed using Class 3 Climaseal screws (8mm diameter with 26mm diameter washer and rubber gasket) as per manufacturer's recommendations for coastal areas to 50 x 76mm treated soft sawn purlins '@ 900mm centres on Sisalation elsewhere measured

26	Roof covering with pitch not exceeding 25 degrees A : 0 B : 300 C : 0 D : 0 F : 0 H : 821 I : 0	m2	1 121
27	Ridge covering 650mm girth, screwed through sheet to purlins A : 0 B : 24 C : 0 D : 0 F : 0 H : 100 I : 0	m	124
28	Sondor corrugated pattern polyclosures under capping A : 0 B : 96 C : 0 D : 0 F : 0 H : 200 I : 0	m	296
29	Corrugated pattern metal closures under capping A : 0 B : 96 C : 0 D : 0 F : 0 H : 200 I : 0	m	296
30	Metal angle flashing with inner and outer drip edges, bent at 2.5 degrees fixed through roof sheeting onto purlins to form capping over fascia boards at gable ends (Fascia boards measured elsewhere) A : 24 B : 32 C : 24 D : 26 F : 18 H : 26 I : 18	m	168

Carried to Collection

Section No. 2

Bill No. 2

New Work to Existing Buildings (Provisional)

LDM QUANTITY SURVEYORS (PTY) LTD

R

ROOF AND WALL INSULATION

"Sisalation 420" or equal approved heavy industrial grade aluminium foil based insulation

31	Insulation laid taut over purlins (at approximately 450mm centres) and fixed concurrent with roof covering including galvanised steel straining wires	m2	1 121		
	A : 0 B : 300 C : 0 D : 0				
	F : 0 H : 821 I : 0				

"Duram" or equal and approved sisalation tape

32	Sisalation tape to tapered joints of insulation (measured elsewhere)	m	683		
	A : 0 B : 200 C : 336 D : 0				
	F : 82 H : 0 I : 65				

Carried to Collection

R

Section No. 2
Bill No. 2
New Work to Existing Buildings (Provisional)
LDM QUANTITY SURVEYORS (PTY) LTD

CARPENTRY AND JOINERY
(PROVISIONAL) (CPAP WORK GROUP NO. 126 UNLESS OTHERWISE STATED)

ROOFS, ETC

PREFABRICATED TIMBER ROOF TRUSSES, ETC

NOTE:

Timber roof trusses are to comply with SABS Code of Practice 0243. (The design, manufacture and erection of timber trusses, including nail-plated and bolted trusses with lapped members).

The following is applicable in respect of roof trusses:

Trusses are at maximum 1200mm centres. Roof covering is IBR profiled metal sheeting colour one side on 50 x 76mm purlins. Ceilings are nailed gypsum plasterboard on brandering.

The dimensions in the descriptions of the trusses are nominal and actual measurements are to be obtained from site before design or fabrication commences.

Plate nailed timber roof truss construction

- 33 Design, supply and install isolated roof trusses to receive metal roof sheeting (elsewhere measured) in accordance with the Standard Building Regulations, including cross battens at hips, valleys, etc. fixed to trusses with and including ring shank nails, temporary and permanent bracing, etc. overall length of truss is 9,00m long with a height of 1,20m - **Block - B**

A : 0.00 B : 28.00 C : 0.00 D : 0.00
F : 0.00 H : 0.00 I : 0.00

No 28.00

Carried to Collection

Section No. 2
Bill No. 2
New Work to Existing Buildings (Provisional)
LDM QUANTITY SURVEYORS (PTY) LTD

R

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

34	Design, supply and install isolated roof trusses to receive metal roof sheeting (elsewhere measured) in accordance with the Standard Building Regulations, including cross battens at hips, valleys, etc. fixed to trusses with and including ring shank nails, temporary and permanent bracing, etc. overall length of truss is 9,00m long with a height of 1,20m - Block - H A : 0.00 B : 0.00 C : 0.00 D : 0.00 F : 0.00 H : 58.00 I : 0.00	No	58.00		
35	Allowance for the issue of TR1 and TR2 certificates after completion of entire roof installation, signed by a competent person <u>ROOFS, ETC</u> <u>Sawn softwood</u>	Item			
36	38 x 114mm Wall plates A : 0 B : 48 C : 0 D : 0 F : 0 H : 0 I : 0	m	48		
37	76 x 50mm Cross bracing A : 0 B : 120 C : 30 D : 175 F : 0 H : 0 I : 0	m	325		
38	76 x 50mm Purlins A : 0 B : 448 C : 616 D : 0 F : 205 H : 0 I : 183	m	1 452		
39	38 x 114mm False timber rafter fixed onto truss for barge and fascia boards A : 38 B : 80 C : 90 D : 82 F : 36 H : 138 I : 38	m	502		
40	32 X 220mm Timber beam bolted to structural steel post A : 0 B : 24 C : 0 D : 0 F : 0 H : 112 I : 0	m	136		
	<u>SUNDRIES</u> <u>Hurricane clips fixed to timber purlins and trusses</u>				
41	Hurricane clips A : 0 B : 792 C : 0 D : 0 F : 0 H : 850 I : 0	No	1 642		
Carried to Collection				R	
Section No. 2 Bill No. 2 New Work to Existing Buildings (Provisional) LDM QUANTITY SURVEYORS (PTY) LTD					

EAVES, VERGES, ETC

Fibre cement boards

42	12mm x 225mm Fascia boards including aluminium H-profile fascia joiners fixed with galvanised screws and washers	m	358		
	A : 38 B : 48 C : 66 D : 56				
	F : 18 H : 112 I : 20				

DOORS, ETC

Wrought Meranti or other approved doors

43	40mm Framed, ledged and braced battened door size 813 x 2032mm high of 40 x 110mm wide top rail and stiles, 20 x 150mm middle ledge, 20 x 225mm bottom ledge and 20 x 110mm braces	No	12		
	A : 2 B : 0 C : 0 D : 3				
	F : 0 H : 7 I : 0				

CEILINGS, PARTITIONS AND ACCESS FLOORING (PROVISIONAL) (CPAP WORK GROUP NO. 129 UNLESS OTHERWISE STATED)

NAILED UP CEILINGS

9.5mm Gypsum plasterboard ceilings including 38 x 50mm sawn softwood branderling at 400mm centres in one direction to trusses

44	Ceilings including 38 x 38mm sawn softwood branderling at 500mm centres in one direction to trusses	m2	540		
	A : 0 B : 300 C : 0 D : 240				
	F : 0 H : 0 I : 0				
45	Extra over ceiling for 600 x 600mm trap door including rebated framing cross branders covered with ceiling board and fitted flush opening	No	8		
	A : 0 B : 4 C : 0 D : 4				
	F : 0 H : 0 I : 0				

Carried to Collection

Section No. 2
Bill No. 2
New Work to Existing Buildings (Provisional)
LDM QUANTITY SURVEYORS (PTY) LTD

R

<u>Gypsum Plasterboard Cornice</u>					
46	75mm Coved cornice	m	210		
	A : 0 B : 120 C : 0 D : 90 F : 0 H : 0 I : 0				
<u>IRONMONGERY (PROVISIONAL) (CPAP WORK GROUP NO. 132 UNLESS OTHERWISE STATED)</u>					
<u>HINGES, BOLTS, ETC</u>					
<u>Stainless steel hinges</u>					
47	JH-BB-STD-2-SS-CE Stainless steel two ball bearing butt hinge, size 102 x 76 x 3mm	Pairs	12		
	A : 2 B : 0 C : 0 D : 3 F : 0 H : 7 I : 0				
<u>LOCKS</u>					
<u>Mortice lockset</u>					
48	2261-76SS Four lever lockset, including striker plates	No	12		
	A : 2 B : 0 C : 0 D : 3 F : 0 H : 7 I : 0				
<u>HANDLES</u>					
<u>Gower residential door handles</u>					
49	152 x 41 x 7mm "CZ682" chromium plated Gower handle	No	12		
	A : 2 B : 0 C : 0 D : 3 F : 0 H : 7 I : 0				
<u>WINDOW FITTINGS</u>					
<u>"Bildware" or equal approved</u>					
50	Ref B3676 Brass plated casement stay to existing steel window	No	10		
	A : 0 B : 0 C : 0 D : 0 F : 0 H : 5 I : 5				
Carried to Collection					
Section No. 2					
Bill No. 2					
New Work to Existing Buildings (Provisional)					
LDM QUANTITY SURVEYORS (PTY) LTD					

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

51	Brass plated window handle to existing steel window	No	36
	A : 0 B : 0 C : 0 D : 0		
	F : 0 H : 27 I : 9		
	<u>SUNDRIES</u>		
	<u>Wall mounted door stop</u>		
52	38mm Diameter rubber door stop, plugged and screwed to wall with 50mm long brass screw	No	12
	A : 2 B : 0 C : 0 D : 3		
	F : 0 H : 7 I : 0		
53	Striker plates to doors	No	12
	A : 2 B : 0 C : 0 D : 3		
	F : 0 H : 7 I : 0		

Carried to Collection

R

Section No. 2
Bill No. 2
New Work to Existing Buildings (Provisional)
LDM QUANTITY SURVEYORS (PTY) LTD

<u>PINNING BOARDS, WRITING BOARDS, PROJECTION SCREENS, ETC</u>				
54	2400 x 1200mm High pinning board comprising of belgotex carpet with aluminium surround A : 1 B : 0 C : 3 D : 0 F : 1 H : 3 I : 1	No	9	
55	2400 x 1200mm High fixed projection magnetic, non-graphic white boards, consisting of two 1220 x 1210mm swing leaf chalkboards fixed to centre board by means of heavy duty hinges, aluminium surround and aluminium pen tray. Note: The rate is to include for the following items to be supplied to the school for each white board: 1. 4No. white board markers (Red, Green, Black and Blue). 2. 1No. cleaning cloth 3. 1No. magnetic eraser 4. 1No. 250ml cleaning fluid 5. 4No. moulded magnets A : 1 B : 0 C : 3 D : 0 F : 1 H : 3 I : 1	No	9	
<u>SUNDRY STEELWORK</u>				
<u>Hot-rolled steel members</u>				
56	76mm Square tubing to backs of rainwater downpipes, including necessary brackets to secure downpipe, base plates, etc. (Downpipes Measured elsewhere) A : 6 B : 6 C : 8 D : 6 F : 4 H : 14 I : 4	No	48	
<u>PROVISIONAL SUMS</u>				
57	Provide a sum of R 120,000.00 (One Hundred and Twenty Thousand Rand) for the supply and installation of 1No. Smart Interactive board in a position to be determined on site.	Item		120 000.00
58	Profit and Attendance	Item		
Carried to Collection				
Section No. 2				
Bill No. 2				
New Work to Existing Buildings (Provisional)				
LDM QUANTITY SURVEYORS (PTY) LTD				

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

59	Provide the sum of R 10,000.00 (Ten Thousand Rand) for training related to the use of the Smart Board		Item	10 000.00
60	Profit and Attendance		Item	
<u>STRUCTURAL STEELWORK</u> <u>(PROVISIONAL) (CPAP WORK GROUP NO. 134 UNLESS OTHERWISE STATED)</u> <u>GALVANISED STEEL COLUMNS AND BEAMS</u> <u>Welded columns in single lengths with flat section base, top and gusset plates, etc. bolted to timber or concrete</u>				
61	CHS 102 x 3mm columns A : 0.00 B : 0.06 C : 0.00 D : 0.00 F : 0.00 H : 0.15 I : 0.00	t	0.21	
<u>BOLTS, ETC.</u> <u>Bolts to columns, beams, trusses, etc.</u>				
62	M12 Grade 8,8 bolts. A : 0.000 B : 16.000 C : 0.000 D : 0.000 F : 0.000 H : 42.000 I : 0.000	kg	58.000	
<u>METALWORK (PROVISIONAL) (CPAP WORK GROUP NO. 136 UNLESS OTHERWISE STATED)</u> <u>HOT DIPPED GALVANISED MILD STEEL DOOR FRAMES</u> <u>1,2mm Rebated frames suitable for block walls</u>				
63	Steel door frame size 813 x 2032mm high A : 2 B : 0 C : 0 D : 3 F : 0 H : 7 I : 0	No	12	
Carried to Collection				R
Section No. 2				
Bill No. 2				
New Work to Existing Buildings (Provisional)				
LDM QUANTITY SURVEYORS (PTY) LTD				

GALVANISED MILD STEEL GATES

Welded screens and gates to galvanised steel frame

- 64 Single gate size 843 x 2250mm high of 40 x 60 x 3mm rectangular tubing with 19mm diameter steel rods at 110mm centre and 40 x 6mm horizontal support flatbars fixed with hinges to steel frame of 45 x 45 x 3mm rectangular tubing fixed to walls with bolts and lugs including padlock plate

No

17

A : 2 B : 0 C : 4 D : 3
F : 1 H : 6 I : 1

STEEL ROLLER SHUTTERS, ETC.

"Seranda" or equal and approved galvanised steel roller shutters with 75mm solid slats, fixed to brickwork or concrete

- 65 Roller shutter size 1200 x 2000mm high, including necessary supports. (LI)

No

1

A : 0 B : 0 C : 0 D : 1
F : 0 H : 0 I : 0

GALVANIZED STEEL BURGLAR BARS

4,7mm x 19mm galvanised mild steel burglar bars welded to window frame over both opening and fixed sections of window horizontally

- 66 Bars at 150mm centres to suit window 1,0 x 0,305m high

No

7

A : 0 B : 0 C : 0 D : 7
F : 0 H : 0 I : 0

- 67 Bars at 150mm centres to suit window 1,0 x 0,95m high

No

72

A : 0 B : 0 C : 18 D : 9
F : 9 H : 27 I : 9

- 68 Bars at 150mm centres to suit window 1,3 x 0,98m high

No

14

A : 14 B : 0 C : 0 D : 0
F : 0 H : 0 I : 0

Carried to Collection

R

Section No. 2

Bill No. 2

New Work to Existing Buildings (Provisional)

LDM QUANTITY SURVEYORS (PTY) LTD

**PLASTERING (PROVISIONAL) (CPAP
WORK GROUP NO. 142 UNLESS
OTHERWISE STATED)**

SCREEDS

Screeds steel trowelled, on concrete

69	25mm Thick screed on floors and landings	m2	844
	A : 0 B : 120 C : 165 D : 182		
	F : 0 H : 328 I : 49		

INTERNAL PLASTER

Cement plaster on blockwork

70	On walls in patches	m2	675
	A : 46 B : 150 C : 210 D : 0		
	F : 0 H : 190 I : 79		

EXTERNAL PLASTER

Cement plaster on blockwork

71	On walls in patches	m2	706
	A : 77 B : 150 C : 210 D : 0		
	F : 0 H : 190 I : 79		

**PLUMBING AND DRAINAGE
(PROVISIONAL) (CPAP WORK GROUP NO.
146 UNLESS OTHERWISE STATED)**

RAINWATER DISPOSAL

Seamless aluminium

72	150 x 150mm box gutters with white baked enamel finish fixed with white concealed brackets	m	358
	A : 38 B : 48 C : 66 D : 56		
	F : 18 H : 112 I : 20		
73	100 x 75mm Fluted aluminium downpipes with white baked enamel finish	m	144
	A : 18 B : 18 C : 24 D : 18		
	F : 12 H : 42 I : 12		

Carried to Collection

Section No. 2
Bill No. 2
New Work to Existing Buildings (Provisional)
LDM QUANTITY SURVEYORS (PTY) LTD

R

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

74	Extra over eaves gutter for stop ends A : 4 B : 4 C : 4 D : 4 F : 4 H : 4 I : 4	No	28
75	Extra over eaves gutter for drop box suitable for 150 x 150mm box gutter A : 6 B : 6 C : 8 D : 6 F : 4 H : 14 I : 4	No	48
76	Extra over rainwater downpipe for bends A : 12 B : 12 C : 16 D : 12 F : 8 H : 28 I : 8	No	96
77	Extra over rainwater downpipe for shoes A : 6 B : 6 C : 8 D : 6 F : 4 H : 14 I : 4	No	48

GLAZING (PROVISIONAL) (CPAP WORK GROUP NO. 150 UNLESS OTHERWISE STATED)

GLAZING TO STEEL WITH PUTTY

6mm Thick safety glass

78	Panes exceeding 0,1m2 and not exceeding 0,5m2 A : 15 B : 20 C : 0 D : 25 F : 10 H : 30 I : 0	m2	100
----	---	----	-----

PAINTWORK (PROVISIONAL) (CPAP WORK GROUP NO. 152 UNLESS OTHERWISE STATED)

NOTES:

1. All paintwork preparation, application, etc. shall be done in accordance with SANS 10305 2012 Edition 1.02 in conjunction with the ASAQs Model Preambles For Trades 2008 and the manufacturer's written specifications.

2. All paint supplied will be subject to the provision of a minimum 7 year guarantee, and the Contractor shall ensure that all the requirements to meet the guarantee provisions will be in accordance with the paint manufacturer's written instructions.

Carried to Collection

Section No. 2

Bill No. 2

New Work to Existing Buildings (Provisional)

LDM QUANTITY SURVEYORS (PTY) LTD

R

PAINTWORK TO PREVIOUSLY PAINTED WORK

ON FLOATED PLASTER

Prepare and brush surface to remove all loose contaminants, one undercoat and two coats PVA emulsion paint for interior use

79	On walls	m2	1 329
	A : 158 B : 174 C : 168 D : 372		
	F : 108 H : 329 I : 20		

Prepare and brush surface to remove all loose contaminants, one undercoat and two coats PVA emulsion paint for exterior use

80	On walls	m2	689
	A : 73 B : 54 C : 48 D : 219		
	F : 108 H : 167 I : 20		

ON WOOD

Prepare and brush surface to remove all loose contaminants and apply two coats anti-corrosive coal tar paint in accordance with manufacturer's specification

81	On roof timbers at eaves and verges	m2	342
	A : 0 B : 58 C : 76 D : 70		
	F : 22 H : 96 I : 20		

Remove all loose contaminants, rust, etc., apply one base coat and one finishing coat of approved roof sheeting paint

82	On corrugated steel roof sheeting	m2	1 312
	A : 180 B : 0 C : 413 D : 455		
	F : 141 H : 0 I : 124		

Carried to Collection

Section No. 2
Bill No. 2
New Work to Existing Buildings (Provisional)
LDM QUANTITY SURVEYORS (PTY) LTD

R

PAINTWORK TO NEW WORK

ON FLOATED PLASTER

Prepare and brush surface to remove all loose contaminants and apply one coat alkali resistant primer, one undercoat and two coats PVA emulsion paint for interior use

83	On walls in patches	m2	675
	A : 46 B : 150 C : 210 D : 0		
	F : 0 H : 190 I : 79		

Prepare and brush surface to remove all loose contaminants and apply one coat alkali resistant primer, one undercoat and two coats PVA emulsion paint for exterior use

84	On walls in patches	m2	706
	A : 77 B : 150 C : 210 D : 0		
	F : 0 H : 190 I : 79		

ON PLASTER BOARD

Prepare and brush surface to remove all loose contaminants and apply one coat alkali resistant primer, one undercoat and two coats PVA emulsion paint for interior use

85	On ceilings and cornices	m2	555
	A : 0 B : 310 C : 0 D : 245		
	F : 0 H : 0 I : 0		

ON FIBRE CEMENT

Prepare and brush surface to remove all loose contaminants and apply one coat alkali resistant primer, one undercoat and two coats superior quality acrylic emulsion paint for exterior use

86	Fascias boards, including priming metal jointing strips	m2	95
	A : 6 B : 8 C : 20 D : 17		
	F : 5 H : 34 I : 6		

ON WOOD

Carried to Collection

R

Section No. 2
Bill No. 2
New Work to Existing Buildings (Provisional)
LDM QUANTITY SURVEYORS (PTY) LTD

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

<u>Prepare and sand down surface to remove all loose contaminants and apply two coats superior quality polyurethane varnish</u>					
87	On doors	m2	48		
	A : 8 B : 0 C : 0 D : 12				
	F : 0 H : 28 I : 0				
<u>Prepare and brush surface to remove all loose contaminants and apply two coats anti-corrosive coal tar paint in accordance with manufacturer's specification</u>					
88	On roof timbers at eaves and verges	m2	226		
	A : 12 B : 58 C : 27 D : 25				
	F : 11 H : 83 I : 11				
<u>ON METAL</u>					
<u>Prepare surfaces and remove all loose material, dust, grease, salts and contamination with an approved degreaser, rinse and apply one type II undercoat and two finishing coats exterior quality non-drip polyurethane enamel paint to selected tints on</u>					
89	Door frames	m2	12		
	A : 2 B : 0 C : 0 D : 3				
	F : 0 H : 7 I : 0				
Carried to Collection				R	
Section No. 2					
Bill No. 2					
New Work to Existing Buildings (Provisional)					
LDM QUANTITY SURVEYORS (PTY) LTD					

Section No. 2		
Bill No. 2		
New Work to Existing Buildings (Provisional)		
<u>COLLECTION</u>		
Total Brought Forward from Page No.	Page No	Amount
	51	
	52	
	53	
	54	
	55	
	56	
	57	
	58	
	59	
	60	
	61	
	62	
	63	
	64	
	65	
	66	
	67	
	68	
	69	
Carried Forward		R
Section No. 2		
Bill No. 2		
New Work to Existing Buildings (Provisional)		
LDM QUANTITY SURVEYORS (PTY) LTD		

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

SECTION SUMMARY - REPAIRS AND RENOVATIONS (PROVISIONAL)				Amount
Bill No		Page No		
1	Alterations and Demolitions (Provisional)	50		
2	New Work to Existing Buildings (Provisional)	73		
				</

[illegible]

<u>KEEPING EXCAVATIONS FREE OF WATER</u>				
<u>Keeping excavations free of water</u>				
4	Allow for keeping excavations free of water or mud by hand or machinery	Item		
<u>COMPACTION</u>				
<u>Compaction of surfaces</u>				
5	Compaction of ground surfaces under floors etc including scarifying for a depth of 150mm, breaking down oversize material, adding suitable material where necessary and compacting to 93% Mod. AASHTO density	m2	200	
<u>TESTS</u>				
<u>Prescribed density tests on filling</u>				
6	Modified AASHTO Density test	No	1	
7	"Field Density" test including "Optimum Moisture Content" (four readings per test)	No	1	
<u>SOIL POISONING</u>				
<u>Soil insecticide in accordance to SANS 5859</u>				
8	Under concrete walkways, etc	m2	200	
<u>CONCRETE, FORMWORK AND REINFORCEMENT (CPAP WORK GROUP NO. 110 UNLESS OTHERWISE STATED)</u>				
<u>REINFORCED CONCRETE CAST ON/IN FORMWORK</u>				
<u>20Mpa/19mm Concrete</u>				
9	Surface beds, cast in panels	m3	30	
Carried to Collection				R
Section No. 3				
Bill No. 1				
Open Walkway (Provisional)				
LDM QUANTITY SURVEYORS (PTY) LTD				

Section No. 3
Bill No. 1
Open Walkway (Provisional)
LDM QUANTITY SURVEYORS (PTY) LTD

**WATERPROOFING (CPAP WORK GROUP
NO. 120 UNLESS OTHERWISE STATED)**

Joint Sealants, etc

**"ABE Flexothane" or equal and approved two-part
grey polysulphide sealing compound including
backing cord, bond breaking, primer, etc**

15	In 10mm joints not exceeding 300mm high	m	50
----	---	---	----

Carried to Collection

Section No. 3
Bill No. 1
Open Walkway (Provisional)
LDM QUANTITY SURVEYORS (PTY) LTD

R

[illegible]

[illegible]

<u>COMPACTION</u>			
<u>Compaction of surfaces</u>			
4	Compaction of ground surfaces under floors etc including scarifying for a depth of 150mm, breaking down oversize material, adding suitable material where necessary and compacting to 95% Mod. AASHTO density	m2	992
<u>Prescribed density tests on filling</u>			
5	"Modified AASHTO Density" test	No	5
6	"Field Density" test including "Optimum Moisture Content" (four readings per test)	No	5
<u>SOIL POISONING</u>			
<u>Soil insecticide in accordance to SANS 5859</u>			
7	Under floors, etc. including forming and poisoning shallow furrows against foundation walls, etc., filling in furrows and ramming	m2	992
<u>CONCRETE, FORMWORK AND REINFORCEMENT (PROVISIONAL) (CPAP WORK GROUP NO. 110 UNLESS OTHERWISE STATED)</u>			
<u>REINFORCED CONCRETE CAST ON/IN FORMWORK</u>			
<u>20MPa/19mm Concrete</u>			
8	Surface beds, slabs, etc to falls and currents	m3	129
Carried to Collection			R
Section No. 3 Bill No. 2 Aprons and V - Drains (Provisional) LDM QUANTITY SURVEYORS (PTY) LTD			

<u>CONCRETE SUNDRIES</u>			
<u>Finishing top surfaces of concrete with a wood float finish</u>			
9	Concrete channel to falls	m2	992
<u>Test blocks</u>			
10	Prepare a set of six concrete cubes each cube size 150 x 150 x 150mm for strength cubes and deliver to an approved laboratory for testing and pay all charges in connection therewith	Sets	5
<u>ROUGH FORMWORK (DEGREE OF ACCURACY II) (PROVISIONAL) (CPAP WORK GROUP NO. 111 UNLESS OTHERWISE STATED)</u>			
<u>Rough formwork to sides</u>			
11	V drains, paving and ramps not exceeding 300mm high	m	496
<u>MOVEMENT JOINTS, ETC</u>			
<u>Expansion joints with 10mm softboard between vertical concrete and brick surfaces</u>			
12	10mm Joints not exceeding 300mm high	m	496
<u>REINFORCEMENT (PROVISIONAL) (CPAP WORK GROUP NO. 114 UNLESS OTHERWISE STATED)</u>			
<u>Fabric reinforcement</u>			
13	Type 193 fabric reinforcement in concrete surface beds, slabs, etc	m2	992
Carried to Collection			R
Section No. 3			
Bill No. 2			
Aprons and V - Drains (Provisional)			
LDM QUANTITY SURVEYORS (PTY) LTD			

	<p><u>WATERPROOFING (PROVISIONAL) (CPAP WORK GROUP NO. 120 UNLESS OTHERWISE STATED)</u></p> <p><u>JOINT SEALANTS, ETC</u></p> <p><u>Two-part grey polyurethane joint sealing compound including backing cord, bond breaker, primer, etc</u></p> <p>14 In 10mm joints not exceeding 300mm high</p>	m	496	
	<p>Carried to Collection</p> <p>Section No. 3 Bill No. 2 Aprons and V - Drains (Provisional) LDM QUANTITY SURVEYORS (PTY) LTD</p>		R	

[illegible]

Item No	Quantity	Rate	Amount
<u>SECTION NO. 3</u>			
<u>BILL NO. 3</u>			
<u>WATER TANK SUPPORTS (18 NO.) (ALL TRADES) (PROVISIONAL)</u>			
The Tenderer is referred to the relevant Clauses in the separate document Model Preambles for Trades (2008 Edition)			
<u>EARTHWORKS (PROVISIONAL) (CPAP WORK GROUP NO. 104 UNLESS OTHERWISE STATED)</u>			
<u>EXCAVATION OTHER THAN BULK</u>			
<u>Excavation in earth not exceeding 2m deep</u>			
1	Bases m3	144	
<u>Extra over trench and hole excavation in earth for excavation in</u>			
2	Hard rock m3	18	
<u>CARTING AWAY</u>			
<u>Extra over all excavations for loading, carting and dumping surplus excavated material (no allowance made for increase in bulk)</u>			
3	Off site to be located by the contractor m3	144	
<u>EARTH FILLING, ETC</u>			
Note: All filling whether obtained from the excavations, from stockpiles or by the contractor from an outside source must be selected and approved by the Structural / Civil Engineers			
Carried to Collection			R
Section No. 3 Bill No. 3 Water Tanks (Provisional) LDM QUANTITY SURVEYORS (PTY) LTD			

<u>Filling with material from the excavations compacted to a density of at least 95% Mod. AASHTO density</u>					
4	150mm G5 Material in accordance with SABS 1200 DM compacted to 95% Mod. AASHTO density	m3	162		
<u>KEEPING EXCAVATIONS FREE OF WATER</u>					
<u>Keeping excavations free of water</u>					
5	Allow for keeping excavations free of water or mud by hand or machinery		Item		
<u>COMPACTION</u>					
<u>Compaction of surfaces</u>					
6	Compaction of ground surfaces under floors etc including scarifying for a depth of 150mm, breaking down oversize material, adding suitable material where necessary and compacting to 93% Mod. AASHTO density	m2	162		
<u>TESTS</u>					
<u>Prescribed density tests on filling</u>					
7	Modified AASHTO Density test	No	18		
8	"Field Density" test including "Optimum Moisture Content" (four readings per test)	No	18		
<u>SOIL POISONING</u>					
<u>Soil insecticide in accordance to SANS 5859</u>					
9	Under floors, etc., including forming and poisoning shallow furrows against foundation walls, etc., filling in furrows and ramming	m2	162		
Carried to Collection				R	
Section No. 3					
Bill No. 3					
Water Tanks (Provisional)					
LDM QUANTITY SURVEYORS (PTY) LTD					

**CONCRETE, FORMWORK AND
REINFORCEMENT (PROVISIONAL)(CPAP
WORK GROUP NO. 110 UNLESS
OTHERWISE STATED)**

**UNREINFORCED CONCRETE CAST AGAINST
EXCAVATED SURFACES**

10MPa Concrete

10	Surface blinding under footings, bases, etc.	m3	18
----	--	----	----

**REINFORCED CONCRETE CAST AGAINST/ON
FORMWORK**

25MPa/19mm Concrete

11	Surface beds	m3	15
----	--------------	----	----

12	Strip footings	m3	41
----	----------------	----	----

CONCRETE SUNDRIES

Finishing top surfaces of concrete with a wood float

13	Surface beds, slabs, etc.	m2	162
----	---------------------------	----	-----

Test blocks

14	Prepare a set of six concrete cubes each cube size 150 x 150 x 150mm for strength cubes and deliver to an approved laboratory for testing and pay all charges in connection therewith	Sets	18.00
----	---	------	-------

**ROUGH FORMWORK (DEGREE OF ACCURACY
III) (CPAP WORK GROUP NO. 111)**

Rough formwork to sides

15	Strip footings	m2	108
----	----------------	----	-----

16	Edges, risers, ends and reveals not exceeding 300mm high or wide	m	216
----	--	---	-----

Carried to Collection

Section No. 3

Bill No. 3

Water Tanks (Provisional)

LDM QUANTITY SURVEYORS (PTY) LTD

R

**REINFORCEMENT (PROVISIONAL) (CPAP
WORK GROUP NO. 114)**

Fabric reinforcement

17	Type 193 fabric reinforcement in concrete surface beds, slabs, etc	m2	162
18	Type 617 fabric reinforcement in concrete surface beds, slabs, etc	m2	149

**MASONRY(CPAP WORK GROUP NO. 116
UNLESS OTHERWISE STATED)**

BRICKWORK IN FOUNDATIONS

Brickwork of NFX (14 MPa nominal compressive strength) clay imperial bricks in cement mortar

19	One brick wall	m2	129
----	----------------	----	-----

BRICKWORK IN SUPERSTRUCTURE

Brickwork of NFP Bricks in Class II mortar

20	One brick wall	m2	193
----	----------------	----	-----

BRICKWORK SUNDRIES

Bagging of 1:3 cement and sand mixture

21	On outer face of inner skin of brick walls including any additional labour required in raising wall in two separate skins and working around wire ties and / or brick reinforcing fabric	m2	193
----	--	----	-----

Brickwork reinforcement

22	150mm Wide reinforcement built in horizontally	m	1 525
----	--	---	-------

Carried to Collection

R

Section No. 3
Bill No. 3
Water Tanks (Provisional)
LDM QUANTITY SURVEYORS (PTY) LTD

FACE BRICKWORK

"Corobrik Travertine FBA" or equal approved face bricks in stretcher bond with ruled joints and perpends internally and externally

23	Extra over brickwork for face brickwork	m2	193
24	Extra over brickwork for brick-on-edge header course	m	216

**PLUMBING AND DRAINAGE
(PROVISIONAL)(CPAP WORK GROUP NO. 148 UNLESS OTHERWISE STATED)**

WATER SUPPLIES AND FIRE SERVICES

TAPS, VALVES, ETC

25	20mm PVC full bore valve "602/0020",complete with PVC reducers and connections to rainwater tank and including one 90 degree PVC elbow threaded on one side and slip on the other side cast in concrete	No	18
----	---	----	----

TANKS, ETC

Polyethylene drinking water tanks

26	5000 Litre low profile circular tank size 2250mm diameter x 1800mm high, with access lid and inlet hole,embedded in pedestal to a minimum of 400mm above ground level and tied down with 2 No. off 4mm galvanised double strap stay wires tied to galvanised mild steel M12 eye bolt of which is to be drilled and fixed to the 4 corners of concrete supporting base.	No	13
27	2400 Litre circular tank size 1420mm diameter x 1700mm high, with access lid and inlet hole,embedded in pedestal to a minimum of 400mm above ground level and tied down with 2 No. off 4mm galvanised double strap stay wires tied to galvanised mild steel M12 eye bolt of which is to be drilled and fixed to the 4 corners of concrete supporting base.	No	5

Carried to Collection

Section No. 3
Bill No. 3
Water Tanks (Provisional)
LDM QUANTITY SURVEYORS (PTY) LTD

R

[illegible]

Item No	Quantity	Rate	Amount
<u>SECTION NO. 3</u>			
<u>BILL NO. 4</u>			
<u>BULK EARTHWORKS (PROVISIONAL)</u>			
The Tenderer is referred to the relevant Clauses in the separate document Model Preambles for Trades (2008 Edition)			
<u>EARTHWORKS (PROVISIONAL)(CPAP WORK GROUP NO. 104 UNLESS OTHERWISE STATED)</u>			
<u>SITE CLEARANCE, ETC.</u>			
<u>Site clearance</u>			
1	Digging up and removing rubbish, debris, vegetation, hedges, shrubs and trees not exceeding 200mm girth, bush, etc	m2	500
<u>BULK EXCAVATION IN EARTH BELOW NATURAL GROUND LEVEL</u>			
<u>Excavation in earth</u>			
2	Open face excavation to reduce levels "cut to fill"	m3	100
<u>Extra over bulk excavations in earth for excavation in</u>			
3	Hard rock	m3	10
<u>EARTH FILLING, ETC</u>			
Note: All filling whether obtained from the excavations, from stockpiles or by the contractor from an outside source must be selected and approved by the Structural / Civil Engineers			
Carried to Collection			R
Section No. 3 Bill No. 4 Bulk Earthworks (Provisional) LDM QUANTITY SURVEYORS (PTY) LTD			

Filling with material from the excavations compacted to a density of at least 95% Mod. AASHTO density

COMPACTION

Extra over all excavations for carting away

Prescribed density tests on filling

8	"Field Density" test including "Optimum Moisture Content" (four readings per test)	No	5
---	--	----	---

9	Allow for keeping excavations free of water other than subterranean water (LI)	Item
---	--	------

R

-92-

[illegible]

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

Bill No	SECTION SUMMARY - EXTERNAL WORKS (PROVISIONAL)	Page No	Amount
1	Open Walkway (Provisional)	79	
2	Aprons and V - Drains (Provisional)	84	
3	Water Tanks (Provisional)	90	
4	Bulk Earthworks (Provisional)	93	
<p style="text-align: right;">Carried to Final Summary Page</p> <p>Section No. 3 LDM QUANTITY SURVEYORS (PTY) LTD</p>		R	

<u>CONDUIT AND CONDUIT BOXES</u>					
<u>Remove & replace PVC conduit in walls, floors or ceiling spaces as specified for lighting, small power and other auxiliary outlets, including couplings, bushes, bending, drawboxes and fixing, etc in accordance with non-metallic conduit and accessories as per SANS 950</u>					
<u>P8000 Galvnised Trucnking C/W enclosure</u>					
1	Supply	m	480		
2	Install	m	480		
<u>20mm conduit Fixed in roof space</u>					
3	Supply	m	650		
4	Install	m	650		
<u>20mm PVC round boxes complete with lids & mounting screws</u>					
5	Supply	No	140		
6	Install	No	140		
<u>20mm Bosal conduit</u>					
7	Supply	m	70		
8	Install	m	70		
<u>100 x 100 x 50mm Deep surface mounted for SSO and isolators</u>					
9	Supply	No	84		
10	Install	No	84		
Carried to Collection				R	
Section No. 4					
Bill No. 1					
Electrical Installation (Provisional)					
LDM QUANTITY SURVEYORS (PTY) LTD					

DUCTING AND POWER SKIRTING

Supply and installation of surface mounted power skirting as specified in the detail specification complete with cover plates-plug assemblies not included

Provisional - for changes in computer room.

3-Compartment galvanised and painted power skirting. (Grey)

11	Supply	m	5
----	--------	---	---

12	Install	m	5
----	---------	---	---

Power skirting inside and outside corners

13	Supply	No	3
----	--------	----	---

14	Install	No	3
----	---------	----	---

Power skirting end caps

15	Supply	No	3
----	--------	----	---

16	Install	No	3
----	---------	----	---

Power skirting cover plates

17	Supply	No	3
----	--------	----	---

18	Install	No	3
----	---------	----	---

Power skirting conduit entry boxes

19	Supply	No	3
----	--------	----	---

20	Install	No	3
----	---------	----	---

CIRCUIT WIRING

Carried to Collection

R

Section No. 4
Bill No. 1
Electrical Installation (Provisional)
LDM QUANTITY SURVEYORS (PTY) LTD

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

<u>Supply and install copper PVC insulated conductors in conduit or trunking system in walls, floors or in roof space for lights, plugs and power points, including connection to switches and equipment.</u>					
<u>2.5mm² (Live, Neutral and Earth)</u>					
21	Supply	m	6 300		
22	Install	m	6 300		
<u>4.0mm² (Live, Neutral and Earth)</u>					
23	Supply	m	6 300		
24	Install	m	6 300		
<u>1.5mm² (Live, Neutral and Earth)</u>					
25	Supply	m	6 300		
26	Install	m	6 300		
<u>LIGHTING EQUIPMENT</u>					
Remove existing light fitting & replace with existing or with new lighting fixtures. Located in ceilings and / or walls.					
<u>Re-install existing Fittings</u>					
Remove and re-install existing light fitting due to replacement of ceilings or due to loose fixing in ceiling or wall.					
<u>Type A</u>					
<u>1500mm (5ft) Surface mounted, open channel fluorescent luminaire. Metal Body. 2 x T5 fluorescent lamps complete with electronic control gear and telescopic ends. Minimum 8750 Lumens. 2 x 35W Cool White. Colour white or as per architect</u>					
27	Supply	No	58		
Carried to Collection				R	
Section No. 4					
Bill No. 1					
Electrical Installation (Provisional)					
LDM QUANTITY SURVEYORS (PTY) LTD					

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

28	Install	No	62		
	<u>Type B</u>				
	<u>Wall mounted die-cast aluminium body with glass diffuser. IP 65, Corrosion and vandal resistant luminaire, complete with 2 x CFL lamp, electronic control gear and all necessary accessories. All external bolts to be stainless steel. Minimum 2400lm.2 x 11W Cool White. Colour black or as per architect</u>				
29	Supply	No	38		
30	Install	No	38		
	<u>Type C</u>				
	<u>Ceiling/Wall mounted high pressure die-cast aluminium base with opal high-impact acrylic diffuser. Minimum IP 65, Corrosion and vandal resistant luminaire complete with 2x CFL lamps, electronic control gear and all necessary accessories. All external bolts to be stainless steel. Minimum 2400lm.2 x 11W Cool White. Colour black or as per architect</u>				
31	Supply	No	36		
32	Install	No	36		
	<u>Re-lamp existing lights with lamps as noted below:</u>				
	<u>230V, 18W ES/BC Compact Fluorescent lamps. Colour Cool White</u>				
33	Supply	No	70		
34	Install	No	70		
	<u>230V, 1500mm T5 florescent tubes. Colour cool white</u>				
35	Supply	No	70		
Carried to Collection				R	
Section No. 4					
Bill No. 1					
Electrical Installation (Provisional)					
LDM QUANTITY SURVEYORS (PTY) LTD					

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

36	Install	No	70		
<u>MISCELLANEOUS</u>					
<u>Administration Block Alarm System including connection cables</u>					
37	Supply	No	1		
38	Install	No	1		
<u>Telephone Distribution Board</u>					
39	Supply	No	1		
40	Install	No	1		
<u>School Siren and Push Button with Latch in Timer</u>					
41	Supply	No	1		
42	Install	No	1		
<u>50mm PVC sleeves</u>					
43	Supply	No	70		
44	Install	No	70		
<u>DISTRIBUTION BOARDS</u>					
<u>Remove and Replace distribution boards, complete with doors where applicable, frames, subframes, chassis, fixtures, fittings, spare space, busbar etc. as per specification and drawings. All shop drawings to be approved prior to manufacture. Refer to Schematic for full details and circuit breaker count</u>					
<u>20 Way Surface - 3 Phase</u>					
45	Supply	No	4		
46	Install	No	4		
				R	
Carried to Collection					
Section No. 4					
Bill No. 1					
Electrical Installation (Provisional)					
LDM QUANTITY SURVEYORS (PTY) LTD					

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

<u>Upgrade DB to bring up to SANS standard and Supply & Install circuit breakers as required. All circuit breakers to match DB kA rating with minimum 6kA Schneider/ CBI breakers. To include all wiring, labels, blanks and safety labels for DB.</u>					
<u>15Amp single phase Circuit breaker</u>					
47	Supply	No	7		
48	Install	No	7		
<u>20Amp single phase Circuit breaker</u>					
49	Supply	No	13		
50	Install	No	13		
<u>60Amp double pole Earth Leakage Unit</u>					
51	Supply	No	7		
52	Install	No	7		
<u>Class II 10kA single pole SPD unit</u>					
53	Supply	No	4		
54	Install	No	4		
<u>40 Amp three phase 4 pole Main Circuit breaker</u>					
55	Supply	No	6		
56	Install	No	6		
<u>60 Amp double pole main double circuit breaker (40amp for 12way DB)</u>					
57	Supply	No	5		
58	Install	No	5		
Carried to Collection				R	
Section No. 4					
Bill No. 1					
Electrical Installation (Provisional)					
LDM QUANTITY SURVEYORS (PTY) LTD					

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

<u>Remove and replace, 16 Amp light switches in existing 100 x 100 x 50mm boxes with white coloured cover plates</u>					
<u>Single Lever, one way switch</u>					
59	Supply	No	42		
60	Install	No	42		
<u>Two lever one way</u>					
61	Supply	No	30		
62	Install	No	30		
<u>One Lever two way switch</u>					
63	Supply	No	30		
64	Install	No	30		
<u>IP65 Single Lever Switch</u>					
65	Supply	No	7		
66	Install	No	7		
<u>SWITCHED SOCKET OUTLETS</u>					
<u>Remove and Replace 16Amp switched socket outlets in existing 100 x 100 x 50mm boxes with white coloured cover plates</u>					
<u>16 Amp 3 pin double SSO (White)</u>					
67	Supply	No	70		
68	Install	No	70		
<u>16 Amp 3 pin Single (White)</u>					
69	Supply	No	30		
Carried to Collection				R	
Section No. 4					
Bill No. 1					
Electrical Installation (Provisional)					
LDM QUANTITY SURVEYORS (PTY) LTD					

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

70	Install	No	30		
<u>ISOLATORS</u>					
<u>Remove and replace isolator in GRP extension box. To be supplied complete with 100 x 100 x 50mm box</u>					
<u>30 Amp 2 pole 230V</u>					
71	Supply	No	5		
72	Install	No	5		
<u>30 Amp 2 pole 230V, weather proof</u>					
73	Supply	No	5		
74	Install	No	5		
<u>PHOTO CELLS</u>					
<u>Replace 10 Amp day light switch per SANS 1777</u>					
75	Supply	No	12		
76	Install	No	12		
<u>EARTHING, BONDING AND LIGHTNING PROTECTION</u>					
<u>Install Earthing & Lightning Protection per SANS 10313, 62305 and 10142. To be undertaken by specialist earthing and lightning contractor. Refer to specification Part A. Item 14</u>					
<u>8mm2 Diameter Aluminium aerial conductor for roof top lightning protection of all non-metallic roof. To include all holding down clamps, down conductors and bonding to earth ring</u>					
77	Supply	m	700		
				R	
Carried to Collection					
Section No. 4					
Bill No. 1					
Electrical Installation (Provisional)					
LDM QUANTITY SURVEYORS (PTY) LTD					

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

78	Install	m	700		
	<u>Bond the metal roofs / aerial conductor around the perimeter of the buildings at each corner of the building bonded to the earth electrode in the ground. To include lugs, brass screws, nuts and washers</u>				
79	Supply	No	84		
80	Install	No	84		
	<u>Provide test joint points at 500mm AFGL at each down conductor location. The test joint shall comprise of two lugs and a 10mm galvanized steel bolt and nut enclosed in a suitable GRP enclosure</u>				
81	Supply	No	70		
82	Install	No	70		
	<u>16mm² stranded BCEW down conductor in surface mounted PVC conduit complete with saddles</u>				
83	Supply	m	70		
84	Install	m	70		
	<u>1200mm x 16mm diameter Copper earth electrodes driven in ground, including 'Cadweld' joining sleeves as required</u>				
85	Supply	No	70		
86	Install	No	70		
Carried to Collection					R
Section No. 4					
Bill No. 1					
Electrical Installation (Provisional)					
LDM QUANTITY SURVEYORS (PTY) LTD					

LOW VOLTAGE CABLES

Supply and installation and termination of copper PVC/SWA/ECC cables laid in ducts, trenches, horizontal racks or vertical ducts. Rates shall include the supply and fixing of supports with regard to installation of cables. Rates shall include the PVC cable ties as required. All cables are Copper PVC/SWA/ECC cables per SANS 1507.

6.0mm x 2 Core ECC

87	Supply	m	300
88	Install	m	300
89	Term	No	8

16.0mm 3 Core ECC

90	Supply	m	300
91	Install	m	300
92	Term	No	16

Trench Excavations including temporary support of sides, keeping excavation dry, bedding material, backfilling, compacting and testing as specified. All backfill material to be suitable as per SANS codes and engineers approval. Backfill material to be imported if necessary. Trench depth to be 500mm below finished ground level.

93	Soft Rock (20%)	m3	25
94	Hard Rock (20%)	m3	25

Carried to Collection

R

Section No. 4
Bill No. 1
Electrical Installation (Provisional)
LDM QUANTITY SURVEYORS (PTY) LTD

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

TESTING, COMMISSIONING & HANDOVER

- | | |
|----|--|
| 95 | Test and commission complete installation as per SANS 10142-1 |
| 96 | Provide Certificate of Compliance (CoC) as per SANS 10142-1. One for each DB and one overall |
| 97 | Provide Earthing certificate for entire site, to include earth resistance test of each down conductor earth electrode, measured by an Earthing specialist by means of an approved instrument |
| 98 | Allow a sum of R 50,000.00 for municipal ESKOM meter |
| 99 | Profit and Attendance |

Item

Item

Item

Item

Item

Carried to Collection

R

Section No. 4
Bill No. 1
Electrical Installation (Provisional)
LDM QUANTITY SURVEYORS (PTY) LTD

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

Section No. 4

Bill No. 1

Electrical Installation (Provisional)

COLLECTION

Total Brought Forward from Page No.

Page
No

Amount

95

96

97

98

99

100

101

102

103

104

105

106

Carried to Final Summary Page

R

Section No. 4

Bill No. 1

Electrical Installation (Provisional)

LDM QUANTITY SURVEYORS (PTY) LTD

KZN STORM DAMAGED SCHOOLS: PHASE 14
NORTH COAST REGION: CLUSTER 69
UQWEQWE SECONDARY SCHOOL

[illegible]



KWAZULU-NATAL PROVINCE

PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

PART C3. SCOPE OF WORKS

C3.1 SCOPE OF WORKS GCC FOR CONSTRUCTION WORKS (Edition 2 of 2010)			
Scope of Works complied in accordance with SANS 10403 where reference is made to this part of SANS 1921-1:2004			
Project title:	PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS		
Tender no:	ZNTU04215W	Project Code:	065986
1	<u>SECTION 1</u> <u>EXTENT OF THE WORKS</u> 1.1 EMPLOYERS OBJECTIVES Repairs and renovations to storm damaged schools including the provision of new facilities (where applicable). 1.2 OVERVIEW OF THE WORKS Repairs and renovations to storm damaged schools including the provision of new facilities (where applicable). 1.3 EXTENT OF THE WORKS Refer to Bills of Quantities and attached drawings for detailed scope of work. 1.4 LOCATION OF THE WORKS KZN North Coast Region: 28°07'14.16"S 30°48'16.56"E 1.5 TEMPORARY WORKS All temporary work to comply with the Occupational Health and safety Act (Act 85 of 1993)		
2	<u>ENGINEERING</u> 2.1 EMPLOYER'S DESIGN Applicable 2.2 DESIGN BRIEF Not Applicable 2.3 DRAWINGS See list of Drawings/Annexures attached to this document.		

2.4	<p>DESIGN PROCEDURES</p> <p>Not Applicable</p>
3	<p><u>PROCUREMENT</u></p> <p>3.1 PREFERENTIAL PROCUREMENT PROCEDURES</p> <p>This tender will be subject to the implementation of the Preferential Procurement Regulations, 2022, pertaining to the Preferential Procurement Policy Framework Act, Act Number 5 of 2000 and the relevant Supply Chain Management Legislation and the KwaZulu-Natal Supply Chain Management Policy Framework published by the KwaZulu-Natal Provincial Treasury. Tenderers are referred to www.kzntreasury.gov.za for access to the relevant documents.</p> <p>Tenderers are advised to familiarize themselves with the contents of the KwaZulu-Natal Supply Chain Management Policy Framework regarding Preference Point Systems, evaluation of tenders appeals and other matters.</p> <p>3.2 RESOURCE STANDARD PERTAINING TO TARGETED PROCUREMENT</p> <p>NOTE : This project will be adjudicated as not exceeding R 50,000 000,00</p> <p>3.3 SCOPE OF MANDATORY SUBCONTRACT WORK</p> <p>Not Applicable</p> <p>3.4 PREFERRED SUBCONTRACTORS/SUPPLIERS</p> <p>Not Applicable</p> <p>3.5 SUBCONTRACTING PROCEDURES</p> <p>Not Applicable</p>
4	<p><u>CONSTRUCTION</u></p> <p>4.1 APPLICABLE SANS 2001 STANDARDS FOR CONSTRUCTION WORKS</p> <p>The Contractor is referred to the "ASAQS Model Preambles to Trades - 2008", any "Supplementary Preambles", the Electrical Specifications and Mechanical Specification for full descriptions of materials and methods referred to in these Bills of Quantities/Lump Sum documents, insofar as they apply. The Contractor is advised to study the "Standard Preambles to all Trades", any "Supplementary Preambles", the Electrical Specifications and Mechanical Specification, before pricing Bills of Quantities/Lump Sum documents.</p> <p>Where the description in the Bills of Quantities/Lump Sum documents differ from those in the Standard Electrical Specifications, the descriptions in the Bills of Quantities/Lump Sum documents are to apply. No claim whatsoever will be allowed in respect of errors in pricing due to brevity of description of items in the Bills of Quantities/Lump Sum documents which are fully described when read in conjunction with the relevant Preambles and/or Specifications. Suppliers of materials and the like, whose quality systems apply with one or more of the SABS/SANS ISO 9000 Series should be used whenever possible in the absence of a particular SABS/SANS Specification Standard Mark.</p> <p>Wherever the words "shall be deemed to be included in the description", "shall be stated" or other words having the same effect, appear in the Standard System, it shall be deemed that all descriptions in these Bills of Quantities/Lump Sum documents incorporated such inclusions and statements whether specifically stated or not.</p> <p>The Contractor is hereby informed that where SABS/SANS Specifications are referred to in these Bills of Quantities/Lump Sums documents and Specifications thereto, then ONLY the Specification of Work Clauses will apply. The method of measurement and payment clauses will NOT apply to this Contract.</p> <p>The Contractor is hereby informed that risk of collapse and keeping excavations free from water (excluding subterranean water) generally are deemed to be included in the descriptions unless accommodated in the system of measurement. Please refer to the Geotechnical Investigation report when included at the end of these tender documents.</p> <p>Whenever reference is made to "Sub-Contractor", "Nominated Sub-Contractor" or the like in the specifications included or referred to in these Bills of Quantities/Lump Sums documents, it shall be deemed to mean "Contractor" as defined.</p>

4.2	<p>APPLICABLE NATIONAL AND INTERNATIONAL STANDARDS</p> <p>See above 4.1</p>												
4.3	<p>PARTICULAR / GENERIC SPECIFICATIONS</p> <p>The Contractor is referred to the following documents whether attached to this document or not:</p> <table border="0"> <thead> <tr> <th><u>SPECIFICATION</u></th><th><u>PAGES</u></th></tr> </thead> <tbody> <tr> <td>Specification for HIV/AIDS Awareness (CIDB)</td><td>HIV1 TO HIV3</td></tr> <tr> <td>Project Specific Health and Safety Specification</td><td>23</td></tr> <tr> <td>ASAQS Model Preambles for Trades 2008</td><td>51</td></tr> <tr> <td>General Electrical Specification</td><td>E/1 to E/21</td></tr> <tr> <td>Lightning Protection Installation</td><td>LP/1 to LP/6</td></tr> </tbody> </table>	<u>SPECIFICATION</u>	<u>PAGES</u>	Specification for HIV/AIDS Awareness (CIDB)	HIV1 TO HIV3	Project Specific Health and Safety Specification	23	ASAQS Model Preambles for Trades 2008	51	General Electrical Specification	E/1 to E/21	Lightning Protection Installation	LP/1 to LP/6
<u>SPECIFICATION</u>	<u>PAGES</u>												
Specification for HIV/AIDS Awareness (CIDB)	HIV1 TO HIV3												
Project Specific Health and Safety Specification	23												
ASAQS Model Preambles for Trades 2008	51												
General Electrical Specification	E/1 to E/21												
Lightning Protection Installation	LP/1 to LP/6												
4.4	<p>CERTIFICATION BY RECOGNIZED BODIES</p> <p>Only contractors registered with the Electrical Contracting Board of South Africa in accordance with the Regulations of the Occupational Health and Safety Act will be accepted and permitted to do work under this contract.</p>												
4.5	<p>AGRÉMENT CERTIFICATES</p> <p>Not Applicable</p>												
4.6	<p>PLANT AND MATERIAL PROVIDED BY THE EMPLOYER</p> <p>Not Applicable</p>												
4.7	<p>SERVICES AND FACILITIES PROVIDED BY THE EMPLOYER</p> <p>Not Applicable</p>												
4.8	<p>OTHER SERVICES AND FACILITIES</p> <p>The Contractor shall provide any artificial lighting which may be necessary or required for the proper execution of the works, and provide electric power and water required by all Sub-Contractors, Nominated Sub-Contractors and Sub-Contractors appointed directly by the Administration.</p> <p>The Contractor shall give all notices and pay all fees in connection with temporary electrical and water connections and shall connect temporary Electrical and Water meters for and pay for all current and water consumed.</p> <p>The Contractor is advised that the permanent light fittings and water points of any kind installed in the Works are not to be used to provide temporary lighting and supplement water requirements for construction purposes.</p>												
5	<p><u>MANAGEMENT</u></p> <p>5.1 APPLICABLE SANS 1921 STANDARDS</p> <p>Tenderers are referred to SECTION 2 : SPECIFICATION DATA ASSOCIATED WITH SANS 1921-1:2004 IN THIS DOCUMENT</p>												

5.2	RECORDING OF WEATHER The Contractor shall keep record of abnormal climatic conditions to facilitate the adjudication of claims for extension of the contract period.																																																																	
	<p>The Contractor shall allow in his programme for the following number of days for rain days (rain > 10mm per day) as per the table below:</p> <table><tr><th colspan="3">CURRENT YEAR</th><th>YEAR + 1</th><th>YEAR + 2</th></tr><tr><td>January</td><td>w/days</td><td></td><td>3</td><td>3</td></tr><tr><td>February</td><td>w/days</td><td></td><td>3</td><td>3</td></tr><tr><td>March</td><td>w/days</td><td></td><td>3</td><td>3</td></tr><tr><td>April</td><td>w/days</td><td></td><td>3</td><td>3</td></tr><tr><td>May</td><td>w/days</td><td></td><td>3</td><td>3</td></tr><tr><td>June</td><td>w/days</td><td></td><td>3</td><td>3</td></tr><tr><td>July</td><td>w/days</td><td></td><td>3</td><td></td></tr><tr><td>August</td><td>w/days</td><td></td><td>3</td><td></td></tr><tr><td>September</td><td>w/days</td><td></td><td>3</td><td></td></tr><tr><td>October</td><td>w/days</td><td></td><td>3</td><td></td></tr><tr><td>November</td><td>w/days</td><td></td><td>3</td><td></td></tr><tr><td>December</td><td>w/days</td><td>3</td><td>3</td><td></td></tr></table>	CURRENT YEAR			YEAR + 1	YEAR + 2	January	w/days		3	3	February	w/days		3	3	March	w/days		3	3	April	w/days		3	3	May	w/days		3	3	June	w/days		3	3	July	w/days		3		August	w/days		3		September	w/days		3		October	w/days		3		November	w/days		3		December	w/days	3	3	
CURRENT YEAR			YEAR + 1	YEAR + 2																																																														
January	w/days		3	3																																																														
February	w/days		3	3																																																														
March	w/days		3	3																																																														
April	w/days		3	3																																																														
May	w/days		3	3																																																														
June	w/days		3	3																																																														
July	w/days		3																																																															
August	w/days		3																																																															
September	w/days		3																																																															
October	w/days		3																																																															
November	w/days		3																																																															
December	w/days	3	3																																																															
5.3	MANAGEMENT MEETINGS In order to facilitate the smooth functioning of the Works and to ensure the closest co-operation between all the parties concerned, the Employer will call for regular meetings to be held on the site (one technical meeting and one site meeting per month), at which a senior member of the Contracting firm and the General Foreman of the Works will always be required to be present. In addition to the above, other persons will be required to attend these meetings as and when their presence is necessary, e.g., Consultants in all disciplines, representatives of the various Sub-Contractors, etc. Proper minutes of these meetings will be kept by the Employer\Principal Agent and copies will be circulated to all persons attending the meetings and to others who need to be kept informed.																																																																	
5.4	FORMS FOR CONTRACT ADMINISTRATION The Employer shall provide all necessary forms.																																																																	
5.5	ELECTRONIC PAYMENTS The Contractor shall provide all required information to the Employer to facilitate electronic payments upon request.																																																																	
5.6	DAILY RECORDS The Contractor shall keep daily records of people and equipment employed as well as a site diary in respect of work performed on the site. At the end of each week the Contractor shall provide the Principal Agent with a written record, in schedule form, reflecting the number and description of tradesmen and labourers employed by him and all Sub-Contractors on the works each day. At the end of each week the Contractor shall provide the Principal Agent with a written record, in schedule form, reflecting the number, type and capacity of all plant, excluding hand tools, currently used on the works.																																																																	
5.7	BONDS AND GUARANTEES The Contractor shall within 10 calendar days after receiving notice from the Engineer and prior to receiving a completed copy of this agreement, including the schedule of deviations (if any), contact the Employer's agent (whose details are given in the contract data) to arrange the delivery of any bonds, guarantees, proof of insurance and any other documentation to be provided in terms of the conditions of contract identified in the Contract Data.																																																																	

5.8	PAYMENT CERTIFICATES Requirements will be in accordance with the Employers prescriptions.
5.9	PERMITS The Contractor is advised that, in the case of an existing building or institution, all security measures in force will remain in operation and he must acquaint himself and his Employees with them as he and his Employees will at all times be subject to these measures. The Contractor will on no account extend his operations beyond the confines of the building site as indicated by the Employer and must ensure that all his Employees are made aware of these limits. Any Employee disregarding this instruction and found outside the limit of the building site without authority, shall be redeployed immediately and shall not again be employed on this Contract. The Contractor will be responsible for ensuring that this instruction is strictly enforced and must provide and remove upon completion or when directed, such other necessary temporary barriers, fences, etc., as may be required and is to allow opposite this item for any charges he may wish to make in this connection. The Employer will accept no responsibility whatsoever for damage to or the loss of plant, materials, etc., from the site.
5.10	PROOF OF COMPLIANCE WITH THE LAW The following certificates must be provided before first delivery is taken: - HIV/STI Report (Bound into this document) - Electrical Compliance Certificate - Plumbing Compliance Certificate - Lightning Certificate - Soil Protection Certificate - Concrete test and cube certificates - Waterproofing Guarantee certificates - TR1 and TR2 prefabricated roof truss certificates - Soil compaction certificates - Electrical and Mechanical test certificates - Plumbing and drainage pressure test certificates - Fire Compliance Certificate - Entomology Certificate - SANS 10400-A:2010 compliance certificates - Latest National Building Regulation
5.11	INSURANCE PROVIDED BY THE EMPLOYER Not Applicable <u>SECTION 2</u> <u>SPECIFICATION DATA ASSOCIATED WITH SANS 1921-2004</u>
4.1.7	The requirements for drawings, information and calculations for which the Contractor is responsible are:
	Prefabricated roof trusses design must be submitted for approval 30 days prior to erections.
4.2.1	The responsibility strategy assigned to the Contractor for the works is:
	Strategy A
4.2.2	The structural engineer is:
	Naidu Consulting (Pty) Ltd
4.2.3	Drawings & other info are to be submitted in accordance with the contractors programme
	N/A
4.3	The planning, programme and method statement are to comply with the following: The Project would be done classroom block for classroom block and the contractor must allow for the fact that they would not have all the buildings at the same time to work on. The sequence of blocks would be determined once the contractor is on site and the contractor has submitted their construction programme and the approval of the removal of asbestos has been obtained from the appointed AIA (IF APPLICABLE TO THE SCHOOL). The construction programme will further be discussed and agreed to by the Principal of the school to ensure normal operations of the school at all times. The contractor will then strictly follow the approved construction programme and occupation will be given back to the school after each block has been completed.

4.12.1	<p>Samples of materials</p> <p>The work is to be executed with materials of the best specified and in the most substantial and workmanlike manner under the inspection of the Employer and to his satisfaction.</p> <p>The Contractor shall furnish, without delay, such samples as called for or may be called for by the Employer, who may reject all materials or workmanship not corresponding with the approved sample.</p> <p>The samples of materials, workmanship and finishes that the Contractor is to provide and deliver to the employer are:</p> <ul style="list-style-type: none"> - Tile sample. - Brick sample. - Light Fitting sample. - Roof Sheeting sample. - Gutter sample. - Door sample. - Screed panel 2m x 2m impact test. - Tested trial mix to be approved by the Engineer. - Others as per the Consultants requirements.
4.12.2	<p>Fabrication drawings that the contractor is to provide to the employer are:</p> <p>None</p>
4.12.3	<p>Office accommodation, equipment, accommodation for site meetings and other facilities for use by the employer and his agents are:</p> <p>OFFICE FOR FOREMAN</p> <p>Provide, erect, maintain and remove at completion a suitable temporary office for the Contractor or his Foreman, perfectly secured, lighted and ventilated and having a desk with drawers.</p> <p>TELEPHONE</p> <p>The Contractor shall provide a telephone on the site for the use of the Contractor and all Sub-Contractors for the duration of the Contract, and must make the necessary application for connection, give all notices and pay all fees, rentals and charges for the service and also for all calls.</p> <p>OFFICE FOR INSPECTOR OF WORKS</p> <p>Provide, erect, maintain and remove at completion a well constructed temporary office for the Inspector of Works not less than 4 x 3 m on plan and 3 m high to eaves to the approval of the Employer. The office shall be constructed of wood framing covered externally with corrugated iron or corrugated asbestos and with a lean-to roof covered with the same material as the external wall covering. The office shall be lined internally with soft board or other approved material and a ceiling shall be provided of the same material as the internal lining. A suspended wood floor shall be provided and is to finish not less than 300 mm above the ground level. A lockable door and a window, which provides adequate light and ventilation, shall be fitted.</p> <p>An office constructed of 115 mm thick brick-work and provided with a screeded concrete floor and roofed and ceiled as above described may be accepted as an alternative but prior permission of the Employer will be necessary before construction of such an office is commenced and his requirements shall be stated and fulfilled by the Contractor.</p> <p>The office shall be fitted in an approved manner with a sloping topped desk of height and length suitable for the laying out and studying of drawings, a desk or table with not less than two lock-up drawers, shelves, seating and wash-stand, and the Contractor shall provide all necessary attendance.</p> <p>TELEPHONE IN OFFICE FOR INSPECTOR OF WORKS</p> <p>The Contractor shall arrange for the installation of a lockable telephone in the Office for the Inspector of Works for the duration of the Contract. The Contractor will be required to make the necessary application for connection and give all notices on behalf of the Employer. The Employer will, however, be responsible for the direct payment of all fees, rentals and other charges by Telkom for the service for the Inspector of Works and for all calls made from this telephone.</p>

	SHED
	Provide, erect, maintain and remove at completion, ample temporary sheds for the proper storage of materials and for the use of the workmen, and remove when no longer required.
4.14.6	The requirement for provision and erection of signboards are:
	Supply, erect, maintain and remove at completion a painted notice board, size overall 2800 x 2345 mm high sign written to detail as Drawing No. T9506 which drawing is available from offices of the Department of Public Works. Only the official notice board is to be displayed on the site and no Sub-Contractor's boards will be permitted. The Contractor, at his own cost, may provide a board on which all sub-contract firms' names may be sign written. The notice board is to be to the approval of the Employer and is to be maintained in first class condition and placed where directed at the entrance to the site and remain there for the duration of the Contract.
4.17.1	Requirement for the termination, diversion or maintenance of existing services:
	Should the Contractor come in contact with any underground cables or pipes during excavations, immediate notification must be made to the Employer and all work in the vicinity of such cables, pipes, etc., shall cease until authority to proceed has been obtained from the Employer. Should the Contractor damage underground cables or pipes resulting in a disruption of services to an existing institution such damage shall be repaired immediately.
4.17.3	Services which are known to exist on the site:
	Investigate and provide detail drawings.
4.17.4	Requirement for detection apparatus
	None
4.18	ADDITIONAL HEALTH AND SAFETY REQUIREMENTS ARE:
	<p>By the submission of a tender, any Tenderer will, if awarded the contract to which this tender document relates, be deemed to be the mandatory as envisaged by Section 37 (2) of the Act. As a mandatory the successful Tenderer will be deemed to be the "principal contractor" and an employer in his/her/their own right with duties as prescribed in the Act and accordingly will be deemed to have agreed to be solely responsible for ensuring that in connection with the service to which this tender document relates, all work will be performed and machinery and plant used in accordance with the Act. Should the Contractor, for whatever reason be unable to perform as required by the Act, the Contractor undertakes to inform the Employer accordingly.</p> <p>Tenderers are advised that it is a Condition of this Tender that a 'Construction Phase Safety, Health and Environmental Plan' specifically relates to the project for which tenders are being submitted and must be prepared by the Tenderer and submitted with the other tender documents at the time of tender. Failure to do so will invalidate the tender.</p> <p>Tenderers are therefore advised to study the 'Construction Safety, Health and Environmental Specification' which is issued as part of this tender document, the ASAQS Model Preambles to Trades - 2008, any project Specification included in this tender document and any and all drawings which are referred to and issued as part of this tender document before preparing their own project specific 'Construction Phase Safety, Health and Environmental Plan'. Tenderers are also advised that such a plan which is submitted with a tender but is incomplete or considered inadequate by the Employer or his Representative will invalidate the tender.</p> <p>The Contractor will be deemed to have satisfied himself with his obligations in terms of the Act and to have allowed for all costs arising from compliance with the Act as no claim for extra costs arising from compliance with, and obligations in terms of the Act will be entertained.</p>
4.22	WORK BY NOMINATED AND SELECTED SUBCONTRACTORS COMPRISE:
	As per the relevant tender returnable.

C3.2 - SPECIFICATION FOR HIV/AIDS AWARENESS

1 Scope

This generic specification contains requirements applicable to the reduction of the risk of transfer of the HIV virus between and among construction workers and the local community through the following four strategies:

- a) raising awareness about HIV/AIDS;
- b) providing construction workers with access to condoms;
- c) HIV counselling, testing and referral services; and
- d) Sexually Transmitted Infection diagnosis and treatment.

2 Normative references:

The following standard contains provisions that, through reference in this text, constitute provisions of this standard:

SANS 4074 ISO 4074, *Condom Rubbers*

3 Definitions and Abbreviations

3.1 Definitions

Construction Worker: all persons in the employ of the contractor or in the employ of any of the subcontractors contracted by the contractor.

Local Community: the communities local to the site which are most likely to have contact with the construction worker and, in particular, sex workers in those communities.

Service provider: the natural or juristic person recognised by the South African Department of Health as specialist in conducting Aids Awareness Programmes.

3.2 Abbreviations

STI: Sexually transmitted infection

HIV: Human Immunodeficiency Virus

AIDS: Acquired Immune Deficiency Syndrome

4 Objectives

The objectives are to:

- a) reduce the risk of transfer of the HIV virus between and among construction workers and the local community;
- b) raise awareness amongst construction workers and the local community of the risk of infection with the HIV virus;
- c) promote early diagnosis; and
- d) assist affected individuals to access care and counselling.

5 Requirements

5.1 General requirement

The contractor shall, in order to satisfy the objectives stated in 4:

- a) make condoms complying with the requirements of SABS ISO 4074 available to all construction workers at readily accessible points on the site, suitably protected from the elements, for the duration of the contract;
- b) either place and maintain HIV/AIDS awareness posters of size of not less than A1 in areas which are highly trafficked by construction workers, or provide construction workers with a pamphlet, in languages largely understood by construction workers, which
- c) encourage voluntary HIV/STI testing;
- d) provide information concerning counselling, support and care of those that are infected services; and
- e) comply with the requirements of 5.2.

The provisions of 5.1 c) and d) do not apply to this contract.

5.2 HIV awareness programme

5.2.1 The contractor shall:

- a) engage a qualified service provider as described in the scope of works to conduct an HIV Awareness Programme which is structured to achieve the outcomes stated in 5.2.3 for contract workers as soon as a construction workers camp is established and populated or, where no such camp is established, within two weeks of the commencement of a significant portion of the works and at subsequent intervals, if any, provided for in the scope of works; and
- b) arrange for, provide a suitable venue, and instruct all construction workers to attend the HIV Awareness Programme and notify the Employer's Representative of the date, time and venue whenever a session with construction workers is conducted.

Note: The National Department of Public Works maintains a list of qualified service providers.

5.2.2 The contractor shall do nothing to dissuade construction workers from attending such an HIV Awareness Programme and shall take all reasonable steps to ensure that a minimum of 90% of construction workers engaged in the works attend such a programme, when it is conducted.

5.2.3 The outcomes of the HIV Awareness Programme shall as a minimum, result in contract workers exposed to such a programme being able to:

- a) communicate the existence of problems of HIV and be able to outline the consequences of transmission of HIV to or from the local community;
- b) recall and communicate the mode of HIV transmission and preventative measures including the proper use of the condom.

The HIV/ Aids awareness programme described in 5.2 is to be repeated at four month intervals throughout the duration of the contract. (Four times in total, including the initial one at the start of the contract)

5.3 Reporting

- 5.3.1** The contractor shall prepare and attach to his claims for payment a brief report which outlines how the actions taken by the contractor in the period for which payment is claimed satisfy the requirements and a schedule which lists the names, identity numbers, trade / occupation and name of employer of all construction workers exposed to the programme (see **HIV/STI Compliance Report**).
- 5.3.2** The employer's representative shall certify the report and schedule described in 5.3.1 whenever a claim for payment is issued to the employer.

Note: In the event that the contractor fails to satisfy the requirements of this specification, the employer (Head: Public Works) may apply any of the sanctions provided for in the contract. Sanctions may include the application of a financial penalty of .04% of the Contract Sum.

The *HIV /Aids* awareness programme *described* in 5.2 shall in addition *be conducted* for the benefit *of* the local community on two occasions in the community centre nearest to the building site. The contractor shall be *responsible* for inviting identifiable community-based *institutions and organisations, churches, and schools to participate in the* programme.

C3.3 - HIV/STI COMPLIANCE REPORT

Pro-forma reporting format in terms of the SPECIFICATION FOR HIV/AIDS AWARENESS

Project Code:

065986

Payment Claim number:

Period covered by payment claim:

1. Distribution of condoms (briefly describe where and how condoms are distributed).

2. Posters / pamphlets (briefly describe where posters were placed / how pamphlets were distributed).

3. Voluntary testing (briefly describe the actions taken / information provided to promote testing).

4. Counselling, support and care (summarise information provided).

5. HIV awareness programme (briefly describe action).

6. Schedule of construction workers exposed to the HIV awareness programme.

[illegible]

I hereby declare the above to be a true reflection of actions taken to ensure compliance with the specification.

For Contractor:

Name: _____

Signature: _____

Date: _____

Employer's representative:

Name: _____

Signature: _____

Date: _____



KWAZULU-NATAL PROVINCE

PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

PART C4. SITE INFORMATION

C4.1 SITE INFORMATION GCC FOR CONSTRUCTION WORKS (2 Edition of 2010)			
Project title:	PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS		
Tender No.	ZNTU04215W	Project Code:	065986
C4.1 Site Information			
C4.1	GENERAL		
(a)	The nature of ground is assumed to be loose, sandy material, possibly interspersed with soft and hard rock.		
(b)	The site is an existing, operational school. Extreme care must be taken to ensure that construction areas are kept secure and not accessible to students. The Contractor must take note that storage material on site must be done in a well organized manner and the Contractor must create a workable space which will not disrupt the operation of the school or endanger the learners on the premises. The working area must be clearly demarcated and entrance to the work area must be controlled.		
(c)	The Tenderer is to note that various blocks that are currently in use, are required to be worked on. Planning and co-ordination therefore will be required by the Contractor to ensure that school activities are not interrupted, and under no circumstances will the Contractor be allowed to utilize any occupied buildings for any purpose other than the renovation of that building.		
	The Project would be done classroom block for classroom block and the contractor must allow for the fact that they would not have all the buildings at the same time to work on. The sequence of blocks would be determined once the contractor is on site and the contractor has submitted their construction programme and the approval of the removal of asbestos has been obtained from the appointed AIA (IF APPLICABLE TO THE SCHOOL). The construction programme will further be discussed and agreed to by the Principal of the school to ensure normal operations of the school at all times. The contractor will then strictly follow the approved construction programme and occupation will be given back to the school after each block has been completed.		
C4.2	GEOTECHNICAL INVESTIGATION REPORT		
(a)	Not Applicable		



KWAZULU-NATAL PROVINCE

PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

PART C5 - DRAWINGS / ANNEXURES

C5.1 - LIST OF DRAWINGS/ANNEXURES

PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS

Tender No.:	ZNTU04215W	Project Code:	065986
--------------------	-------------------	----------------------	---------------

(Where drawings/annexures are issued, document compilers must insert the following paragraph and list the applicable drawings/annexures below.)

The following drawings/annexures shall be issued during the Tender period to form part of the tender documentation. Where applicable, drawings/annexures could be re-issued to the Contractor at commencement of the construction phase.

<u>DRAWING NO</u>	<u>DESCRIPTION</u>
-------------------	--------------------

N/A	Provisional Site Plan

ANNEXURES

Annexure 1	ASAQS Model Preambles for Trades 2008
Annexure 2	General Electrical Specifications
Annexure 3	Lightning Protection Specifications
Annexure 4	Map of Tender Submission Location
Annexure 5	Joint Venture Agreement
Annexure 6	Project Specific Health and Safety Specification
Annexure 7	Health and Safety Bill of Quantities
Annexure 8	Builders Lien Agreement
Annexure 9	Geotechnical Investigation Report - (If applicable)
Annexure 10	EPWP Employment Contract and EPWP Specification/Checklist
Annexure 11	Attendance Register - Infrastructure and Other Projects
Annexure 12	EPWP Data Collection tool for Phase 3 System



KWAZULU-NATAL PROVINCE

PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

PROVISIONAL SITE PLAN



BLOCK	DESCRIPTION	SIZE
A	1 Classroom Block	16m x 9m
B	Admin Block	24m x 10m
C	3 Classroom Block	33m x 10m
D	Kitchen and Classroom Block	28m x 8.5m
E	Guard House	3m x 3m
F	Classroom Block	9m x 8.5m
G	No Assessment Done	
H	3 Classroom Block	50.5m x 9m
I	1 Classroom Block	7m x 9m
J	No Assessment Done	
K	No Assessment Done	
L	No Assessment Done	
M	No Assessment Done	
N	No Assessment Done	
O	No Assessment Done	
P	No Assessment Done	

REVISIONS

Rev.	Date	Description	By

PROVINCE OF KWAZULU-NATAL

DEPARTMENT OF PUBLIC WORKS

HEAD: WORKS

CLIENT

education

Department: Education

PROVINCE OF KWAZULU-NATAL

PROVINCE OF KWAZULU-NATAL

Department: Education

CLIENT DEPARTMENT

CONSULTANTS	Programme Managers : NAIDU CONSULTING (PTY) LTD
Architect : NAIDU CONSULTING (PTY) LTD	Quantity Surveyors : TBC
Electrical Engineers : DBA CONSULTING ENGINEERS	Civil & Structural Enggs : NAIDU CONSULTING (PTY) LTD

EMIS NO: 500290265 SCHOOL: UQWEQWE HIGH SCHOOL - 28° 7'14.16"S 30°48'16.56"E

PROJECT	STORM DAMAGED SCHOOLS PROGRAMME PHASE 14B	Scale	N.T.S	Date	2017.03.30	Drawn	NGM
DRAWING DESCRIPTION	SITE PLAN	Project No.		Drawing No.		Rev.	PP



KWAZULU-NATAL PROVINCE
PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

TABULATED SCOPE OF WORKS

DPW : STORM DAMAGED SCHOOLS: REPAIRS AND RENOVATIONS TO STORM DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU NATAL

SCHOOL NAME: UQWEQWE SECONDARY SCHOOL

SCOPE OF WORK SCHEDULE
EXISTING BUILDINGS

SCHOOL NAME : UQWEQWE SECONDARY SCHOOL

SCOPE OF WORKS DESCRIPTION	EXISTING BUILDINGS										EXTERNAL WORKS
	BLOCK A	BLOCK B	BLOCK C	BLOCK D	BLOCK E	BLOCK F	BLOCK G	BLOCK H	BLOCK I		
1 Remedial Works to Existing Structures											
1.1 Replace old asbestos roof with new corrugated iron including new trusses, install doors											
1.2 Replace old damaged corrugated roof sheeting with new corrugated iron including new trusses		X						X			
1.3 Repair roof sheeting	X					X			X		
1.4 Roof sheeting to be sealed			X	X							
1.5 Walkway trusses required for the support of the overhang		X									
1.6 Construction of v-drains around building			X						X		
1.7 Scable damaged existing v-drains and cast new				X		X		X			
1.8 Replace Ridge capping to roof											
1.9 Bracing of walkway trusses											
1.10 Replace timber beam to walkway overhang											
1.11 Replace with new gutters, downpipes, barge boards, fascia boards	X	X	X	X	No work required					X	
1.12 Provision of new ceiling boards and cornices				X							
1.13 Repairs to minor cracks	X		X	X		X		X	X		
1.14 Beam filling plaster and paint											
1.15 Replace damaged glazing to windows	X	X		X		X		X			
1.16 New door and frame	X			X				X			



KWAZULU-NATAL PROVINCE

PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

ANNEXURES



KWAZULU-NATAL PROVINCE
PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

ANNEXURE 1

ASAQS MODEL PREAMBLES FOR ALL TRADES (2008)



MODEL PREAMBLES FOR TRADES

2008

*forming part of
the bills of quantities*

Project: DPW: PHASE 14 STORM DAMAGED PROGRAMME

Contract Reference Number: _____

EXPLANATORY NOTES AND INSTRUCTIONS ON THE USE OF THESE MODEL PREAMBLES

1. The document

- 1.1 This document is published by and is available from the Association of South African Quantity Surveyors, P.O. Box 3527, Halfway House, 1685. Telephone (011) 315 4140. E-mail: administration@asaqs.co.za
- 1.2 The contents of this document are intended to cover workmanship and materials encountered in a significant majority of projects. If a material is not encountered in a significant majority of projects, its preamble will in all likelihood not be included in this document
- 1.3 By its very nature, this document is a "Model" document and one that is designed to act as a basis upon which to build. It is anticipated that it will be supplemented by a "Supplementary Preambles" document included in the text of the bills of quantities that will include, *inter alia*, the following:
 - 1.3.1 supplementary clauses of a general nature that practitioners may deem necessary to cover their own individual requirements,
 - 1.3.2 additional clauses pertaining to specific materials incorporated in a project and not covered by the Model Preambles,
 - 1.3.3 amendments to anything contained in the Model Preambles. A clause has been incorporated in the "General" section of the document stipulating that anything contained in the "Supplementary Preambles" which is at variance to that which is contained in the Model Preambles, will take precedence over the Model Preambles and apply to the works in hand
- 1.4 It is intended that this document will be used by reference only in the text of the bills of quantities and will NOT be bound or reproduced therein

2. The basic philosophy

- 2.1 Wherever possible, reference has been made throughout the preambles to South African National Standards (SANS) to describe materials and methods respectively. It is therefore incumbent on the users of these preambles to have ready access to the relevant Specifications and Codes. Where such Specifications or Codes do not exist, suitable preambles have been compiled
- 2.2 These preambles have been designed to assist in abbreviating descriptions in the text of the bills of quantities and practitioners are encouraged to make use of this facility. e.g. The description of a stormwater catchpit would read:

"Brick stormwater catchpit size internally 600 x 400 x 1 200mm deep to invert fitted with and including a 450 x 300mm x 59kg cast iron grating and frame"
- 2.3 Wherever alternatives exist in respect of materials or workmanship, specific choices have been made in these preambles. Should users require different choices to specific items, these should be referred to in the Supplementary Preambles as outlined in clause 1.3

3. Additional notes in the use of these Model Preambles

3.1 Concrete, Formwork and Reinforcement

The Project Specification embodied in these preambles was compiled in collaboration with the Authors of SANS 1200G, which forms the basis for the Concrete, Formwork and Reinforcement model preambles

Users of these preambles are advised to submit a copy of the Model Preambles to the Engineers involved in a project for their scrutiny. Any amplifications, amendments, etc required by individual Engineers would then be incorporated in the Supplementary Preambles referred to in item 1.3

3.2 Roof Coverings

The roof coverings included in these Model Preambles are limited in their content and therefore any roofing material not included in these Preambles will need to have its full preamble included in the Supplementary Preambles

3.3 Structural Steelwork

The comments made under item 3.1 apply equally to Structural Steelwork

Note that the protective treatment of the structural steel covers only the treatment up to and including the primer (and patching after erection). The finishing coats of paint must be fully described and included either in the "Structural Steelwork" or in the "Paintwork" trade, as the practitioner wishes

MODEL PREAMBLES FOR TRADES

CONTENTS

REFERENCE	TRADE	PAGE
A	General	2
B	Alterations	3
C	Earthworks	4
D	Concrete, Formwork and Reinforcement	6
E	Precast Concrete	10
F	Masonry	11
G	Waterproofing	14
H	Roof Coverings etc	15
I	Carpentry and Joinery	17
J	Ceilings, Partitions and Access Flooring	20
K	Floor Coverings, Wall Linings, etc	22
L	Ironmongery	23
M	Structural Steelwork	24
N	Metalwork	25
O	Plastering	29
P	Tiling	31
Q	Plumbing and Drainage	32
R	Glazing	41
S	Paintwork	42
T	Paperhanging	44
U	External Works	45

A. GENERAL

A.1 APPLICATION OF CLAUSES

These Model Preambles for Trades, and any Supplementary Preambles, shall be read in conjunction with and shall form part of the descriptions of items in the bills of quantities

Where descriptions or Supplementary Preambles in the bills of quantities differ from these Model Preambles for Trades, the descriptions or Supplementary Preambles in the bills of quantities shall take precedence. Where supplementary preambles differ from descriptions in the bills of quantities, the descriptions in the bills of quantities shall take precedence

Except where otherwise stated, all preambles contained in any individual Trade Preamble shall apply equally to any work of a similar nature in all other trades

A.2 ABBREVIATIONS

The following abbreviations shall apply:

AASHTO	–	American Association of State Highway and Transportation Officials
AISI	–	American Institute of Steel Industries
BS	–	British Standard
CKS	–	Coordinating Specifications issued by the Central Coordinating Committee under the auspices of the South African Bureau of Standards
CSIR	–	Council for Scientific and Industrial Research
SANS	–	South African National Standards and the number following shall refer to the relevant specification or code of practice as the case may be

A.3 MATERIALS AND WORKMANSHIP

Materials and workmanship shall be the best of their respective kinds. Only new and undamaged materials shall be used in the Works. Materials to be permanently installed into the works shall not be used for any temporary purposes on site. Work shall be to the approval of the Principal Agent and shall be executed in accordance with the relevant manufacturer's written recommendations and instructions where applicable

A.4 PROPRIETARY PRODUCTS

For the purposes of submission of tenders, rates for items described in the bills of quantities by trade names, catalogue references, etc shall be for the particular type and manufacture specified

The approval of the Principal Agent shall be obtained prior to any substitution and where products or materials etc other than those specified are used, adjustments in the rates will be made if necessary

A.5 ASSEMBLING

Rates for manufactured items shall include assembling complete and handing over in proper working order

A.6 REFERENCES IN DESCRIPTIONS

Any references given in brackets at the end of certain descriptions shall refer to the relevant references on the drawings or schedules

A.7 WATER

Water shall be clean and free from injurious amounts of acids, alkalis, organic matter and other substances and shall be suitable for its intended use

A.8 APPLICATION OF THE NATIONAL BUILDING REGULATIONS

All work shall be executed in accordance with the requirements of SANS 10400

A.9 ACCURACY IN BUILDINGS

The dimensional and positional accuracy of the buildings and their component parts shall comply with Grade II requirements of SANS 10155 unless otherwise stated

A.10 REFERENCES TO OTHER DOCUMENTS

References in these "Model Preambles for Trades" to other documents, including SANS, CKS and BS, shall pertain to the latest edition thereof including all amendments thereto at the date for submission of the tender

B. ALTERATIONS

B.1 ALTERATIONS

In taking down and removing existing work the utmost care shall be observed to prevent any structural or other damage to remaining portions of the building. The Contractor shall ensure the stability of all structures during alteration work

Special care shall be exercised during the progress of the work to ensure that any electrical installations, water supply pipes, telephone and other services which may be encountered are not interfered with and notice shall be given to the Principal Agent if any disconnection or alterations become necessary

The Contractor shall take all precautions necessary to prevent any nuisance from dust whilst carrying out the work

B.2 MATERIALS FROM THE ALTERATIONS, CREDIT, ETC

Materials recovered from the alterations (except where described as to be re-used or to be handed over to the Employer) will become the property of the Contractor, who may allow credit in respect thereof where provided for in the bills of quantities. Such materials shall not be re-used in new work without written permission from the Principal Agent

Materials described as "removed" shall be removed from the site immediately.

Materials described as "handed over to the Employer" shall be carefully dismantled where necessary, neatly stored under cover on the site where directed and protected from damage, until required

Materials described as "set aside for re-use" shall be carefully dismantled where necessary, cleaned, neatly stored under cover and protected from damage until required for re-use. Any damage caused to such materials during removal, storage or refixing shall be made good at the Contractor's expense

B.3 DISPOSAL OF DEBRIS ETC

The Contractor shall be responsible for the removal from the site of all materials, debris and rubbish resulting from the alterations

B.4 MAKING GOOD DAMAGED WORK

The Contractor shall make good in all trades to existing work where damaged or disturbed through the alterations with all necessary new materials to match the existing

B.5 FORMING NEW OPENINGS OR ALTERING OPENINGS IN EXISTING WALLS

Where new openings are formed or openings altered in existing walls, the wall above the opening shall be broken out and a new brick, in situ concrete or prestressed concrete lintel inserted, complete with all necessary reinforcement, formwork, turning piece, etc, the jambs and portions of openings as described shall be built up with new brickwork or blockwork properly toothed and bonded to existing, cavities of hollow walls shall be closed where necessary and finishes shall be made good all round and into reveals

B.6 BUILDING UP OPENINGS

Where existing openings are given in number as built up, the existing surfaces all round shall be prepared as necessary, brickwork or blockwork properly toothed and bonded to existing, wedged up to underside of existing lintel and finishes shall be made good on both sides

C. EARTHWORKS

C.1 DEMOLITIONS

C.1.1 Nature and extent

Descriptions of demolitions give a rough guide only as to the scope of the work. Tenderers are therefore advised to visit the site before submitting a tender and to acquaint themselves with the nature and extent of the work to be done and the value of recoverable materials which are not to be re-used or handed over to the Employer. Unless otherwise stated, loose furniture, kitchen and other equipment, apparatus, machinery, etc shall remain the property of the Employer and the removal thereof does not fall within the scope of this Contract

The Contractor shall completely demolish the buildings etc in a careful, skilful, practical and safe manner down to 150mm below ground level

Demolitions shall include breaking up and removing:

all floors and surface beds;

all external screen walls, steps, ramps, aprons, surface water channels, rainwater sumps, gulleys, etc attached to the building to be demolished;

all services, manholes, etc in ground to a point not less than 1m beyond the perimeter of the building including plugging off ends of all remaining pipes, drains, etc, filling in holes where necessary and ramming and levelling to ground level

Where only a portion of a building is to be demolished, it shall be done without damage to the remaining portion of the building. Any such damage shall be made good by the Contractor at his own expense

C.1.2 Notices etc

The Contractor shall, before commencing work, obtain all necessary authorisation for carrying out the work, by whatever means including the use of pneumatic equipment or blasting, give all necessary notices and pay all charges and fees in connection therewith. He shall also comply with all regulations pertaining to rodent extermination and he shall obtain the requisite Rodent Extermination Clearance Certificate and pay all necessary fees. All receipts and certificates shall be left in the safekeeping of the Principal Agent. All the abovementioned charges and fees shall be paid by the Contractor and included in his prices

The Contractor shall give ample notice to the Principal Agent and Local Authorities regarding any disconnections necessary prior to the removal or interruption of electrical or telephone cables, water and sanitary services etc

C.1.3 Loss

After the handing over of the site to the Contractor, the full risk of any loss or damage to buildings to be demolished shall be the responsibility of the Contractor and he shall take such precautions as he deems necessary against such loss or damage

C.1.4 Materials from the demolitions, credit, etc

Materials recovered from the demolitions will become the property of the Contractor, who may allow credit in respect thereof where provided for in the bills of quantities. Such materials shall not be re-used in any new work without written permission from the Principal Agent

C.1.5 Disposal of debris etc

The Contractor shall be responsible for the removal from the site of all materials, rubble, debris and rubbish resulting from the demolitions

C.2 SOIL INSECTICIDES

The application of soil insecticides shall be carried out in accordance with "The application of soil insecticides for the protection of buildings" - SANS 10124

C.3 FILLING ETC

C.3.1 Filling generally

Filling over site shall be spread, levelled, watered and consolidated in layers not exceeding 300mm

Filling under floors and backfilling to excavations shall be suitable inert material, free from clay, vegetable matter, large stones, etc, having a maximum plasticity index of 10, spread, levelled and compacted to a density of at least 90% Mod. AASHTO

C.3.2 Hardcore

Hardcore shall be broken stone or other approved hard material graded from 25mm to 75mm with the finer material on top and shall be spread, levelled and consolidated

C.4 EXCAVATIONS

C.4.1 Classification of excavated material

"Hard rock" shall mean granite, quartzitic sandstone or other rock of similar hardness, the removal of which requires drilling, wedging and splitting or the use of explosives

"Soft rock" shall mean hard material the removal of which warrants the use of pneumatic tools and includes hard shale, ferricite, compact outcrop and material of similar hardness

"Earth" shall mean all ground other than that classified as "hard rock" or "soft rock" and shall include made-up ground and any loose stones or pieces of concrete not exceeding 0,03m³ in volume

D. CONCRETE, FORMWORK AND REINFORCEMENT

D.1 SPECIFICATION FOR CONCRETE WORK GENERALLY

All in situ concrete work (plain and reinforced) shall comply with SANS 1200G supplemented by the following Project Specification. Where SANS 1200G and the Project Specification are in conflict, the Project Specification shall take precedence

Wherever the term "Engineer" appears in SANS 1200G or in the following Project Specification this shall be deemed to mean the Principal Agent's representative responsible for this section of the Works

PROJECT SPECIFICATION

The following amplifications, additions and amendments to SANS 1200G shall constitute the Project Specification. Clause numbers refer to either the existing clauses in SANS 1200G or to new clauses, which are related to the existing clauses

1. SCOPE

This clause is amended to include:

- 1.1 This specification does not cover the methods by which the finished structure is to be measured for the purpose of payment and the "Standard System of Measuring Building Work" shall apply

2. INTERPRETATIONS

2.1 SUPPORTING SPECIFICATIONS

Clause 2.1(b) shall not apply

2.2 APPLICATION

This clause shall not apply

4. PLANT

4.5 FORMWORK

4.5.2 Finish

Unless otherwise stated the quality of all formwork shall be such that the finished surface of the concrete is "Rough" in terms of clause 5.2.1(a)

5. CONSTRUCTION

5.2 FORMWORK

5.2.1 Classification of Finishes

- (a) **Rough.** No treatment of the surface of the concrete will be required after the striking of the formwork. The finish of the concrete need not be more accurate than Degree of Accuracy III
- (b) **Smooth.** Imperfections such as small fins, bulges, irregularities, surface honeycombing and surface discolorations shall be made good and repaired by approved methods. The finish of the concrete shall be accurate to Degree of Accuracy II
- (c) **Special**
- (i) **Smooth and fair**

This class of finish requires the highest standard of concrete work, formwork, accuracy and technique

Concrete placed in any one structure to give this finish shall be made from cement and aggregates from the same source. The grading of the aggregate shall be kept constant

Formwork shall be metal, wrot timber or other approved material in new condition designed and constructed to suit the particular job in hand and with shutter bolts and joints between panels in a regular pattern approved by the Principal Agent. Joints between panels shall be watertight, but the use of sealing tape which will mark the concrete shall not be permitted

Designated joints shall be in the position and of the details shown upon the working drawings. Should the Contractor wish to incorporate further construction joints or amend the position of those shown to suit his own requirements or technique, this may be allowed provided that all design considerations are met, that the prior approval of the Engineer is obtained and that any extra costs are borne by the Contractor

In the case of horizontal construction joints, the top edge of the concrete on the smooth and fair finished side shall be struck true and level with a trowel

Special care shall be taken to ensure that forms are clean and free of all pieces of tying wire, nails and other debris at the time of concreting

The standard of finish shall be such that upon removal of the formwork, no further treatment, other than treatment of bolt holes if required, shall be found necessary to provide a straight, smooth and uniform finish of good quality and consistent colour and texture, free of all honeycombing etc. Any defect shall be made good by either removing and replacing the defective concrete or, in certain instances only, by patching

5.5 CONCRETE

5.5.1.6 Prescribed mix concrete

Where prescribed mix concrete is specified the proportions of constituents, the maximum size of coarse aggregate and the estimated minimum compressive strength shall be as specified in the following table:

Class of Concrete	Estimated minimum compressive strength in MPa at 28 days	Maximum nominal size of coarse aggregate in mm	Proportions of Constituents		
			Cement (Parts)	Fine aggregate (Parts)	Coarse aggregate (Parts)
A	7	37,5	1	4	8
B	15	19	1	3	5
C	20	19	1	2,5	3,5

Cement shall comply with SANS 50917-1 of strength 32,5N or higher

Should cement and aggregates be mixed by volume, the contents of a 50kg sack of cement shall be taken to be 0,033m³

Notwithstanding the requirements contained in SANS 1200G, the Principal Agent may permit certain items of non-structural concrete to be mixed by hand

If the concrete is mixed by hand, it shall first be mixed in a dry state on a clean non-absorbent surface until it is of uniform colour and consistency. Just enough water shall then be added to permit mixing and working, at which stage the concrete shall continue to be mixed until it is of uniform colour and consistency

5.5.1.7 Strength concrete

Where strength concrete is specified it shall be designated by its specified strength followed by the size of stone used in its manufacture, eg 30 MPa/19mm

The water/cement ratio shall be as Table 5 of clause 5.5.1.5 for moderate exposure conditions

5.5.1.8 "No-Fines" concrete

"No-fines" concrete shall consist of one part cement to eight parts aggregate graded from minimum 6mm to maximum 13mm size

The quantity of water used shall be just sufficient to form a smooth grout which shall completely coat every particle of aggregate and also to ensure that the grout is just wet enough to form a small fillet at each point of contact between the stones. "No-fines" concrete mixed with excessive water, which results in a thin grout, which drops off the aggregate, will be rejected

"No-fines" concrete shall be placed in its final position within 20 minutes of mixing and shall be placed in continuous horizontal layers. Concrete shall be spade worked sufficiently to ensure that it fills the forms but vibrating, tamping or ramming will not be permitted

5.5.3.2 Ready-mixed concrete

The use of ready-mixed concrete and the acceptability of test results from a central concrete production facility shall be subject to the written approval of the Engineer

6. TOLERANCES

Degree of Accuracy II shall apply for all work unless otherwise stated

7. TESTS

7.1 FACILITIES AND FREQUENCY OF SAMPLING

7.1.2 Frequency of sampling

7.1.2.5 The frequency of sampling shall be as directed by the Engineer, but not less than one set of cubes from every 50m³ cast

8. MEASUREMENT AND PAYMENT

This clause shall not apply

D.2 AGGREGATES OF LOW DENSITY

Aggregates of low density shall comply with SANS 794

D.3 HOLLOW BLOCKS, PREFABRICATED BLOCK BEAMS AND PLANKS, ETC

Blocks, block beams, planks, etc shall be fixed and supported in such a manner that no movement can take place before or during the casting of concrete. No broken components shall be used

D.4 SUPERVISION

A competent and experienced foreman shall superintend personally the whole of the concrete construction and pay special attention to:

- (a) The quality, testing and mixing of materials,
- (b) The placing and compaction of concrete,
- (c) The construction and removal of formwork and
- (d) The sizes and position of reinforcement

The Contractor shall obtain the permission of the Principal Agent before commencing concreting of foundations or reinforced structure

No inspection, approval, authorisation to proceed, comment or instructions following from such an inspection, or failure of the Principal Agent to comment on any particular aspect of the work, shall be deemed to relieve the Contractor in any way from his obligation to ensure through his own supervision that the work is constructed in every way in accordance with the Drawings, Specification and Conditions of Contract, nor relieve him from his obligations to make good any fault or defect, nor shall it be deemed that there is any obligation on the Principal Agent to inspect all or any part of the Works or that such inspection is necessarily complete in every respect

D.5 GENERAL

Concrete

Rates for concrete work shall include all "construction joints" other than "designated joints" as defined in SANS 1200G clause 2.4.3 which are measured separately, and for the design of strength concrete mixes and all testing of concrete and materials other than compressive strength testing of concrete samples taken from concrete being placed in the Works. The Contractor shall only be entitled to payment for those samples and compressive strength tests called for by the Engineer and which pass the test requirements

Surface beds cast in panels shall be cast in panels approximately 9m²

Formwork

Formwork to slabs and beams shall be cambered where required

Rates for formwork to soffits shall include propping not exceeding 3,5m high unless otherwise described.

Formwork to walls and columns is not exceeding 3,5m high above bearing level unless otherwise described

Reinforcement

Standard welded steel fabric reinforcement shall be as included in Table 1 of SANS 1024 and shall have 300mm wide laps.

The mass of binding wire is not included in the mass of the reinforcement and the cost thereof shall be included in the rates for the reinforcement

E. PRECAST CONCRETE

E.1 MATERIALS AND WORKMANSHIP

Materials and workmanship shall comply with the following standards:

Precast concrete paving slabs

SANS 541

Cement, water, aggregates and reinforcement shall be as described under D. CONCRETE, FORMWORK AND REINFORCEMENT

E.2 CONCRETE

Concrete shall be as described under D. CONCRETE, FORMWORK AND REINFORCEMENT and unless otherwise stated shall be prescribed mix concrete Class C but with coarse aggregate of an appropriate size

E.3 MOULDS

Before each casting, moulds shall be coated with a suitable release agent which will not in any way discolour the surface of the finished product or impair its strength. Where items are described as "finished smooth from the mould" or as "precast terrazzo", moulds shall be made to a high degree of accuracy and shall be such as to leave even and smooth surfaces

E.4 FINISHES TO BLOCKS

Where described as "precast terrazzo", such surfaces shall have a facing of terrazzo described under O. PLASTERING. The facing shall be poured into the moulds in a wet state (not dry pressed) and thoroughly worked up against finished faces to ensure that it finishes smooth from the mould

Projections shall be rubbed off and faces shall be of even colour and free from blemishes, cracks and other imperfections. Salient angles shall be arris rounded

E.5 CASTING ETC

Items shall be suitably cured, shall not be handled whilst still green and shall not be built in within 21 days of casting

E.6 REINFORCEMENT

Unspecified reinforcement required for manufacturing, handling and erection purposes and for reinforcing projecting and other unwieldy portions of blocks shall be provided by the Contractor at his discretion

E.7 BEDDING, JOINTING AND POINTING

Blocks shall be bedded and jointed solidly in Class I mortar as described under F. MASONRY and shall be pointed with slightly keyed joints

Blocks finished with "precast terrazzo" shall have joints raked out and pointed with slightly keyed joints in tinted waterproofed mortar composed of one part cement and three parts sand to match terrazzo facing

E.8 GENERAL

Precast concrete work shall include reinforcement required for manufacturing, handling and erection purposes, steel rod or wire hooks and/or mortices for lewis bolts required for handling and transporting, any necessary temporary propping and strutting and bedding, jointing and pointing

F. MASONRY

F.1 MATERIALS AND WORKMANSHIP

Materials and workmanship shall comply with the following standards:

Burnt clay masonry units	SANS 227
Limes for use in building	SANS 523 {Slaked (hydrated) limes}
Aggregates from natural sources – fine aggregates for plaster and mortar	SANS 1090
Concrete masonry units	SANS 1215
Prestressed concrete lintels	SANS 1504
Burnt clay paving units	SANS 1575
Metal ties for cavity walls	SANS 28
Common cement	SANS 50197-1 (Class 32,5N)
Masonry cement	SANS 50413-1 (Class 22,5X)
Concrete masonry construction	SANS 10145
The structural use of masonry	SANS 10164-1
Masonry walling	SANS 10249
Concrete floors	SANS 10109-1&2

F.2 SAND

Sand shall be washed where necessary and screened through a 2,4mm mesh sieve

F.3 BURNT CLAY BRICKS

Burnt clay bricks shall be of nominal size 222 x 106 x 73mm unless otherwise stated

Common bricks shall be General Purpose bricks

Extra hard burnt bricks shall be General Purpose (Special) bricks

Facing bricks shall exhibit a liability to efflorescence not in excess of "Slight" and water absorption when tested in conformity with the requirements of SANS 227 shall not exceed 14%

Particular care shall be taken to preserve arrisses and faces of facing and paving bricks during transit and handling

F.4 CONCRETE BRICKS

Concrete bricks shall have a nominal compressive strength of 8 MPa

F.5 QUARRY TILES ETC

Quarry, cement and similar tiles shall be of approved manufacture, even in shape and size, free from cracks, twists or blemishes and uniform in colour

F.6 WIRE TIES

Wire ties shall be of galvanized steel of the single wire type for solid walls and either the "Butterfly" or Modified PWD type for hollow walls. Ties shall be of sufficient length to allow not less than 75mm of each end to be built into brickwork or embedded in concrete

F.7 BRICKWORK REINFORCEMENT

Brickwork reinforcement shall be manufactured from hard drawn steel wire conforming to BS 785 and shall consist of two 2,8mm diameter main wires with 2,5mm diameter cross wires at 300mm centres welded at intersections

Brickwork reinforcement shall be lapped not less than 300mm at end joints and for a length equal to the width of the widest reinforcement at intersections

F.8 MORTAR

Mortar shall comply with the following table:

1	2	3	4
Mortar Class	Minimum compressive strength MPa	Cement:sand (common cement)	Cement:sand (masonry cement)
I	10	1:4 or 50kg to 130 litres	1:3 or 50kg to 100 litres
II	5	1:6 or 50kg to 200 litres	1:5 or 50kg to 170 litres
III	1,5	1:9 or 50kg to 300 litres	1:6 or 50kg to 200 litres

Mortar shall be Class II unless otherwise specified

Mortar plasticizers may only be used with the approval of the Principal Agent

The materials shall be mixed dry until of uniform colour, water added and the mixture turned over until the ingredients are thoroughly incorporated

Mortar shall be produced in such quantities as can be used before commencement of set and no mortar that has set shall be used

F.9 COMPO MORTAR

Compo mortar shall be Class III mortar in accordance with clause F.8 but with a lime content of 80 litres

The lime and sand shall be mixed dry until of uniform colour, water added and the mixture turned over until the ingredients are thoroughly incorporated. Immediately before use, the cement shall be mixed in and the requisite amount of water added. Compo mortar shall be produced in such quantities as can be used before commencement of set and no compo mortar that has set shall be used

F.10 BRICKWORK

Wherever practicable, brickwork shall be built in stretcher bond. Unless legitimately required to form bond, no false headers shall be used. English bond shall only be used where specifically so indicated or where stretcher bond is not practicable

Brickwork, unless otherwise described, shall be built in Class II mortar

Bricks shall be laid on a solid bed of mortar and all joints shall be grouted up solid

The brickwork shall be carried up in a uniform manner, no part being raised more than 1,2m above adjoining work

Where necessary, bricks shall be wetted before being laid and the course of bricks last laid shall be well wetted before laying a fresh course upon it

Walls in thicknesses of more than one skin shall have at least five wire ties per square metre. Linings to concrete, unless otherwise specified, shall be tied to the concrete with at least five wire ties per square metre

Hollow walls, unless otherwise specified, shall be built of two half brick skins with cavity between, tied together with at least five wire ties per square metre. The cavities shall be kept free of all rubbish, mortar droppings and projecting mortar. Mortar joints to brickwork shall be not less than 8mm or more than 12mm thick

F.11 BLOCKWORK

Unless otherwise described, all blockwork shall be built in stretcher bond. Whole blocks shall be used except where bats or closers are required to form bond. Blockwork, unless otherwise described, shall be built in Class II mortar

Solid blocks shall be laid on a solid bed of mortar and all joints shall be grouted up solid

Hollow blocks shall be laid in shell bedding, ie only the inner and outer shells of the blocks shall be covered with mortar. Vertical joints shall be similarly formed

The blockwork shall be carried up in a uniform manner, no part being raised more than 1,2m above adjoining work

Clay blocks shall be wetted before being laid and the course of blocks last laid shall be well wetted before laying a fresh course upon it

F.12 CENTRES AND TURNING PIECES

Centres and turning pieces to soffits of arches and lintels shall be left in position for not less than 14 days

F.13 FACE BRICKWORK

Face brickwork shall be built in stretcher bond, unless otherwise specified, to a true and fair face. Perpendics shall be vertically aligned

Facing bricks shall be mixed to ensure that the proper blending of bricks within the colour range of each facing brick being used is obtained

F.14 PAVINGS, SILLS, COPINGS, ETC

Clay bricks and tiles shall be wetted before fixing and shall be solidly bedded and jointed in Class I mortar and pointed with slightly keyed joints

G. WATERPROOFING

G.1 MATERIALS AND WORKMANSHIP

Materials and workmanship shall comply with the following standards:

Bituminous damp-proof courses	SANS 248 (Type FV)
Polyolefin film for damp- and waterproofing in buildings (walls, sills, etc)	SANS 952 (Type B)
Polyolefin film for damp- and waterproofing in buildings (floors and basements)	SANS 952 (Type C)
Mastic asphalt for roofing	SANS 297
Mastic asphalt for damp-proof courses and tanking	SANS 298
Bituminous roofing felt	SANS 92 (Type 60)
Polyolefin film for damp- and waterproofing in buildings (flat roofs)	SANS 952 (Type A)
Chloroprene rubber sheet (for waterproofing)	SANS 580
Sealing compounds for the building industry, two-component, polysulphide base	SANS 110 (Type 2 - Gun Grade)
Sealing compounds for the building and construction industry, two- component, polyurethane base	SANS 1077
The waterproofing of buildings (including damp-proofing and vapour barrier installation)	SANS 10021

G.2 WATERPROOFING TO ROOFS, BASEMENTS, ETC

Waterproofing to roofs, basements, etc shall be carried out by workmen who are experienced in this type of work

G.3 DAMP-PROOF COURSE TO WALLS

All joints in damp-proof course to walls shall be lapped a minimum of 150mm except at junctions and corners where the lap shall equal the full thickness of the wall

H. ROOF COVERINGS ETC

H.1 MATERIALS AND WORKMANSHIP

Materials and workmanship shall comply with the following standards:

Concrete roofing tiles	SANS 542
Clay roofing tiles	SANS 632
Sawn softwood timber battens	SANS 1783-4
Fibre-cement sheets (flat and profiled)	SANS 685
Aluminium alloy corrugated and troughed sheets	SANS 903
Continuous hot-dip zinc-coated carbon steel sheet of commercial, lock-forming and drawing qualities	SANS 3575
Continuous hot-dip zinc-coated carbon steel sheet of structural quality	SANS 4998
Polyolefin film for damp- and waterproofing in buildings	SANS 952
Metal roofing tiles	SANS 1022
Glass-reinforced polyester (GRP) laminated sheets (profiled or flat)	SANS 1150
Fasteners for roof and wall coverings in the form of sheeting	SANS 1273
Materials for thermal insulation of buildings	SANS 1381-1&4
Expanded polystyrene thermal insulation boards	SANS 1508
Fixing of concrete interlocking roofing tiles	SANS 10062
Roof and side cladding	SANS 10237
Sheet zinc	BS 849
Sheet lead	BS 1178
Sheet aluminium	BS 1470
Sheet copper	BS 2870

H.2 GALVANIZED STEEL PROFILED SHEETS ETC

Galvanized steel profiled sheets, ridge and hip coverings, etc shall be coated with a minimum of 275 g zinc per m² and shall be free of white rust

H.3 GALVANIZED SHEET IRON

Galvanized sheet iron shall be rolled steel sheet coated on both sides with a minimum of 275 g of zinc per m² and shall be free from white rust

H.4 NAILING AND SCREWING

Where nailing and screwing is required:

- galvanized iron nails and screws shall be used for galvanized sheet iron and sheet zinc
- copper or copper alloy nails and screws for sheet copper and sheet lead
- aluminium alloy or stainless steel nails and screws for sheet aluminium

H.5 LAPS

Sheet metal flashings shall have minimum 100mm laps and linings to valleys, secret gutters, etc minimum 225mm laps

H.6 GENERAL

Rates for profiled sheet roofing and rolled edges, ridge and hip coverings, flashing pieces, etc of metal, fibre-cement, plastic, etc shall include fixing accessories

I. CARPENTRY AND JOINERY

I.1 MATERIALS AND WORKMANSHIP

Materials and workmanship shall comply with the following standards:

Sawn softwood timber : General requirements	SANS 1783-1
Sawn softwood timber : Stress-graded structural timber and timber for frame wall construction	SANS 1783-2
Sawn softwood timber : Brandering and battens	SANS 1783-4
Softwood flooring boards	SANS 629
Hardwood furniture timber	SANS 1099
Hardwood block and strip flooring	SANS 281
Wooden ceiling and panelling boards	SANS 1039
Laminated timber (glulam)	SANS 1460
Gypsum plasterboard	SANS 266
Fibreboard products	SANS 540
Wood-wool panels (cement bonded)	SANS 637
Fibre-cement sheets (flat and profiled)	SANS 685
Fibre-cement boards	SANS 803
Plywood and composite board	SANS 929
Wooden ceiling and panelling boards	SANS 1039
Particle boards	SANS 50312-1to7
Decorative laminates	SANS 4586
Wooden doors	SANS 545
Fire doors	SANS 1253
Materials for thermal insulation of buildings	SANS 1381-1,2,4&6
Expanded polystyrene thermal insulation boards	SANS 1508
Mild steel nails	SANS 820
Metal screws for wood	SANS 1171
Wood-preserving creosote	SANS 539

Softwood shall bear the relevant SABS mark and shall be ordered in the sizes in which it will be used as no scantlings of marked timber will be allowed. Should SABS marked timber be unavailable, the Principal Agent's prior permission shall be obtained before using unmarked timber

I.2 HARDWOODS

All hardwoods shall be specially selected, well seasoned, free from sapwood and well kiln dried. Meranti shall be Red or Medium Brown Meranti, even in grain and colour, selected from "Standard and Better" quality from Malaysia

I.3 INFECTION AND PRE-TREATMENT OF TIMBER

All timber used on the site, whether for permanent or temporary work, shall be free of borer or other beetle and termite infection. If the work under this contract falls within an area designated under Government Notice R2577 of 197812-29, permanent softwood fixed in the building shall be treated against borer etc in accordance with Government Notice R451 of 1969-03-28 using Class B or C preservative

When treated timbers are cut, the cut surfaces shall be effectively brushed with at least two coats of preservative solution

I.4 CONSTRUCTION IN GENERAL

Where applicable, construction methods shall comply with SANS 10082. Wood and laminate flooring shall be installed in accordance with SANS 10043. Roof trusses shall be manufactured, erected and braced in accordance with SANS 10243

I.5 STRUCTURAL TIMBER

Timbers generally shall be in single lengths and jointing of timbers will only be permitted when the required length is unobtainable. Only the absolute minimum of joints to obtain a particular length will be permitted and such joints are to be evenly spaced along the length of the timber

Finger-jointing of structural timber will be permitted, in which case it shall be manufactured in accordance with SANS 10096

I.6 PLATE NAILED TIMBER ROOF TRUSSES

Plate nailed timber roof trusses shall be of approved design and manufacture and constructed with softwood structural timber by a truss Fabricator holding a current Certificate of Competence awarded by the Institute of Timber Construction

Each roof truss shall have all its members accurately cut and closely butted together and rigidly fixed by CSIR approved patented galvanized metal spiked connectors, precision pressed on both sides of each intersection by an approved method, all in accordance with the manufacturer's instructions

The design, manufacture and transportation of the roof trusses, bracing, etc shall be under the control of a registered Structural Engineer in accordance with SANS 1900, SANS 10160 and SANS 10163, who shall, after erection, provide a certificate confirming that the design, manufacture, transportation, erection and bracing has been carried out in accordance with this specification

The design shall include for all live loads, wind loads and for dead loads imposed by roof covering, purlins, ceilings, etc

Fully detailed shop drawings of all trusses etc, indicating sizes, bracing, loading, etc, shall be submitted to the Principal Agent for approval prior to fabrication

Unless specific erection instructions are given, erection shall be carried out in accordance with the procedures and recommendations of the manual "The Erection and Bracing of Timber Roof Trusses" published by the Institute for Timber Construction and the Council for Scientific and Industrial Research or as detailed by the designer

Roof trusses and bracing shall include design and preparation of shop drawings

I.7 TONGUED AND GROOVED BOARDING

Tongued and grooved boards for floors, panelling, etc shall be in long varying lengths with joints tightly cramped up and secret nailed. Flooring boarding shall be flush jointed with staggered heading joints and machine sanded after fixing

I.8 JOINERY

Skirtings, cornices, rails, etc shall be in single lengths wherever practicable and shall have splayed heading joints where necessary. Skirtings shall be trenched at back

All horns of door frames shall be checked and splayed back where frames are fixed projecting or flush with surface and built in

Heads of screws in exposed faces of hardwood joinery shall be sunk and match pelleted

Joinery shall have arris rounded angles and shall be blocked and planted on

I.9 VENEERS

All face veneers shall be of kiln dried timber, free from knots, cracks, patchwork, sapwood and other defects, selected and glued, dried and machine-sanded to a smooth finish. All veneers shall be applied under hydraulic pressure

I.10 DOORS

Flush doors shall have solid timber edge strips with concealed edges. Where doors are to be finished with a transparent finish, the veneer and the edge strips shall be timber of the same species and as far as possible of matching colour. Unless otherwise described all flush doors shall be of interior quality, but where exterior quality doors are specified the glue used shall be of the WBP type

Framed and ledged batten doors described as filled in with V-jointed boarding shall be filled in flush on one side with tongued and grooved vertical boarding, V-jointed on one or both sides and of the thickness stated. The boarding shall be in narrow widths, closely cramped up, rebated or tongued on outer edges and housed to grooves in stiles and rails and twice countersunk brass screwed at each intersection with ledges and braces and the inner edges of the abutting stiles and rails shall be chamfered to form a V-joint at junction with the board

Unless otherwise described double doors shall have rebated meeting stiles

I.11 FIXING

All nails and screws shall be of the size, length and type appropriate to their respective uses. All screws for hardwood joinery work shall be brass

Items described as "plugged" shall be screwed to fibre, plastic or metal plugs at not exceeding 600mm centres. Where items are described as "bolted", the bolts have been given separately

I.12 ADHESIVES

Adhesives shall comply with BS 1204 and 4071 where applicable. Adhesives used in the manufacture of external joinery exposed to excessive moisture (eg kitchen and laboratory worktops) shall be of the WBP type

J. CEILINGS, PARTITIONS AND ACCESS FLOORING

J.1 MATERIALS AND WORKMANSHIP

Materials and workmanship shall comply with the following standards:

Gypsum plasterboard	SANS 266
Fibreboard products	SANS 540
Gypsum cove cornice	SANS 622
Wood-wool panels (cement-bonded)	SANS 637
Sawn softwood timber : Brandering and battens	SANS 1783-4
Sawn softwood timber : Timber for frame wall Construction	SANS 1783-2
Fibre-cement boards	SANS 803
Plywood and composite board	SANS 929
Wooden ceiling and panelling boards	SANS 1039
Materials for thermal insulation of buildings	SANS 1381-1&4
Expanded polystyrene thermal insulation boards	SANS 1508
Raised access flooring	SANS 1549

J.2 TONGUED AND GROOVED BOARDING

Tongued and grooved boarding for ceilings shall be in long varying lengths, V-jointed one side and with joints tightly cramped up and secret nailed

J.3 CEILINGS ETC

J.3.1 Brandering

Brandering for ceilings and eaves soffit coverings shall be symmetrically arranged with necessary smaller panels. Main branders shall be at right angles to roof timbers, with cross branders cut in between and branders shall be fixed with galvanized wire nails driven in on skew alternately in opposite directions

J.3.2 Ceiling boards

Ceiling boards shall be in long lengths symmetrically arranged with necessary smaller panels, closely butted and secured at 150mm centres to brandering with galvanized or cadmium-plated clout-headed nails

J.4 GYPSUM SKIM PLASTER

Gypsum skim plaster shall be pure gypsum plaster finished with a steel trowel

J.5 EXPOSED TEE-SYSTEM SUSPENDED CEILINGS

The ceiling panels shall be as described in the items and the panels shall be stiffened at back as recommended by the manufacturer to prevent bowing or sagging

The exposed surfaces of all ceiling panels and supporting members shall be uniform in colour and free from surface blemishes

The suspension grid system shall be an approved patent suspension system comprising 38mm galvanized steel main and cross tee bearers spaced in both directions at centres to suit sizes of ceiling panels used, with the cross bearers fitted between and notched to form flush fit with main bearers. The exposed flange of the tees shall be 25mm wide, covered with a rolled aluminium cap painted a low sheen satin white. Cornices etc shall be as described in the items and shall be finished to match the exposed tees

The main tee bearers shall have holes for cross tees at 300mm centres and holes for hangers at 50mm centres. In addition, main and cross tee bearers shall be holed as necessary for and provided with timber wedges or steel clips where recommended by the manufacturer to prevent ceiling panels from lifting

The web of the exposed cross tee bearers shall extend to form a positive interlock with the main tee bearers and the lower flange shall be cut back to provide a joint free appearance

All hangers shall be galvanized and shall be at centres to meet the requirements of the specification with one end fixed to the suspension grid main bearers and the other end fitted with suitable galvanized fixing cleat securely fixed to the structure. Fixing points shall be agreed to by the Principal Agent before any power shot fixings are made. Hangers shall not be suspended from air-conditioning ducts. Where recommended by the manufacturer, hangers shall be of the rigid type

Component parts and fixings shall be non-corrosive and able to withstand atmospheric pollution. Surfaces of aluminium which are in contact with other materials when fixed, particularly metals, shall be suitably insulated to prevent electrolytic corrosion

Ceilings shall comprise hangers, suspension grid system and ceiling panels, shall be constructed in a manner suitable for carrying air-conditioning diffusers and light fittings in the positions required, shall be set out to layouts approved by the Principal Agent and shall have the standard suspension systems modified as necessary to work around any pipes or light fittings

J.6 FLUSH PLASTERED SUSPENDED CEILINGS

Gypsum plasterboard panels of the specified thickness generally in 1200mm widths and in long lengths shall be fixed grey side down with self-tapping screws to the suspension system with the joints between boards loosely butt jointed and covered with 50mm wide strips of self-adhesive fibre tape

The plasterboard panels shall be finished with gypsum skim plaster trowelled to a smooth polished surface to the thickness etc recommended by the manufacturer

The suspension system shall be an approved patent concealed suspension system consisting of galvanized mild steel bearers suspended on approved non-rusting metal hangers spaced generally at 1200mm centres or to suit layout of air-conditioning ducts and other services etc above ceiling with one end bolted to the bearer and the other end fitted with a galvanized fixing cleat securely fixed to the structure as required

Fixing points shall be agreed to by the Principal Agent before any power shot fixings are made. Hangers shall not be suspended from air-conditioning ducting

Ceilings shall comprise hangers, suspension system, ceiling panels and plaster finish, shall be constructed in a manner suitable for carrying air-conditioning diffusers and light fittings in the positions required, shall be set out to layouts approved by the Principal Agent and shall have the standard suspension system modified as necessary to work around any pipes or light fittings

K. FLOOR COVERINGS, WALL LININGS, ETC

K.1 MATERIALS AND WORKMANSHIP

Materials and workmanship shall comply with the following standards:

Semi-flexible vinyl floor tiles	SANS 581
Resin modified vinyl floor tiles	SANS 586
Flexible vinyl flooring	SANS 786
Hardwood block and strip flooring	SANS 281
Wood mosaic flooring	SANS 978
Textile floor coverings (pile construction)	SANS 1375
Textile floor coverings (needle-punched construction)	SANS 141
Carpet underlays	SANS 1419
The installation of wood and laminate flooring	SANS 10043
The installation of resilient thermoplastic and similar flexible floor covering materials	SANS 10070
The installation of textile floor coverings	SANS 10186
Sheet linoleum (calendered types), cork, carpet and linoleum tiles	BS 810
Solid rubber flooring	BS 1711
Felt backed linoleum	BS 1863

K.2 LAYING OF MATERIAL

Floor tiles shall be laid with continuous joints in both directions

Patterned floor coverings shall be matched at joints

K.3 GENERAL

Floor coverings, wall linings, skirtings, nosings, etc shall include all preparatory work to screeded or plastered surfaces etc, priming coats and adhesives

Floor coverings and wall linings shall be dressed around and into corners. Wood block and wood mosaic flooring shall be sanded with a sanding machine and sealed with a coat of approved penetrating sealer

Plastic handrails shall have welded and polished butt joints

L. IRONMONGERY

L.1 MATERIALS AND WORKMANSHIP

Materials and workmanship shall comply with the following standards:

Locks, latches and associated furniture for doors. (Domestic type)	SANS 4
Kitchen cupboards: Built-in and free-standing	SANS 1385
Single action closers	SANS 1510
Padlocks	SANS 1533
Fasteners	SANS 1700
Chalk writing boards for schools	CKS 36

L.2 KEYS

Locks shall have the minimum possible number of interchangeable keys. Cylinder locks and locks described as "en suite" shall be clearly marked with consecutive numbers and each key shall be punched with the corresponding number of the relative lock

L.3 FIXING

Unless otherwise described, ironmongery is to be fixed to wood

Items described as "plugged" shall be screwed to fibre, plastic or metal plugs

Screws, bolts, etc for fixing of ironmongery shall be of matching metal and finish, except for aluminium ironmongery or ironmongery fixed to aluminium in which cases stainless steel screws may be used

All necessary preparation of pressed steel door frames for the fixing of ironmongery to the frames has been included with the pressed steel door frames

L.4 KITCHEN CUPBOARDS

Steel cupboards shall be finished with baked enamel. Tops of floor cupboards shall have laminated plastic covering

Cupboards shall be fitted with all necessary hinges, handles, catches, etc. Cupboards shall be securely fixed with all necessary screws and fibre, plastic or metal plugs

Where cupboards are described as a "series", tops shall be continuous and cupboards shall be bolted or screwed together, including bolts, screws, holes, etc

M. STRUCTURAL STEELWORK

M.1 SPECIFICATION

All structural steelwork shall comply with SANS 1200H or 1200HA as applicable. Structural fasteners shall comply with SANS 1700

Whenever the term "Engineer" appears in SANS 1200H or 1200HA or in the following Project Specification this shall be deemed to mean the Principal Agent's representative responsible for this section of the Works

M.2 PROJECT SPECIFICATION INCORPORATING AMPLIFICATIONS, ADDITIONS AND AMENDMENTS TO SANS 1200H AND 1200HA

The following amplifications, additions and amendments to SANS 1200H and SANS 1200HA shall apply and clause numbers refer to either the existing clauses in the relevant SANS or to new clauses which are related to the clauses therein

SANS 1200H

3.1.1 Weldable structural steel

Weldable structural steel shall comply with SANS 1431

5.1.2 Contractor provides shop details

The Contractor shall be responsible for the preparation of all shop detail drawings

5.1.3 Engineer provides shop details

This clause shall not apply

5.3.9 Protective treatment

Structural steelwork shall be cleaned and prepared by wire brushing in accordance with SANS 10064 and all surfaces shall be primed as specified to a minimum dry film thickness of 30 micrometres before leaving the workshop. Upon delivery to the site and again after erection all bared surfaces shall be made good with similar primer

8. Measurement and payment

This clause shall not apply

SANS 1200HA

5.2.10 Protective treatment

Structural steelwork shall be cleaned and prepared by wire brushing in accordance with SANS 10064 and all surfaces shall be primed as specified to a minimum dry film thickness of 30 micrometres before leaving the workshop. Upon delivery to the site and again after erection all bared surfaces shall be made good with similar primer

5.3.7 Repairs to paint and site painting

This clause shall not apply

8. Measurement and payment

This clause shall not apply

N. METALWORK

N.1 MATERIALS AND WORKMANSHIP

Materials and workmanship shall comply with the following standards:

Fasteners	SANS 1700
Expanded metal	SANS 190-1&2
Windows and doors made of rolled mild steel sections	SANS 727
Hot-dip galvanized zinc coatings on fabricated iron and steel articles	SANS 121
Strongroom and vault doors	SANS 949
Anodized coatings on aluminium (for architectural applications)	SANS 999
Steel door frames	SANS 1129
Mushroom- and countersunk-head bolts and nuts	SANS 1143
Welding of metalwork	SANS 1044
Adjustable glass-louvred windows	CKS 413
Aluminium sheet and strips	BS 1470
Aluminium extruded tube and hollow sections	BS 1474
Aluminium bars and sections	BS 1476

N.2 STEEL

Steel shall be mild steel of approved commercial quality. Steelwork shall be cleaned and prepared by wire brushing in accordance with SANS 10064 and given one coat of primer as specified before leaving the workshop

N.2.1 Galvanizing of steel

Steelwork described as "galvanized" shall be galvanized by means of the hot-dip process after fabrication. Where welding on site is unavoidable, such welded joints shall be cleaned down and cold galvanized to approval

N.3 STAINLESS STEEL

Stainless steel shall be AISI Type 304 stainless steel and shall be buffed to an even satin finish. Stainless steel screws shall be used for fixing stainless steel

N.4 ALUMINIUM

Aluminium extrusions shall be of 6063-T6 alloy and temper. Aluminium sheet and strips shall be of 1200-H4 alloy and temper.

Joints in all aluminium members shall be formed in an approved manner so that the joints are practically invisible. Screw heads, pins, rivets, etc shall be concealed as far as possible. 300 Series stainless steel screws and bolts shall be used for jointing and fixing aluminium work

The surfaces of all aluminium which are in contact with other materials when fixed shall be suitably insulated with a non-absorbent insulating material to prevent corrosion. All aluminium work shall be suitably protected against damage, deterioration or discolouration caused by mortar droppings, paint, etc by taping with removable tape, covering with temporary casings or by covering with motor oil

N.4.1 Anodizing of aluminium

Aluminium described as "anodized" shall be treated with Grade 25 coating thickness for exterior use or Grade 15 for interior use as specified, to the required finish. All alloys to be anodized shall be suited to anodizing

N.5 BOLTS AND NUTS

Nuts shall be of at least the strength grade appropriate to the grade of bolt or other threaded element with which they are used

N.6 SCREWING OF METALWORK TO STEEL, WOOD, CONCRETE, ETC

Metalwork described as "screwed" to steel, wood, etc or "plugged" to brickwork, concrete, etc shall be fixed at not exceeding 500mm centres, with necessary holes, countersinking, threading, screws, set screws, self-tapping screws and fibre, plastic or metal plugs

N.7 BOLTING OF METALWORK

Where metalwork is described as "bolted" to steel, wood, brickwork, concrete, etc the bolts are measured elsewhere

N.8 WELDING OF METALWORK

All welds shall be cleaned and filed or ground off smooth to approval. All welded joints shall be continuous

N.9 METALWORK GENERALLY

Metalwork shall have all sharp edges ground smooth. Tubular and pipe work shall include running joints. Rails etc described as "continuous" shall be in long lengths with welded joints

N.10 PRESSED STEEL DOORS, FRAMES, ETC

N.10.1 Door frames

Frames shall project not less than 20mm into floor finish. Except where described as galvanized, frames shall be primed as specified before leaving the factory. Frames are to jambs and heads of openings. Frames for single doors shall be provided with two 100mm steel butt hinges and an adjustable striking plate for a mortice lock and frames for double doors shall be provided with four 100mm steel butt hinges. Butt hinges shall be steel butts with loose pins, welded to frames. Where necessary mortar caps shall be welded to frames and back plates shall be welded on behindappings for screws

N.10.2 Cupboard door frames

Cupboard door frames shall be as described in N.10.1, but with thresholds of unequal channel section, two 100mm steel butt hinges to hanging stiles, two 75mm steel butt hinges to hanging stiles above transoms, necessary striking plates for mortice locks and keeps for barrel bolts

N.10.3 Combination doors and frames

Combination doors and frames shall be manufactured of 1,6mm thick steel plate. Frames shall be as described in N.10.1. Doors shall be standard design and required profile, with a 44mm wide edge all round, vertical reinforcing ribs pressed in and with two reinforcing rails welded on. The door shall be provided with two lever mortice lock with lock box welded to inside. Doors shall be welded to steel butts

N.10.4 Transformer room doors and frames

Transformer room doors and frames shall be manufactured of 1,6mm thick steel plate. Frames shall be as described in N.10.1. Doors shall be of standard design with a 44mm wide edge all round, vertical reinforcing ribs pressed in and with three reinforcing rails welded on. Single doors shall be fitted with a padlock cleat and two 100mm brass pintle hinges and double doors shall be fitted with a padlock cleat, two 150mm bolts and four 100mm brass pintle hinges. Each leaf shall be fitted with a louvered ventilation panel of standard design backed with 6mm mesh galvanized wire vermin proof screen

N.10.5 Sizes

The frame widths given refer to unfinished wall thicknesses

N.10.6 Glazing beads

Where specified, glazing beads shall be 12 x 12mm standard metal glazing beads mitred at angles and countersunk screwed on at not exceeding 300mm centres with self-tapping screws

N.11 STEEL WINDOWS, DOORS, ETC

N.11.1 Windows, doors, etc

All fittings to windows, doors, etc shall be chromium plated. Fixed lights and opening sashes shall be in single squares. Windows etc of single unit construction shall have weather bars at transoms above opening sashes

Composite windows not of single piece construction shall be coupled with standard coupling mullions and transoms that correspond with the window section used

Kicking plates and panels shall be 1,6mm metal plate fixed with standard metal glazing beads mitred at angles and countersunk screwed on at not exceeding 300mm centres with self-tapping screws

Except where described as galvanized, windows, doors, burglar bars, etc shall be primed as specified before leaving the factory

N.11.2 Burglar bars and flyscreens

Where windows are described as fitted with burglar bars or flyscreens, these shall be standard type fitted over opening sashes

N.12 ADJUSTABLE LOUVRE UNITS

Adjustable louvre units shall be suitable for hand or longarm operation

Louvre units shall include glass louvres with polished edges and installation, including holes, screws, rivets, preparation of openings, etc

N.13 ALUMINIUM WINDOWS AND DOORS

The foregoing preambles "N.4 – ALUMINIUM" shall apply to aluminium windows, doors, etc in all respects in so far as they are applicable. Aluminium windows and doors shall be manufactured from extruded aluminium members of 6063T6, 6261-T6 or 6082-T6 alloy and temper

Ancillary members such as sills, flashings, infill panels and the like formed from flat sheet material shall be of an appropriate alloy selected from 1200, 3004 or 5251 complying with BS 1470 of a temper suitable for the method of forming and a composition suitable for anodizing or painting as required

Windows, doors, etc shall be of an approved standard system, manufactured by an approved firm experienced in this type of work, and shall meet with the minimum recommended performance requirements as set out by the Association of Architectural Aluminium Manufacturers of South Africa (AAAMSA) in the latest edition of the Selection Guide

The fittings for all opening sashes shall be substantial and, unless otherwise described, shall be of high quality aluminium alloy finished to match the windows, doors, etc on which they occur. Samples of all fittings shall be supplied to the Principal Agent for approval

Top, side and bottom hung opening sashes shall be hung on two aluminium hinges with 300 Series stainless steel pins, nylon bushes and stainless steel washers. Side hung sashes shall have fasteners and sliding stays, top hung sashes shall have peg stays and bottom hung sashes shall have spring catches and concealed arms

Projected out sashes shall have aluminium fasteners and concealed arms of a non-corrosive material compatible with aluminium

The frames which are to be built into openings in brickwork shall be fitted with the manufacturer's standard type fixing lugs, not less than 20 x 3 x 150mm long, screwed to frame and placed one near each corner and intermediately not more than 450mm apart to sides, top and bottom and where fixed to concrete reveals, wood sub-frames or to preformed openings in brickwork shall have countersunk holes for screws, one near each corner and intermediately not more than 450mm apart to sides, top and bottom

N.13.1 Glazing beads

Where so described, openings and sashes of windows and doors shall be fitted with approved channel section aluminium glazing beads sufficient in size and profile to suit the method of glazing employed, finished to match the windows, doors, etc and neatly mitred. Screws where necessary shall be of aluminium or 300 Series stainless steel and have pan or raised heads finished to match the beads

N.13.2 Finishes

Windows, doors, etc described as "anodized" shall be treated with Grade 25 coating thickness. Windows, doors, etc described as "factory painted" shall have an electrostatically applied oven baked polyester paint coating not less than 25 micrometres thick

N.13.3 General

Aluminium windows, doors, etc shall include glass as described, fixing in position, sealing and protection against damage, deterioration or discolouration by taping with removable tape or covering with temporary casings or motor oil and removing same on completion

N.14 STRONGROOM AND RECORD ROOM DOORS

Strongroom and record room doors shall not be built in as the work proceeds, but shall be fixed later in the openings provided. The Contractor shall ensure that the lock or other important parts of the door are not tampered with. Should any such tampering occur, the Contractor will be held responsible and at the Principal Agent's discretion shall provide a new door or lock and keys at his own expense. The keys shall not be delivered together with the doors to the building site. The Contractor shall arrange for the manufacturer to send the keys direct to the Principal Agent per registered post. If these instructions are not complied with, a new lock and keys shall be provided by the Contractor at his own expense

N.15 STEEL ROLLER SHUTTERS

Roller shutters shall be of approved manufacture comprising curtain, vertical channel guides and top mechanism. The curtain shall be constructed of 1mm thick machine-rolled galvanized interlocking slats with mild steel end locks spot welded to alternate strips. The bottom shall be provided with a galvanized rail riveted on and vertical edges shall slide in galvanized channel guides formed of steel not less than 2,5mm thick bolted to sides of openings

The mechanism shall be covered in a galvanized sheet iron box. The ungalvanized sections shall be primed as specified before leaving the factory

O. PLASTERING

O.1 MATERIALS AND WORKMANSHIP

Materials and workmanship shall comply with the following standards:

Common cement	SANS 50197-1(Class 32,5N)
Masonry cement	SANS 50413-1(Class 225X)
Limes for use in building	SANS 523 {Slaked (hydrated) limes}
Aggregates from natural sources – Fine aggregates for plaster and mortar	SANS 1090

O.2 PREPARATORY WORK

Surfaces shall be clean and free of oil and thoroughly wetted directly before any plastering or other in situ finishes are commenced. Concrete surfaces shall be slushed with a mixture of one part cement and one part coarse sand or otherwise treated to form a proper key. Preparatory coats shall be thoroughly scored and roughened to form a proper key

O.3 FINISH

All coats of paving and plastering shall be executed in one operation without any blemishes

O.4 SCREEDS

Screeds shall be composed of one part cement and four parts sand

O.5 CEMENT RENDER

Cement render shall be composed of one part cement and three parts sand finished with a steel trowel to a smooth polished surface and cured for at least seven days after laying

Cement render finish shall be divided into panels not exceeding 6m² with V-joints and deep trowel cuts

O.6 GRANOLITHIC

Granolithic shall be composed of one part cement, one part fine sand, two parts coarse sand and one part granite or other approved stone aggregate that will pass through a 5mm sieve, finished with a steel trowel to a smooth polished surface and cured for at least seven days after laying

Coloured granolithic shall be carried out in two coats in one operation and shall be tinted to the required colour with approved colouring pigment mixed into the finishing coat. Under no circumstances is the pigment to be sprinkled on and trowelled in after the granolithic is laid

Granolithic shall be divided into panels not exceeding 6m² with V-joints and deep trowel cuts

O.7 TERRAZZO

Terrazzo shall be applied in two coats. The undercoat shall be composed of one part cement and three parts sand and shall be finished with a wooden float. The finishing coat shall be composed of one part cement and two parts marble or stone aggregate of a colour and size to obtain the required colour and texture and shall be at least 12mm thick, and applied before the undercoat has dried out. The finishing coat shall be compacted by tamping or rolling until superfluous water has been expelled, finished with a steel trowel and cured for at least seven days after laying. The finished surface shall show at least 80% of the aggregate

Surfaces described as "polished" shall be polished by machine using various grades of abrasive and grouting with tinted cement as necessary between polishings

Surfaces described as "polished" shall be polished by machine using various grades of abrasive and grouting with tinted cement as necessary between polishings

Surfaces described as "brushed" shall be brushed with a steel wire brush on the day the terrazzo has been laid to expose the aggregate as required

Where required, brass or other dividing strips shall be embedded in the undercoat to finish flush with the finished surface

Three sample blocks, each size 300 x 300mm, as separately measured shall be prepared for approval by the Principal Agent and kept in an accessible place on the site until the completion of the contract

O.8 SKIRTINGS

Skirtings shall not exceed 25mm thick and shall have a fair edge with arris or rounded external angle at top edge or V-joint to finish flush with plaster and coved or square junction with floor finish

O.9 THICKNESS OF PLASTER

All plaster, other than skim plaster, shall be not less than 10mm and not more than 20mm thick

O.10 CEMENT PLASTER

Cement plaster shall comply with the following table:

1	2	3
Plaster Class	Cement:sand (common cement)	Cement:sand (masonry cement)
I	1:4 or 50kg to 130 litres	1:3 or 50kg to 100 litres
II	1:6 or 50kg to 200 litres	1:5 or 50kg to 170 litres
III	1:9 or 50kg to 300 litres	1:6 or 50kg to 200 litres

O.11 COMPO PLASTER

Compo plaster shall be composed of one part cement, two parts lime and nine parts sand

O.12 GYPSUM SKIM PLASTER

Gypsum skim plaster shall be pure gypsum plaster finished with a steel trowel

O.13 TWO COAT PLASTER WITH GYPSUM FINISH

Two coat plaster with gypsum finish shall comprise an undercoat of Class II cement plaster finished with a wooden float and a finishing coat of gypsum skim plaster

O.14 ROUGH-CAST PLASTER

Rough-cast plaster shall be applied in two coats. The undercoat shall be composed of one part cement and five parts sand finished with a wooden float. The finishing coat shall be composed of one part cement and three parts stone aggregate that will pass through a 4mm sieve. The finishing coat shall be flicked on with a machine before the undercoat has set to obtain an even texture

O.15 FINE ROUGH-CAST PLASTER

Fine rough-cast plaster shall be as for rough-cast plaster but the finishing coat shall be composed of one part cement and three parts coarse sand

O.16 GENERAL

Rates for plastering described as being on vertical surfaces of brickwork or blockwork shall include concrete columns, beams and lintels flush with the face of the wall

P. TILING

P.1 MATERIALS AND WORKMANSHIP

Materials and workmanship shall comply with the following standards:

Glazed ceramic wall tiles and fittings	SANS 22
Ceramic wall and floor tiles	SANS 1449
Common cement	SANS 50197-1(Class 32,5N)
Masonry cement	SANS 50413-1(Class 22,5X)
Aggregates from natural sources – Fine aggregates for plaster and mortar	SANS 1090
The design and installation of ceramic tiling	SANS 10107

P.2 TILES, MOSAICS, ETC

Tiles, mosaics, etc shall be even in shape and size, free from cracks, twists or blemishes and uniform in colour

P.3 PREPARATORY WORK

Surfaces shall be clean and free of oil and thoroughly wetted directly before any tiling is commenced. Concrete surfaces shall be slushed with a mixture of one part cement and one part coarse sand or otherwise treated to form a proper key

P.4 CERAMIC WALL AND FLOOR TILING

Where tiles are fixed to plaster or screeds with an adhesive, the adhesive shall be as recommended by the manufacturer of the tiles. Joints shall be straight, continuous and flush pointed with an approved grouting compound

P.5 GENERAL

Tiling described as "on walls" is on brick walls or block walls unless otherwise stated and shall include concrete columns, beams and lintels flush with the face of the wall

Q. PLUMBING AND DRAINAGE

Q.1 MATERIALS AND WORKMANSHIP

Materials and workmanship shall comply with the following standards:

Sheet metal

Sheet zinc	BS 849
Sheet aluminium	BS 1470
Sheet copper	BS 2870

Rainwater systems

Unplasticized poly(vinyl chloride) (PVC-U) components for external rainwater systems	SANS 11
--	---------

Pipes and fittings

Steel pipes : Pipes suitable for threading and of nominal size not exceeding 150mm	SANS 62
Plain-ended solid drawn copper tubes for Potable water	SANS 460
Malleable cast iron fittings threaded to ISO 7-1	SANS 4
Polyethylene (PE) pipes for water supply – Specifications	SANS 4427
Cast iron fittings for asbestos cement pressure pipes	SANS 546
Vitrified clay sewer pipes and fittings	SANS 559
Reinforced concrete pressure pipes	SANS 676
Concrete non-pressure pipes	SANS 677
Cast iron pipes and pipe fittings for use above ground in drainage installations	SANS 746
Unplasticized poly(vinyl chloride) (PVC-U) sewer and drain pipes and pipe fittings	SANS 791
Fibre-cement pipes, couplings and fittings for sewerage, drainage and low-pressure irrigation	SANS 819
Pitch-impregnated fibre pipes and fittings and jointing	SANS 921
Unplasticized poly (vinyl chloride) (PVC-U) pressure pipe systems	SANS 966-1
Unplasticized poly(vinyl chloride) (PVC-U) soil, waste and vent pipes and pipe fittings	SANS 967
Rubber joint rings (non-cellular)	SANS 974-1
Copper-based fittings for copper tubes	SANS 1067-1&2
Fibre-cement pressure pipes and couplings	SANS 1223
Polypropylene pressure pipes	SANS 1315
Non-metallic waste traps	SANS 1321-1&2
Vent valves for drainage installations	SANS 1532
Heavy duty cast iron pipe fittings for drainage and gas and water supplies	BS 78

Lead pipes	BS 602
Cast iron pressure pipes for use in drainage and gas and water supplies	BS 1211
Stainless steel pipes for use with compression fittings	BS 4127
Sanitary fittings etc	
Stainless steel sinks with draining boards (for domestic use)	SANS 242
Stainless steel wash-hand basins and wash troughs	SANS 906
Stainless steel sinks for institutional use	SANS 907
Stainless steel stall urinals	SANS 924
Acrylic sanitary ware : Baths	SANS 1402-1
Glazed ceramic sanitary ware	SANS 497
WC flushing cisterns	SANS 821
Flush valves for WC flushing cisterns	SANS 1509
Taps, valves etc	
Water taps (metallic bodies)	SANS 226
Water taps (plastic bodies)	SANS 1021
Single control mixer taps	SANS 1480
Float valves	SANS 752
Plastic floats for ball valves	SANS 1006
Functional control valves and safety valves for Domestic hot and cold water supply systems	SANS 198
Cast iron gate valves for waterworks	SANS 664
Automatic shut-off flush valves for water closets and urinals	SANS 1240
Check valves (flanged and wafer types)	SANS 1551-1&2
Fire extinguishers	
Portable refillable fire extinguishers	SANS 1910
Portable rechargeable fire extinguishers : Halogenated hydrocarbon type extinguishers	SANS 1151
Water heaters and fire hose reels	
Fixed electric storage water heaters	SANS 151
Fire hose reels (with semi-rigid hose)	SANS 543
Drainage covers, gratings, etc	
Cast iron surface boxes and manhole and inspection covers and frames	SANS 558
Cast iron gratings for gullies and stormwater drains	SANS 1115
The installation of polyethylene and poly (vinyl chloride) (PVC-U and PVC-M) pipes	SANS 10112
Water supply and drainage for buildings	SANS 10252-1&2

Q.2 GENERAL**Q.2.1 Excavations**

Excavations shall be deemed to be in "earth". Backfilling to excavations shall be executed in 300mm thick layers, watered and compacted. Surplus excavated material shall be spread and levelled over site as directed

Q.2.2 Concrete

Unreinforced concrete shall be Class B prescribed mix concrete and reinforced and precast concrete shall be Class C prescribed mix concrete

Q.2.3 Brickwork

Brickwork shall be of extra hard burnt bricks built in Class I mortar

Q.2.4 Plaster

Plaster shall be 1:3 cement plaster finished smooth with a steel trowel. All angles shall be rounded

Q.2.5 Diameters of pipes etc

Diameters stated for pipes, traps, valves, etc are internal diameters except PVC, polyethylene, stainless steel and copper pipes and traps for which external diameters are stated

Q.3 SHEET METAL WORK**Q.3.1 Galvanized sheet iron**

Galvanized sheet iron shall be rolled steel sheet coated on both sides with Class Z275, unless otherwise specified, zinc coating complying with SANS 3575/4998. Sheets shall be free from white rust

Q.4 EAVES GUTTERS**Q.4.1 Galvanized sheet iron gutters**

Galvanized sheet iron gutters shall have beaded edges and all joints shall be riveted and soldered. Angles shall be strengthened with 50 x 0,6mm galvanized sheet iron strips soldered on over the internal faces of mitres

Gutters shall be fixed with falls to outlets on 30 x 3mm galvanized mild steel brackets, bent to the shape of gutters, with front ends taken up to the underside of beaded edge of gutter and each screwed to roof timbers or bolted to fibre-cement fascias with 6mm galvanized gutter bolts. Gutters shall be bolted to brackets at front with 6mm galvanized gutter bolts, one to each bracket

Brackets shall be positioned at joints of gutters and intermediately at not exceeding 1,25m centres

Q.4.2 Fibre-cement gutters

Fibre-cement gutters shall have spigot and socket joints. Gutters shall be fixed with falls to outlets on standard aluminium alloy brackets, screwed or bolted to roof timbers or fascias

Q.4.3 Unplasticized polyvinyl chloride (UPVC) gutters

Gutters shall be fixed with falls to outlets on brackets as supplied by the manufacturer, screwed or bolted to roof timbers or fascias

Q.4.4 Aluminium gutters

Aluminium gutters shall be roll formed on site to required lengths and profiles from 3003H14-3SH4 alloy strip not less than 0,7mm thick factory coated on both sides with baked enamel and two coats of silicone modified polyester to a total minimum thickness of 20 micrometres. Angles, stopped ends, etc shall be prefabricated units pop riveted to gutters with joints sealed with mastic. The guttering shall be in continuous lengths between angles, stopped ends, etc

Q.5 RAINWATER PIPES

Q.5.1 Galvanized sheet iron pipes

Galvanized sheet iron pipes shall have seams at the back and shall be jointed with soldered slip joints. Pipes shall be fixed to walls etc with galvanized mild steel holderbats spaced at not exceeding 2m centres with tails driven in or cut and pinned in 1:3 cement mortar

Q.5.2 Fibre-cement pipes

Fibre-cement pipes shall have spigot and socket joints. Pipes shall be fixed to walls etc with standard aluminium alloy holderbats with tails driven in or cut and pinned in 1:3 cement mortar

Q.5.3 Unplasticized polyvinyl chloride (UPVC) pipes

Pipes shall be fixed to walls etc with patented UPVC or aluminium clips and holderbats as supplied by the manufacturer of the pipe

Q.5.4 Aluminium pipes

Aluminium pipes and fixing straps shall be formed from 3003H14-3SH4 alloy strip not less than 0,7mm thick factory coated on both sides as described for aluminium gutters. Pipes shall be in continuous lengths with formed angles, offsets, shoes, etc. Pipes shall be fixed to walls etc with 20 x 0,6mm straps at not exceeding 1,5m centres screwed to 25 x 75 x 100mm hardwood chamfered and oiled blocks plugged to walls

Q.6 STORMWATER CHANNELS

In-situ concrete stormwater channels shall be constructed of unreinforced concrete with segmental channel formed in top. Channels shall be laid to falls on a well rammed earth bottom and finished smooth on exposed surfaces

Precast concrete channels shall be of 25 MPa concrete, generally in 1m lengths, finished smooth from the mould on exposed surfaces, laid to falls on a well rammed earth bottom, jointed in 1:3 cement mortar and pointed with keyed joints

Q.7 JOINTS

Joints of pipes not covered by SANS shall be as follows:

Pipes

Fibre-cement, concrete, pitch-impregnated fibre and vitrified clay pipes for use under ground in non-pressure pipe lines

Cast iron for use above ground

Cast iron for use below ground

Galvanized mild steel

Joints between pipes of different materials shall be as follows:

Between cast iron and mild steel

Between cast iron and clay

Between mild steel or copper and clay

Joints

Flexible joints in accordance with the manufacturer's instructions

Spigot and socket joints with tarred rope yarn and caulking compound

or

Plain ended joints with stainless steel couplings with neoprene rubber sleeves

Spigot and socket joints with tarred rope yarn and caulking compound

Joints of screwed galvanized steel sockets or bolted galvanized iron flanges

Screwed joints with plastic jointing tape or hemp

Flanged joints which shall be bolted and provided with rubber gaskets and with flanges screwed to pipes

Spigot and socket joints with tarred rope yarn and caulking compound

Spigot and socket joint with semi-dry cement caulking and 1:2 cement mortar fillet

Spigot and socket joint with either bitumen or semi-dry cement caulking and 1:2 cement mortar fillet

Q.8 FIXING OF PIPES

Pipes shall be fixed as follows:

Q.8.1 Galvanized mild steel (except those stated in Q.8.3)

To walls with galvanized mild steel brackets for pipes not exceeding 80mm diameter and with galvanized cast iron hinged holderbats with brass pins or bolts for pipes exceeding 80mm diameter; both types with tails cut and pinned in 1:3 cement mortar

To woodwork with screw-on type galvanized mild steel holderbats

Q.8.2 Copper and stainless steel

To walls with brass holderbats or screw-on type two-piece spacing clips for pipes not exceeding 75mm diameter and with purpose made holderbats for pipes exceeding 75mm diameter; both types with tails cut and pinned in 1:3 cement mortar

To woodwork with screw-on type brass holderbats

Q.8.3 Cast iron and galvanized mild steel for soil, waste and vent pipes

To walls with hinged cast iron holderbats with brass bolts and with tails cut and pinned in 1:3 cement mortar

To woodwork with screw-on type galvanized mild steel holderbats

Q.8.4 Polyethylene, polypropylene and patented UPVC or unplasticized polyvinyl chloride

To walls, woodwork, etc with aluminium clips and holderbats as supplied by the manufacturer of the pipes

Q.8.5 Fibre-cement

To walls with aluminium alloy holderbats with tails cut and pinned in 1:3 cement mortar

Q.8.6 Pipes fixed to ceilings

Fixed with holderbats and standard or purpose made hangers, with extended hangers for pipes to falls

Q.9 PIPES LAID IN GROUND

Q.9.1 Water pipes etc

Water pipes, gas pipes, etc laid in ground shall be at least 400mm deep from the crown of the pipe to the finished surface

Q.9.2 Drain pipes

Excavations taken out too deep shall be filled in with selected soil and compacted. Backfilling to sides and up to 300mm above plastic pipes shall be free from stone or hard substances which will not pass a 10mm mesh

Q.10 CLEANING EYE LIDS

Cleaning eye lids for drain pipe fittings shall be fixed and sealed as follows:

Pipe fittings	Method of sealing and fixing
Fibre-cement	Sealed with synthetic rubber or bituminous mastic packing and fixed with screws
Vitrified clay	Polypropylene lid sealed with synthetic rubber packing and pressed into position
Polypropylene and unplasticized polyvinyl chloride	Sealed with synthetic rubber packing and screwed on or pressed into position
Cast iron	Sealed with tallow or putty and fixed with non-ferrous metal screws
Galvanized malleable cast iron and cast brass	Sealed with synthetic rubber packing and screwed in

Q.11 CLEANING EYES

Cleaning eyes shall consist of cast iron frames and lids with letters "CE" (or "SO") cast in lids. The lids shall be secured with non-ferrous metal screws. Frames shall be jointed to vertical drain pipes. Cleaning eyes shall be encased in unreinforced concrete taken up to ground level and plastered on exposed surfaces

Q.12 INSPECTION EYE MARKER SLABS

Inspection eye marker slabs shall be 350 x 350 x 50mm thick precast concrete finished smooth from the mould, with letters "IE" (or "IO") formed in top and placed flush in ground or paving

Q.13 GULLEYS

Gulleys shall be built up of traps, vertical piping and gulley heads with loose gratings, all encased in unreinforced concrete to finish flush with gulley head top and taken up to at least 50mm above surrounding finished surfaces. The outer top edge of the concrete encasing shall be splayed and the exposed surfaces plastered

Q.14 DISHED GULLEYS

Dished gulleys shall be built up of traps, vertical piping and gulley heads with loose gratings, all encased in unreinforced concrete and with dished unreinforced concrete hopper size 450 x 450mm overall around gulley head with rounded kerb 50mm wide to front and sides and 25mm wide at back, 100mm high above top of dishing and the hopper plastered on exposed surfaces. Top of hopper shall be taken up to at least 50mm above surrounding finished surfaces

Q.15 SUMPS, CATCHPITS, INSPECTION CHAMBERS, ETC

Q.15.1 Rainwater sumps

Rainwater sumps shall be built with half-brick sides on 100mm thick unreinforced concrete bottom, plastered internally on walls and with 80mm high unreinforced concrete kerb at top rebated for grating or cover and plastered on exposed surfaces

Q.15.2 Stormwater catchpits and inspection chambers

Brick catchpits and inspection chambers shall be built with one-brick sides on 150mm thick unreinforced concrete bottom projecting 100mm beyond walls all round, plastered internally on walls and with 100mm thick reinforced concrete cover slab with opening rebated for frame of grating or cover and plastered on exposed surfaces

Precast concrete catchpits and inspection chambers shall be constructed in accordance with the applicable details shown on Drawing LE-1 of SANS 1200LE. Precast concrete manhole sections and slabs shall comply with SANS 1294 and pipes shall be SC type and in accordance with SANS 677

Q.15.3 Sewer inspection chambers

Brick inspection chambers shall be built as for brick stormwater inspection chambers and with the bottom of the chamber well benched around half round channels, bends, junctions, etc up to sides of chamber in unreinforced concrete finished smooth

Precast concrete inspection chambers shall be constructed in accordance with the applicable details shown on Drawing LD-5 of SANS 1200LD. Precast concrete manhole sections and slabs shall comply with SANS 1294 and the pipes shall be SC type in accordance with SANS 677

Q.15.4 Stormwater drain junction boxes

Junction boxes shall be formed of 150mm thick unreinforced concrete bottom and sides to suit the various sizes of the drain pipes and built after the pipes have been laid, with the sides taken up slightly higher than the highest pipe and finished level on top for and covered with a 75mm thick loose precast concrete slab

Q.15.5 Step irons

Where inspection chambers exceed 1,2m deep, cast iron step irons shall be provided, built into the wall at 300mm centres and staggered regularly in vertical rows spaced at 200mm centres horizontally

Q.16 STOPCOCK AND METER BOXES

Stopcock and meter boxes shall be built with half-brick sides with a cast iron box and lid complying with SANS 558 set in 75mm wide unreinforced concrete kerb for the full depth of the cast iron box and plastered on exposed surfaces

Q.17 VALVE CHAMBERS

Valve chambers shall be built with half-brick sides with 100mm thick unreinforced concrete kerb to top with rebate for cover and frame to finish flush with adjacent paving or finished ground level and plastered on exposed surfaces

Q.18 CAST IRON COVERS, GRATINGS, ETC

All cast iron covers, gratings, frames and surface boxes shall be coated with preservative solution. Frames shall be cast into concrete. Covers, except covers to stormwater drainage or electrical cable inspection chambers, shall be set in grease

Q.19 CONCRETE ENCASING

Concrete encasing for pipes, bends, traps, gulleys, grease traps, etc shall be unreinforced concrete not less than 100mm thick all round

Q.20 SANITARY FITTINGS

Q.20.1 General

Glazed ceramic, acrylic and porcelain enamelled sanitary fittings and component parts shall be white. Accessories for sanitary fittings shall be chromium plated brass

Waste outlets for baths, basins, etc shall comprise chromium plated brass waste union with grating, rubber washers and locknut, fitted with rubber or vulcanite plug on a chromium plated brass chain and stay

Q.20.2 Stainless steel sanitary fittings

Stainless steel sinks and draining boards, basins, wash troughs and urinals shall be AISI Type 304 satin finished stainless steel. All stainless steel fittings shall be treated on the back with a vermin proof sound deadening coating. Sinks, basins and wash troughs shall be provided with 40mm diameter screwed waste outlets

Q.20.3 Precast concrete wash troughs

Reinforced precast concrete wash troughs shall have a sloping front with ribbed rubbing surface and shall be finished smooth on exposed faces with top edges and inner angles rounded. Each compartment shall be fitted with a 40mm diameter waste outlet. Wash troughs shall each be supported on two reinforced precast concrete pedestals finished smooth on exposed faces

Q.20.4 Steel baths

Steel baths shall be porcelain enamelled internally and painted externally and fitted with waste outlet and overflow grating with coupling

Q.20.5 Acrylic resinous baths

Acrylic resinous baths shall be fitted with waste outlet and overflow grating with coupling

Q.20.6 Acrylic resinous wash hand basins

Acrylic resinous wash hand basins and vanity units shall have a smooth high gloss finish, with outlet openings, soap recesses, tap-holes and integral overflow and shall be fitted with waste outlet and overflow grating with coupling

Q.20.7 Glazed ceramic sanitary fittings

Sinks shall be provided with integral weir overflows

Washdown closet pans shall have washdown action and be provided with smooth finished injection moulded polypropylene heavy duty double flap seats fixed with non-ferrous bolts. Urinal channels shall be provided with outlet gratings fitted in bitumen

Q.20.8 Flush and sparge pipes

Flush pipes for high level cisterns shall be of plastic or drawn galvanized steel

Flushpipes for low level cisterns shall be of plastic

Flush and sparge pipes for urinals with high level cisterns shall be of chromium plated copper piping and of the sizes recommended by the manufacturer of the urinal

Q.21 INSTALLATION OF SANITARY FITTINGS

Sanitary fittings shall be installed as follows:

Q.21.1 Precast concrete wash troughs

Precast concrete wash troughs shall be bedded on top of pedestals which shall be bedded on floors in 1:3 cement mortar

Q.21.2 Stainless steel wash troughs and wash hand basins

Stainless steel wash troughs and wash hand basins shall be fixed to walls on a pair of galvanized mild steel galleys brackets bolted to wall with 6mm diameter expanding bolts

Q.21.3 Acrylic resinous wash hand basins

Acrylic resinous wash hand basins shall be fixed to walls on a pair of standard painted cast iron brackets screwed to underside of basin and bolted to wall with 6mm diameter expanding bolts

Q.21.4 Ceramic wash hand basins

Ceramic wash hand basins shall be fixed to walls on a pair of standard painted steel or cast iron brackets bolted to wall with 6mm diameter expanding bolts

Q.21.5 Acrylic resinous baths

Acrylic resinous baths shall be bedded in 1:5 cement mortar on three cross rows of bricks or bedded solid on a layer of dry river sand and fixed to wall with galvanized steel brackets under edges (in the middle of the sides against walls) bolted to wall with 6mm diameter expanding bolts and sealed along top against wall finishes with patent mildew resistant silicone rubber

Q.21.6 Washdown closet pans and cisterns

Washdown closet pans shall be bedded on floors in 1:3 cement mortar. Cisterns shall be fixed to walls with 6mm diameter expanding bolts

Q.21.7 Ceramic urinals

Ceramic stall and slab urinals shall be bedded on floors and against walls in 1:3 cement mortar. Slabs, channels, treads, etc shall be jointed in 1:3 cement mortar and pointed in white cement

Ceramic bowl urinals shall be fixed to walls on standard steel brackets bolted to wall with 6mm diameter expanding bolts. Cisterns shall be fixed to walls on standard brackets bolted to wall with 6mm diameter expanding bolts

Q.21.8 Stainless steel urinals

Stainless steel stall and slab urinals shall be bedded on floors in 1:3 cement mortar and with backs and sides against walls filled in with fine unreinforced concrete. Cisterns shall be fixed as cisterns for ceramic urinals

Q.22 FIRE HOSE REELS

Fire hose reels shall each be fitted with a 30m long hose of internal diameter not less than 19mm with a 4,8mm internal diameter chromium plated brass nozzle

Q.23 FIRE EXTINGUISHERS

All fire extinguishers shall be fully charged

Q.24 TESTS

Sewerage pipe lines, sanitary plumbing including fittings and hot and cold water supply and fire service shall be tested to the approval of the Principal Agent and Local Authority

The Contractor shall provide all testing apparatus, material and labour required for the tests and inspections

R. GLAZING

R.1 MATERIALS AND WORKMANSHIP

Materials and workmanship shall comply with the following standards:

Glass in building	SANS 50572-1 to 5
Glazing putty for wooden and metal window frames	SANS 680
Silvered glass mirrors for general use	SANS 1236
Safety and security glazing materials for buildings	SANS 1263-1 to 3
Sealing compounds for the building industry, one Component, silicone-rubber based	SANS 1305
The installation of glazing materials in buildings	SANS 10137
Work on glass for glazing	SANS 1817

R.2 PUTTY ETC

Glazing putty shall be Type I for wooden sashes and Type II for steel sashes. Putty for glazing to unpainted hardwood shall be tinted to match the colour of the wood

Back putty shall not exceed 3mm thick. Putty shall not be painted until it has formed a surface crust, and if the putty does not form a surface crust it shall be replaced

Butyl putty shall be used where glass is to be fixed in aluminium sashes with glazing beads

Non-setting compounds shall be used where laminated glass is fixed in sashes with glazing beads

S. PAINTWORK

S.1 MATERIALS AND WORKMANSHIP

Materials and workmanship shall comply with the following standards:

Decorative paint for interior use	SANS 515
Decorative high gloss enamel paints	SANS 630
Primers for wood (for external work)	SANS 678
Primers for wood (for internal work)	SANS 678
Zinc phosphate primer for steel	SANS 1319
Undercoats for paints (except emulsion paint)	SANS 681
Aluminium paint	SANS 682
Varnish for interior use	SANS 887
Emulsion paints	SANS 1586

Materials for paintwork shall be delivered to the site in unopened containers and applied in accordance with the manufacturer's instructions. Materials shall be suitable for application to the surfaces concerned. Undercoats shall be as recommended by the manufacturer of the finishing coats

S.2 PREPARATORY WORK

S.2.1 Plastered surfaces etc

Plastered surfaces shall be thoroughly inspected and, if necessary, washed down and brushed in order to remove any traces of efflorescence and allowed to dry completely before any paint finish is applied. Before any paint is applied, holes, cracks and irregularities in plaster and other surfaces shall be filled with a suitable filler and finished smooth. Unfinished concrete surfaces shall have all projections rubbed off and shall be thoroughly cleaned with a spirits-of-salts solution (1 part concentrated spirits-of-salts to 4 parts water)

S.2.2 Metal surfaces

Metal surfaces shall be sanded, where necessary, washed with a suitable cleaning agent and left smooth

Protective coatings applied by manufacturers to galvanized metal surfaces shall be removed with a suitable agent and the surfaces washed down

Rust, grease and defective factory primers on metal surfaces, as well as pitch on cast iron pipes, shall be removed

S.2.3 Wood surfaces

Knots in woodwork shall be treated with knotting. Minor blemishes shall be filled with a suitable filler. Wood surfaces shall be sanded smooth

S.3 APPLICATION OF PAINT

Primers to wood surfaces shall be applied by brush. Primers to other surfaces may be applied by roller with the approval of the Principal Agent. Undercoats and finishing coats may be applied by brush or roller

Paint shall not be sprayed on except in the case of cellulose and other special paints where spray painting is the accepted method of application

Before subsequent coats of paint are applied the previous coat shall be properly dry and shall be sanded down where necessary

S.4 COLOUR SCHEME

A colour scheme comprising colours and the blending of colours approved by the Principal Agent shall be used for the paintwork. The tints of the undercoats shall closely match the finishing coat but nevertheless differ sufficiently to indicate the number of undercoats. Colour samples of the finishing coats shall be provided in all cases

S.5 GENERAL

Paintwork shall include the preparation of surfaces, filling, stopping, sanding and priming of nail heads and screws. Where windows, sashes, etc are to be painted, the rebates of the openings to be glazed shall be primed

T. PAPERHANGING

T.1 PREPARATORY WORK

Plaster surfaces to be papered shall be dry, thoroughly cleaned down, filled with a suitable filler as necessary to obtain a smooth surface and painted thereafter with a single coat of emulsion paint

Wood surfaces to be papered shall be knotted, stopped and sanded

T.2 PAPERHANGING

Wallpaper shall be hung in vertical long lengths. Vertical joints shall be close-fitted and plumb and the paper shall be tightly fitted to skirtings, ceilings, door frames, windows, etc. Horizontal joints will not be allowed

U. EXTERNAL WORKS

U.1 GENERAL

U.1.1 Excavations

Excavations shall be deemed to be in "earth"

U.2 LANDSCAPING

U.2.1 Topsoil

Topsoil shall vary between sandy loamy soil and sandy clayey soil with an ideal composition of 15% to 25% clay, 10% silt/sludge and 65% to 75% sand, with a minimum ratio of organic material of 2%. All material shall be free of harmful deposits as well as unwanted seeds

U.2.2 Compost

Compost shall be composed of properly decayed organic material, free from harmful deposits, salts, seeds and other waste material and shall have a pH of more than 4 and less than 7

U.2.3 Mulch

Mulch shall be approved organic material free from small particles of bark residue, fungus, disease, etc

U.2.4 Lime

Lime shall be agricultural lime of an approved manufacture

U.2.5 Fertilizer

Fertilizer shall be of the type specified, mixed thoroughly into the soil as prescribed. No fertilizer shall be added more than two weeks prior to planting

U.2.6 Backfilling

Backfilling in plant and tree holes shall be composed of two parts topsoil to one part compost mixed thoroughly together and compacted by foot in 100mm layers. Fertilizer shall only be added if prescribed

U.2.7 Pebbles

Pebbles shall be smooth with a uniform colour and form and ranging in size from 50mm to 75mm diameter. Removal of pebbles from river beds shall be done selectively to avoid any major disruption to the ecology of the river and environment

U.2.8 Plant material

U.2.8.1 General

All plant material (plants, shrubs, trees, etc) shall be obtained from a registered nursery and shall be free from damaged parts, parasites, fungus, other plant diseases or insects. No container-bound plants will be acceptable

U.2.8.2 Trees

The height of trees described in the bills of quantities shall be measured from the top of the root ball to the top of the tree. Where trees are pruned, such prune wounds shall not be more than 25mm in diameter and be sealed with an approved sealing compound

U.2.8.3 Shrubs and small plants

Shrubs and small plants shall meet the requirements for height and spread as specified. Thin or sparsely branched plants shall not be accepted. Branches shall be well spread with ample young branches and the plant as a whole shall be growing well

U.2.8.4 Groundcover

Groundcover shall be dense and healthy and shall comply with the minimum requirements for leaf density as specified

Formal grass shall be planted as runners in 50mm deep drills at 150mm centres unless otherwise described

U.2.9 Cultivation and preparation of planting areas etc

All surface rocks and stones larger than 50mm shall be removed before commencing cultivation and preparation. The entire area shall be ripped and rotavated using approved machinery by breaking up the earth to a depth of 300mm at 600mm centres in both directions, unless otherwise described, and then levelled. Where fertilizer or compost is specified, it shall be worked into the topsoil after ripping and rotavation to a depth of 300mm and finished to final levels

All fertilizer to areas to be grassed shall be strewn on the final layer before final finishing is commenced and worked mechanically into the top 150mm soil

U.2.10 Planting procedure

Holes for shrubs and groundcover shall be as follows:

Shrubs – 500 x 500 x 500mm deep

Groundcover – 300 x 300 x 300mm deep (if not planted in drills)

Holes for trees shall be square, of adequate size to accommodate the root system and suitable for the height of the tree

All plant material shall be watered thoroughly before careful removal from the container and planted in the prescribed planting medium with the top of the soil in the container finishing level with the surrounding area. Water dams size 800mm diameter x 150mm deep and 500mm diameter x 150mm deep shall be formed around trees and shrubs respectively and all planting material shall be watered immediately after planting. Trees, shrubs, etc shall be properly staked or stayed, depending on their size, on the prevailing windy side with patent tree ties

U.2.11 Maintenance

All planted areas shall be maintained for a period of three months after practical completion as defined in the contract with the exception of hydroseeded areas which shall be maintained for 12 months after an acceptable cover has been obtained

This maintenance shall consist of keeping clear of weeds and litter, loosening soil where necessary every two weeks, replacing damaged, diseased or dead plants, pruning, cutting and mowing as necessary and watering so as to keep the plant material in a healthy growing condition

U.3 ROADWORK

U.3.1 Filling

Filling under roads etc shall be of inert material having a maximum plasticity index of 10, free from large stones etc spread, levelled, watered and compacted in layers not exceeding 200mm thick to a density of 98% Mod AASHTO

U.3.2 Preparation of sub-grade

The sub-grade shall be prepared by scarifying for a depth of 150mm and compacting to a density of 98% Mod. AASHTO, including trimming to the correct levels and grades

U.3.3 Base course

The base course shall consist of crusher run stone compacted to a density of 98% Mod. AASHTO and finished to the correct levels and grades

U.3.4 Weed killer

The completed sub-grade shall be treated with an approved total weed killer

U.3.5 Bituminous premix road surfacing

Before spreading the premix material, the base course shall be swept clean and free from all dust, dirt and loose particles, lightly wetted and sprayed with a prime coat of cutback bitumen complying with SANS 308 at the rate of 1 litre/m²

The material shall consist of semi-gap graded crushed stone aggregate having the following grading:

Sieve size (mm)	% By mass passing sieve
13,2	100
4,75	45-60
2,36	42-55
1,18	40-52
0,3	25-45
0,075	5-12

The aggregate shall be mixed with bituminous road tar binder complying with SANS 748 at the rate of 1m³ of stone to 120 litre of emulsion at atmospheric temperature

The binder shall be added to the stone and mixed until the stone is uniformly coated. Thereafter 5% of clean, dry quartzitic sand shall be added and mixed until evenly distributed through the mixture

The premix shall be applied only after the primer has dried out completely and shall be spread immediately after mixing and rolled on the same day

Spreading shall be done evenly over the prepared base course to a loose depth sufficient to ensure the consolidated thickness specified

Rolling shall commence as soon as the binder has set sufficiently, followed after three days by a final rolling

U.3.6 Precast concrete block road surfacing

Paving blocks shall be precast concrete blocks complying with SANS 1058

Blocks shall be laid to true levels and grades on and including a 25mm thick layer of river sand with joints exceeding 2mm and not exceeding 6mm wide

After laying, the paving shall be compacted by means of a vibrating plate compactor, with joints between the blocks filled in, after compaction, by sweeping in fine sand

Infill areas at edges of paving constituting less than 25% of a full block unit and of 25mm minimum dimension shall be filled with Class C prescribed mix unreinforced concrete with top surface trowelled smooth to match blocks. Smaller areas shall be filled with 1:4 cement mortar

U.3.7 Precast concrete kerbs and channels

Precast concrete kerbs and channels shall comply with SANS 927, generally in 1m lengths and finished smooth from the mould on exposed surfaces. Kerbs and channels shall be bedded on and jointed in 1:3 cement mortar and pointed with keyed joints. Bases to kerbs shall be Class B prescribed mix unreinforced concrete

U.3.8 Process control tests

The Contractor shall be responsible for carrying out all necessary process control tests on the density and moisture content of the compacted sub-grade, base course, etc to ensure that the required compaction is being attained

U.4 FENCING ETC

U.4.1 Materials

Materials and workmanship shall comply with the following specifications and requirements :

Wooden poles, droppers, guardrail posts and spacer blocks	SANS 457-2&3
Zinc-coated fencing wire	SANS 675
Prefabricated concrete components for fencing	SANS 1372
Chain-link fencing and its wire accessories	SANS 1373

	Fasteners	SANS 1700
	Anti-intruder fences	CKS 451
	Metal droppers and standards	CKS 451
U.4.2	Galvanized wire	
	All galvanized wire shall be zinc coated wire with Class B zinc coating. Straining wire shall be 4mm diameter galvanized mild steel wire. Tie wire shall be 1,6mm diameter galvanized mild steel wire	
U.4.3	Plastic coated wire	
	Plastic coated straining wire shall be 3,15mm diameter Class C galvanized mild steel wire plastic coated to an overall diameter of 3,95mm	
	Plastic coated tie wire shall be 1,8mm diameter Class C galvanized mild steel wire plastic coated to an overall diameter of 2,5mm	
U.4.4	Galvanized barbed wire	
	Galvanized barbed wire shall be 2,5mm diameter mild steel double strand reverse twist zinc coated barbed wire with Class A zinc coating	
U.4.5	Galvanized wire mesh	
	Galvanized wire mesh shall be 50mm mesh chain link netting of 2,5mm diameter Class C galvanized mild steel wire	
U.4.6	Plastic coated wire mesh	
	Plastic coated wire mesh shall be 50mm mesh chain link netting of 2,5mm diameter Class C galvanized mild steel wire plastic coated to an overall diameter of 3,25mm	
U.4.7	Galvanized welded wire mesh	
	Galvanized welded wire mesh shall be fabricated from pre-galvanized wires to rectangular pattern welded together at each intersection using a welding method which forms a zinc oxide protective coating at each intersection	
U.4.8	Razor wire	
	Razor wire shall be fabricated from 2,5mm diameter galvanized high tensile steel wire fitted with razor barbs formed of 0,5mm galvanized steel strip clipped on at 37,5mm centres	
U.4.9	Metal droppers and standards	
	Droppers shall be of ridged T-section mild steel with a mass of not less than 0,55kg/m. Standards shall be of I- section mild steel with a mass of not less than 3kg/m or of ridged edge Y-section mild steel with a mass of not less than 2,5kg/m, and shall be driven 600mm deep into the ground	
	Droppers and standards shall have either galvanized, sprayed metal or painted finish as described in the items and in accordance with CKS 451. In addition, those surfaces of standards embedded in the ground shall be coated with bitumen	
U.4.10	Metal posts and stays	
	Posts and stays shall comply with CKS 451 and shall be of black galvanized mild steel tubing as specified	
	Straining posts shall be of 108mm outside diameter x 3mm wall thickness tubing, each with a 300 x 300 x 5mm thick mild steel sole plate and a steel cap welded on	
	Intermediate posts shall be of 50mm outside diameter x 2,5mm wall thickness tubing, each with a 230 x 230 x 5mm thick mild steel sole plate and a steel cap welded on	
	Stays for straining posts shall be of 50mm outside diameter x 2,5mm wall thickness tubing, each with a 230 x 230 x 5mm thick mild steel sole plate welded on and fixed raking with top end flattened, bent, holed and bolted to straining post with and including a 5mm diameter galvanized mild steel bolt with nut and washer	
	Posts and stays shall have either galvanized or painted finish as described in the items and in accordance with CKS 451. In addition, sole plates and portions of posts and stays embedded in ground shall be coated with bitumen	

U.4.11 Timber posts, stays and droppers

Timber posts shall be 125mm diameter, timber stays shall be 100mm diameter and timber droppers shall be 30mm diameter

U.4.12 Prestressed concrete posts and stays

Prestressed concrete posts and stays shall be finished smooth from the mould and uniformly stressed by means of high tensile longitudinal prestressing wires with concrete cover to wires of not less than 20mm

Corner and straining posts shall be 100 x 100mm and intermediate posts and stays shall be 75 x 75mm. Stays shall be fixed raking with top end splayed and glued to posts with a suitable epoxy compound

U.4.13 Bolts, nuts and washers

Straining eye bolts, hinge bolts, bolts, nuts and washers shall be galvanized

U.4.14 Precast concrete fencing

Precast concrete fencing over sloping terrain shall be stepped to suit terrain, including the use of increased lengths of posts as necessary, excavation, etc

U.4.15 Concrete bases

Bases in ground for posts, stays, etc shall be of Class B prescribed mix concrete with tops 100mm below surface of ground

Sizes of concrete bases for posts, stays, etc shall be as follows:

Straining and gate posts	–	450 x 450 x 700mm deep
Intermediate posts	–	300 x 300 x 600mm deep
Stays	–	600 x 300 x 500mm deep

U.4.16 Security overhangs

Where fencing is described as having a security overhang, the posts and standards shall have angular (single arm) extension arms

Extension arms shall be attached to the posts and standards by welding in the case of steel and by spiking in the case of timber

Concrete extension arms shall be cast integrally with the post or standard

Barbed wire to security overhangs shall be tightly strained and wired at each intersection with extension arms and shall have barbed wire braces at 450mm centres between standards, posts, etc wired onto the barbed wire and the top straining wire

U.4.17 Gates

Gates shall be formed of 40mm outside diameter x 2,5mm wall thickness mild steel tubular framework with welded joints, strongly braced as necessary and filled in with wire mesh as described above, properly strained and securely bound to framework with tie wire



KWAZULU-NATAL PROVINCE
PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

ANNEXURE 2
GENERAL ELECTRICAL SPECIFICATIONS

GENERAL ELECTRICAL SPECIFICATION

(ALL IN CONTRACTS)

1. CONDUIT AND CONDUIT ACCESSORIES

1.1 Conduit

Conduit shall be of steel galvanised internally and externally, either solid drawn, or welded and not less than 20 mm diameter, with all rough edges removed. All tube ends removed. All tube ends are to be reamed. With screwed conduit one threaded end is to be fitted with a coupling and the other end is to be protected against damage.

UPVC conduit may only be used if permitted by the Head : Works and only in those areas which he may specify. In this case this conduit shall be according to SABS 950.

Conduit accessories, which are secured to the conduit by means of lugs, screws or setscrews, are not acceptable.

General requirements of conduiting to SABS IEC 60614 (1).

Metal conduits shall be fully in accordance with SABS 1065 PART I.

1.2 Conduit Accessories

All conduit accessories shall be galvanised both internally and externally and comply with SABS 1065 – PART II.

All screwed conduit fittings shall be of malleable cast iron.

Where fittings are fitted with covers, the covers shall be of galvanised pressed steel secured with brass screws.

1.3 Flexible Conduit

Flexible conduit shall be of the plastic covered metal type complete with brass connectors to the approval of the Head : Works.

2. INSTALLATION OF CONDUIT

2.1 General

Except where cables are specified for certain circuits, the installation(s) shall be tubed throughout in steel conduit. Split conduit is not permitted. All conduits shall, wherever possible, or unless otherwise specified or agreed, be concealed in the structural work.

Except where agreed or otherwise specified or indicated on the drawings, all conduit to points shall run via the ceiling and floor slabs or roof space. In damp situations and where exposed to the weather, the conduits shall be so installed as to avoid, as far as possible, the condensation of moisture within them. All running joints are to be painted with an approved metal primer.

Mechanical and Electrical continuity must be maintained throughout the installation. Each length of conduit and every conduit fitting must be inspected for defects and all sharp edges or burrs must be removed before it is installed. All joints are to be tightly fitted together.

Running joints with long threads, where used, are to be fitted with a lock nut and the running thread shall not be longer in length than a coupling and lock unit.

In conduits smaller than 32 mm elbows and normal bends are not to be used but conduits are to be set to the required angles.

Flexible connections between conduit and appliance or other equipment shall be by means of flexible tubing (see Par 1.3).

No wiring shall be drawn into conduits until the conduits have been installed.

Where more than one socket outlet is connected on a circuit, the conduit shall be looped from the one outlet box to the following outlet box.

All switch-boxes, socket outlet boxes and any other purpose made metal box including distribution board trays shall be suitable treated against corrosion before installation with "Rustodian" or other approved metal primer.

All conduits shall be securely fixed into chases, and all flush switch and socket outlet boxes must be firmly embedded in cement mortar.

The Contractor shall make himself familiar with the positions of all fittings, such as blackboards, pinning boards, cupboards, shelving, worktops, etc, before commencing the conduit installation. The position of switches and socket outlets as indicated on the drawings are approximate only. The Contractor must verify that the final position of these will not be covered by the installation of the fittings referred to above, or come midway between the junction of any dados and upper wall finishes.

No extras will be entertained for moving switches or socket outlets as a result of the Contractor's failure to verify the final positions of the fittings or type of wall finish.

2.2 **In Roof Spaces**

The conduit in roof spaces shall be installed parallel or at right angles to the roof truss members and shall be secured at centers not exceeding 1,2 m by means of galvanised saddles nailed to the timbers with galvanised clout nails. Crampets will not be allowed.

Crossing of conduits is to be avoided wherever possible. Where unavoidable, one conduit must be neatly set over the other. Where a number of conduits have to run back to the distribution board or switchboard, they shall run parallel to the distribution board or switchboard, and at saddle distance to each other wherever possible.

Conduit runs from distribution boards shall terminate in fabricated sheet steel draw boxes installed in the roof above the distribution boards. Each draw box shall be fabricated from 1,6 mm galvanised sheet steel with welded corners and

suitably treated against corrosion with "Rustodian" or other approved primer and finished in aluminium paint.

Each draw box is to be fitted with slip-on lid with a 13 mm skirt. The box shall be 75 mm deep, shall be rectangular in shape and the size of conduits entering or leaving the box. Conduits shall be fixed to the box by means of couplings and brass male bushes or lock nuts and brass bush-nuts.

Conduit droppers shall be neatly cut into timber wall plates and set to face the right direction. All sets must be uniform. Conduits may be set at angles only where droppers or ceiling points are within 230 mm of roof members.

No conduits are to be run over the top of gangplanks or trapdoors.

Draw-in boxes with metal covers shall be provided where required and shall be installed near the gangplanks, if any. All inspection conduit fittings in open roof spaces shall face upwards to facilitate wiring and to permit easy inspection. Three-way conduit boxes shall be used for tee-off purposed in open roof spaces. Inspection tees are not to be used except where otherwise agreed or specified.

All conduits extended into a roof space with a roof clearance of more than 900 mm shall be set onto the beam and extended into the roof for a distance where there is sufficient clearance. Under flat roofs or where there is less than 900 mm clearance, the conduit shall be installed as specified for tubing in concrete slabs, right angle bends should be kept to a minimum and the shortest route taken.

Where false ceilings occur they shall be tubed as called for in the detailed specification. Conduits in restricted spaces and run as for concrete slabs must however, be installed in a neat and orderly manner.

Conduits to ceiling points for all types of fittings must be firmly supported and shall terminate in a back entry conduit box. The conduit box shall be taken through to the face of the ceiling and finish flush. Where the ceiling brander interferes with the installation of the ceiling point specified, the Contractor must trim the brander to allow the conduit box to be taken through to the face of the ceiling as specified. Luminaires must be bonded to the conduit box by means of metal threaded screws.

2.3 **In Concrete Slabs**

In order not to delay building operations, the Contractor must ensure that all conduits and conduit fittings, which are to be cast in concrete, are laid in good time. The Contractor shall have a competent Electrical Artisan standing by during casting of concrete, etc, to ensure that the conduit boxes are not damaged during casting of concrete.

Draw boxes, expansion joints boxes and round conduit boxes are to be provided where necessary.

Deep type conduit boxes shall be used for side entering conduits and normal shallow boxes may be used for back entry conduits. No elbows, bends or sharp sets will be allowed in concrete slabs except in cases of conduits of 40 mm diameter or when larger sweeping bends will be permitted.

Common drawn and/or inspection boxes shall be used where there is more than one circuit involved. They shall be installed in lavatories, storerooms, or other inconspicuous places. Covers shall be of hardboard neatly finished to match the finished ceiling or wall surface, and shall be fitted parallel to the wall or ceiling.

All boxes, etc. are to be securely fixed to the shuttering to prevent displacement when concrete is cast. All conduits must be laid off the deck, supported and secured at regular intervals and installed as close as possible to the neutral axis of concrete beams and slabs.

Expansion joints shall be shown on layout drawings and shall consist of a metal box in which one conduit is fixed and the other capable of movement with the building's expansion and contraction. Earth continuity of these joints shall be maintained by means of stranded copper conductors bonded to the conduits in the box as shown on the drawing.

Earth conductors and clamps buried in concrete are not permitted.

Conduits must be spaced sufficiently apart to allow for proper concreting. All joints shall be painted with an approved metal primer after completion of the tubing installation, prior to the concreting. All exposed parts of the conduit installation shall be suitably, protected against corrosion at the discretion of the Head : Works.

Before any concrete slab is cast, all conduit droppers to switchboards shall be neatly spaced and rigidly fixed.

2.4 **Surface Work**

All conduit must be plumbed and leveled and only straight lengths shall be used.

In cases where doorframes are out of plumb, or fittings, beams etc, are out of level, the conduit shall be run parallel with the doorframes, fittings, beams etc.

No threads shall be visible when the conduit installation is complete, except on running couplings.

Running couplings shall only be used where unavoidable and shall be fitted with a sliced coupling as a lock nut.

No inspection or normal bends are to be used on surface work, except with the approval of the Works Inspector and where conduits of 32 mm diameter or larger are used. Conduits shall be set uniformly and inspection couplings shall be used where necessary.

Fittings, tees, boxes, couplings, etc, are to be cut into the surface to allow the conduit to fit flush against the surface or alternatively spacer bar saddles may be used. Conduit is to be bedded into any irregularities to avoid gaps between the surface and the conduit.

Double sets, where used, shall be parallel with no twists and shall be as short as possible. All conduits, which terminate at metal trays, boxes, industrial switches and plugs shall do so by means of couplings and male bushes. No couplings will be permitted in droppers of lengths less than 3.6 m.

Where crossings of conduits is unavoidable, purpose made metal boxes shall be used. The length of the box is to be 8 times the diameter of the largest conduit, the width one and half times the sum of the diameter of all the conduits, and the depth one and half times the diameter of the largest conduit with a minimum depth of 50 mm. The box shall be fitted with a neatly fitting cover and the finish shall be in keeping with the general layout.

Where a number of conduits are to be installed in parallel they shall be evenly spaced and grouped under one purpose made saddle. Conduit spacing shall not exceed 10 mm. The purpose made saddle shall be made of 25 x 2 mm galvanised steel strip or other approved material, formed to suit the curvature of the various conduits and shall be drilled and fixed by means of screws between. Saddles shall be spaced at intervals not exceeding 1.8 m, except for conduit droppers, which shall be saddled centrally between ceiling and accessory box. All saddles are to be secured to the wall by means of black japan or brass rounded head screws. Distribution boards, draw boxes, industrial switches and plugs, etc, shall be neatly recessed into the surface of plastered walls to avoid double sets or alternatively spacer bar saddles may be used. On face brick walls the conduit shall be tightly set into the switch or plug.

In situations where there are not ceilings, the conduits are to be run along the wall plates and tie beams.

No wiring is to be carried out until the tubing has been inspected and approved.

Where spacer bar saddles are used, these shall be installed at centers of 1 m for horizontal and 1.5 m for vertical runs.

All conduits shall be painted with an approved enamel paint to match the background colour.

2.5 **Future Extensions**

In roof spaces with a minimum clearance of 900 mm, switch and plug drips for future use are to be set 300 mm in the correct direction and shall be threaded and fitted with plugged couplings. Where the roof over a slab is to be removed for future expansions, conduits for future use are to terminate 40 mm above tie beams and shall be threaded and fitted with plugged couplings.

Where future extensions are to be below slabs, all switch, socket outlet and other conduit droppers are to terminate 130 mm below slabs or beams with conduit ends threaded and fitted with plugged couplings.

Where provision is made for future extensions to a concrete slab, all conduits required for future use are to project 130 mm from the slab. Conduit projections are to be painted with an approved anti-corrosive paint and must be fitted with plugged couplings.

All switch, plug and other outlet boxes required for future use shall be fitted with approved blank cover plates.

Unused lighting outlet boxes are to be fitted with round hardboard or plastic covers with brass cover screws, which shall fit flat on the finished ceiling.

2.6 **Fixing of Conduits**

Conduits shall be fixed to switch and socket outlet boxes by means of couplings and brass male bushes or lock nuts and brass bush nuts. Couplings and male bushes to be used on all surface work.

2.7 **Chases and Building Work**

Except where otherwise specified conduits, switch boxes, plug boxes and distribution boards are to be built into the brick walls by the Contractor. It will, however, remain the responsibility of the Contractor to ensure that the above-mentioned boxes and distribution boards are correctly built in and are firmly bedded and cemented into the walls, plumb and square.

The Contractor shall, unless otherwise specified, do all necessary chasing and cutting of bricks. All electrical materials (e.g. conduits up to 40 mm for UG cables, conduits, conduit boxes, distribution boards etc) must be supplied by the Contractor who must arrange to have these on site, and positioned when required for the building work. A competent Electrical Artisan must be in attendance and ensure that the conduits etc are correctly installed and positioned.

The Contractor is to ensure that tubing installed in chases is securely nailed and covered by a layer of 5:1 mixture of coarse sand and cement, finished flush with brickwork and that switch and plug boxes finish flush with the finished wall surface.

The Contractor is to ensure that below distribution boards connected by means of under-ground cables, a 230 mm wide by 115 mm deep cavity in the wall from the cable pipe to the distribution board is to be provided by the Contractor, or alternatively, cable sleeves as specified.

3. **PLUGGING OF WALLS**

Only approved plastic plugs shall be used to secure conduit or equipment up to 5kg mass. The use of round-headed screws only will be permitted.

Heavier equipment shall be secured by means of approved expansion bolts.

Wood plugs and any plugs in the joints in brick walls are not permitted.

4. **FIXING TO CONCRETE CEILINGS**

Ceilings mounted equipment other than luminaires shall be secured to concrete ceilings by means of expansion bolts, shot bolts or "Robot" tools bolts or as expressly specified for the service.

5. **WIRING**

5.1 **PVC Insulated Single Core Medium Voltage Conductor**

The conductor is to be of high conductivity copper wire insulated with Polyvinyl Chloride. The cable shall be finished in the required colours and shall be in accordance with SABS 1507 and 1574.

Circuit wiring shall be of the Loop-in system and no wiring joints in the conduit or conduit fittings will be permitted. Not more than two conductors of a kind will be allowed at any outlet point. the end strands of cables, whether single or looped which have to be connected to terminals of switched, plugs, lamp-holders, fittings and distribution boards, etc, are to be tightly twisted together. Cutting away of wire strands of any cable will not be allowed. Only one circuit in any one conduit will be permitted unless otherwise specified.

Conductor sizes shall be as follows except where otherwise specified:

Lighting circuits	1,5 mm ²	
Bells circuits	1,5 mm ²	
Clock circuits	1,5 mm ²	
Incinerator circuits	2,5 mm ²	
Ironing circuits	2,5 mm ²	with 2,5 mm ² insulated earth wire
Plug circuits	4,0 mm ²	with 2,5 mm ² insulated earth wire
Geyser circuits	4,0 mm ²	with 2,5 mm ² insulated earth wire
Heater circuits	4,0 mm ²	with 2,5 mm ² insulated earth wire
Stove	10 mm ²	with 6,0 mm ² insulated earth wire
Motor circuits		
Up to 4kW single phase	4,0 mm ²	with 2,5 mm ² insulated earth wire
Up to 11kW three phase	4,0 mm ²	with 2,5 mm ² insulated earth wire

To avoid deformation of PVC insulated cables at temperatures in excess of 57° C, they shall not be brought directly on to the terminals of appliances such as electric heaters, or any other electrical appliances or apparatus (including luminaires) which have a temperature in excess of 57° C. They shall terminate in a suitable terminal box as near to the appliance or fittings as possible and connect up from thereon, with heat resistant conductor.

6. **MOUNTING AND POSITIONING OF LUMINAIRES**

Luminaires and installation to comply with SABS 1464 Parts 1 to 22 and IEC 598-1 and IEC 60598 as applicable.

The contractor shall, in the case of board and acoustic tile ceilings (i.e. as opposed to concrete slabs), ensure that the luminaires are symmetrically positioned with regard to the ceiling pattern.

The layout of the luminaires as indicated on the drawings shall be adhered to as far as possible. The exact positions must be confirmed on site with the Head : Works.

Except where otherwise specified, pendant luminaires are to be mounted with the bottom of the fittings 2,5 m above finished floor level, mounted on either metal discs or wood blocks.

Under no circumstances shall cover strips be cut to accommodate wood blocks. Wood blocks must be neatly slotted to fit over cover strips and are to be secured by a minimum of two screws, which shall penetrate at least 25 mm into solid wood. Ceiling cover strips shall be neatly cut to accommodate fluorescent luminaires.

Where ceilings are raked, all incandescent luminaires are to be mounted on shaped leveling wood blocks securely fixed to the ceiling. Batten holders shall be secured to woodblocks by suitable brass screws. Fluorescent luminaires are to be mounted direct on raked ceiling without leveling blocks.

Fluorescent luminaires to be mounted on concrete ceilings shall be screwed to the outlet boxes and additionally supported by means of 50 x 6 mm expansion bolts. The bolts are to be $\frac{3}{4}$ of the length of luminaires apart.

Where a number of luminaires are installed end to end, outlet points must be provided after every second luminaire unless otherwise indicated on the drawing.

The luminaires are to be joined together by means of 20 mm conduit nipples, lock nuts and male brass bushes, and the wiring led through the channels of the luminaires. The Contractor shall ensure that all such rows are correctly lined up and that the rows are parallel with the relevant building line.

The luminaires are to be jointed together by means of 20 mm conduit nipples, lock nuts and male brass bushes, and the wiring led through the channels of the luminaires. The Contractor shall ensure that all such rows are correctly lined up and that the rows are parallel with the relevant building line.

Incandescent luminaires are to be screwed directly to outlet boxes in concrete slabs and in board ceilings. In board ceilings the conduit box and the conduit shall be secured to the timberwork of the ceiling in such a manner that it shall support any incandescent luminaire, which is designed to be fixed to a normal conduit box.

Fluorescent luminaires shall be secured to board ceilings by means of the conduit box and 6 mm bolts passing through the boards and banding.

7. **BATTEN HOLDERS**

B.C. batten holders shall be of brass or moulded plastic reinforced type complete with shade ring. The batten holders shall comply with SABS IEC 60238 and SABS IEC 61184. All lamp holders are to have brass terminals with screw type connection.

8. **LAMP HOLDERS**

Edison screw lamp holders : SABS IEC 60238

Bayonet lamp holders : SABS IEC 61184

Lamp holders for tubular fluorescent lamps : SABS IEC 60400

B.C. screwed lamp holders shall be of brass 20 mm E.T. complete with shade ring and shall comply with SABS IEC 60238 and SABS IEC 61184 with screw type connection terminals.

9. **SWITCHES AND SOCKET OUTLETS**

Switches SABS IEC 60669 as applicable and socket outlets SABS IEC 60884 as applicable shall be of the most modern manufacture and bear the SABS mark.

Flush switch and plug cover plates shall, unless otherwise specified, be of anodized aluminium of thickness not less than 0,9 mm, satin or other approved finish as directed and otherwise to be fully in accordance with SABS IEC 1084 for cover plates and SABS 1085 for wall boxes.

10. **POSITIONS OF SWITCHES AND SOCKET OUTLETS**

Except where otherwise specified, lighting switches and socket outlets are to be installed 1,4 m above finished floor level.

All mounting heights specified are to be measured from finished floor level to the bottom of the outlet box.

Where the lower portion of the wall consists of face brickwork and the upper portion of plastered finish, switches and socket outlets are to be mounted in the plastered surface, provided that the lower edge of the plasterwork does not exceed a height of 1,5 m above finished floor level in which case the switches or socket outlets are to be installed in the face brick dado.

Where socket outlet and switch boxes have been installed with fixing lugs below finished wall surface, only approved distance pieces required to compensate for the recess shall be used. The lengths of distance pieces are not to exceed 15 mm.

Unless otherwise approved, light switches adjacent to doors are to be installed at the lock side of the door. Where the lock position is not indicated on the drawings, its position shall be ascertained before the switch box is installed. Switches are to be installed 150 mm from the reveal, or centrally if there is a fitting near the door.

All switch and socket outlet boxes shall be installed plumb, and built into the wall with a 1:1 mixture of cement and sand.

Industrial type switches and socket outlets shall be neatly recessed into the surface of plastered walls to avoid sets or alternatively spacer bar saddles may be used.

Deep type boxes may be used where switches or socket outlets are back to back, but where one side only is to be utilized at the time and the other is for future use, the side for future use shall be suitably covered with a metal cover plate.

11. **LOW TENSION SWITCHBOARDS**

Low Voltage switch gear and control gear to comply with SABS 1473 and SABS IEC 60947 and SABS 60349.

Where switchboards are to be installed in switch rooms or switch cupboards, the Contractor must ensure that the boards are manufactured to suit the dimensions of the rooms or cupboards.

Low tension switchboards shall be specified in detail for each service, but shall generally conform to the following:

They are to be of strong and rigid construction, with suitable angle, channel or folded steel framework. They are to be flush fronted and totally enclosed with sheet steel panels suitably formed at the edges and reinforced to prevent distortion. Unless otherwise directed, all front panels must be at least 2 mm thick and all other panels at least 1.6 mm thick. Panels are to be secured to the framework with studs and chromium plated dome nuts (self-tapping and similar screws are not permitted).

Switches, etc, are to be mounted on metal frames within the boards to give flush front panels. Equipment of normally surface mounted types such as energy meters, time switches and contractors, are to be mounted on inner metal trays behind hinged front panels. In the case of supply authority meters the hinged front panels must have transparent inserts.

All metal work of the boards must be thoroughly degreased, primed with PA 10 self etching primer and finished with one coat of undercoat and two coats of electrical orange high gloss enamel, unless otherwise specified.

All accessible current carrying parts, bus-bars, connecting strips, collector bars, etc, are to be adequately insulated in phase colours and suitably braced to withstand projected fault currents.

Connecting strips and collector bars must be of sufficient cross sectional area to carry full rated current of the switches served, irrespective of the fuse or trip rating.

The complete distribution board including bus-bars must be suitably constructed to withstand fault currents specified.

Connections to bus-bars are to be made by means of lugs suitably bolted and locked with high tensile bolts and connections to lugs must be effected by means of a crimping tools.

Incoming and outgoing bus-bar studs, where required, must be suitably insulated where they pass through panels of the board, and firmly supported within the board.

Where applicable, incoming and outgoing collector bars for cables in parallel must so arrange that the multiple cable ends can be connected to the bars with reasonably short tails which do not have to cross.

Cable supports must be placed at suitable heights having regard to the bending radius of the cables concerned and convenience in making off.

Wall-mounting and floor-standing back to wall type boards must be provided with full easy access to all equipment and wiring without any necessity of disconnecting or removing of any of the equipment mounted in the board.

Clear visible indication of all switch positions must be provided and the switches must be clearly labeled as directed by the Head : Works.

The details of construction proposed, and the Head : Works must approve all equipment of switchboards: Works before manufacture is commenced.

12. **DISTRIBUTION BOARDS**

12.1 **Approval**

The Head : Works must approve the details of construction proposed and all equipment within distribution boards: Works before manufacture is commenced.

12.2 **Flush Mounting Distribution Boards**

These shall be generally manufactured in accordance with SABS 1765. The board shall consist of two panels fitted side by side with common bonding tray and attached to a common architrave. One panel shall accommodate all single phase MCB's and the second panel shall accommodate the main isolator, main bus-bars and the triple pole MCB's. Chassis shall be of rigid channel section rust proofed steel with clip-on trays for the single pole MCB's. The main isolator is to be mounted at the bottom of the second panel with the triple pole circuit breakers above.

12.3 **Surface Mounting Distribution Boards**

These shall be generally manufactured in accordance with SABS 1765, with two panels as for flush boards.

12.4 **Single Phase Distribution Boards**

Single Phased boards shall be generally constructed as three phase boards except they shall have a single panel. Single phase boards shall be mounted with the bottom of the architrave 1,5 m above finished floor level unless specifically directed otherwise.

12.5 **Distribution Board – In Roof Spaces**

Where distribution boards are installed below a roof space, a minimum of 2 x 20 mm and 1 x 25 mm spare conduits are to be run from the distribution board into the roof space.

13. **METER BOXES**

The meter box shall be mounted with the top 1,7 m above finished ground level. Surface mounted meter boxes shall be secured by at least 4 x 10 mm expansion bolts.

Service cables entering the meter box shall be protected by means of a suitably sized galvanised pipe extended 450 mm below the ground surface and securely saddled to the wall and bonded to the meter box.

14. **CONNECTIONS TO OUTLETS**

14.1 **General**

Where connectors are used to connect to the wiring of luminaires and other appliances, the connectors shall comply with SABS Specification 1239.

14.2 **Connection to Stoves**

14.2.1 **General**

The connection to an electric stove, unless otherwise specified shall consist of 2 x 10 mm² conductors and a 6 mm² insulated earth wire in 25 mm conduit. The stove shall be controlled by a 60 Amp micro gap switch of approved make and the connection shall be by means of a 45 Amp 3 pin stove plug of the "Cape Town" type. Cable ends, which are to be connected to the stove, shall be equipped with suitable soldered or crimped lugs. The connection between the stove plug and stove shall be by means of flexible conduit.

Except for high school domestic science unit kitchens (see Clause 14.2.2), the conduit shall be chased into the wall and fitted with a switchbox for housing the micro gap switch and a 25 mm circular conduit box over which the stove plug will be mounted. The stove plug shall be fitted with an adaptor plate and shall be screwed directly to the conduit box by means of round head metal screws. The plug outlet shall face downward.

The stove plug and switch shall be mounted 430 mm and 1,4 m respectively above finished floor level unless otherwise specified or indicated on the drawings.

14.2.2 **Stove Connections in High School Domestic Science Unit Kitchens**

Connections to stoves in High School Domestic Science Unit Kitchens, where the stoves are situated in front of a fitting, shall be generally as specified in Clause 14.2.1 except that the 25 mm diameter conduit shall be run in the floor slab, from the distribution board to a position to the right of the stove. A pedestal, which is complete with a 45 Amp 3 pin "Cape Town" type cooker plug, mounted on the back, shall be fitted over the conduit and securely bolted to the floor by means of expansion bolts. The plug circuit, which passes through the pedestal, is to be on a separate circuit.

14.3 **Connections to Hot-water Cylinders**

The connections to hot-water cylinders not exceeding 3kW loading shall consist of 2 x 4 mm² PVC conductors and 1 x 2,5 mm² earth wire in a 20 mm diameter conduit from the distribution board. The conduits shall be chased in the wall and shall terminate at the side of the cylinder in a box over which is to be mounted a double pole isolator with pilot light.

The final connection between the isolator and cylinder shall be by means of silicone heat resistant conductors in 20 mm diameter flexible conduit.

Connections to roof mounted hot-water cylinders shall generally be as specified above with an isolator with pilot light mounted adjacent.

14.4 **Connections to Power Points**

Connections to electric motors and fixed apparatus to vibration shall, unless otherwise specified or indicated on the drawings, have final connections consisting of conduit and flexible tubing or reinforced hose in accordance with Clause 1.3 of this specification and PVC cables and earth wire of the required size.

An isolator shall protect all fixed apparatus and where necessary a starter fitted with a no-volt coil and overload protection adjacent to such apparatus.

Power points for connection of fixed apparatus to be installed by others, shall terminate in an approved type wall mounted switch unless otherwise specified.

The minimum conductor size for all power points shall be 4 mm² unless otherwise specified.

14.5 **Underground Service Connection**

This clause refers to underground service connections not provided by the Supply Authority.

The service cable and earth wire to be connected at the supply point in accordance with Clause 15.8 of this specification, and unless otherwise specified, shall be laid 600 mm below ground level throughout and otherwise fully in accordance with Clause 15 and all applicable sub-clauses thereof. Cable entries to meter boxes shall be in accordance with Clause 13 and other entries shall be by pipe or duct as directed.

14.6 **Connections to Outbuildings**

Connections to outbuildings shall be made by means of underground cable only, laid in accordance with Clause 15 and all applicable sub-clauses.

Where the cable is run from the roof space of the main building, it shall be enclosed in suitably sized galvanised pipe built into the wall or run surface as directed. Surface run pipes shall be securely saddled at 1.8 m centers. Where the cable connects to the conduit in the roof space, a suitable joint box shall be provided or alternatively the cable may be taken through the roof space, a suitable joint box shall be provided or alternatively the cable may be taken through the roof space with fixings at regular intervals, and down to the main board. At the outbuildings, the cable shall be enclosed in a suitably sized galvanised sleeve pipe built into the wall or run surface and terminated in the distribution board tray.

14.7 **Connection and Mounting of Cable Fed Street/Site Lighting**

Street/site lights shall in all cases, except where otherwise specified, be fed by underground cable. Unless otherwise directed, a suitable terminal board shall be provided in the base of the lighting pole for the connection of the incoming and outgoing cables, the feeds from the terminal board to the fitting shall be as specified.

"Surfix" cable and compression glands shall be installed between terminal board and cross arm/bracket mounted luminaires. The terminal board shall also accommodate a miniature circuit-breaker in the phase connection to the fitting. Poles intended for mounting directly in ground are to be provided with a 300 x 300 mm base plate.

15. **UNDERGROUND CABLES**

1000 volt PVC SWA and 110 Volt PILCA cable and accessories shall be in accordance with the relevant SABS specifications to SABS 1507.

The storage, transportation, handling and laying of underground cables shall be according to the manufacturer's requirements and the Contractor shall have adequate and suitable equipment and labour to ensure that no damage is done to cables during such operation. All cable pipes and ducts entering buildings are to be sealed against the ingress of vermin, water, etc.

15.1 **Trenching**

Cables, unless otherwise specifically directed, shall be laid at a depth of 600 mm below ground level. Trenches shall not be less than 300 mm wide for one to three cables, and the width shall be increased where more than three cables are to be laid together so that the cables may be placed at least 75 mm throughout the run.

The Contractor shall take all necessary precautions to prevent trenching work being in any way a hazard to the public and to safeguard all structures, roads, sewer works, or other property from risk of subsidence and damage.

15.2 **Cable Joints**

Joints in underground cable runs will not be permitted unless unavoidable and at the discretion of the Head : Works. Where cable joints are unavoidable, the cable jointer is to work efficiently and cleanly and so that each end of the cables to be joined may have a minimum of 0,9 m of slack disposed in a loop without stress. Back-filling under joints must be firmly tamped to prevent any subsequent settling.

15.3 **Bedding**

In trenches made in intermediate, hard rock, or boulder material, the cables shall be laid on a 75 mm thick bed of earth and be covered with a 150 mm layer of earth before the trench is filled in. The Contractor to supply all earth required for trench filling.

15.4 **Laying**

Cables shall be removed from the cable drum in such a way that no twisting, tension or mechanical damage is caused, and must be adequately supported at short intervals during the whole operation. Particular care must be exercised where it is necessary to draw cables through pipes and ducts, to avoid abrasion, elongation or distortion of any kind. The ends of such pipes and ducts shall be sealed to approval after the drawing in of the cables.

15.5 **Back Filling**

Back filling after bedding (see Clause 15.3) is to be carried out with a proper grading of the material to ensure settling without voids, and the material is to be tamped down after the addition of every 150 mm. The surface is to be made good as required.

Back filling of cable trenches must not be commenced until after the cable trenches and laid cable(s) have been inspected by the Head : Works. Where a Contractor fails to observe this requirement he may, at the discretion of the Head : Works, be required to re-open such cable trenches for inspection at his own expense.

15.6 **Protection of Cables**

Where so directed by the Head : Works, concrete or other warning covers shall be placed over cables above the top bedding layer. Cable pipes when directed are to be installed at road and other crossings.

15.7 **Marking of Cables**

Cable marking tape is to be supplied by the Contractor and is to be laid 150 mm below ground over a cable run and as may be directed by the Head : Works to give early indication of underground cable runs.

15.8 **Joints and Termination of Cables**

Joints in underground cables and terminations shall be made by means of "Scotch Cast" or other approved epoxy-resin pressure type jointing kits. Low tension PVC cables are to be made off with sealing glands and materials designed for this purpose, which must be of approved make.

15.9 **Sealing of Paper Insulated Cable Ends**

Where cables are cut and not immediately made off, the ends must be sealed without delay. If cables are cut and the ends not immediately made off or sealed, the cable may be rejected and the Contractor will be required to replace it at his own expense.

15.10 **Earth Wires**

Except where specifically directed otherwise, earth continuity conductors are to be run with all underground cables constituting part of a low tension distribution system. Such earth continuity conductors shall be bare copper wire of a cross sectional area in accordance with the Code of Practice 0142 but shall not be less than 4 mm² nor more than 70 mm². The earth continuity conductor is to be bonded to the cable armouring, and to the lead sheath if any, at each termination, as well as to the local earth bar. The earth wire must be secured to the cable at 1,8 m centers.

15.11 Opening Up of Existing Cables

Where it is necessary to expose existing buried cables for any purpose, or to excavate in the vicinity of existing buried cables, pipes, etc, every care is to be exercised and only labourers experienced in such work, and duly warned by the Contractor, shall be employed thereon.

15.12 Definitions for Classifying of Excavation

- (a) Soft Excavation – shall be excavation in material that can be efficiently removed by a back-acting excavator of flywheel power approximately 0,10kW per millimeter of tinned-bucket width, without the assistance of pneumatic tools such as paving breakers, or that can be efficiently loaded without prior ripping or stockpiling by a rubber tyred front-end loader approximately 15T mass and a flywheel power of approximately 100kW.
- (b) Intermediate Excavation – shall be excavation in material that requires a back-acting excavator of flywheel power exceeding 0,10kW per millimeter of tinned-bucket width and the assistance of pneumatic tools prior to removal by equipment equivalent to that specified in (a) above.
- (c) Hard Rock Excavation – shall be excavation in material that cannot be efficiently removed without blasting or without wedging and splitting prior to removal.
- (d) Class A Boulder Excavation – shall be excavation in materials containing more than 40% by volume of boulders of sizes between 0,03 cubic meter and 20 cubic meter in a matrix of softer material or smaller boulders.

Note: (1) Excavation of solid boulders or lumps of size exceeding 20 cubic meter will be classified as hard rock excavation.

(2) Excavation of fissured or fractured rock will not be classed as boulder excavation but as hard rock intermediate excavation according to the nature of the material.

- (e) Class B Boulder Excavation – shall be excavation of boulders only in a material containing 40% or less by volume of boulders of size between 0,03 cubic meter and 20 cubic meter in a matrix of softer material or smaller boulders.

Note: Those boulders that required individual drilling and blasting in order to be loaded by a back-acting excavator as specified in (a) above, or by a track type front-end loader, will each be separately classed as Class B Boulder Excavation.

16. **EARTHING**

16.1 **Main Earthing**

The type of main earthing shall be as required by the Supply Authority, if other than the Head : Works and in any case as directed by the Head : Works who may require additional earthing to meet test standards.

Where required, an earth mat is to be provided, the minimum size, unless otherwise specified, being constructed from copper straps 950 x 25 x 3 mm at 230 mm centers and braced at all intersections. Alternatively or additionally earth rods or trench earths may be required, as the Head : Works may direct, and installed according to his instructions.

All earth electrodes and connections thereto must be approved "in-situ" by the Head : Works before back-filling.

The electrical installation shall not be earthed by means of the lightning arrester earth electrode, if such is included in the installation, but may be bonded thereto.

16.2 **Earthing in Installations**

The installation shall be effectively earthed in accordance with the relevant sections of the Code of Practice 0142 and the requirements of the Supply Authority.

All hot and cold water and waste pipes are to be effectively bonded by means of 12 x 1,5 mm solid copper tape (perforated tape or wire will not be permitted), clamped by means of brass bolts and nuts. Bonding tapes exceeding 75 mm in length must be fixed to the wall by means of No. 6 x 20 mm brass screws and plastic plugs not exceeding 150 mm centers. Main earth copper tapes where installed less than 2,5 m from ground level, must be run in 20 mm diameter conduit securely saddled to the wall.

Gutters and down pipes are to be bonded by means of 6 mm round headed brass bolts, with nuts and washers. Self-tapping screws are not permitted.

Connections from the earth bar or terminal on the main board must be made to a visible cold water main, the incoming service conductor, if any, and the earth mat or plate (where such is required) by means of either 12 x 1,5 mm solid copper tape or bare 25 mm² copper wire, or such larger conductor as the Head : Works may direct. From each distribution board separate earth conductors are to be taken to the main earth bar or terminal on the main board. Each conductor shall consist to stranded copper conductors drawn into the conduit together with the distribution board feeders. The size of the earth conductors to be in accordance with the requirements of the Code of Practice 0142 or as specified.

Earthing clips shall be made of not less than 0,9 mm thick copper strips not less than 12 mm wide. They are to be complete with 25 x 7,7 mm brass bolts, washers and nuts and must be constructed so that the clips will fit firmly to the conduit without any additional packing.

Adjustable earth clips are not permitted.

17. **EXISTING BUILDINGS**

17.1 **Occupied Buildings**

Where work is to be carried out in occupied buildings the Contractor must arrange to carry out the installation with as little interruption to services and discomfort to the occupants as possible.

17.2 **Temporary Connections**

Temporary connections shall be provided where necessary for continuity of services, and as directed by the Head : Works. The contractor must ensure that such connections are both electrically safe and free from physical hazard.

17.3 **Old Materials**

Unless otherwise specified all existing materials removed by the Contractor shall remain the property of the Head : Works and are to be handed to the Head : Works.

17.4 **Making Good**

Any damage which may be done to the plaster work, floors, ceilings, wood and paint work, furniture and other equipment in the building, etc, during the progress of the electrical installation shall be repaired and made good by the Contractor to the satisfaction of the Head : Works.

18. **COMPLETION**

18.1 **Balancing of Load**

The Contractor is required to balance the load as equally as possible over multi-phase supplies.

18.2 **Tests**

The installation shall be tested by the Contractor as the service progresses or as required by the Head : Works and upon completion, for earth continuity and insulation. The final test before the taking over of the installation shall be made in the presence of the Head : Works.

The mandatory "Certificate of Compliance" shall be issued by the Contractor to the Supply Authority, with a copy to the Head : Works prior to first delivery being taken.

18.3 **Labelling**

All circuits and apparatus on switchboards shall be suitably correctly labeled by means of engraved plastic labels (white lettering on black), which are to be either bolted or screwed to the equipment panel, or fitted in channeling provided below the switch gear.

Sub-circuits are to be numbered and a legend detailing the circuits is to be framed and fitted to the door of the distribution board.

All other equipment is to be individually labeled to indicate the function.

All switchboards are to be fitted with a label on which the designation of the board is clearly indicated.

A separate engraved label depicting the origin and cable/conductor size shall be fixed below the main switch.

18.4 **Finishes**

Covers for all boxes, expansion boxes, etc, shall be finished to match the paint work of the ceiling or wall surface or as specified.

18.5 **Site Drawing**

On all completed new work or where specifically called for in the Tender Document, the Contractor shall, on completion of the works, submit to the Head : Works, a marked up site plan indicating the exact underground cable reticulation.

19. **POWER DUCTING FOR SCHOOL SCIENCE LABORATORIES**

The ducting shall be "Ductline 3" supplied by Messrs. Lascon Lighting, 102 Malbourne Road, P.O. Box 2479, Durban 4000: Telephone 031-2075081 or other approved.

20. **SPEAKER AND MICROPHONE OUTLETS**

Speaker and microphone outlets are to conform to the following details:

1. Speaker outlet – To have one flat and one round pin.
2. Microphone outlet – To have one round pin only.

Both female and male parts to be supplied and installed by the Contractor.

21. **BELLS AND BUZZERS**

21.1 **Bells**

Bells for schools and hostels shall be 220 Volt AC or 24 Volt DC as specified for the service. They are to be of robust construction encased in a sturdy cast metal weather-proof case. They are to operate on the frequency of the supply. They shall have an adjustable stabilizing spring, gold-silver contact points and 150 mm gongs.

21.2 **Doorbells, Buzzers and Bell Transformers**

These will be as specified for each service.

21.3 **Bell Pushes**

Except where otherwise specified, bell pushes shall be of the flush type suitable for mounting in a standard 100 x 50 mm box. They shall be clearly marked as a bell push and shall be fitted with satin finished anodized aluminium cover plates.

22. **SIGNAL TIMERS**

22.1 **Primary Schools**

The timer shall be designed to automatically signal the start and finish of school periods by the switching of a bell circuit and is to comply with the following specification:

1. The mechanism may be synchronous motor or quartz movement driven with a 24 hour dial or digital time read-out suitable for operation on a 220V 50Hz supply and is to be provided with a spring or battery reserve of a least 24 (twenty four) hours.
2. The unit is preferably to have minute to minute timing for a 24 (twenty four) hour period although 5 (five) minute intervals are acceptable, and is to be provided with Weekend lockout. Signal periods shall be adjustable from 5 – 45 seconds.
3. The unit shall be housed in a metal or plastic case with detachable front cover suitable for wall mounting.
4. Timers with punch tape programming are not acceptable.

22.2 **High Schools and Colleges**

Timers for these institutions shall generally be as for Primary Schools but are to have at least 3 (three) separate programmes and be fitted with three push buttons for independent manual operations for testing of each programme, plus an on/off switch for each programme, which does not affect the running of the clock.

23. **CLOCKS**

Electric clocks shall be of the quartz electronic battery operated type, with a dial of 250 mm diameter. The dial shall be white, with distinctive minute markings and chapters shall be black Arabic figures. Time adjustment shall be simple. Where mains operated electronic clocks are specified, these shall be of the synchronous self starting type, suitable for a 200 – 250 V 50 Hz AC supply

24. **TIME SWITCHES**

The time switch shall consist of a single pole switch with silver to silver or other approved contacts operated by a quartz movement with a 24 hour reserve.

A suitable 24 hour, night and day dial, with hour indicator and two adjustable strikers, one OFF and one ON must be provided. The whole mechanism is to be totally enclosed in a dust proof case.

The current rating shall be required and the switch is to be suitable for operation on 220 volt 50 Hertz AC supply. Time switches used for under floor heating are to be fitted with weekend cut-out.

25. **MOULDED CASE CIRCUIT BREAKERS (INCLUDING MINIATURE)**

Circuit breakers shall be of the size and type as directed and specified for the service. They shall comply with SABS Specification 156 and SABS IEC 60947-2.

26. **SWITCHES: ON-LOAD FAULT MAKING (CIRCUIT BREAKER TYPE) WITHOUT TRIPS**

The switches shall be triple pole, hand operated, panel mounting air break type, having continuous current rating as specified and suitable for operation of 380 – 440 Volt 50 Hz AC system.

The contacts are to be of silver alloy and the switch mechanism shall be of the quick-make, quick-break type.

27. **SWITCHBOARD EQUIPMENT**

Switchboard equipment such as switches, circuit breakers, etc, shall be as directed and specified in the detail specification for the service.

Circuit breaker equipment of SABS IEC 60934.

28. **FUSE-SWITCH UNITS (WITH HRC FUSES)**

The fuse-switch unit is to be of the double pole, or triple pole or triple pole with neutral link type, and of the required current rating, as specified for the service and must be in accordance with BS EN 60947-3.

The fuse links must be fully isolated when the switch is in the open position, and interlocks must be provided to prevent the switch being operated with the cover open.

The fuse links shall comply with SABS Specification 172 and SABS IEC 60269-1 to 4.

29. **BUS-BAR COPPER**

Bus-bar copper must be fully in accordance with Tables A1 and A2 of SABS 1473-2 and SABS IEC 60439-2.

30. **SPECIFICATION COMPLIANCE**

The complete installation shall comply with the requirements of this specification. Should any differences or contradictions exist between this Specification and the detailed requirements for a specific installation, then the detailed requirements shall take precedence.



KWAZULU-NATAL PROVINCE

PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

ANNEXURE 3

LIGHTNING PROTECTION SPECIFICATIONS

LIGHTNING PROTECTION INSTALLATION

GENERAL SPECIFICATION

1. SATISFACTORY INSTALLATION

The whole of the installation shall be carried out in accordance with:

- (a) The latest S.A.B.S. Code of Practice for the Protection of Structures against Lightning - S.A.B.S. 03 ; SABS IEC 61024 (1) , 61024 (1 -1); SABS IEC 61312 (1) ; SABS IEC 61662 & NRS 042.
- (b) The KwaZulu-Natal Department of Works General Electrical Specification.
- (c) The Municipal By-Laws and any other special requirements as deemed necessary by the Local Supply Authority;
- (d) Local Fire Regulations.

2. S.A.B.S. APPROVED DRAWINGS

SABS Approved drawings are not required for this project.

3. TEST ON COMPLETION

Upon completion of the lightning protection system, the following tests shall be witnessed by an appointed representative of the Employer. The results shall be recorded on suitable test certificates which must be signed by both the Contractor and the Employers representative. A sketch must be included on each test certificate indicating the positions of each earth electrode in relation to some permanent reference point. It must also indicate the positions at which tests were carried out, the type of test and the results of these tests.

3.1 Earth Resistance Test

The Earth Resistance Test shall involve measuring the resistance to earth of each rod-type electrode, or group of rod-type electrodes, or trench earth which would normally be connected to one down-conductor or earth terminal. This test must be made with the electrodes completely disconnected from any part of the structure or lightning protection system.

3.2 Electrical Continuity Tests

(a) External Down-Conductors

Electrical continuity between the lower ends of external down-conductors which must all be disconnected from the earthing system during the test shall not exceed 1 (one) ohm.

(b) Metallic Services

Electrical continuity between any metallic structures of services (e.g. rainwater pipes) which form an integral part of the lightning protection system shall not exceed 1 (one) ohm. These tests should be carried out with all other components of the lightning protection system disconnected from the component being tested.

4. **DESCRIPTION OF MATERIAL**

4.1 **Air Terminals and Down-conductors**

All conductors must be in accordance with the requirements of BSS 1474 or American Standards Specification 6063. All aluminium conductors shall have a cross-section area of not less than 30 mm² (domestic dwelling only) or 50 mm² for all other applications. The dimensions of flat section conductors to be 20 mm x 3 mm. Where conductors are mounted in stand-off guides, the cross-section area of the conductor must be not less than 70 mm² to give adequate mechanical strength.

4.2 **Conductor Guides**

The conductor must be mounted in aluminium alloy guides conforming with the material specification given in 4.1 above. The guides must allow for free longitudinal movement of the conductor to cater for expansion and contraction of the system caused by temperature variation. The minimum thickness of any part of the guide shall not be less than 3 mm. The guides must be securely attached to the structure using two stainless steel screws and plugs, the use of plated screws is not permitted.

The conductor system shall be supported in guides so that an air gap exists at all times between the aluminium and the surface of the structure, the guides being seated upon plastic or other similar insulating material. Should conductors be installed directly upon the surface of concrete or cement plaster, an insulating strip is to be installed over its whole length to prevent contact between the two surfaces. Guides shall be installed to support the conductor at intervals not exceeding 1,2 metres horizontally or 1,5 metres vertically.

N.B.: No part of an aluminium conductor system must be allowed to come into direct contact with concrete or cement plaster as this may cause the aluminium to corrode.

4.3 **Expansion Loops**

Where conductors are installed horizontally without deviation from a straight line over long distances, expansion loops must be provided at distances not exceeding 30 metres. These expansion loops must have a cross-sectional area which is at least equal to that of the conductor.

4.4 **Protection of Down-conductors**

Where external down-conductors are installed in areas which are readily accessible to the public, the lower ends of the conductors shall be enclosed in a semi-rigid insulating material. In the case of a circular section conductor this shall comprise a 2 metre length of 20 mm diameter P.V.C. conduit. This conduit shall be securely attached to the wall by means of galvanized steel saddles fixed with stainless steel screws and plugs, spaced at intervals not exceeding 1 m. Where a flat section conductor is used this shall be covered by a similar length of 25 mm P.V.C. conduit. The lower end of the conduit shall be positioned as close as practicable to ground level, i.e. immediately above an aluminium to copper joint. The ends of the conduit shall not be sealed.

4.5 **Earthing Electrodes**

Earthing electrodes must consist of either copper-clad steel rods not less than 12 mm in diameter and having a minimum copper thickness of 0,20 mm driven into the ground, or a 50 mm² (35 mm² for domestic dwellings) bare copper conductor buried in a trench, or a combination thereof. Where copper clad steel electrodes are used they must have a suitable bond between the steel core and copper exterior to prevent moisture ingress between the two metals. Where it is necessary to extend earth rods, an electrolytically compatible corrosion resistant, coupling device, which prevents ingress or moisture into the joint shall be used. The copper conductor below the down-conductor joint shall be covered by a semi-rigid P.V.C. conduit for a distance of approximately 200 mm above ground and 400 mm below ground.

4.6 **Joints Above Ground**

Circular section aluminium conductors shall be jointed by aluminium ferrules or lugs which are securely crimped into place. Aluminium lugs must be bolted together using 10 mm diameter aluminium bolts and washers. The material specification for these components must conform with that laid down in paragraph 4.1. Alternatively heavily tinned copper lugs and ferrules may be used. The lugs should be joined together by means of 10 mm diameter copper, brass or bronze bolts and washers. Care should be taken to inhibit corrosion where dissimilar metals are used by thoroughly cleaning the surfaces of the metal before assembly and subsequently sealing the joint with an inert tenacious compound or tape.

Flat section aluminium conductors shall be joined by double riveting, using aluminium rivets which comply with the material specification laid down in 4.1. Alternatively 2 x 6 mm diameter stainless steel bolts, nuts and washers may be used. Fold over type bends will not be permitted.

Down-conductors are to be terminated approximately 200 mm above finished ground level. Circular section aluminium is to be jointed to a 50 mm² (35 mm² in the case of domestic dwellings) stranded copper conductor by securely crimping in place two heavily tinned lugs and bolting these together using 10 mm diameter copper, brass or bronze nuts, bolts and washers.

N.B. : Under no circumstances shall aluminium conductors be buried in the ground.

4.7 **Joints Below Ground**

A joint in the stranded copper conductor which forms part of the earthing system must be made by using a crimped copper ferrule clamping (not lugs) using two copper line taps of suitable dimensions, or exothermic welding. The copper earth conductor must be joined to an earth rod by either clamping, using a standard earth rod clamp or copper line tap or by exothermic welding. Joints which are made between dissimilar metals (i.e. copper conductor to galvanized steel water main), must be thoroughly cleaned before assembly. They shall be rendered watertight using waterproof adhesive tape on a suitable compound for a minimum distance of 200 mm in all directions from the joint.

4.8 **Bonds**

Where it is necessary to bond the aluminium conductor to any other metallic surface, this must be done by bolting or riveting. When attaching aluminium to a dissimilar metal the joints are to be thoroughly cleaned and sealed to prevent corrosion.

5. **GENERAL INSTALLATION PROCEDURE**

5.1 **Air Terminals for Non-metallic Pitched Roofs**

Aluminium conductors are to be installed along all ridges of roofs and projections such as dormer windows, etc., terminating at the ends with conductors running downwards over the surface of the roof and the eaves. Non-metallic chimneys must be protected by means of a finial of sufficient length to cover the chimney within a 45° angle struck downwards from its point. Alternatively it should have a conductor installed in the form of a closed loop upon the upper surface. The conductors are to follow the outer contour of the stack and must be bonded at a convenient point to the nearest component of the air terminal system.

N.B. : This bond may run in a horizontal or downward direction, but under no circumstances must any part of it run above horizontal.

Conductors may be dead-ended (i.e. have one end free and unbonded), providing that the length of such a conductor does not exceed 10 metres and that the unbonded end is either at the same level or higher than the bonded end. This technique may be used where ridge conductors are installed over dormer windows, etc.

In all cases where metallic gutters have been installed along the eaves of a pitched roof, these must be bonded to the air terminal system. Where metallic gutters do not exist, however, a conductor must be installed over the surface of the roof at eaves level to which the remainder of the air terminal system is to be bonded, with the following exceptions :

- (a) Where the maximum distance from the ground level to the eaves of the building is less than 4 metres and the pitch of the roof is more than 1 in 2 (27° from the horizontal).
- (b) Where the maximum distances from ground level to the eaves is less than 7 metres and the pitch of the roof is more than 1 in 1,5 (34° from the horizontal).
- (c) Where the distance from the ground level to the eaves is more than 7 metres and the pitch of the roof is more than 1 in 1 (i.e. the included angle at the apex of the roof is less than 90°).

Under these circumstances eaves conductors need not be installed.

Any non-metallic objects which protrude above the general roof lines, such as Cape Dutch gable ends, must be protected as described above with a suitable air terminal system. Any metallic objects which protrude above the general roof line, such as hot water expansion pipes must be bonded as directly as possible to the nearest eaves conductor, gutter or other part of the lightning system.

N.B. : These bonding conductors must run in a horizontal or preferably a downward direction, from the vent pipe, etc., to the lightning protection system.

5.2 **Air Terminals for Metallic Pitched Roofs**

Buildings with roofs covered with electrically continuous metal sheets do not require separate air terminals but must be earthed via down conductors generally as described in 5.6 and 5.7. Any non-metallic objects projecting above the general roof line must be separately protected as described in 5.1 and bonded to the metal roof covering.

5.3 **Air Terminals for Non-metallic flat or Mono-pitched Roofs**

For flat or mono pitched roofs of non-metallic construction the air terminal system must consist of aluminium alloy conductors installed around the outer perimeter of each section of the roof structure. These conductors must be installed on top of parapet walls if these exist. Lift motor rooms, tank rooms, penthouses, etc., which protrude above the general roof line must have air terminal conductors installed around the outer perimeter of each roof slab or parapet wall. Any metallic objects which protrude above the roof line, such as expansion pipes, signs, flag poles, handrails, etc., must be bonded directly to the nearest component of the lightning protection system as described in 5.1.

N.B. : It is not permissible for the ends of conductors to be bonded directly to the perimeter air terminal system if the latter is installed upon a parapet wall having a height exceeding 500 mm above roof slab level. In these circumstances the conductors are to be bonded directly to the down conductors.

5.4 **Air Terminals for Metallic flat or Mono Pitched Roofs**

Metallic flat or mono pitched roofs do not require separate air terminal conductors, providing that there is electrical continuity between the metallic roofing sheets, (see 5.2). A metallic roof surrounded by a non-metallic parapet wall shall have conductors installed at the top of the parapet wall and these must be bonded to the metallic roof at intervals not exceeding 20 metres. If the parapet wall is clad with metal over its upper surface or a handrail is installed which affords good electrical continuity, separate air terminal conductors need not be installed. Under these circumstances the metal handrail or cladding must be bonded to the metal roof covering at intervals not exceeding 20 metres.

All non-metallic covering such as slates, tiles, asbestos cement sheeting, etc., supported by a steel structure being electrically continuous throughout may be treated as being of a complete metal construction. In these circumstances no separate air terminal system need be installed providing the steel roof structure is bonded to earth at intervals given in 5.5.

5.5 **Down Conductors for Non-metallic Structures**

Down conductors must be installed at regular intervals around structures and to run as directly as possible between the air terminal and earthing system. They must, where practicable, be positioned at the external corners of the structure. The maximum separating distance between down conductors around the perimeter of the structure must not exceed 30 metres. In the case of very tall buildings having a slender base (i.e. chimney stacks, water towers, etc.), a minimum of two down conductors must be installed.

The lower ends of down conductors are to be terminated and bonded to the earthing system approximately 200 mm above finished ground level. Under no circumstances must aluminium conductors be buried underground. Test joints must be provided between the down conductors and earthing system. Down conductors must run vertically between the air terminal and earthing systems. Where this is impracticable, their course may be deviated to run at any angle up to and including horizontal.

Where it is necessary to run conductors horizontally over the upper surface of a structural protrusion, such as an exposed concrete slab, the conductor may run down vertically over the edge of the slab and return to the main structure, so that the distance between the upper and lower conductors exceeds one third of the length of the horizontal run. Looped down conductors are not permitted. Down conductors must not run over the underside of large overhangs which are less than 6 metres above ground level, or other areas where people are likely to be present during a thunderstorm.

External or internal metallic rainwater pipes may be used as down conductors providing these are of substantial section and are jointed by screwing one length into another or welding. Thin gauge galvanized steel pipes whose sections are held together by friction, rivets or screws must not form part of a lightning protection system.

5.6 **Down conductors for reinforced concrete framed structures**

The steel reinforcement of this type of structure may be used in place of down conductors. Where the reinforcing system is used, the air terminal system must be bonded to it at a maximum of 30 metre intervals using steel clamps. This bond may be achieved by clamping, with a steel clamp, a steel conductor to a selected reinforcing bar, the opposite end of this conductor must terminate at a corrosion resistant metallic terminal such as Grade 316 stainless steel.

The reinforcing system of prefabricated concrete buildings must not be used unless special provision is made for bonding the various prefabricated sections together.

The terminals should be mounted flush with the face of the concrete. An aluminium alloy bond must then be taken from the air terminal system and be connected to the stainless steel terminal by means of a heavily tinned crimp lug for circular section aluminium, or a suitable bi-metallic joint in the case of flat section aluminium. A similar system must be used to bond the reinforcing system at ground level to the earthing system at points directly below the air terminal bonds. Here copper conductors must be used as the external bonding material.

Under no circumstances must copper, or other non-ferrous material be allowed to come into contact with steel reinforcing bars, as this may cause severe corrosion and subsequent structural damage. The lightning protection system must not be bonded to any part of the structure which is electrically isolated from the remainder of the building, i.e. cantilevered sections. In these circumstances, or where it is otherwise impracticable to use the reinforcing system, external down conductors must be installed as described in 5.5.

5.7 **Down conductors for steel framed structures**

Where the framework of a building is constructed of structural steel columns, these may be used in place of down conductors providing the separating distance between them does not exceed 30 metres. The upper ends of the columns must be bonded to the air terminal systems and the lower ends to the earthing system.

5.8 **Earthing by means of vertically installed rod type electrodes**

Rod-type electrodes must be driven into the ground at a position directly below each down connector. The maximum earthing resistance of each electrode or number of electrodes bonded to any one down conductor shall not exceed $N \times 30$ ohms, where N equals the total number of down conductors which are bonded to a common air terminal system, or 200 ohms whichever is the lower value.

The minimum horizontal separating distance between rod-type electrodes bonded together must not be less than their installed depth. The upper ends of installed rod-type electrodes are to be terminated approximately 500 mm below finished surface level. A 50 mm² copper bonding conductor must be installed to run between each earthing electrode system and the lower ends of the adjacent down conductors. A joint is to be made between each of these bonding conductors and the down conductors at a position approximately 200 mm above finished ground level. These bonding conductors must be installed in P.V.C. conduit securely affixed to the wall (see 3.4). The length of this P.V.C. conduit must be approximately 600 mm and must be installed so that approximately 200 mm protrudes above ground level, the remainder being buried into the soil.

5.9 **Earthing by means of metallic water mains**

Where two or three down conductors are installed the water mains may serve as an earth terminal for one of these. Where three or more down conductors are installed the water mains may serve as an earth terminal for two of these. Regardless of whether the water mains are used as an earth terminal or not, the incoming metal water pipe must be bonded to the lightning protection earthing system underground.

5.10 **Earthing by means of trench type electrodes**

Where the soil conditions prevent the satisfactory installation of rod-type electrodes, a trench earth system must be installed. This method is to comprise a 50 mm² stranded copper conductor installed horizontally into a trench at a depth of 500 mm below finished ground level. The conductor is to follow the general outline of the structure to be protected and be installed 1 metre away from the outside walls. Where the building stands on rocky ground, the trench earth may be attached to the lower part of the wall in areas where rock protrudes through the soil. The conductor must, however, be buried wherever possible as described above.

Each down conductor must be bonded to the trench earth system as directly as possible by means of a copper conductor.

Trench earth systems must have a maximum earth resistance of 30 ohms. An isolated length of trench earth mat must be bonded to the down conductor system in such a way as to reduce the length of dead-ends to the minimum.

Should trench earths be installed beneath pathways where people are likely to be present during a thunderstorm, a plastic, bitumastic or ceramic pipe must be installed having a length similar to the width of the pathway and the trench earth conductor run inside it.

N.B. : The maximum useful length of a dead-ended trench earth is 80 metres.




KWAZULU-NATAL PROVINCE

PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

ANNEXURE 4

MAP OF BID SUBMISSION LOCATION

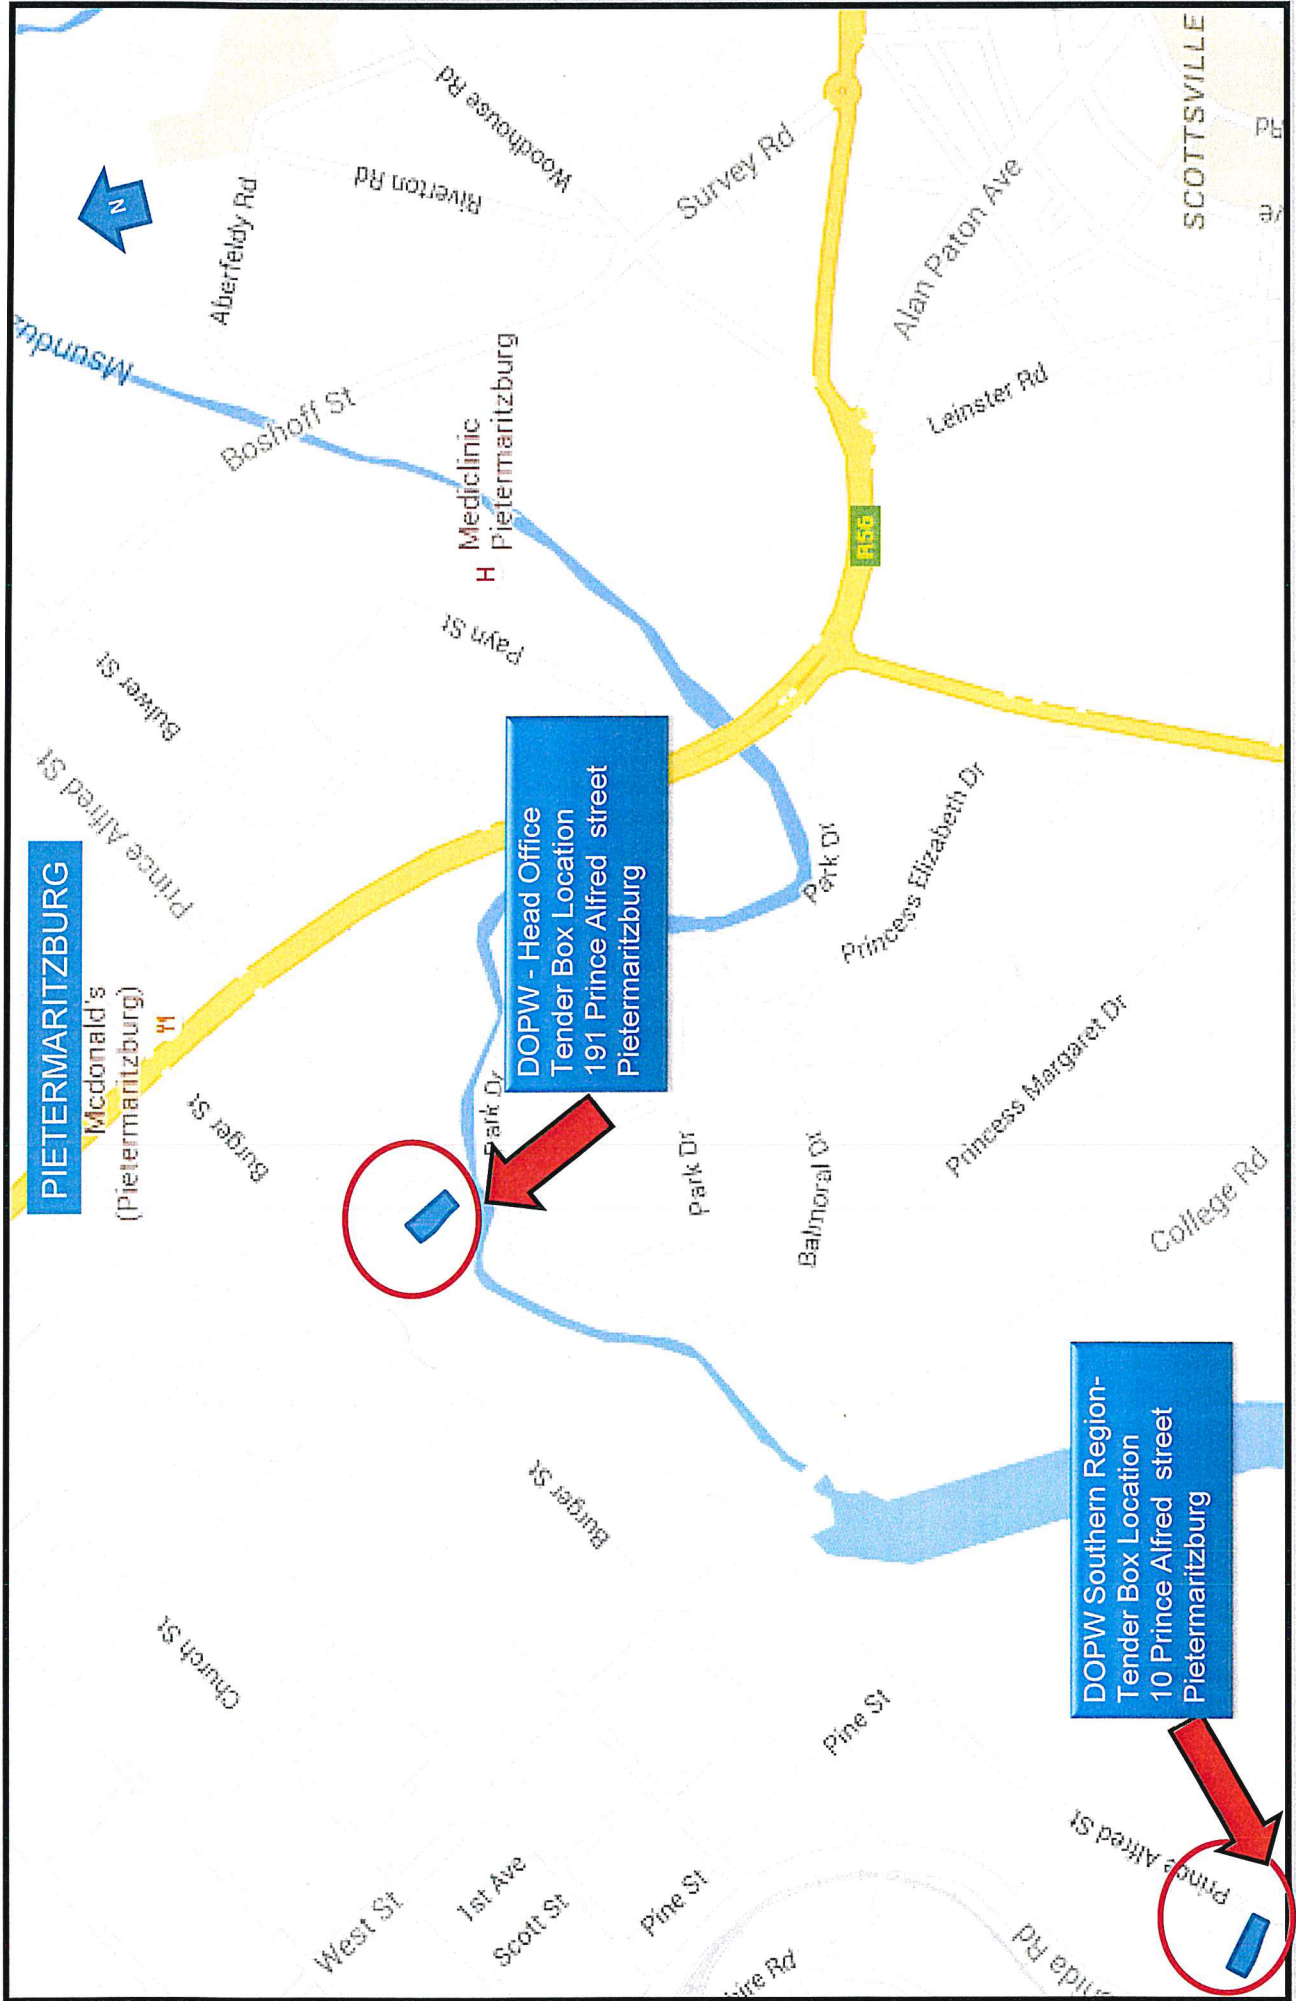



KWAZULU-NATAL PROVINCE

PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

ANNEXURE 5

JOINT VENTURE AGREEMENT



KWAZULU-NATAL PROVINCE
PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

Joint Venture Agreement
(March 2004)
(First Edition of CIDB document 1017)

1. **PREAMBLE**

This agreement is made and entered into by and between

of the first part and

of the second part and

of the third part.

(allow for additional parties as necessary).

Whereas the foregoing parties have resolved to form a Joint Venture under the title of

for the exclusive purposes of securing and/or executing the Contract to be awarded by

(name of Employer)

to the KZN Department of Public Works in respect of the following project:

for (brief description of Contract)

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM DAMAGED SCHOOLS
THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST REGION: CLUSTER 69: UQWEQWE SECONDARY
SCHOOL - OPEN BIDS**

Now it is hereby agreed as follows :

2. **DEFINITIONS AND INTERPRETATION**

2.1 **Definitions**

The following words and expressions shall have the meanings indicated, except where the context otherwise requires. Defined terms and words are, in general, signified in the text of the Agreement by the use of capital initial letters, but the absence of such letters does not necessarily signify that a term, or word, is not defined.

'Agreement' means the agreement between the Members of the Joint Venture and includes this model form of agreement together with the Preamble, Specific Provisions, if any, Schedules 'A', 'B' and 'C' and any relevant Documents prepared prior to the signing of the Agreement and appended thereto.

'Contract' means the contract with the Employer for the supply of the Deliverables, for the purposes of securing and executing which, the Joint Venture has been formed.

'Deliverables' means the works and/or services, equipment, materials, goods, etc. to be furnished by the Joint Venture to the Employer in terms of the Contract.

'Document' means any written, drawn, typed, printed, or photographic material, which relates to the Agreement

'Employer' means the person, or body, which is to award the Contract and will employ the Joint Venture if it is awarded the Contract.

'Joint Venture' means the joint venture formed by the Members in accordance with the Agreement

'Management Committee' means the body established in terms of the Agreement to manage all aspects of the work of the Joint Venture in securing and executing the Contract and in meeting the provisions for the Agreement.

'Member' means a person, or body which, being a party to the Agreement, is a member of the Joint Venture

'Member's Interest' means the proportion expressed as a percentage, which the total monetary value of all resources provided and contributions made by a Member towards the execution by the Joint Venture of the Contract bears to the total of such values by all Members and, unless otherwise indicated in the Agreement, represents the extent to which the Member participates in the fortunes of the Joint Venture.

'Representative' means the person representing a Member on the Management Committee

'Schedules' means Schedules 'A', 'B' and 'C' which set out general, financial and other information relating to the Members and the obligations, duties, rights, risks and benefits arising from their participation in the Joint Venture.

'Specific Provisions' means the variations, if any, required to this standard form of agreement for the specific purposes of the Agreement.

2.2 Interpretation

Unless inconsistent with the context, an expression in the Agreement which denotes:

- any gender shall include the other genders
- a natural person shall include a juristic person and vice versa
- the singular shall include the plural and vice versa

2.3 Headings

The headings to clauses of the Agreement shall not be considered part thereof, nor shall the words they contain be taken into account in the interpretation of any clause.

2.4 Law

The Agreement shall be construed in accordance with and governed by the laws of the Republic of South Africa and the English language versions shall prevail.

2.5 Language

English shall be exclusively used by the Members in the preparation of Documents unless otherwise indicated.

2.6 Conflict between Agreement and Contract

Should any provision of the Agreement be in conflict with the terms of the Contract, the Agreement shall be amended to the approval of the Management Committee so as to eliminate the conflict.

3. **JOINT VENTURE GENERAL**

3.1 Establishment and Purpose

The Joint Venture established by the Members in terms of the Agreement is an unincorporated association with the exclusive purposes of securing and executing the Contract for the benefit of the Members.

3.2 Termination

The operation of the Joint Venture and the validity of the Agreement shall terminate if and when it becomes evident that the Joint Venture will not be awarded the Contract, or, if the Joint Venture secures the Contract, when all obligations and rights of the Joint Venture and the Members in connection with the Contract and the Agreement have ceased and/or been satisfactorily discharged.

Unless otherwise decided by the Management Committee, the Agreement shall not terminate if a Member changes its name, or is taken over by, or merged with, another body.

This agreement will terminate when any one of the Members resigns, are liquidated or opts out of this agreement and the Joint Venture will be in breach of contract with the Employer and their contract could be cancelled.

3.3 Exclusivity

Unless otherwise agreed by the Management Committee, or provided for in the Contract no Member shall engage in any activity related to the Contract other than as a Member of the Joint Venture and Members shall ensure that their subsidiaries and other bodies over which they have control comply with this requirement.

3.4 Participation of Members

Except as may otherwise be stipulated in the Agreement, each Member shall be responsible for all costs incurred by it prior to the date of inception of the Agreement.

Subsequent to the date of inception of the Agreement, each Member shall, participate in the operations, risks, responsibilities and fortunes of the Joint Venture including, inter alia, the provision of funding, sureties, guarantees, insurances, human and other resources and participation in profits and losses to the extents indicated in the Schedules. Participation in any aspect not covered in the Schedules shall, if an agreement cannot be reached between the Members, be to the same extents as indicated by the Members Interests.

3.5 Management

The affairs of the Joint Venture shall be directed and controlled by the Management Committee, as set out in Section 4 hereof.

3.6 Confidentiality

All matters relating to the Agreement and the Contract shall be treated by the Members as confidential and no such matter shall be disclosed to any third party without the prior written approval of the Management Committee.

No Member shall be party to the dissemination of publicity relating to the Contract, or the Agreement, without the prior written approval of the Management Committee and the Employer.

3.7 Assignment

No Member shall cede, assign, or in any other way make over any of its rights, or obligations, under the Agreement without the prior written consent of the Management Committee.

3.8 Subcontracting

No Member shall subcontract any obligation, work or duty for which it is, itself, responsible in terms of the Agreement without the prior written consent of the Management Committee.

3.9 Variations to Agreement

No variation, modification, or waiver of any part of the Agreement shall be of any force, or effect, unless unanimously agreed by the Members and reduced to writing.

3.10 Liability

Each Member warrants that it will indemnify the other Members against all legal liabilities arising out of, or in connection with the performance of its obligations under the Agreement.

It is acknowledged by the Members that they may be held jointly and severally liable in respect of claims against the Joint Venture by the Employer or third parties.

4. **MANAGEMENT OF JOINT VENTURE**

4.1 General

The affairs of the Joint Venture shall be directed, controlled and managed by the Management Committee, which, within the terms of the Agreement and the Contract, shall have full authority to bind the Members in all matters relating to the affairs of the Joint Venture.

Communication between the Joint Venture and the Employer, or third parties, relating to the Contract shall be conducted exclusively by the Management Committee, or by such person as it may delegate to perform this function.

The Management Committee shall have the power to appoint a project manager and/or such other persons as it may see fit to appoint for the purpose of executing the Contract and may delegate such of its powers, responsibilities and duties as it may consider necessary, or desirable, to persons or bodies appointed or seconded for this purpose.

Such administrative functions as are necessary to ensure the effective operation of the Management Committee shall be performed by its chairman.

4.2 Management Committee

4.2.1 Composition

The Management Committee shall, unless otherwise agreed by all the Members, consist of one Representative of each Member and each Member shall be obliged, at all times, to maintain a Representative on the Management Committee.

Each member shall, not later than three working days after the signing of the Agreement, appoint its Representative and notify the other Members of the name and contact details of the Representative. Such Representative shall have the power to bind the Member that he represents in all matters relating to the execution of the Contract and the performance of the Agreement.

A Member shall be entitled, after giving the other Members not less than three working days written notice of his intention to do so, appoint, remove and/or replace, an alternate who shall, at any meeting of the Management Committee from which the Representative whom he represents is absent, be vested with all rights and powers and subjected to all the obligations of the absent Representative.

The chairman of the Management Committee shall be the Representative of the Member which has the largest Member's Interest. If two, or more, Members have the same, largest Member's Interest, the chairmanship shall rotate between the Representatives of such Members at three monthly intervals, the order of rotation to be determined by ballot.

Notwithstanding the foregoing, the chairmanship of the Management Committee may be determined, or changed, at any time by unanimous decision of the Management Committee.

No remuneration shall be paid by the Joint Venture to Representatives or their alternates for serving on the Management

4.2.2 *Meetings*

Meetings of the Management Committee shall take place at such times and places as the Management Committee may determine, provided that the chairman shall convene a meeting of the Management Committee to be held not later than ten working days after he has been requested, in writing, by a Member to do so. Not less than five working days written notice of any meeting of the Management Committee shall be given to all Representatives and their alternates.

The Management Committee may permit, or invite, persons other than Representatives or alternates to attend any of its meetings, but such persons shall not have voting rights.

4.2.3 *Decisions*

Each Representative shall have one vote on the Management Committee and where, in terms of this clause, a casting vote is required, this shall be exercised by the chairman.

All decisions of the Management Committee shall, desirably, be unanimous. Accordingly, if unanimity cannot, initially, be achieved in regard to a decision, the meeting at which that decision is sought shall be adjourned for a period of 48 hours to enable Representatives to consult with their principals. If, on resumption of the adjourned meeting, unanimity can still not be achieved, the decision, provided it is not one requiring unanimity of the Members, shall be taken by majority vote and, in the event of a tie, the chairman shall exercise a casting vote.

A Member not satisfied with a majority decision of the Management Committee may declare a dispute, to be dealt with in terms of Clause 8 hereof, but the majority decision shall, nevertheless, be implemented with immediate effect.

Decisions of the Management Committee, whether taken at a meeting, or otherwise, shall be recorded in written minutes, which shall be distributed by the chairman to reach the Representatives not later than five working days after those decisions were taken. Such minutes shall be deemed to have been affirmed by the Representatives unless written notice of dissent is received by the chairman not later than three working days after receipt of the minutes by the Representative.

4.2.4 Powers and duties

The functions, responsibilities and powers of the Management Committee shall include, inter alia, those listed below:

- 4.2.4.1 Formulating overall policy in regard to the achievement of the objectives of the Joint Venture.
- 4.2.4.2 Managing the day to day affairs of the Joint Venture.
- 4.2.4.3 Monitoring, directing and co-ordinating the activities of the Members to ensure that the objectives of the Joint Venture are achieved and that the obligations and responsibilities of the individual Members are met.
- 4.2.4.4 Monitoring and controlling the financial affairs of the Joint Venture and ensuring that proper books of account and financial records relating to affairs of the Joint Venture are maintained in an approved form and submitted to the Management Committee for approval at regular intervals, which shall not be longer than one month.
- 4.2.4.5 Determining the necessity for and the details of any changes in the duties and responsibilities of Members provided that any resulting changes in Members' Interests shall be unanimously approved by the Members.
- 4.2.4.6 Determining the terms and conditions of employment of personnel and the emoluments applicable to staff seconded to the Joint Venture by the Members.
- 4.2.4.7 Controlling and approving the appointment of all subcontractors.
- 4.2.4.8 Procuring, after the completion of the Contract and the release of all bonds, guarantees and sureties given in respect of the performances of the Joint Venture and the Members, the preparation and auditing of a final set of accounts, on the basis of which the final profits, or losses, attributable to the individual Members shall be determined and any necessary adjustments effected.

5 **RESOURCES OF JOINT VENTURE**

The resources to be utilised by the Joint Venture in securing and executing the Contract shall, insofar as these are to be provided directly by the Members, be as set out in the Schedules and may, from time to time, be amended by decision of the Management Committee, provided that the Member's Interests are not, except with the unanimous approval of the Members, affected thereby.

Similarly, specific areas of responsibility of the Members for the performance of work and the provision of facilities shall be as set out in the Schedules and may, from time to time, be amended by decision of the Management Committee, provided that the Members' Interest are not, except with the unanimous approval of the Members, affected thereby.

5.1 Schedule 'A' (General)

Schedule 'A' shall contain general information relating to the Joint Venture including, inter alia, the following :

1. The Employer's name and address.
2. A brief description of the Contract and the Deliverables.
3. The name, physical address, communications addresses and domicilium citandi et executandi of each Member and of the Joint Venture.
4. The Members' Interests.
5. A statement indicating whether, or not, Specific Provisions apply to the Agreement.
6. A schedule of insurance policies which must be taken out by the Joint Venture and by the individual Members.
7. A Schedule of sureties, indemnities and guarantees that must be furnished by the Joint Venture and by the individual Members.
8. Details of the persons, who, in the event of failure by the Members to reach agreement on the appointments of mediator and arbitrator, will nominate appointees to these positions in terms of Clauses 8.2 and 8.3.

5.2 Schedule 'B' (Financial)

Schedule 'B' shall contain information regarding the financial affairs of the Joint Venture including, inter alia, the following :

1. The working capital required by the Joint Venture and the extent to which and manner whereby this will be provided and/or guaranteed by the individual Members from time to time.
2. The banking accounts that are to be opened in the name of the Joint Venture and the manner in which these are to be operated.
3. The rates of interest that will be applicable to amounts by which Members are in debit, or credit, to the Joint Venture.
4. The names of the auditors and others, if any, who will provide auditing and accounting services to the Joint Venture.
5. The intervals at which interim financial accounts and forecasts will be prepared for approval by the Management Committee.
6. Insofar as not covered in Schedule 'C', the basis on which contributions of various types by the Members towards the work of the Joint Venture in securing, executing, managing and satisfactorily completing the Contract, will be valued.
7. The basis on which profits and/or surplus cash will, if available from time to time, be distributed to Members.
8. The basis upon which losses, if any, are to be apportioned to Members.

5.3 Schedule 'C' (Contributions by Members)

Schedule 'C' shall set out the contributions of various types, other than cash, that will be made by the individual Members towards the work and obligations of the Joint Venture and shall, as far as possible, indicate the monetary values to be placed on such contributions, which may include, inter alia, the following :

1. Staff seconded to the Joint Venture.
2. Work carried out and services provided to, or on behalf of, the Joint Venture.
3. Plant, equipment, facilities etc. made available for use by the Joint Venture.
4. Materials and goods supplied to, or on behalf of, the Joint Venture.
5. Licences, sureties, guarantees and indemnities furnished to, or on behalf of, the Joint Venture.
6. Joint Venture Disclosure form required for the Contract.

6. **BREACH OF AGREEMENT**

If a Member breaches any material provision of the Agreement, or delays or fails to fulfil its obligations in whole, or in part, and does not remedy the situation within fourteen calendar days of receipt of notice from the Management Committee, or another Member, to do so, the other Members shall have the right, without prejudice to any other rights arising from the default, to summarily terminate the Agreement and re-assign the defaulting Member's rights and obligations in the Joint Venture as they see fit and withhold any moneys due to the defaulting member by the Joint Venture.

Each Member shall indemnify the other Members against all losses, costs and claims which may arise against them in the event of the Agreement being terminated as a result of breach of the Agreement by the said Member.

7. **INSOLVENCY OF MEMBER**

Should a Member be placed in liquidation, or under judicial management, whether provisionally or finally, or propose any compromise with its creditors, the other Members shall be entitled to proceed in terms of Clause 6, as if the Member had breached the Agreement.

8. DISPUTES

8.1 Settlement

The Members shall negotiate in good faith and make every effort to settle any dispute, or claim, that may arise out of, or relate to, the Agreement.

If agreement cannot be reached, an aggrieved Member shall, if he intends to proceed further in terms of Clause 8.2 hereof, advise all other Members in writing that negotiations have failed and that he intends to refer the matter to mediation in terms of Clause 8.2.

8.2 Mediation

Not earlier than ten working days after having advised the other Members, in terms of Clause 8.1, that negotiations in regard to a dispute have failed, an aggrieved Member may require that the dispute be referred, without legal representation, to mediation by a single mediator.

The mediator shall be selected by agreement between the Members, or, failing such agreement, by the person named for this purpose in Schedule 'A'. The costs of the mediation shall be borne equally by all Members.

The mediator shall convene a hearing of the Members and may hold separate discussions with any Member and shall assist the Members in reaching a mutually acceptable settlement of their differences through means of reconciliation, interpretation, clarification, suggestion and advice. The Members shall record such agreement in writing and thereafter they shall be bound by such agreement.

The mediator is authorised to end the mediation process whenever in his opinion further efforts at mediation would not contribute to a resolution of the dispute between the Members.

8.3 Arbitration

Where a dispute or claim is not resolved by mediation, it shall be referred to arbitration by a single arbitrator to be selected by agreement between the Members or, failing agreement, to be nominated by the person named for this purpose in Schedule 'A'.

The Member requiring referral to arbitration shall notify the other Members, in writing, thereof, not later than thirty calendar days after the mediator has expressed his opinion, failing which the mediator's opinion shall be deemed to have been accepted by all Members and shall be put into effect.

Arbitration shall be conducted in accordance with the provisions of the Arbitration Act No. 42 of 1965, as amended, and in accordance with such procedure as may be agreed by the Members or, failing such agreement, in accordance with the rules for the Conduct of Arbitrations published by the Association of Arbitrators and current at the date that the arbitrator is appointed.

The decisions of the arbitrator shall be final and binding on the Members, shall be carried into immediate effect and, if necessary, be made an order of any court of competent jurisdiction.

9. DOMICILIUM

The Members choose domicilium citandi et executandi for all purposes of and in connection with the Agreement as stated in Schedule 'A'. A Member shall be entitled to change his domicilium from time to time, but such change shall be effective only on receipt of written notice of the change by all other Members.

Member No. 1

Thus done and signed at _____ this _____ day of _____ 20____

For and on behalf of _____ [Company]

by [name] _____ who warrants his authority to do so.

As witnesses 1. _____

As witnesses 2. _____

Member No. 2

Thus done and signed at _____ this _____ day of _____ 20____

For and on behalf of _____ [Company]

by [name] _____ who warrants his authority to do so.

As witnesses 1. _____

As witnesses 2. _____

Member No. 3

Thus done and signed at _____ this _____ day of _____ 20____

For and on behalf of _____ [Company]

by [name] _____ who warrants his authority to do so.

As witnesses 1. _____

As witnesses 2. _____

[Allow for additional parties as necessary].



KWAZULU-NATAL PROVINCE
PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

ANNEXURE 6

PROJECT SPECIFIC HEALTH AND SAFETY SPECIFICATION



public works

Department:
Public Works
PROVINCE OF KWAZULU-NATAL

Occupational Health and Safety Specification (OHSE SPEC)

Project Name : Uqweqwe Swcondary School : Storm Damage

WIMS No. : 65986

Client OHS

Representative : L. Ntuli

Region : North Coast Region

District : Zululand

Ward no. : N/A

TABLE OF CONTENTS

1 Introduction	3
2. Definitions	4-5
3. Scope of application	6
4. Contractual Issues	7
5. Administrative Requirements	8
5.1 <i>Notification of Construction Work</i>	8
6. Appointment of Safety Officers	8
7. Annexures	
i. <i>Annexure A – Structure of the detailed OHSE Plan</i>	9-10
ii. <i>Annexure B – Client Specific Legal Requirements</i>	11-16
iii. <i>Annexure C – OHS Declaration for Tenders</i>	17
iv. <i>Annexure D - Baseline Risk Assessment</i>	18-24

1. Introduction

The Kwa Zulu / Natal Department of Public Works is deemed as the “**Client**” in terms of the definitions of Construction Regulations of 2014 as published in *Government Gazette No. 37305*. The Construction Regulations of 2014 under CR (5) (1) stipulates that the client must prepare a suitable, sufficiently documented and coherent site specific Occupational Health and Safety Specification for the intended construction work based on the baseline risk assessment.

The purpose of this Occupational Health and Safety Specification document (*which hereinafter will be referred to as OHSE Spec*) is to provide designers and the successful tenderer with essential OHS information to ensure effective safety management during the design and construction phase of the project.

This OHSE Spec forms an integral part of the contract between the Client and the Principal Contractor, so as to ensure compliance with the Occupational Health and Safety Act, Act 85 of 1993 and its applicable regulations and must serve as the basis for the Principal Contractor to develop his/her Project Safety, Health and Environmental Management Plan. As with any other plan for it to be implemented and managed effectively it requires the allocation of sufficient funds to achieve the objectives set out in the plan. In line with this requirement Construction Regulation 5(1) (g) requires the Client to ensure that the Principal Contractor has made adequate provisions for the cost of Health and Safety Measures in their tenders.

It must be noted that this OHSE Spec as much as it is detailed it is not exhaustive and the onus is on the Principal Contractors to ensure that they comply with Section 8 of the OHS Act, Act 85 of 1993 which states that “*Every Employer shall provide and maintain, as far as is reasonably practicable, a working environment that is safe and without risk to the health of his employees.*” this means that Principal Contractors as they are employers in their own right must at all times ensure continuous assessments are done for continued provision and maintenance of a healthy and safe working environment.

2. Definitions

For the purpose of the OHSE Spec, the abbreviations or definitions given hereunder shall apply and the reference to on gender will also apply to the other gender.

"CR" refers to the Construction Regulations 2014

"Agent (Pr. CHSA)" means a competent person who acts as a representative for a Client in terms of regulation (5)5.

"Client" means Department of Public Works

"Competent person" means a person who-

- (a) Has in respect of the work or task to be performed the required knowledge, training and experience and, where applicable, qualifications, specific for that work or task: Provided that where appropriate qualifications and training are registered in terms of the provisions of the National Qualifications Framework Act, 2000 (Act No.67 of 2000), those qualifications and that training must be regarded as the required qualifications and training; and
- (b) Is familiar with the OHS Act, Act 85 of 1993 and with the applicable regulations made under the Act;

"Construction Manager (Site Agent)" means a competent person responsible for the management of the physical construction processes and the coordination, administration and management of resources on a construction site;

"Construction Site" means a work place where construction work is being performed;

"Construction Supervisor" means a competent person responsible for supervising construction activities on a construction site;

"Construction Vehicle" means a vehicle used as a means of conveyance for transporting persons or material, or persons and material, on and off the construction site for the purposes of performing construction work;

"Construction work" means any work in connection with –

- (a) The construction, erection, alteration, renovation, repair, demolition or dismantling of or addition to a building or any similar structure; or
- (b) the construction, erection, maintenance, demolition or dismantling of any bridge, dam, canal, road, railway, runway, sewer or water reticulation system; or the moving

of earth, clearing of land, the making of excavation, piling, or any similar civil engineering structure or type of work;

"Construction Work Permit" means a document issued in terms of regulation 3 of the Construction Regulations 2014;

"Contractor" means an employer who performs construction work;

"Demolition Work" means a method to dismantle, wreck, break, pull down or knock down of a structure or part thereof by way of manual labour, machinery, or the use of explosives;

"Fall Protection Plan" means a documented plan, which includes and provides for-

- (a) All risks relating to working from a fall risk position, considering the nature of work undertaken;
- (b) The procedures and methods to be applied in order to eliminate the risk of falling; and
- (c) A rescue plan and procedures;

"Health and Safety File" means a file, or other record containing the information in writing required by these Regulations;

"Health and Safety Plan" means a site, activity or project specific documented plan in accordance with the client's health and safety specification;

"Health and Safety Specification" means a site, activity or project specific document prepared by the client pertaining to all health and safety requirements related to construction work;

"Medical Certificate of Fitness" means a certificate contemplated in regulation 7(8) of Construction Regulations 2014;

"Principal Contractor" means an employer appointed by the client to perform construction work;

"Safety Officer" – a person deemed competent by SACPCMP under the relevant category of registration.

"Professional Engineer or Professional Certificated Engineer" means a person holding registration as either a Professional Engineer or Professional Certificated Engineer in terms of the Engineering Profession Act, 2000 (Act No. 46 of 2000);

3. Scope of Application

3.1 This OHSE Specification document stipulates the minimum Occupational Health, Safety, and Environmental requirements that the tenderer need to address in his / her OHSE Plan. This Specification also addresses legal compliance, hazard identification, risk assessment, risk control, and the promotion of a Health and Safety culture amongst those working on the project.

3.2 This Specification also makes provision for the protection of persons other than employees. This OHSE Spec is exclusively applicable to the following project pending any change of scope which may necessitate changes to the OHSE Specification;

Uqweqwe Swcondary School: Storm Damage Project

3.3 This OHSE Specification further seeks to achieve the following;

3.3.1 To provide Principal Contractors with the Structure of the Detailed OHSE Plans they will have to prepare and submit for this project. ***See Annexure A***

3.3.2 Provide the overarching framework within which the Principal Contractor is required to demonstrate compliance with certain requirements for occupational health and safety established by the Occupational Health and Safety Act, Act 85 of 1993, all applicable regulations and Client Specific Requirements. ***See Annexure B***

3.3.3 To bring to the attention of the Bidding Principal Contractors that they need to make an undertaking that the costs for executing the project includes the costs of complying with the OHS Act, Act 85 of 1993, all applicable regulations including Client Specific requirements. Such undertaking is made by appending signatures on the OHS Declaration for Tenders. ***See Annexure C***

3.3.4 Ensure that the Principal Agent as the Professional Service Provider appointed by the Department to manage the project on its behalf in terms of the Conditions of Contract applicable to this project ensures that the contents of this document and the attached Baseline Risk Assessment are taken into consideration during design by all professionals appointed and that the OHSE Specification is incorporated into the tender documents. ***See Annexure D***

4. Contractual Issues

- 4.1** Acceptance by the Principal Contractor of the contract with KZN DOPW shall constitute acknowledgement that the Principal Contractor has familiarised him / herself with the contents of the OHSE Spec and that he / she will comply with all its obligations in respect thereof.
- 4.2** Due to fact that this document is based on legislative requirements, the Client requires that all Contractors comply with the requirements of this document and all other relevant legislative requirements not covered by this document.
- 4.3** The Client or its duly appointed Construction H&S Agent reserves the right to stop any Principal Contractor or Sub-Contractors from working whenever Safety, Health or Environmental requirements are being violated as required by regulation 5(1)(q). Any resultant costs of such work stoppages will be for the relevant Contractor's account.
- 4.4** The requirements as specified by the Client in this document must not be deemed to be exhaustive and the Client reserves the right to make changes as and when the Client deems fit to address issue of OHSE Compliance.
- 4.5** The Client will not entertain any claim of any nature whatsoever which arises as a result of costs incurred or delays being experienced due to the Contractor not complying with the requirements of this document and or any other applicable legislative requirements imposed on the Contractor.

5. Administrative Requirements

5.1. Notification of Construction Work

The successful tenderer must at least within 07 working days before commencing with construction work notify the Provincial Director in writing using **Annexure "2"**. A copy of the notification once stamped by a DEL Official must be submitted to the client prior to commencing with construction work.

6. Appointment of a Part time Safety Officer

6.1 The Principal Contractors will have to appoint a competent Part Time Construction H&S Officer as per the following criteria;

- *A part time safety officer shall be appointed and will be onsite at least 2 days a week.*
- *During asbestos removal the Safety Officer will have to be present during that period.*

Annexure A

Structure of the Detailed OHSE Plan

A detailed OHSE Plan is to be submitted by the successful tenderer as per section 3.3.1 above. The following are the minimum standard legal documentation that must form part of the OHSE Plan based on the risks attached in executing this project –

Uqweqwe Swcondary School: Storm Damage Project

1. The notification to commence with construction work made to the Provincial Director of Labour using Annexure 2. *(Filled in only to be submitted on approval of the Safety Plan)*
2. Letter of Good Standing with Compensation Commissioner or Compensation insurer
3. The Contractor's Health, Safety & Environmental Policy, signed by the chief executive officer, which outlines the Contractor's OHSE compliance objectives and how they will be achieved.
4. Pre-Construction risk assessment
5. Fall Protection Plan
6. Relevant checklists and registers.
7. SHE Audit Format to be used for Self-audits and Sub-contractors
8. Site specific OHSE Organogram
9. Preliminary Induction Program
- 10. Environmental Management Plan**
11. Proof of competency for the following legal appointees;
 - 11.1. *Construction Manager –(Detailed CV reflecting qualification, relevant experience and references from previous clients)*
 - 11.2. *Construction Work Supervisor - Detailed CV reflecting qualification, relevant experience and references from previous clients.*
 - 11.3. *Construction H&S Officer – ((Proof of registration with SACPCMP + CV)*
 - 11.4. *Risk Assessor – SAMTRAC or equivalent*
 - 11.5. *Fall Protection Planner - Fall Protection Certificate or equivalent (Training recognised under SAQA unit standard u/s 229994.*
 - 11.6. *Incident Investigator - SAMTRAC or equivalent*

Legal appointments to be appointed	
Prior Site Handover	After Site Handover on commencement with Construction work
<ul style="list-style-type: none"> • Construction Manager • Construction Work Supervisor • Risk Assessor • Fall Protection Planner • Incident / Accident Investigator • Safety Officer 	<ul style="list-style-type: none"> • Scaffold Erectors • Scaffold Inspectors • Excavation inspector • Demolition Work Supervisor • First Aider • Emergency co-ordinator • Fire Marshalls • Fire team members • Portable Electrical tool inspector • Hand tools inspector • Housekeeping inspector • Stacking and storage inspector • Construction Vehicle Operator • Flammable liquids Storage Inspector • Hazardous substance storage inspector • SHE Representative • Ladder Inspector

Annexure B

Client Specific Requirements

Items	Client Specific Requirements
Site Office location	<ul style="list-style-type: none"> The location of the site office should be in an area that will not require visitors to pass through or enter area where construction work is active and will not require the re-location of the office as the project progresses.
Medical Certificates	<ul style="list-style-type: none"> In compliance with the requirements of the Construction Regulations 2014 section 7(8) the Contractor must ensure that all of his employee's onsite have a valid medical certificate of fitness specific to the construction work to be performed and issued by an occupational health practitioner in the form of Annexure 3.
Appointment of a Part -time safety officer	<ul style="list-style-type: none"> The Principal Contractors will have to appoint a competent Part Time Construction H&S Officer for this project and the part time safety officer will have to visit the site at least once in every 30 days for the duration of this project.
Public Safety	<ul style="list-style-type: none"> When working in a occupied facility the contractors risk assessment and subsequent safe work method statement must take into consideration the negative effect the Contractors activities may have on the health and safety of the occupants of the facility and make provisions for the implementation of all reasonably practicable measures to ensure the health and safety of the occupants of the building.
Extreme weather conditions	<ul style="list-style-type: none"> If the weather condition poses a threat to the health & safety of employees be it extreme heat, cold, lighting or any adverse weather condition appropriate safety measures have to be taken.
Change to scope of work	<ul style="list-style-type: none"> Should there be changes to the original scope of work, the Principal Agent must inform appointed Construction Health and Safety Agent to effect changes to the OHSE Specification.
Safety Plan Submission	<ul style="list-style-type: none"> The successful Tenderer must submit a copy of the detailed OHSE Plan for approval and keep the original for onsite use during construction. The principal Contractor will not be allowed to start site establishment before his / her SHE Plan has been approved in writing.
Bylaws	<ul style="list-style-type: none"> The Principal Contractor must incorporate any aspects of the Local Municipal bylaws which affect the, Safety and Environmental wellbeing of the employees and the public into his/her OHSE Plan and ensure compliance to such bylaws.
Risk assessment for construction work	<ul style="list-style-type: none"> To comply with CR (9) and to also address environmental issues <i>See the attached baseline risk assessment to be considered by both the designer and the principal contractor.</i>
Fall protection	<ul style="list-style-type: none"> To comply with CR (10), Edge protection and protection of floor openings need to be of such a manner as to properly protect employees from falling off elevated positions or falling into floor openings.
Structures	<ul style="list-style-type: none"> To comply with CR (11)
Construction vehicles	<ul style="list-style-type: none"> To comply with CR (23) and the following;

Electrical installations and machinery on construction sites	<ul style="list-style-type: none"> To comply with CR (24)
Use and temporary storage of flammable liquids on construction sites.	<ul style="list-style-type: none"> To comply with CR (25)
Water environments	<ul style="list-style-type: none"> To comply with CR (26)
Housekeeping and general safeguarding on construction sites	<ul style="list-style-type: none"> To comply with CR (27) and the following; Contractor to designate areas for placing refuse and rubble prior to being removed from site Contractor must implement a daily task site clean-up for all activities these should cover work areas, stairways, walkways etc. to free of any construction debris obstruction. Refuse to be separated for recycling purposes Hazardous materials such as asbestos may not be included in general rubble and need to be disposed of as per applicable legislative requirements.
Stacking and storage on construction sites	<ul style="list-style-type: none"> To comply with CR (28).
Fire precautions on construction sites	<ul style="list-style-type: none"> To comply with CR (29) and the following; No smoking may be permitted on site except in designated smoking areas.
Construction employees' facilities	<ul style="list-style-type: none"> To comply with CR (30) and the following; Gender signs to be placed at appropriate locations All welfare facilities to be kept in a hygienic condition at all times Employees to be trained in good hygiene practices.
Public Safety & Signage	<ul style="list-style-type: none"> The Principal Contractor engaged in construction work must ensure that each person working on or visiting a site, and the general public in the vicinity of the construction site, shall be made aware of the dangers likely to arise from onsite activities and the precautions to be observed to avoid or minimise those dangers. Appropriate signage shall be posted at conspicuous points within and around the perimeter of the site. The steps to comply with this requirement must be outlined in the OHSE Plan. The public or visitors may only be permitted on site if they go through an appropriate health and safety induction detailing hazards and risks they may be exposed to and what measures are in place to control these hazards and risks The entire project site must be secured against unauthorized access and provided with appropriate warning signage. Where roadways or walkways must be encroached or closed due to work, adequate barriers shall be installed to safely redirect the flow of vehicles and pedestrians and protect them from construction activities. Whenever it is necessary to maintain public use of work areas (such as sidewalks, ramps, entrances to buildings, corridors, or stairways), the public shall be protected with appropriate guardrails, barricades, temporary fences, overhead protection, or temporary partitions and hoarding. The public must also be adequately protected from any work created hazards, such as excavations.

	<p>Appropriate warnings, signs, warning lights and instructional safety signs shall be conspicuously posted and placed where necessary.</p> <ul style="list-style-type: none"> The public must also be protected from falling debris and objects from the project site. Overhead protection shall be provided that will fully protect the public and be capable of withstanding the maximum forces that could be applied from potential falling objects. Special attention shall also be given to developing adequate means to protect against wind-blown debris and construction-related materials.
On Site Health and Safety Training & Induction	<ul style="list-style-type: none"> The Principal Contractor shall ensure that all site personnel and visitors undergo a risk-specific health & safety induction training session before starting work or being permitted to enter the site. A record of attendance shall be kept in the health & safety file. The Principal Contractor shall ensure that, on site periodic toolbox talks take place at least once per week. These talks should deal with risks relevant to the construction work at hand. A record of attendance shall be kept in the health & safety file. The above should also cover all sub-contractors that are onsite. All Contractors have to comply with this minimum requirement. Environmental issues to be included in toolbox talks where required.
General Record Keeping	<ul style="list-style-type: none"> The Principal Contractor and all Sub Contractors must keep and maintain Health and Safety records to demonstrate compliance with this Specification, The OHS Act 85 / 1993; and with the Construction Regulations of 2014. The Principal Contractor shall ensure that all records of incidents / accidents, training, inspections; audits, etc. are kept in a health & safety file held in the site office, which must be present on site at all times. The Principal Contractor must ensure that every Sub Contractor opens its own health & safety file, maintains the file and makes it available on request.
Health & Safety Audits, Monitoring and reporting	<ul style="list-style-type: none"> The Client or its duly appointed Agent shall conduct monthly health & safety audits. The Principal Contractor is obligated to conduct similar audits on all Sub Contractors appointed by them at least once a month. Detailed audit reports must be presented and discussed at all levels of project management meetings and a copy of such audit will be provided to the Client or its duly appointed Agent within 7 working days of such audit. Copies of the Client's audit reports shall be kept in the Principal Contractors Health & Safety File.
Emergency Procedures	<ul style="list-style-type: none"> The Principal Contractor shall submit a detailed Emergency Plan for approval by the Client prior to commencement on site. The plan shall detail the response procedure including the following key elements: <ol style="list-style-type: none"> 1. List of key competent personnel; 2. Details of emergency services; 3. Actions or steps to be taken in the event of the specific types of emergencies; 4. Information on hazardous material/situations.
First Aid Boxes and First Aid Equipment	<ul style="list-style-type: none"> The appointed First Aider(s) to be in possession of a valid first aid training certificate Level 2. Valid certificates are to be kept in the Site Safety File. All Sub Contractors with more than 5 employees shall supply their own first aid box, except if otherwise agreed upon between Principal and Sub- Contractor in writing.
Accident / Incident Reporting and Investigation	<ul style="list-style-type: none"> Injuries are to be categorised into Near miss, first aid, LTI, fatal etc. Fatal accidents to be reported in addition to applicable legislative requirements to the Client or its duly appointed Agent with immediate effect. The Principal

	<p>Contractor must stipulate in its construction phase OHSE Plan how it will handle each of these categories. When reporting injuries to the Client, these categories shall be used. The Principal Contractor shall investigate all injuries, with a report being forwarded to the Client immediately. All Sub- Contractors have to report on the abovementioned categories of injuries to the Principal Contractor at least monthly. All categories of incidents/accidents must be in the Statistics Section of the Monthly Audit Reports, submitted to the Client or it's duly appointed Agent.</p>
Hazards and Potential Situations	<ul style="list-style-type: none"> • The Principal Contractor shall immediately notify other Sub Contractors as well as the Client of any hazardous or potentially hazardous situations that may arise during performance of construction activities. • Should a hazardous situation require work stoppages, the work must be stopped and corrective steps taken such as the issue of Written Safe Work Procedures and the issue of Personal Protective Equipment.
Personal Protective Equipment (PPE) and Clothing	<ul style="list-style-type: none"> • The Principal Contractor must ensure that all workers are issued with the required PPE as required by the risks associated with the activities they perform. The minimum PPE to be worn on site will be Safety Shoes/Boots, Hard Hats, Overalls. No Visitors may enter the site without Safety Shoes/Boots and Hard hats. The Principal Contractor and all Sub Contractors shall make provision and keep adequate quantities of SABS approved PPE on site at all times. All employees issued with PPE to be trained in correct use, records of training and issue to be kept in the Site SHE File. Procedure to be in place to deal with: <ol style="list-style-type: none"> 1. Lost or stolen PPE; 2. Worn out or damaged PPE replacement; and 3. Employees not utilising PPE as required. <p>The above procedure applies to Principal Contractors and their appointed Sub-Contractors, as they are all employers in their own right.</p>
Speed Restrictions and Protections	<p>Unless otherwise stipulated, the maximum speed limit on sites must be limited to 10 km/h.</p> <ol style="list-style-type: none"> 1) Vehicle movement routes on site must be clearly indicated where applicable. 2) Signage to ensure the safe movement of vehicles on site, as well as to ensure the health and safety of all employees and visitors on site, must be displayed in strategic locations.
Hazardous Chemical Substances (HCS)	<ol style="list-style-type: none"> 1) To comply with Hazardous Chemical Substances Regulations as published in Government Notice No. R. 1179 dated 25 August 1995. 2) In addition to the abovementioned, Material Safety Data Sheets must be kept on site for all materials, which may contain hazardous chemical substances.
Fire Extinguishers and Fire Fighting Equipment	<ol style="list-style-type: none"> 1) The Principal Contractor and Sub-Contractors must allow for and provide adequate provision of regularly serviced temporary firefighting equipment located at strategic points on site, specific for the classes of fire likely to occur. 2) The appropriate notices and signs must be allowed for and be erected as required. 3) Contractors may not utilize fire protection equipment belonging to the Client without prior consent.
Ladders and Ladder Work	<ol style="list-style-type: none"> 1) The Principal Contractor must allow for and ensure that all ladders are inspected at least monthly, are in a good safe working order, are the correct height for the task, extend at least 1m above the landing, are fastened and secured and are placed at a safe angle. 2) Records of inspections must be kept in a register on site.

General Machinery	To comply with Driven Machinery Regulations as published in Government Notice No. R. 1010 dated 18 July 2003.
Portable Electrical Tools and Hand Tools	<ol style="list-style-type: none"> 1) The Principal Contractor shall ensure that all electrical tools, electrical distribution boards, extension leads, and plugs are kept in a safe working order. 2) The Principal Contractor shall ensure that all portable electrical Equipment, is clearly numbered, inspected by a Competent appointed person and records of such inspections to be kept on record in an appropriate register on the site SHE file. 3) The Principal Contractor shall allow for and ensure the following in relation to hand Tools: That a "Competent Person" undertakes routine inspections and records are kept on site. <ul style="list-style-type: none"> ○ That only authorized trained persons use the tools. ○ That safe working procedures apply. ○ That PPE is provided and used.
Adequate Lighting	All Contractors must allow for and ensure that adequate lighting is provided to allow for work to be carried out safely.
Transportation of Workers	<ol style="list-style-type: none"> 1) In addition to CR 23 the following will apply The Principal Contractor and Sub-Contractors shall not: <ul style="list-style-type: none"> • Transport persons together with goods or tools unless there is an appropriate area or section of the vehicle in which to store such goods. • Transport persons on the back of trucks except if a proper canopy (properly covering the sides and top) has been provided with suitable seating areas. • Permit workers to stand or sit on the edge of the transporting vehicle. • Transport workers in LDVs unless they are closed / covered and have the correct number of seats for the passengers • No driver may transport more than six people on the back of a 1 Ton LDV and more than four passengers on the back of a ½ Ton LDV. 2) The driver of any LDV may not permit more than two passengers to occupy the cab of any LDV. 3) Drivers of such vehicles must have a valid driver's license for the code of vehicle being driven by them. 4) No servicing of vehicles will be permitted on a Construction Site. No Vehicles or machinery leaking oil will be permitted on site due to the risk posed to the environment. 5) Any oil or diesel spilled on site must be cleaned up as per accepted environmental practice. <p>In the event that Earth Moving Machinery is present on site the following must be adhered to:</p> <ul style="list-style-type: none"> • Drivers of vehicles must be instructed to avoid parking behind earth moving machinery in order to ensure that their vehicles are visible to the operators of earth moving machinery. • Right of way must be afforded to earth moving machinery at all times. • Vehicles must only be permitted to park, where possible, in designated areas.
Occupational Hygiene	<ol style="list-style-type: none"> 1) Occupational exposure is a major problem and all Contractors must ensure that proper health and hygiene measures are put in place to prevent exposure to these hazards.

	<p>2) All Contractors must prevent inhalation, ingestion and absorption of any harmful chemical or biological agents.</p> <p>3) Water to be utilized for drinking purposes may only be drawn from taps designated for drinking water purposes. Fire hydrants and fire hose reels may not be utilized for drinking water purposes.</p>
Environmental Management	<ul style="list-style-type: none"> • The Principal Contractor and Sub-Contractors must comply with the requirements of NEMA Act No. 107 (<i>National Environmental Management Act No 107, 1998</i>). • The Principal Contractor must develop a waste management plan, implement and maintained it onsite. • Cement mixing to be done at a predetermined location on site which must include a solid, slab, and bunded edges to prevent runoff. • Contaminated run off water from the site must be treated such as to ensure that it does not pose a risk to the environment. • Any material which may have a harmful effect when disposed of by normal means must be disposed of in an appropriate manner to eliminate its harmful effect on the environment after disposal. • The Principal Contractor must allow for and ensure that adequate procedures are implemented and maintained to ensure that waste generated is placed in suitable receptacles and removed from the site promptly. • Plans to deal with spillages must be in place and maintained. • No waste materials (liquid or solid) may be disposed of in drains. • No burning of waste material may take place on site as such material being burned may result in pollution of the air or give off toxic vapours which could be harmful to the health of employees or any other person present on site.
Alcohol and other Drugs	<ul style="list-style-type: none"> • No alcohol and other drugs will be allowed on site without the express permission of the Principal Contractor • No person may be under the influence of alcohol or any other drugs while on the construction site. • Any person on the construction site who is on prescription drugs must inform his / her Employer accordingly and the Employer shall in turn report this to the Principal Contractor immediately. • Any person on the construction site who is suffering from any illness / condition that may have a negative effect on his/her safety performance must report this to his / her Employer, who in turn must report this to the Principal Contractor forthwith. • Any person on the construction site who is suspected of being under the influence of alcohol or other drugs must be removed from site immediately and be instructed to report back the next day for a preliminary inquiry. A full disciplinary procedure must be followed by the Contractor concerned and a copy of the disciplinary action must be forwarded to the Principal Contractor for his records.

Annexure C

T2.16 CONTRACTOR'S SAFETY, HEALTH AND ENVIRONMENTAL DECLARATION

Project title:	Uqweqwe Secondary School: Storm Damage		
Bid no:		WIMS no:	65986

INTRODUCTION

In terms of *Construction Regulation 7(1) (h)* of the *Construction Regulations of February 2014* a Contractor may only be appointed to perform construction work if the Client is satisfied that the Contractor has the necessary competencies and resources to carry out the work safely in accordance with the *Occupational Health and Safety Act, Act 85 of 1993* and the *Construction Regulations of February 2014*. In line with this requirement the Contractor is required to read through this document carefully, sign it and submit it with his/her Tender.

DECLARATION

1. I the undersigned hereby declare and confirm that I am fully conversant with the Occupational Health and Safety Act, Act 85 of 1993, the Construction Regulations of February 2014 and the Construction Safety, Health and Environmental Specification attached in the tender document.
2. I hereby declare that my company and its employees has the necessary competency and resources to safely carry out the construction work under this contract in compliance with the Occupational Health and Safety Act, Act 85 of 1993, the Construction Regulations of February 2014 and the Construction Safety, Health and Environmental Specification.
3. I hereby confirm that adequate provisions have been made in my tender to cover the cost of all Safety, Health and Environmental duties and responsibilities imposed on me by the Occupational Health and Safety Act, Act 85 of 1993, the Construction Regulations of February 2014 and the Construction Safety, Health and Environmental Specification.
4. I confirm that I may not commence with any part of construction work under the contract until my Construction Safety, Health and Environmental Plan has been approved in writing by the Client.
5. I hereby confirm that copies of the following documentation will be kept on site for viewing and inspection purposes for the duration of the construction work:
 - a) Client's Construction Safety, Health and Environmental Specification
 - b) Approved Construction Safety, Health and Environmental Plan
 - c) Occupational Health and Safety Act, Act 85 of 1993, and
 - d) Construction Regulations of February 2014.
6. I agree that my failure to complete and execute this declaration to the satisfaction of the Client will mean that I am unable to comply with the requirements of the Occupational Health and Safety Act, Act 85 of 1993 and Construction Regulations 2014, and accept that my tender will be rejected.

Duly Signed at..... on this the..... day of.....201.....

Full Name of Signatory

Name of Enterprise

Capacity of Signatory

Signature of authorised representative of Bidder

Annexure D
Baseline Risk Assessment
Uqwegwe Swcondary School: Storm Damage Project

Main Activity	Sub Activity	Safety Risk	Health Risk	Environmental Risk	Public Safety Risk	Control Measures	Responsible Person
Site Establishment	Identification of existing services (<i>i.e. water pipes, live electricity cables, sewer, etc.</i>).	Electrocution, multi body burns, struck by tools, bite by poisonous insects & other dangerous animals, etc.	Dust exposure, body fatigue, back strains, exposure to extreme temperature, etc.	Land Pollution from poor housekeeping	None	Safe systems of work, training , PPE, Good Housekeeping Practises, Supervision; etc.	Contractor
	Water & Electricity services provision (<i>i.e. electricity connections, etc.</i>)	Electrocution, multi body burns, struck by tools; etc.	Dust exposure, body fatigue, back strains, exposure to extreme temperature, etc.	Land Pollution from poor housekeeping	Electrocution, exposure to dust, etc.	Safe systems of work, training, PPE, Good Housekeeping Practises, Supervision; etc.	Contractor
	Temporal fencing of active construction areas.	Physical injuries (<i>i.e. cuts, abrasion, etc.</i>) from being struck by tools; falls from trips, etc.	Back strain; exposed to intermittent noise levels; respiratory conditions from dust inhalation; etc.	Littering from poor housekeeping	Physical injuries from tripping hazard; etc.	Safe systems of work, training , PPE, Good Housekeeping Practises, Supervision; etc.	Contractor
	Placement of site office & Construction Facilities (<i>i.e. toilets, changing areas, etc.</i>) on site.	Physical injuries (<i>i.e. cuts, abrasion, etc.</i>); <i>cuts & abrasion; trips & falls; eye injuries</i> ; etc.	Back strain; exposed to intermittent noise levels; respiratory conditions from dust inhalation; etc.	Littering from poor housekeeping	Physical injuries from tripping hazard; etc.	Safe systems of work, training , PPE, Good Housekeeping Practises, Supervision; etc.	Contractor
	Vehicles entering & exiting a construction site	Death or physical injuries; employees knocked / run-over by construction vehicles; etc.	Dust inhalation; death; etc.	Land pollution from petrol and oil leaks & spillages from construction vehicles.	Exposed to noise levels & dust inhalation on site; etc.	Safe systems of work, training , PPE, Good Housekeeping Practises, Supervision; etc.	Contractor

	Moving and stacking of materials	Physical injuries from tripping; struck or bumped by or against any construction materials; etc.	Back strain from lifting heavy material; bruising & hand injuries from handling sharp equipment; etc.	Land pollution (from poor housekeeping)	none	Safe systems of work, training , PPE, Good Housekeeping Practises, Supervision; etc.	Contractor
Main Activity	Sub Activity	Safety Risk	Health Risk	Environmental Risk	Public Safety Risk	Control Measures	Responsible Person
Stripping of Roof Sheeting/ Corrugated fixtures	Isolation of services	Electrocution; struck by tools; cuts; trip & fall; skin burn; etc.	Dust Inhalation; electrocution; death; etc.	Littering due to poor housekeeping; etc.	None	Risk Assessment; training to employees; Safe & proper use of portable electrical tools; Wearing required PPE	Contractor
	Removing of roof Sheets	Falls from height; struck by tools; bumping against objects; cuts; trip & fall; etc.	Back strain; dust inhalation; heat exhaustion; exposure to noise; etc.	Littering due to poor housekeeping; etc.	None	Training, PPE, safe systems of work and supervision	Contractor
	Stripping of fixtures	Struck by tools; cuts; abrasion; trip & falls; fracture / hand injuries; etc.	Back strain; dust inhalation; heat exhaustion; exposure to noise; etc.	Littering due to poor housekeeping; etc.	None	Training, PPE, safe systems of work and supervision	Contractor
	Use of hand tools	Struck by hand tools, tripping.	Abrasions, burns, hand injuries, eye injuries, back injury, heat exhaustion	none	none	Training in pre-use inspection, maintenance; Training in using correct tools, inspection; Wearing required PPE (i.e. Overalls, hard hats, safety shoes, goggles, etc.)	Contractor
	Rubble Removal	Trip & fall; bumping against; persons run-over by truck; etc.	Back strain; heat exhaustion; dust inhalation; death; etc.	spilling of diesel, petrol or oil	Noise, dust, collisions, death	Training, PPE, safe systems of work and supervision	Contractor

Installation of Roof Trusses and Roof Covering	Installation of timber roof Trusses	Falls, Struck by, hands caught between,	Back strain, cuts, abrasions, Heat exhaustion, noise, fractures and death/	None	None	Training, PPE, safe systems of work and supervision	Contractor
	Fitting of battens	Falls, Struck by, hands caught between,	Back strain, cuts, abrasions, Heat exhaustion, noise, fractures and death	None	None	Training, PPE, safe systems of work and supervision	Contractor
	Fitting of roof sheets	Falls, struck by, bumping against objects, sharp edges	Back strain, cuts, abrasions, Heat exhaustion, noise, fractures and death etc.	none	Sheets being fitted falling on public	Training, PPE, safe systems of work and supervision	Contractor
Installation of barge and fascia boards	Lifting into position	Falls, hazardous dust, bumps, sharp edges. Struck by falling objects	Muscular strains, dust inhalations, cuts and abrasions	Hazardous dust being release into the environment	None	Training, PPE, safe systems of work and supervision	Contractor
	Drilling and securing	Falls, hazardous dust, bumps, sharp edges, struck by falling objects	Muscular strains, dust inhalations, cuts and abrasions	Hazardous dust being release into the environment	None	Training, PPE, safe systems of work and supervision	Contractor
	Lifting into position	Falls, hazardous dust, bumps, sharp edges, struck by falling objects	Muscular strains, cuts and abrasions	None	None	Training, PPE, safe systems of work and supervision	Contractor
Installation of gutters and down pipes	Drilling and securing	Falls, hazardous dust, bumps, sharp edges, struck by falling objects	Muscular strains, cuts and abrasions, noise	None	None	Training, PPE, safe systems of work and supervision	Contractor
	Fitting doors/windows	Struck by items, hands caught between areas, falling items, sharp edges, noise, dust	Cuts, abrasions, fractures, death	none	None	Training, PPE, safe systems of work and supervision	Contractor

	Fitting glass panes	Struck by items, hands caught between areas,, falling items, sharp edges	Cuts, abrasions, fractures, severe injuries, death	None	None	Training, PPE, safe systems of work and supervision	Contractor
	Glazing	Contact with sharp edges , Hazardous substances, falling	Cuts and lacerations ,, fractures , death	None	None	Training, PPE, safe systems of work and supervision	Contractor
Stitching	Grinding	Falls, hazardous dust, bumps, sharp edges, struck by falling objects	Muscular strains, cuts and abrasions	None	None	Training, PPE, safe systems of work and supervision	Contractor
Electrical Installation	Disconnection of services	Electrocution, struck by tools, sharp edges,	Burns, respiratory failure ,cuts, abrasions, death	None	None	Training, PPE, safe systems of work and supervision	Contractor
	Chasing	Electricity, moving part, entanglement, struck by flying items, sparks, noise , dust, entanglement	Burns, Electrocution, cuts abrasions, dust inhalation, noise induced hearing loss	None	None	Training, PPE, safe systems of work and supervision	Contractor
	Fitting of plug boxes, junction boxes ,Distribution boards etc	Noise , dust , Electricity ,bumping against, struck by flying items, entanglement , moving parts	Electrocution ,cuts and abrasions , dust inhalation ,noise induced hearing loss	None	None	Training, PPE, safe systems of work and supervision	Contractor
	Wiring	Muscular exertion ,bumping against , sharp surfaces	Muscular strain ,cuts and abrasions ,	None	None	Training, PPE, safe systems of work and supervision	Contractor
Re-Screeding Floors	Chipping	Struck by tools, hands caught between areas, Flying particles	cuts, abrasions, dust inhalation, fractures	None	None	Training, PPE, safe systems of work and supervision	Contractor

	Screeding	Poor working position ,caught between surfaces, dust	Muscular strain , dust inhalation, abrasions, dermatitis etc	None	None	Training, PPE, safe systems of work and supervision	Contractor
Installation of a Jo-jo tank	Excavation	Poor posture, Bumps, sharp edges etc	Muscular strains, dust inhalation, cuts and abrasions	None	None	Training, PPE, safe systems of work and supervision	Contractor
	Concrete pouring for base	Poor posture, Bumps, sharp edges etc	Muscular strains, dust inhalation, cuts and abrasions	None	None	Training, PPE, safe systems of work and supervision	Contractor

Uqweqwe Swsecondary School: Onsite General Construction Activities						
Activity	Risk to safety	Risk to Health	Risk to Environment	Risk to Public Safety	Control Measures	
Drilling	Entanglement, struck by flying objects, electricity, hazardous substance dust , noise, etc.	Electrocution, dust inhalation, noise induced hearing loss, muscle strain, foreign objects in eyes, etc.	Contamination of natural resources (spillages), etc.	dust , noise	Safe systems of work , Training, PPE, barricading, Supervision, etc.	
External Wall Painting	Bumping against, wrist strain, etc.	Inhalation of vapours, paint in eyes , minor abrasions, etc.	Contamination of natural resources (spillages), etc.	None	Safe systems of work ,PPE, ventilation of area, good housekeeping, etc.	
Grinding	Electrocution, entanglement,, tripping hazards, struck by flying materials, etc.	Noise induced hearing loss, cuts, loss of limbs, electrocution, etc.	none	Noise, dust etc.	Safe systems of work ,Wet cutting, barricading, temporary guarding, signage Supervision, etc.	

Breaking of concrete	Struck by flying particles, impact hazards, vibration, electrocution, etc.	Noise induced hearing loss ,dust inhalation , particles in eye, electrocution, etc.	None	Noise, dust etc.	Safe Systems of work , barricading, temporary guarding, signage Supervision, etc.
Plastering	Grazing abrasions, bumping against, struck by flying/falling objects, slipping hazards, hazardous substances, etc.	Minor bruising, particles in eyes, dust inhalation, hazardous substances exposure effects, etc.	Contamination of natural resources, etc.	None	Safe systems of work, training , PPE Supervision ,etc.
Loading and unloading by hand	Bumping against edges , Hands caught between , Sharp edges, muscle strain, etc.	Back strain, exhaustion, bruising, hand injuries, etc.	None	None	Safe systems of work, PPE, Training in correct lifting procedures , Supervision etc.
Ladder use	Incorrect positioning, overreach , Overhead hazards , dropping of tools from ladder , Falls, etc.	Broken bones , death, electrocution, etc.	None	None	Safe systems of work , PPE usage, Supervision, etc.
Extension cords	Electricity , tripping hazards, etc.	Electrocution , fractures etc.	none	None	Safe systems of work, PPE, Supervision etc.
Hand tools	Tripping, struck by, bumping against, abrasions, sharp edges, caught between surfaces, flying metal particles etc.	Cuts ,Bruising ,Foreign material in eyes, etc.	none	None	Safe systems of work, PPE, Supervision, etc.
Scaffolding erection, dismantling	Falls from height, dropping of items, sharp edges, scaffolding collapse, etc.	Back strain, bruising, cuts, abrasions, broken bones, death, etc.	none	None	Safe system of work, use of fall arrest equip, erection of safe scaffolding, Supervision, etc.

Note:

CR 7 (8) A contractor must ensure that **all his or her employees** have a **valid medical certificate of fitness** *specific to the construction work to be performed*, and issued by an **Occupational Health Practitioner in the form of Annexure 3.**



KWAZULU-NATAL PROVINCE

PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

ANNEXURE 7

HEALTH AND SAFETY BILL OF QUANTITIES

HEALTH AND SAFETY IMPLEMENTATION COSTING

Contractor to give a breakdown of his Health and Safety costs on this sheet.

ITEM	DESCRIPTION	UNIT	QUAN- TITY	MONTHS (Indicative)	RATE	AMOUNT
			(a)		(b)	(a) x (b)
1	MEDICALS					
1.1	Pre-employment medical	Nr.	-			
1.2	Re-medicals - yearly	Nr.	-			
	TOTAL					
2	PERSONAL PROTECTIVE EQUIPMENT					
2.1	Overalls	Nr.				
2.2	Hard Hats	Nr.				
2.3	Safety boots/shoes	Nr.				
2.4	Gloves	Nr.				
2.5	Gumboots steel toe cap	Nr.				
2.6	Safety glasses	Nr.				
2.7	Reflector Bibs	Nr.				
2.8	Barricading Material	M				
2.9	Dust masks	Box 20				
	TOTAL					
3	FIRE FIGHTING					
3.1	Fire extinguishers - 4.5Kg	Nr.				
3.2	Surveys - Annual Service	Nr.				
	TOTAL					
4	HEALTH AND SAFETY PERSONNEL					
4.1	Safety Manager	Nr.				
4.2	Safety Officer	Nr.				
4.3	Construction Phase Safety, Health, Environmental and Waste Management Plan	Nr.				
	TOTAL					
5	FACILITIES					
5.1	Provision of ablution facilities	Nr.				
5.2	Service and maintenance of ablution facilities	Nr.				
5.3	Provision of eating areas	Nr.				
5.4	Cleaning of Lay down and other storage areas	Nr.				
5.5	Wash hand basin	Nr.				
5.6	Hot and Cold running water	Nr.				
5.7	Degreasing & Toilet soap	Nr.				
	TOTAL					
6	FALL PREVENTION / PROTECTION					
6.1	Safety harnesses with double lanyards	Nr.				
6.2	Safety harnesses with Scaffold hooks	Nr.				
6.3	Lifelines and vertical fall arrest systems	Nr.				
6.4	Scaffolding – material, erection and inspection (Estimate for project)	Nr.				
6.5	Temporary hand railing material and kick flats	Nr.				
6.6	Chin Straps	Nr.				
	TOTAL					

7	FIRST AID					
7.1	Replenishment of boxes and other supplies	Nr				
	TOTAL					
8	TRAINING					
8.1	SHE Representative	Nr.				
8.2	First Aid Level 1	Nr.				
8.3	Fire Fighting	Nr.				
	TOTAL					
9	SIGNAGE					
9.1	All Signage as required by Law, regulatory, warning and information	Nr.				
9.2	Posters for awareness	Nr.				
	TOTAL					
10	ELECTRICAL					
10.1	Replacement of Locks required for lockouts	Nr.				
10.2	Replacement of tags	Nr.				
10.3	Replacement for Permit books	Nr.				
10.4	Replacement of Calipers	Nr.				
	TOTAL					
11	OTHERS (Project Specific)					
11.1		Nr.				
	TOTAL					
GRAND TOTAL TO BE CARRIED TO THE PRELIMINARIES AND GENERAL IN BILL OF QUANTITIES						



KWAZULU-NATAL PROVINCE

PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

ANNEXURE 8
BUILDERS LIEN AGREEMENT

WAIVER OF CONTRACTOR'S LIEN

DEFINITIONS

Contractor: _____

Employer: Head: Public Works (KZN Department of Public Works: Province of KwaZulu-Natal)

Agreement: GCC FOR CONSTRUCTION WORKS - SECOND EDITION 2010

Works (description):

PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO
STORM DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-
NATAL: NORTH COAST REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL
- OPEN BIDS

Site:

GPS CO-ORDINATES: 28°07'14.16"S 30°48'16.56"E

AGREEMENT

The Contractor waives, in favour of the Employer, any lien or right of retention that is or may be held in respect of the Works to be executed on the Site

Thus done and signed at _____ on _____
[Date]

Name of signatory

Capacity of signatory

As witness

For and on behalf of the contractor who by
signature hereof warrants authorisation
hereto



KWAZULU-NATAL PROVINCE

PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

ANNEXURE 9

GEOTECHNICAL INVESTIGATION REPORT - (IF APPLICABLE)




KWAZULU-NATAL PROVINCE

PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

ANNEXURE 10

**EPWP EMPLOYMENT CONTRACT AND EPWP
SPECIFICATION/CHECKLIST**

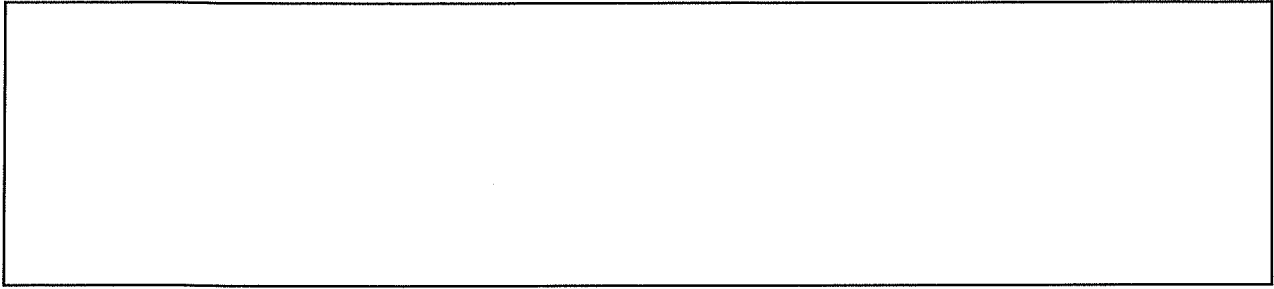

(Insert Your Company Logo)

(This shall serve as the cover page on employment contracts for local labour)

EMPLOYMENT AGREEMENT

BETWEEN

[CONTRACTOR NAME].....

AND

[WORKER NAME].....

1. PARTIES

The Parties to this Agreement are -

1.1. Contractor: _____
herein represented by: _____
duly authorised thereto

And

1.2. Mr / Me: _____
[worker's name]

2. DEFINITIONS AND INTERPRETATION

2.1. In this Agreement and any Annexure thereto, unless inconsistent with or otherwise indicated by the context-

"Agreement" means the contents of this Agreement.

"Company" means the company that employs the worker

"Department" means the Department of Public Works

"Worker" is a person that performs a specific or necessary task or who completes tasks in a certain way

"EPWP" The Expanded Public Works Programme is a government programme aimed at the alleviation of poverty and unemployment. The programme ensures the full engagement on Labour Intensive Methods of Construction (LIC) to contractors for skills development. The EPWP focuses at reducing unemployment by increasing economic growth by means of improving skills levels through education and training and improving the enabling environment for the industry to flourish.

3. PURPOSE

The purpose of this agreement is to:-

Ensure that the agreement is binding to both the Worker and the Employer.

4. TERMS AND CONDITIONS

- The worker will have no entitlement to the benefits of a full time employee, namely;

- The worker should not have the expectation that this contract will be renewed or extended.
- The worker will be subject to all laws, rules, policies, codes and procedures applicable to the;

- The worker must meet the standards and requirements of the contractor
- The worker must render his/her services during normal working hours of minimum of forty to fifty five hours in any week; which comprise of an eight-hour working day in a five-day week.

5. REMUNERATION

The worker will receive compensation to the amount of R_____00 which must be paid by the 25th or on the last day of each month.

6. ROLES AND RESPONSIBILITIES

6.1 Employer / Worker

- Work for _____ in terms of the period as specified in the employment agreement contract.
- Be available for and participate in all learning and work experience required by the company.
- Comply with workplace policies and procedures.
- Complete any attendance or any written assessment tools supplied by the contractor to record relevant workplace experience.
- Demonstrate willingness to grow and learn through work experience.

Provide the following documentation to the employer,

- Certified identity document not longer than 3 months
- ID size photos
- Sign employment contract

6.2 Employer

- Employ the worker for a period specified in the agreement.
- Provide the worker with appropriate work based experience in the work environment.
- Facilitate payments of wages / stipends.
- Keep accurate records of workers.
- Where a worker/ learner is disabled, the employer will have to provide in the additional needs e.g. special materials, learning aids and in some cases physical or professional support (such aids remain the property of the employer).
- Keep up to date records of learning and discuss progress with the intern on a regular basis.
- Apply fair disciplinary, grievance and dispute resolution procedures to the worker.
- Prepare an orientation/ induction course to introduce worker/ learner to the workplace and specific workplace requirements.
- Ensure the daily attendance register is signed by the worker.

7. DURATION.

This agreement commences on: _____

and

expires on: _____

8. BREACH.

If either party commits any breach of the terms of this contract (and fails to rectify it within 30 days of receipt of a written notice calling it to do so, then) the other party shall be entitled to terminate the contract or to claim specific performance without prejudice to any of its other legal rights, including its rights to claim damages.

9. CONDITIONS OF EMPLOYMENT

9.1. Meal Breaks

9.1.1 A worker may not work for more than five hours without taking a meal break of at least thirty minutes duration.

9.1.2 An employer and worker may agree on longer meal breaks.

9.1.3 A worker may not work during a meal break. However, an employer may require a worker to perform duties during a meal break if those duties cannot be left unattended and cannot be performed by another worker. An employer must take reasonable steps to ensure that a worker is relieved of his or her duties during the meal break.

9.1.4 A worker is not entitled to payment for the period of a meal break. However, a worker who is paid on the basis of time worked must be paid if the worker is required to work or to be available for work during the meal break.

9.2. Special Conditions for Security Guards (Only applicable to security Guards)

9.2.1 A security guard may work up to 55 hours per week and up to eleven hours per day.

9.2.2 A security guard who works more than ten hours per day must have a meal break of at least one hour or two breaks of at least 30 minutes each.

9.3. Weekly Rest Period

Every worker must have two days off every week. A worker may only work on their day off to perform work which must be done without delay and cannot be performed by workers during their ordinary hours of work ("emergency work").

9.4. Work on Sundays and Public Holidays

9.4.1 A worker may only work on a Sunday or public holiday to perform emergency or security work.

9.4.2 Work on Sundays is paid at the ordinary rate of pay.

9.4.3 A task-rated worker who works on a public holiday must be paid;

- (a) the worker's daily task rate, if the worker works for less than four hours;
- (b) double the worker's daily task rate, if the worker works for more than four hours.

9.4.4 A time-rated worker who works on a public holiday must be paid

- (a) the worker's daily rate of pay, if the worker works for less than four hours on the public holiday;
- (b) double the worker's daily rate of pay, if the worker works for more than four hours on the public holiday.

9.5 Sick leave

9.5.1 Only workers who work more than 24 hours per month have the right to claim sick-pay in terms of this clause.

9.5.2 A worker who is unable to work on account of illness or injury is entitled to claim one day's paid sick leave for every full month that the worker has worked in terms of a contract.

9.5.3 A worker may accumulate a maximum of twelve days' sick leave in a year.

9.5.4 Accumulated sick-leave may not be transferred from one contract to another contract.

9.5.5 An employer must pay a task-rated worker the worker's daily task rate for a day's sick leave.

9.5.6 An employer must pay a time-rated worker the worker's daily rate of pay for a day's sick leave.

9.5.7 An employer must pay a worker sick pay on the worker's usual payday.

9.5.8 Before paying sick-pay, an employer may require a worker to produce a certificate stating that the worker was unable to work on account of sickness or injury if the worker is

- (a) absent from work for more than two consecutive days; or
- (b) absent from work on more than two occasions in any eight-week period.

9.5.9 A medical certificate must be issued and signed by a medical practitioner, a qualified nurse or a clinic staff member authorised to issue medical certificates indicating the duration and reason for incapacity.

9.5.10 A worker is not entitled to paid sick-leave for a work-related injury or occupational disease for which the worker can claim compensation under the Compensation for Occupational Injuries and Diseases Act.

9.6. Maternity Leave

- 9.6.1 A worker may take up to four consecutive months' unpaid maternity leave.
- 9.6.2 A worker is not entitled to any payment or employment-related benefits during maternity leave.
- 9.6.3 A worker must give her employer reasonable notice of when she will start maternity leave and when she will return to work.
- 9.6.4 A worker is not required to take the full period of maternity leave. However, a worker may not work for four weeks before the expected date of birth of her child or for six weeks after the birth of her child, unless a medical practitioner, midwife or qualified nurse certifies that she is fit to do so.
- 9.6.5 A worker may begin maternity leave as follows;
- (a) four weeks before the expected date of birth; or
 - (b) on an earlier date
 - (i) if a medical practitioner, midwife or certified nurse certifies that it is necessary for the health of the worker or that of her unborn child; or
 - (ii) if agreed to between employer and worker; or
 - (c) on a later date, if a medical practitioner, midwife or certified nurse has certified that the worker is able to continue to work without endangering her health.
- 10.6 A worker who has a miscarriage during the third trimester of pregnancy or bears a stillborn child may take maternity leave for up to six weeks after the miscarriage or stillbirth.

9.7. Family responsibility leave

9.7.1 Workers, who work for at least four days per week, are entitled to three days paid family responsibility leave each year in the following circumstances;

- (a) when the employee's child is born;
- (b) when the employee's child is sick;
- (c) in the event of a death of
 - (i) the employee's spouse or life partner;
 - (ii) the employee's parent, adoptive parent, grandparent, child, adopted child, grandchild or sibling.

9.8. Keeping Records

9.8.1 Every employer must keep a written record on site for the duration of the project and three (3) year after completion records should consists of at least the following;

- (a) the worker's name and position;
- (b) copy of an acceptable worker identification
- (c) in the case of a task-rated worker the number of tasks completed by the worker;
- (d) in the case of a time-rated worker, the time worked by the worker;
- (e) payments made to each worker in a form of Proof of Payment, Payroll registers and the acknowledgement of payment receipt signed by the worker.

9.8.2 The employer must keep this record for a period of at least three years after the completion of the EPWP.

9.9. Payment

9.9.1 An employer must pay all wages at least monthly in cash or by cheque or into a bank account.

9.9.2 A worker may not be paid less than the Ministerial Determination wage rate.

9.9.3 A task-rated worker will only be paid for tasks that have been completed.

9.9.4 An employer must pay a task-rated worker within five weeks of the work being completed and the work having been approved by the manager or the contractor having submitted an invoice to the employer.

9.9.5 A time-rated worker will be paid at the end of each month.

9.9.6 Payment must be made in cash, by cheque or by direct deposit into a bank account designated by the worker.

9.9.7 Payment in cash or by cheque must take place

- (a) at the workplace or at a place agreed to by the worker;
- (b) during the worker's working hours or within fifteen minutes of the start or finish of work;
- (c) in a sealed envelope which becomes the property of the worker.

9.9.8 An employer must give a worker the following information in writing

- (a) the period for which payment is made;
- (b) the numbers of tasks completed or hours worked;
- (c) the worker's earnings;
- (d) any money deducted from the payment;
- (e) the actual amount paid to the worker.

9.9.9 If the worker is paid in cash or by cheque, this information must be recorded on the envelope and the worker must acknowledge receipt of payment by signing for it.

9.9.10 If a worker's employment is terminated, the employer must pay all monies owing to that worker within one month of the termination of employment.

9.10. Inclement weather

If no work has begun on site, and if an employee has reported for work, the employee will be paid for four hours. Should work be stopped after the first four hours, the employee will be paid for the hours worked. Where the employer has given employees notice on the previous working day that no work will be available due to inclement weather, then no payment will be made.

9.11. Deductions

9.11.1 An employer may not deduct money from a worker's payment unless the deduction is required in terms of a law.

9.11.2 An employer must deduct and pay to the SA Revenue Services any income tax that the worker is required to pay.

9.11.3 An employer who deducts money from a worker's pay for payment to another person must pay the money to that person within the time period and other requirements specified in the agreement of Law; court order or arbitration

9.11.4 It is the responsibility of the employers to arrange for all persons employed on a Project to be covered in terms of the Unemployment Insurance Fund Contributions Act, 2002 (Act No. 4 of 2002)

9.11.5 An employer may not require or allow a worker to

- (a) repay any payment except an overpayment previously made by the employer by mistake;

- (b) state that the worker received a greater amount of money than the employer actually paid to the worker; or
- (c) pay the employer or any other person for having been employed.

9.12. Health and Safety

9.12.1 Employers must take all reasonable steps to ensure that the working environment is healthy and safe.

9.12.2 A worker must;

- (a) work in a way that does not endanger his/her health and safety or that of any other person;
- (b) obey any health and safety instruction;
- (c) use any personal protective equipment or clothing issued by the employer;
- (d) report any accident, near-miss incident or dangerous behaviour by another person to their employer or manager.

9.13. Compensation for Injuries and Diseases

9.13.1 It is the responsibility of the employers to arrange for all persons employed on a Project to be covered in terms of the Compensation for Occupational Injuries and Diseases Act, 130 of 1993 as amended by COIDA Act 61, 1997.

9.13.2 A worker must report any work-related injury or occupational disease to their employer or manager.

9.13.3 The employer must report the accident or disease to the Compensation Commissioner.

9.13.4 An employer must pay a worker who is unable to work because of an injury caused by an accident at work 75% of their earnings for up to three months. The employer will be refunded this amount by the Compensation Commissioner. This does NOT apply to injuries caused by accidents outside the workplace such as road accidents or accidents at home.

9.14. Termination

9.14.1 The employer may terminate the employment of a worker for good cause after following a fair procedure.

9.14.2 A worker will not receive severance pay on termination.

9.14.3 A worker is not required to give notice to terminate employment. However, a worker who wishes to resign should advise the employer in advance to allow the employer to find a replacement.

9.14.4 A worker **who is absent for more than three consecutive days** without informing the employer of an intention to return to work will have terminated the contract. However, the worker may be re-engaged if a position becomes available.

9.14.5 A worker who does not attend required training events, without good reason, will have terminated the contract. However, the worker may be re-engaged if a position becomes available.

Notice procedure is as follows;

- One week if employed for four weeks or less
- Two weeks if employed for more than four weeks but not more than a year
- Four weeks if employed for one (1) year or more

9.15. Certificate of Service

9.15.1 On termination of employment, a worker is entitled to a certificate stating;

- (a) the worker's full name;
- (b) the name and address of the employer;
- (c) the Project on which the worker worked; the work performed by the worker;
- (d) any training received by the worker;
- (e) the period for which the worker worked on the Project; and
- (f) any other information agreed on by the employer and worker.

9.16. DOMICILE

The address to which notices and all legal documents may be delivered or served are as follows:

Employee Details

Name & Surname: _____

ID No: _____

Residential Address: _____

Contact No: _____

Date of Employment: _____

To be supervised by:

Main Contractor:
or Sub Contractor:

Category of employment:

Skilled:
Semi-skilled:
Unskilled:

For Skilled & Semi-skilled state the trade: _____

Period of employment: Fixed for until when your services are still required on site

I confirm that I have been inducted and fully understand the condition of my appointment.

Employee Signature: _____

Witness by SGB/CLO: _____

Signature by Witness: _____

Employer Details

Name & Surname: _____

Designation: _____

Contact No: _____ Signature: _____



EXPANDED PUBLIC WORKS PROGRAMME
Creating opportunities towards human fulfilment

Project Employment Data Management and Reporting Requirements – to be included in the tender documents for the Department of Public Works

NB: All information, documents and files stated herein must be available for Auditor

No.	Information / Document	Comments
1	Monthly Reports	
1.1	Monthly reports to be submitted in the specified Employment Data Collection Form <ul style="list-style-type: none">This is a monthly schedule where monthly attendance, training and other aspects of participants (labourers) is summarised. The Employment Data Collection Form must provide credible data that corresponds with the Payroll Register and Proof of payment.	
1.2	Payroll Register <ul style="list-style-type: none">Which is a list of each participant (labourer) who was paid for each month and which would include the amount of the wage paid.	
1.3	Proof of payment <ul style="list-style-type: none">Which is a download from the payment system or a bank statement reflecting all participants paid and the amounts paid	
1.4	Payment Register/Pay sheet signed by workers <ul style="list-style-type: none">Where proof of payment is not available, a payment register must be submitted. This is a schedule where participants sign as an acknowledgement of receipt of wages for the number of days worked at a stipulated daily rate. .	
1.5	ID size photos <ul style="list-style-type: none">Every participant must have an ID size photo taken within the first month of employment and photo to be supplied to the Department.	



No.	Information / Document	Comments
2 Records to be filed and updated monthly on site		
2.1	Identity Document (ID) copies <ul style="list-style-type: none"> Every new (at the beginning of employment) participant to provide a certified South African ID copy that is not older than 3 months 	
2.2	Daily attendance register showing full name and gender (To correspond with Proof of payment and payroll register and monthly report in the Data Collection Form)	
2.3	Employment Contracts indicating date signed by both the employer and the employee and witnesses if applicable	
2.4	Payslips for all payments made to participants indicating the number of days worked	
2.5	Document where beneficiaries completed / provided their bank account details	
2.6	Completed Beneficiary/participants list-simplified form	
2.7	Project coordinates	
2.8	Project progress report	
3 Training		
3.1	Training attendance registers for ALL training attended by participants Number of training days and Training should be reported as follows; <ol style="list-style-type: none"> Number of people trained Number of people that received accredited training Number of people that received non-accredited training Profile of the participants (Women, Disabled, Youth) 	As and when training is provided



No.	Information / Document	Comments
	5. Percentage of participants who worked on the project after receiving training.	
4	UIF	
4.1	Evidence to confirm that UIF for participants has been paid for the employment duration	
5	COIDA	
	<p>Evidence that the participants of the project are included in the Employers monthly provisions for COIDA.</p> <ul style="list-style-type: none"> Evidence that the Employer paid the relevant contributions as required by the Compensation Commissioner. 	



KWAZULU-NATAL PROVINCE

PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

ANNEXURE 11

ATTENDANCE REGISTER - INFRASTRUCTURE & OTHER PROJECTS



EXPANDED PUBLIC WORKS PROGRAMME

The Attendance Register for on-site Workers

Reporting month: _____
Surname: _____

Cell No: _____
First Name: _____

Project Name: **PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

Project Code: **065986**

Tender No **ZNTU04215W**

IDENTITY NUMBER:

Day	Date	Time In	Signature	Time Out	Signature	Report On Any Formal Training Provided In The Reporting Month
WEEK 1						
MONDAY						
TUESDAY						
WEDNESDAY						
THURSDAY						
FRIDAY						
WEEK 2						
MONDAY						
TUESDAY						
WEDNESDAY						
THURSDAY						
FRIDAY						
WEEK 3						
MONDAY						
TUESDAY						
WEDNESDAY						
THURSDAY						
FRIDAY						
WEEK 4						
MONDAY						
TUESDAY						
WEDNESDAY						
THURSDAY						
FRIDAY						
WEEK 5						
MONDAY						
TUESDAY						
WEDNESDAY						
THURSDAY						
FRIDAY						
Total Days worked						



KWAZULU-NATAL PROVINCE
PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS**

ANNEXURE 12
EPWP DATA COLLECTION TOOL

BUSINESS PLAN

Reference No	
Profile ID	
Project Name	
Project Details	
Project Name	
Project Reference Number	
Project description	
Project Start Date	
Project End Date	
Estimated Budget	
Project Location	
Province	
District/Metro Municipality	
Local Municipality/Metro Region	
Latitude (in decimal format)	
Longitude (in decimal format)	
Public Body Details	
Public body sphere	
Reporting public body that is the project owner (and will report on the project)	
Implementing public body type	
Public body that will implement the project	
IDP reference number allocated to the project	
EPWP Details	
EPWP Sector	
EPWP Program	
EPWP Sub programme	
Budget Amount	
April 2014/March 2015	
April 2015/March 2016	
Total Budget Amount	
Wages	

UIF	
COIDA	
Training	
Administration	
Equipment and materials	
Other	
Describe other	
Outputs and Training	
Output	
Description	
Target Quantity	
Number of persons to be trained	
Contact person	
Title	
Initials	
First Name	
Surname	
Email	
Tel (Office)	
Fax Number	
Cell Number	
Physical Address 1	
Physical Address 2	
Physical Address 3	
Physical Address 4	
Postal Address 1	
Postal Address 2	
Postal Address 3	
Postal Address 4	

KZN PUBLIC WORKS
Monthly Data collection for LOCAL Labour



Name of Contractor: _____

Project Code: _____

Project location name (area): _____

PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND RENOVATIONS TO STORM
DAMAGED SCHOOLS THROUGHOUT THE PROVINCE OF KWAZULU-NATAL: NORTH COAST
REGION: CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS

Name of Project: _____

Reporting month: _____

Project location (Ward No.): _____

Beneficiary Details										Experience/Literacy					Location Details			Household Details								
No	First Name	Initial	Surname	ID number	D.O.B	Gender F/M	Disability Y/N	Start Date on the current month	End Date on the current month	Total days worked	Job description	Registered on UIF (Y/N)	Registered with COIDA (Y/N)	Are you receiving any Gov grant? (Y/N)	1st Language	Other Language 1	Other Language 2	Education Level (See Codes below)	Highest Level of Education	Address	Ward No.	Cell No.	Nationality	No. of people in Household	No. of Dependents in Household	No. of Children attending school
1																										
2																										
3																										
4																										
5																										
6																										
7																										
8																										
9																										
10																										

• Education Levels – use the codes (1,2,3) on the excel spreadsheet
o (1) Unknown
o (2) No Schooling
(3) Grade 1-3 (Sub A – Std 1)
(4) Grade 4 (Std 2) ABET 1
(5) Grade 5-6 (Std 3-4) ABET 2
(6) Grade 7-8 (Std 5-6) ABET 3
(7) Grade 9 (Std 7) ABET 4
(8) Grade 10-11 (Std 8-9)
(9) Grade 12 (Std 10)
(10) Post Matric

Contractor sign: _____
Designation: _____
Date: _____
Contact no: _____

DPW Official/Consultant sign: _____
Designation: _____
Date: _____
Contact no: _____

EPWP Official sign: _____

Worker payment capture form for LOCAL Labour



KWAZULU-NATAL PROVINCE
PUBLIC WORKS
REPUBLIC OF SOUTH AFRICA



Name of Contractor: _____

Project Code: _____

065986

**PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS
AND RENOVATIONS TO STORM DAMAGED SCHOOLS
THROUGHOUT THE PROVINCE OF KWAZULU-NATAL:
NORTH COAST REGION: CLUSTER 69: UQWEQWE
SECONDARY SCHOOL - OPEN BIDS**

Name of Project: _____

Reporting month: _____

Payment Upload

No.	First Name	Initials	Surname	Identity No.	D.O.B	Job Description	Daily Wage Rate	Total Paid Days	Total Amount Paid	Total days Worked Days
1										
2										
3										
4										
5										
6										
7										
8										
9										
10										

Contractor sign: _____
Designation: _____
Date: _____
Contact no: _____

DPW Official/Consultant sign: _____
Designation: _____
Date: _____
Contact no: _____

EPWP Official sign: _____
Designation: _____
Date: _____
Contact no: _____



Name of Contractor: _____
Name of Project: _____

Project Code: _____

065986

PHASE 14 STORM DAMAGED PROGRAMME: REPAIRS AND
RENOVATIONS TO STORM DAMAGED SCHOOLS THROUGHOUT
THE PROVINCE OF KWAZULU-NATAL: NORTH COAST REGION:
CLUSTER 69: UQWEQWE SECONDARY SCHOOL - OPEN BIDS

Reporting month: _____

Training

No	Name	Surname	ID No.	Job description	Course Name	Was training Accredited or Non - accredited by a relevant SETA	Start date on current month	End date on current month	Training Days Paid	Training Days Not Paid	Total Number of Training Days	Cost per trainee	Is training complete or on - going	Name of Training Provider
1														
2														
3														
4														
5														
6														
7														
8														
9														
10														
11														
12														
13														
14														
15														

Contractor sign: _____

Designation: _____

Date: _____

Contact no: _____

DPW Official/Consultant sign: _____

Designation: _____

Date: _____

Contact no: _____

EPWP Official sign: _____

Designation: _____

Date: _____

Contact no: _____

Location	
Locality Name	
Municipality	
Subplace	
Ward	
Government Facility	
Latitude	
Longitude	
Physical Address/Location	