

Supply and delivery of Fasteners as and when required basis for a five-year period for Stock Replenishment at Lethabo Power Station



## NEC3 Supply Contract (SC3)

Between **ESKOM HOLDINGS SOC Ltd**  
(Reg No. 2002/015527/30)

and

for **Supply and delivery of Fasteners (Bolts, nuts & washers) as and when required basis for a five-year period for Stock Replenishment at Lethabo Power Station**

---

### Contents:

**Part C1 Agreements & Contract Data**

**Part C2 Pricing Data**

**Part C3 Scope of Work**

---

**CONTRACT No.**

---

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK  
REPLENISHMENT AT LETHABO POWER STATION

## **PART C1:      AGREEMENTS & CONTRACT DATA**

---

### **Contents:**

**C1.1 Form of Offer and Acceptance**

**C1.2a Contract Data provided by the *Purchaser***

**C1.2b Contract Data provided by the *Supplier***

**C1.3 Proforma Guarantees**

---

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK  
REPLENISHMENT AT LETHABO POWER STATION

## C1.1 Form of Offer & Acceptance

### Offer

The Purchaser, identified in the Acceptance signature block, has solicited offers to enter into a contract for the procurement of:

### Supply and delivery of Fasteners as and when required basis for a five-year period for Stock Replenishment at Lethabo Power Station

The tenderer, identified in the Offer signature block, has

<i>either</i>	examined the documents listed in the Tender Data and addenda thereto as listed in the Returnable Schedules, and by submitting this Offer has accepted the Conditions of Tender.
<i>or</i>	examined the draft contract as listed in the Acceptance section and agreed to provide this Offer.

By the representative of the tenderer, deemed to be duly authorised, signing this part of this Form of Offer and Acceptance the tenderer offers to perform all of the obligations and liabilities of the *Supplier* under the contract including compliance with all its terms and conditions according to their true intent and meaning for an amount to be determined in accordance with the *conditions of contract* identified in the Contract Data.

	The offered total of the Prices exclusive of VAT is	
	Value Added Tax @ 15% is	
	The offered total of the amount due inclusive of VAT is <sup>1</sup>	
	(in words)	

This Offer may be accepted by the Purchaser by signing the Acceptance part of this Form of Offer and Acceptance and returning one copy of this document including the Schedule of Deviations (if any) to the tenderer before the end of the period of validity stated in the Tender Data, or other period as agreed, whereupon the tenderer becomes the party named as the *Supplier* in the *conditions of contract* identified in the Contract Data.

Signature(s)

Name(s)

Capacity

**For the  
tenderer:**

(Insert name and address of organisation)

Name &  
signature of  
witness

Date

<sup>1</sup> This total is required by the *Purchaser* for budgeting purposes only. Actual amounts due will be assessed in terms of the *conditions of contract*.

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK  
REPLENISHMENT AT LETHABO POWER STATION

## Acceptance

By signing this part of this Form of Offer and Acceptance, the Purchaser identified below accepts the tenderer's Offer. In consideration thereof, the Purchaser shall pay the Supplier the amount due in accordance with the *conditions of contract* identified in the Contract Data. Acceptance of the tenderer's Offer shall form an agreement between the Purchaser and the tenderer upon the terms and conditions contained in this agreement and in the contract that is the subject of this agreement.

The terms of the contract, are contained in:

- |         |  |
|---------|--|
| Part C1 | Agreements and Contract Data, (which includes this Form of Offer and Acceptance) |
| Part C2 | Pricing Data   |
| Part C3 | Scope of Work: Goods Information including Supply Requirements                   |

and drawings and documents (or parts thereof), which may be incorporated by reference into the above listed Parts.

Deviations from and amendments to the documents listed in the Tender Data and any addenda thereto listed in the Returnable Schedules as well as any changes to the terms of the Offer agreed by the tenderer and the Purchaser during this process of offer and acceptance, are contained in the Schedule of Deviations attached to and forming part of this Form of Offer and Acceptance. No amendments to or deviations from said documents are valid unless contained in this Schedule.

The tenderer shall within two weeks of receiving a completed copy of this agreement, including the Schedule of Deviations (if any), contact the Purchaser's agent (whose details are given in the Contract Data) to arrange the delivery of any securities, bonds, guarantees, proof of insurance and any other documentation to be provided in terms of the *conditions of contract* identified in the Contract Data at, or just after, the date this agreement comes into effect. Failure to fulfil any of these obligations in accordance with those terms shall constitute a repudiation of this agreement.

Notwithstanding anything contained herein, this agreement comes into effect on the date when the tenderer receives one fully completed and signed original copy of this document, including the Schedule of Deviations (if any).

Signature(s)

Name(s)

Capacity

for the  
Purchaser

**Eskom Holdings SOC Ltd, Megawatt Park, Maxwell Drive, Sandton, Johannesburg,  
2199**

*(Insert name and address of organisation)*

Name &  
signature of  
witness

Date

Note: If a tenderer wishes to submit alternative tenders, use another copy of this Form of Offer and Acceptance.

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK  
REPLENISHMENT AT LETHABO POWER STATION

### **Schedule of Deviations to be completed by the *Purchaser* prior to contract award**

Note:

1. This part of the Offer & Acceptance would not be required if the contract has been developed by negotiation between the Parties and is not the result of a process of competitive tendering.
2. The extent of deviations from the tender documents issued by the Purchaser prior to the tender closing date is limited to those permitted in terms of the Conditions of Tender.
3. A tenderer's covering letter must not be included in the final contract document. Should any matter in such letter, which constitutes a deviation as aforesaid be the subject of agreement reached during the process of Offer and Acceptance, the outcome of such agreement shall be recorded here and the final draft of the contract documents shall be revised to incorporate the effect of it.

No.	Subject	Details
1		
2		
3		
4		
5		

By the duly authorised representatives signing this Schedule of Deviations below, the Purchaser and the tenderer agree to and accept this Schedule of Deviations as the only deviations from and amendments to the documents listed in the Tender Data and any addenda thereto listed in the Tender Schedules, as well as any confirmation, clarification or changes to the terms of the Offer agreed by the tenderer and the Purchaser during this process of Offer and Acceptance.

It is expressly agreed that no other matter whether in writing, oral communication or implied during the period between the issue of the tender documents and the receipt by the tenderer of a completed signed copy of this Form shall have any meaning or effect in the contract between the parties arising from this Agreement.

#### **For the tenderer:**

#### **For the Purchaser**

Signature

Name

Capacity

On behalf of *(Insert name and address of organisation)*

Name &  
signature  
of witness

Date

**Eskom Holdings SOC Ltd, Megawatt  
Park, Maxwell Drive, Sandton,  
Johannesburg, 2199**

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

## C1.2 SC3 Contract Data

### Part one - Data provided by the *Purchaser*

Completion of this data in full, according to the Options chosen, is essential to create a complete contract.

Clause	Statement	Data
1	<b>General</b>	
	The <i>conditions of contract</i> are the core clauses and the clauses for Options	
		<b>X1: Price adjustment for inflation</b>
		<b>X2 Changes in the law</b>
		<b>X7: Delay damages</b>
		<b>Z: Additional conditions of contract</b>
	of the NEC3 Supply Contract (April 2013) <sup>2</sup>	(If the December 2009 edition is to be used delete April 2013 and replace by December 2013)
10.1	The <i>Purchaser</i> is (name):	<b>Eskom Holdings SOC Ltd (reg no: 2002/015527/30), a state owned company incorporated in terms of the company laws of the Republic of South Africa</b>
	Address	<b>Registered office at Megawatt Park, Maxwell Drive, Sandton, Johannesburg</b>
	Tel No.	<b>[•]</b>
	Fax No.	<b>[•]</b>
10.1	The <i>Supply Manager</i> is (name):	
	Address	<b>Lethabo Power Station</b>
	Tel	
	Fax	
	e-mail	
11.2(13)	The <i>goods</i> are	<b>Supply and delivery of Fasteners as and when required basis for a five-year period for Stock Replenishment at Lethabo Power Station as stated on C3.1 "Purchaser's Goods Information"</b>
11.2(14)	The following matters will be included in the Risk Register	<b>1. Delay on delivery date</b> <b>2. Community Unrest.</b> <b>3. Safe offloading by Eskom</b>

<sup>2</sup> Available from Engineering Contract Strategies Tel 011 803 3008 Fax 086 539 1902, [www.ecs.co.za](http://www.ecs.co.za).

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

		4. Improper storage and use of goods upon delivery								
		5. Non-conformance to specification								
11.2(15)	The Goods Information is in	Part 3: Scope of Work and all documents and drawings to which it makes reference.								
11.2(15)	The Supply Requirements as part of the Goods Information is in	Annexure A to this Contract Data								
12.2	The <i>law of the contract</i> is the law of	the Republic of South Africa								
13.1	The <i>language of this contract</i> is	English								
13.3	The <i>period for reply</i> is	2 working days								
2	<b>The <i>Supplier's</i> main responsibilities</b>	Data required by this section of the core clauses is provided by the Supplier in Part 2 and terms in italics used in this section are identified elsewhere in this Contract Data.								
3	<b>Time</b>	The contract expiry shall be based on either the contract term of 5 (five) years and/or the total contract value, whichever occurs first will determine and give effect to the contract expiry, unless otherwise agreed								
30.1	The <i>starting date</i> is.									
30.1	The <i>delivery date</i> of the <i>goods</i> is:	<table><tr><th><i>goods</i></th><th><i>delivery date</i></th></tr><tr><td>Supply and delivery of fasteners as and when required basis for a five-year period for Stock Replenishment at Lethabo Power Station.</td><td>As per the Task Order</td></tr><tr><td>Supplier to deliver within 14 days after an order is received, unless otherwise agreed in writing with the Supply Manager</td><td></td></tr><tr><td>Supplier to keep minimum spares (consignment stock). The minimum quantities will be as agreed by both parties</td><td></td></tr></table>	<i>goods</i>	<i>delivery date</i>	Supply and delivery of fasteners as and when required basis for a five-year period for Stock Replenishment at Lethabo Power Station.	As per the Task Order	Supplier to deliver within 14 days after an order is received, unless otherwise agreed in writing with the Supply Manager		Supplier to keep minimum spares (consignment stock). The minimum quantities will be as agreed by both parties	
<i>goods</i>	<i>delivery date</i>									
Supply and delivery of fasteners as and when required basis for a five-year period for Stock Replenishment at Lethabo Power Station.	As per the Task Order									
Supplier to deliver within 14 days after an order is received, unless otherwise agreed in writing with the Supply Manager										
Supplier to keep minimum spares (consignment stock). The minimum quantities will be as agreed by both parties										
30.2	The <i>Supplier</i> does not bring the <i>goods</i> to the Delivery Place more than 4 weeks before the Delivery Date.	Unless agreed in writing by both parties								
31.1	The <i>Supplier</i> is to submit a first programme for acceptance within	1 week of the Contract Date.								

## SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

32.2 The *Supplier* submits revised programmes at intervals no longer than **2 weeks.**

#### 4 Testing and defects

42 The *defects date* is **52 weeks from the date of delivery. In the event of a defect, the repaired goods shall be re-warranted for a period of 12 months from the date of repair or replacement. Repairs or replacement shall be the sole and exclusive remedy for defects**

43.2 The *defect correction period* is **2 weeks – To address the defect at hand and to determine the corrective action and timelines that will be required**

42.2 The *defects access period* is **5 days**

#### 5 Payment

50.1 The *assessment interval* is **As per Task order**

51.1 The *currency of this contract* is the **South African Rand**

51.2 The period within which payments are made is **To be communicated**

51.3 The *interest rate* is **the publicly quoted prime rate of interest (calculated on a 365 day year) charged from time to time by the Standard Bank of South Africa Limited (as certified, in the event of any dispute, by any manager of such bank, whose appointment it shall not be necessary to prove) for amounts due in Rands and**

**(ii) the LIBOR rate applicable at the time for amounts due in other currencies. LIBOR is the 6 month London Interbank Offered Rate quoted under the caption “Money Rates” in The Wall Street Journal for the applicable currency or if no rate is quoted for the currency in question then the rate for United States Dollars, and if no such rate appears in The Wall Street Journal then the rate as quoted by the Reuters Monitor Money Rates Service (or such service as may replace the Reuters Monitor Money Rates Service) on the due date for the payment in question, adjusted *mutatis mutandis* every 6 months thereafter and as certified, in the event of any dispute, by any manager employed in the foreign exchange department of The Standard Bank of South Africa Limited, whose appointment it shall not be necessary to prove.**

#### 6 Compensation events

**There is no reference to Contract Data in this section of the core clauses and terms in italics used in this section are identified elsewhere in this Contract Data.**

#### 7 Title

**There is no reference to Contract Data in this section of the core clauses and terms in italics**



SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

used in this section are identified elsewhere in this Contract Data.

## 8 Risks, liabilities, indemnities and insurance

80.1	These are additional <i>Purchaser's</i> risks	<b>1. Delay on delivery date</b> <b>2. Community Unrest</b> <b>3. Safe offloading by Eskom</b> <b>4. Improper storage and use of goods upon delivery</b> <b>5. Non-conformance to specification</b>
88.1	The <i>Supplier's</i> liability to the <i>Purchaser</i> for indirect or consequential loss, including loss of profit, revenue and goodwill is limited to	<b>R0.0 (zero Rand)</b>
88.2	For any one event, the <i>Supplier's</i> liability to the <i>Purchaser</i> for loss of or damage to the <i>Purchaser's</i> property is limited to	<b>(1) for the <i>Purchaser's</i> existing and surrounding property in the care, custody and control of the <i>Supplier</i> the amount of the deductible (first amount payable) relevant to the event and</b>  <b>(2) for all other existing <i>Purchaser's</i> property the applicable deductible as at contract date</b>
88.3	The <i>Supplier's</i> liability for Defects due to his design which are not notified before the last <i>defects date</i> is limited to:	<b>N/A</b>
88.4	The <i>Supplier's</i> total liability to the <i>Purchaser</i> , for all matters arising under or in connection with this contract, other than the excluded matters, is limited to	<b>N/A</b>
88.5	The <i>end of liability date</i> is	<b>1 years after Delivery of the whole of the goods.</b>

## 9 Termination and dispute resolution

94.1	The <i>Adjudicator</i> is	the person selected from the ICE-SA Division (or its successor body) of the South African Institution of Civil Engineering Panel of Adjudicators by the Party intending to refer a dispute to him. (see <a href="http://www.ice-sa.org.za">www.ice-sa.org.za</a> ). If the Parties do not agree on an Adjudicator the Adjudicator will be appointed by the Arbitration Foundation of Southern Africa (AFSA).
94.2(3)	The <i>Adjudicator nominating body</i> is:	the Chairman of ICE-SA, a Division of the South African Institution of Civil Engineering, or its successor body (See <a href="http://www.ice-sa.org.za">www.ice-sa.org.za</a> )

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

94.4(2)	The <i>tribunal</i> is:	<b>arbitration</b>												
94.4(5)	The <i>arbitration procedure</i> is	<b>the latest edition of Rules for the Conduct of Arbitrations published by The Association of Arbitrators (Southern Africa) or its successor body.</b>												
94.4(5)	The place where arbitration is to be held is	<b>South Africa</b>												
	The person or organisation who will choose an arbitrator													
	- if the Parties cannot agree a choice or	<b>the Chairman for the time being or his nominee</b>												
	- if the arbitration procedure does not state who selects an arbitrator, is	<b>of the Association of Arbitrators (Southern Africa) or its successor body.</b>												
<b>10</b>	<b>Data for Option clauses</b>													
<b>X1</b>	<b>Price adjustment for inflation</b>	<b>The prices shall be fixed and firm for the first 12 months of the contract and thereafter Contract price Adjustment (CPA) will apply as per formula below</b>												
X1.1	The <i>base date</i> for indices is	<b>TBA</b>												
	The proportions used to calculate the Price Adjustment Factor are:	<table> <tr> <td><b>proportion</b></td> <td><b>linked to index for</b></td> <td><b>Index prepared by</b></td> </tr> <tr> <td><b>85%</b></td> <td><b>fixed</b></td> <td><b>SEIFSA Table UA</b></td> </tr> <tr> <td><b>15%</b></td> <td><b>non-adjustable</b></td> <td></td> </tr> <tr> <td><b>100%</b></td> <td></td> <td></td> </tr> </table>	<b>proportion</b>	<b>linked to index for</b>	<b>Index prepared by</b>	<b>85%</b>	<b>fixed</b>	<b>SEIFSA Table UA</b>	<b>15%</b>	<b>non-adjustable</b>		<b>100%</b>		
<b>proportion</b>	<b>linked to index for</b>	<b>Index prepared by</b>												
<b>85%</b>	<b>fixed</b>	<b>SEIFSA Table UA</b>												
<b>15%</b>	<b>non-adjustable</b>													
<b>100%</b>														
<b>X2</b>	<b>Changes in the law</b>	<b>is a compensation event if it occurs after the Contract Date</b>												
X2.1	A change in the law of	<b>The Republic of South Africa is a compensation event if it occurs after the Contract Date</b>												
<b>X7</b>	<b>Delay damages</b>	<b>Delay damages of 2% per day up to a maximum of 15 % of the order value for late deliveries will apply.</b>												
<b>Z</b>	<b>The <i>additional conditions of contract</i> are</b>	<b>Z1 to Z15 always apply for Eskom</b>												

## **Z1 Cession delegation and assignment**

- Z1.1 The *Supplier* does not cede, delegate or assign any of its rights or obligations to any person without the written consent of the *Purchaser*.
- Z1.2 Notwithstanding the above, the *Purchaser* may on written notice to the *Supplier* cede and delegate its rights and obligations under this contract to any of its subsidiaries or any of its present divisions or operations which may be converted into separate legal entities as a result of the restructuring of the Electricity Supply Industry.

## **Z2 Joint ventures**

- Z2.1 If the *Supplier* constitutes a joint venture, consortium or other unincorporated grouping of two or

## SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

more persons or organisations than these persons or organisations are deemed to be jointly and severally liable to the *Purchaser* for the performance of this contract.

Z2.2 Unless already notified to the *Purchaser*, the persons or organisations notify the *Supply Manager* within two weeks of the Contract Date of the key person who has the authority to bind the *Supplier* on their behalf.

Z2.3 The *Supplier* does not alter the composition of the joint venture, consortium or other unincorporated grouping of two or more persons without the consent of the *Purchaser* having been given to the *Supplier* in writing.

**Z3 Change of Broad Based Black Economic Empowerment (B-BBEE) status**

Z3.1 Where a change in the *Supplier's* legal status, ownership or any other change to his business composition or business dealings results in a change to the *Supplier's* B-BBEE status, the *Supplier* notifies the *Purchaser* within seven days of the change.

Z3.2 The *Supplier* is required to submit an updated verification certificate and necessary supporting documentation confirming the change in his B-BBEE status to the *Supply Manager* within thirty days of the notification or as otherwise instructed by the *Supply Manager*.

Z3.3 Where, as a result, the *Supplier's* B-BBEE status has decreased since the Contract Date the *Purchaser* may either re-negotiate this contract or alternatively, terminate the *Supplier's* obligation to Provide the Goods and Services.

Z3.4 Failure by the *Supplier* to notify the *Purchaser* of a change in its B-BBEE status may constitute a reason for termination. If the *Purchaser* terminates in terms of this clause, the procedures on termination are P1, P2 and P3 as stated in clause 92, and the amount due is A1 and A3 as stated in clause 93.

**Z4 Confidentiality**

Z4.1 The *Supplier* does not disclose or make any information arising from or in connection with this contract available to Others. This undertaking does not, however, apply to information which at the time of disclosure or thereafter, without default on the part of the *Supplier*, enters the public domain or to information which was already in the possession of the *Supplier* at the time of disclosure (evidenced by written records in existence at that time). Should the *Supplier* disclose information to Others in terms of clause 23.1, the *Supplier* ensures that the provisions of this clause are complied with by the recipient.

Z4.2 If the *Supplier* is uncertain about whether any such information is confidential, it is to be regarded as such until notified otherwise by the *Supply Manager*.

Z4.3 In the event that the *Supplier* is, at any time, required by law to disclose any such information which is required to be kept confidential, the *Supplier*, to the extent permitted by law prior to disclosure, notifies the *Purchaser* so that an appropriate protection order and/or any other action can be taken if possible, prior to any disclosure. In the event that such protective order is not, or cannot, be obtained, then the *Supplier* may disclose that portion of the information which it is required to be disclosed by law and uses reasonable efforts to obtain assurances that confidential treatment will be afforded to the information so disclosed.

Z4.4 The taking of images (whether photographs, video footage or otherwise) of the *goods* or any portion thereof, in the course of Providing the Goods and Services and after Delivery, requires the prior written consent of the *Supply Manager*. All rights in and to all such images vests exclusively in the *Purchaser*.

Z4.5 The *Supplier* ensures that all his subcontractors abide by the undertakings in this clause.

**Z5 Waiver and estoppel: Add to core clause 12.3:**

Z5.1 Any extension, concession, waiver or relaxation of any action stated in this contract by the Parties, the *Supply Manager* or the *Adjudicator* does not constitute a waiver of rights, and does not give rise to an estoppel unless the Parties agree otherwise and confirm such agreement in

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

writing.

**Z6 Health, safety and the environment: Add to core clause 25.4**

Z6.1 The *Supplier* undertakes to take all reasonable precautions to maintain the health and safety of persons in and about the provision of the *goods* and execution of the *services*.

Without limitation the *Supplier*:

- warrants that the total of the Prices as at the Contract Date includes a sufficient amount for proper compliance with all applicable health & safety laws and regulations and the health and safety rules, guidelines and procedures provided for in this contract and generally for the proper maintenance of health & safety in and about the execution of supply and
- undertakes, in and about the execution of the supply, to comply with all applicable health & safety laws and regulations and rules, guidelines and procedures otherwise provided for under this contract and ensures that his Subcontractors, employees and others under the *Supplier's* direction and control, likewise observe and comply with the foregoing.

Z6.2 The *Supplier*, in and about the execution of the supply, complies with all applicable environmental laws and regulations and rules, guidelines and procedures otherwise provided for under this contract and ensures that his Subcontractors, employees and others under the *Supplier's* direction and control, likewise observe and comply with the foregoing.

RISK	MITIGATING FACTORS	LEVEL (HIGH/MEDIUM/LOW)
Delays: Failure to complete the works as per agreed program.	Delay damages to be imposed on the delayed key date as per the contract data and in line with the approved schedule at 2% per day up to a maximum of 15% per task order. This also applies all defects notifications that will be issued during execution.	Medium
Safety  Non- compliance to all legal requirements.	1.Driver training & competence 2.Strict adherence to the rules and Eskom vehicle specifications and other procedures 3.Strict adherence to Eskom offloading processes 4.Adherence to vehicle maintenance plans and daily/pre-trip inspections 5. Strict adherence to travelling task risk assessment.	High

## SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

Quality	<ul style="list-style-type: none"> <li>▪ The service provider shall supply and deliver various fasteners / components as per Scope of work requirements.</li> <li>▪ During tendering process where applicable, Data sheet shall be mandatory submitted as returnable.</li> <li>▪ Category 4 for quality requirements shall be used for evaluation.</li> </ul>	Medium
Poor Quality of Products Delivered		
Delays Deliveries	Supplier shall be penalized as per contractual requirements.	
Product packaging and transportation to the client	All fasteners / components shall be packaged in a safely manner. Description and quantities of fasteners/ components shall be identified on the packaged.	
Environment	Contractor to be familiarized with Lethabo waste management procedure.	Low
Incorrect waste disposal	Contractor to be familiarised with Environmental Statement of Commitment.  Contractor shall report all incidents or risks whilst on the job to the Eskom Project leader who will inform the environmental department.  Material to be stored in allocated areas only.	

**Z7 Provision of a Tax Invoice and interest. Add to core clause 51**

- Z7.1 Within one week of receiving a payment certificate from the *Supply Manager* in terms of core clause 51.1, the *Supplier* provides the *Purchaser* with a tax invoice in accordance with the *Purchaser's* procedures stated in the Goods Information, showing the amount due for payment equal to that stated in the payment certificate.
- Z7.2 If the *Supplier* does not provide a tax invoice in the form and by the time required by this contract, the time by when the *Purchaser* is to make a payment is extended by a period equal in time to the delayed submission of the correct tax invoice. Interest due by the *Purchaser* in terms of core clause 51.2 is then calculated from the delayed date by when payment is to be made.
- Z7.3 The *Supplier* (if registered in South Africa in terms of the companies Act) is required to comply with the requirements of the Value Added Tax Act, no 89 of 1991 (as amended) and to include the *Purchaser's* VAT number 4740101508 on each invoice he submits for payment.

**Z8 Notifying compensation events**

- Z8.1 Delete from the last sentence in core clause 61.3 the words, "unless the event arises from the *Supply Manager* giving an instruction, changing an earlier decision or correcting an assumption".

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

**Z9 Purchaser's limitation of liability**

Z9.1 The *Purchaser's* liability to the *Supplier* for the *Supplier's* indirect or consequential loss is limited to R0.00 (zero Rand)

Z9.2 The *Supplier's* entitlement under the indemnity in 83.1 is provided for in 60.1(12) and the *Purchaser's* liability under the indemnity is limited.

**Z10 Termination: Add to core clause 91.1, at the second main bullet point, fourth sub-bullet point, after the words "against it":**

Z10.1 or had a business rescue order granted against it.

**Z11 Addition to secondary Option X7 Delay damages (if applicable in this contract)**

Z11.1 If the amount due for the *Supplier's* payment of delay damages reaches the limits stated in this Contract Data for Option X7, the *Purchaser* may terminate the *Supplier's* obligation to Provide the Goods and Services using the same procedures and payment on termination as those applied for reasons R1 to R15 or R18 stated in the Termination Table.

**Z12 Ethics**

For the purposes of this Z-clause, the following definitions apply:

**Affected Party** means, as the context requires, any party, irrespective of whether it is the *Supplier* or a third party, such party's employees, agents, or Subcontractors or Subcontractor's employees, or any one or more of all of these parties' relatives or friends,

**Coercive Action** means to harm or threaten to harm, directly or indirectly, an Affected Party or the property of an Affected Party, or to otherwise influence or attempt to influence an Affected Party to act unlawfully or illegally,

**Collusive Action** means where two or more parties co-operate to achieve an unlawful or illegal purpose, including to influence an Affected Party to act unlawfully or illegally,

**Committing Party** means, as the context requires, the *Supplier*, or any member thereof in the case of a joint venture, or its employees, agents, or Subcontractors or the Subcontractor's employees,

**Corrupt Action** means the offering, giving, taking, or soliciting, directly or indirectly, of a good or service to unlawfully or illegally influence the actions of an Affected Party,

**Fraudulent Action** means any unlawfully or illegally intentional act or omission that misleads, or attempts to mislead, an Affected Party, in order to obtain a financial or other benefit or to avoid an obligation or incurring an obligation,

**Obstructive Action** means a Committing Party unlawfully or illegally destroying, falsifying, altering or concealing information or making false statements to materially impede an investigation into allegations of Prohibited Action, and

**Prohibited Action** means any one or more of a Coercive Action, Collusive Action Corrupt Action, Fraudulent Action or Obstructive Action.

Z12.1 A Committing Party may not take any Prohibited Action during the course of the procurement of this contract or in execution thereof.

Z12.2 The *Purchaser* may terminate the *Supplier's* obligation to Provide the Services if a Committing Party has taken such Prohibited Action and the *Supplier* did not take timely and appropriate action to prevent or remedy the situation, without limiting any other rights or remedies the *Purchaser* has. It is not required that the Committing Party had to have been found guilty, in court or in any other similar process, of such Prohibited Action before the *Purchaser* can terminate the *Supplier's* obligation to Provide the Services for this reason.

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

- Z12.3 If the *Purchaser* terminates the *Supplier's* obligation to Provide the Services for this reason, the amounts due on termination are those intended in core clauses 92.1 and 92.2.
- Z12.4 A Committing Party co-operates fully with any investigation pursuant to alleged Prohibited Action. Where the *Purchaser* does not have a contractual bond with the Committing Party, the *Supplier* ensures that the Committing Party co-operates fully with an investigation.

## Z13 Insurance

### Z 13.1 Replace core clause 84 with the following:

- Insurance cover 84**
- 84.1** When requested by a Party, the other Party provides certificates from his insurer or broker stating that the insurances required by this contract are in force.
- 84.2** The *Supplier* provides the insurances stated in the Insurance Table A for events which are at the *Supplier's* risk from the *starting date* until the last *defects date* or a termination certificate has been issued.

**INSURANCE TABLE A**

<b>Insurance against</b>	<b>Minimum amount of cover or minimum limit of indemnity</b>
Loss of or damage to the goods, plant and materials	<p>The replacement cost where not covered by the <i>Purchaser's</i> insurance.</p> <p>The <i>Purchaser's</i> policy deductible as at Contract Date, where covered by the <i>Purchaser's</i> insurance.</p>
Liability for loss of or damage to property (except the goods, plant and materials and equipment) and liability for bodily injury to or death of a person (not an employee of the <i>Supplier</i> ) caused by activity in connection with this contract	<p><b><u>Loss of or damage to property</u></b>  <u><i>Purchaser's</i> property</u>  The replacement cost where not covered by the <i>Purchaser's</i> insurance.</p> <p>The <i>Purchaser's</i> policy deductible as at Contract Date, where covered by the <i>Purchaser's</i> insurance.</p> <p><u>Other property</u>  The replacement cost</p> <p><b><u>Death of or bodily injury</u></b>  The amount required by the applicable law.</p>
Liability for death of or bodily injury to employees of the <i>Supplier</i> arising out of and in the course of their employment in connection with this contract	The amount required by the applicable law

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

**Z 13.2 Replace core clause 87 with the following:**

**Insurance by  
the Purchaser**

87

87.1 The *Purchaser* provides the insurances stated in the Insurance Table B

**INSURANCE TABLE B**

Insurance against or name of policy	Minimum amount of cover or minimum of indemnity
Assets All Risk	Per the insurance policy document
Contract Works insurance	Per the insurance policy document
Environmental Liability	Per the insurance policy document
General and Public Liability	Per the insurance policy document
Transportation (Marine)	Per the insurance policy document
Motor Fleet and Mobile Plant	Per the insurance policy document
Terrorism	Per the insurance policy document
Cyber Liability	Per the insurance policy document
Nuclear Material Damage and Business Interruption	Per the insurance policy document
Nuclear Material Damage Terrorism	Per the insurance policy document

**Z14 Nuclear Liability**

- Z14.1 The *Purchaser* is the operator of the Koeberg Nuclear Power Station (KNPS), a nuclear installation, as designated by the National Nuclear Regulator of the Republic of South Africa, and is the holder of a nuclear licence in respect of the KNPS.
- Z14.2 The *Purchaser* is solely responsible for and indemnifies the *Supplier* or any other person against any and all liabilities which the *Supplier* or any person may incur arising out of or resulting from nuclear damage, as defined in Act 47 of 1999, save to the extent that any liabilities are incurred due to the unlawful intent of the *Supplier* or any other person or the presence of the *Supplier* or that person or any property of the *Supplier* or such person at or in the KNPS or on the KNPS site, without the permission of the *Purchaser* or of a person acting on behalf of the *Purchaser*.
- Z14.3 Subject to clause Z14.4 below, the *Purchaser* waives all rights of recourse, arising from the aforesaid, save to the extent that any claims arise or liability is incurred due or attributable to the unlawful intent of the *Supplier* or any other person, or the presence of the *Supplier* or that person or any property of the *Supplier* or such person at or in the KNPS or on the KNPS site, without the permission of the *Purchaser* or of a person acting on behalf of the *Purchaser*.
- Z14.4 The *Purchaser* does not waive its rights provided for in section 30 (7) of Act 47 of 1999, or any replacement section dealing with the same subject matter.
- Z14.5 The protection afforded by the provisions hereof shall be in effect until the KNPS is decommissioned.



SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

## **Z15 Asbestos**

For the purposes of this Z-clause, the following definitions apply:

<b>AAIA</b>	means approved asbestos inspection authority.
<b>ACM</b>	means asbestos containing materials.
<b>AL</b>	means action level, i.e. a level of 50% of the OEL, i.e. 0.1 regulated asbestos fibres per ml of air measured over a 4 hour period. The value at which proactive actions is required in order to control asbestos exposure to prevent exceeding the OEL.
<b>Ambient Air</b>	means breathable air in area of work with specific reference to breathing zone, which is defined to be a virtual area within a radius of approximately 30cm from the nose inlet.
<b>Compliance Monitoring</b>	means compliance sampling used to assess whether or not the personal exposure of workers to regulated asbestos fibres is in compliance with the Standard's requirements for safe processing, handling, storing, disposal and phase-out of asbestos and asbestos containing material, equipment and articles.
<b>OEL</b>	means occupational exposure limit.
<b>Parallel Measurements</b>	means measurements performed in parallel, yet separately, to existing measurements to verify validity of results.
<b>Safe Levels</b>	means airborne asbestos exposure levels conforming to the Standard's requirements for safe processing, handling, storing, disposal and phase-out of asbestos and asbestos containing material, equipment and articles.
<b>Standard</b>	means the <i>Purchaser's</i> Asbestos Standard 32-303: Requirements for Safe Processing, Handling, Storing, Disposal and Phase-out of Asbestos and Asbestos Containing Material, Equipment and Articles.
<b>SANAS</b>	means the South African National Accreditation System.
<b>TWA</b>	means the average exposure, within a given workplace, to airborne asbestos fibres, normalised to the baseline of a 4 hour continuous period, also applicable to short term exposures, i.e. 10-minute TWA.

Z15.1 The *Purchaser* ensures that the Ambient Air in the area where the *Supplier* will Provide the Services conforms to the acceptable prescribed South African standard for asbestos, as per the regulations published in GNR 155 of 10 February 2002, under the Occupational Health and Safety Act, 1993 (Act 85 of 1993) ("Asbestos Regulations"). The OEL for asbestos is 0.2 regulated asbestos fibres per millilitre of air as a 4-hour TWA, averaged over any continuous period of four hours, and the short term exposure limit of 0.6 regulated asbestos fibres per millilitre of air as a 10-minute TWA, averaged over any 10 minutes, measured in accordance with HSG248 and monitored according to HSG173 and OESSM.

Z15.2 Upon written request by the *Supplier*, the *Purchaser* certifies that these conditions prevail. All measurements and reporting are effected by an independent, competent, and certified occupational hygiene inspection body, i.e., a SANAS accredited, and Department of Employment and Labour approved AAIA. The *Supplier* may perform Parallel Measurements and related control measures at the *Supplier's* expense. For the purposes of compliance, the results generated from Parallel Measurements are evaluated only against South African statutory limits as detailed in clause Z15.1. Control measures conform to the requirements stipulated in the AAIA-approved asbestos work plan.

Z15.3 The *Purchaser* manages asbestos and ACM according to the Standard.

## SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

- Z15.4 In the event that any asbestos is identified while Providing the Services, a risk assessment is conducted and if so required, with reference to possible exposure to an airborne concentration of above the AL for asbestos, immediate control measures are implemented, and relevant air monitoring conducted in order to declare the area safe.
- Z15.5 The *Supplier's* personnel are entitled to stop working and leave the contaminated area forthwith until such time that the area of concern is declared safe by either Compliance Monitoring or an AAIA approved control measure intervention, for example, per the emergency asbestos work plan, if applicable.
- Z15.6 The *Supplier* continues to Provide the Services, without additional control measures presented, on presentation of Safe Levels. The contractually agreed dates to Provide the Services, including the Completion Date, are adjusted accordingly. The contractually agreed dates are extended by the notification periods required by regulations 3 and 21 of the Asbestos Regulations.
- Z15.7 Any removal and disposal of asbestos, asbestos containing materials and waste, is done by a registered asbestos contractor, instructed by the *Purchaser* at the *Purchaser's* expense, and conducted in line with South African legislation.

**SDL&I undertakings**

Tenderers who complete and submit the undertaking as required, but who do not meet Eskom's targets, will not be disqualified. SD&L undertakings do not form part of scoring, but commitments will form part of contractual obligations

***Note: The undertakings shall be sourced from previously disadvantaged Communities around Sedibeng and Fezile Dabi District Municipalities.***

**3.1. B-BBEE Requirements**

Tenderers will be required to maintain or improve their B-BBEE Recognition Level for the duration of the contract.

**3.2. Local Procurement Content**

Tenderers will stipulate local procurement content for the works.

Local Procurement Content" refers to value added in South Africa by South African resources. Where a single contract involves a combination of local and imported goods and/or services, the tender response must be separated into its components as per the Price Schedule included with the tender documents. Local procurement content is total spend minus the imported component.

Local Procurement Content	Eskom Target	Tenderer Proposal
	100%	

**3.3 Enterprise Development**

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK  
REPLENISHMENT AT LETHABO POWER STATION

	<b>YES</b>	<b>NO</b>
Are there specific ED requirements that are not achievable through Sub-contracting?	<input checked="" type="checkbox"/>	<input type="checkbox"/>

If Yes, the main contractor is required propose development in the following areas or against the following Eskom's targets:

<b>Eskom's Target</b>	<b>Tenderer Proposal</b>
The bidder to identify and incubate a Small Measured Entity from the above-mentioned District Municipalities. Assistance could be in the form of <b>business support/ equipment/finance</b> .	

A detailed ED plan that shows impact to the beneficiary should be submitted to the employer for approval prior to contract award. The ED implementation plan should include the following:

- ☐ Clear objective.
- ☐ Priority interventions
- ☐ Key performance indicators; and
- ☐ A concise implementation plan with clearly articulated milestones

In addition, they will expected to draft an ED proposal within eight weeks of contract award stage. ED agreement must be signed with the beneficiary and sent to Eskom for review and acceptance. Progress will be monitored throughout the duration of the contract.

#### Section 4: SD&L Penalty

Eskom will apply a penalty of 2.5% of the Contract Value for failure to meet SDL&I obligations. For the duration of the contract, Eskom will retain 2.5% of every invoice (excluding VAT) as security for the fulfilment of all SDL&I Obligations. The retained amounts shall only be released to the Contractor upon fulfilment of all SDL&I obligations at the end of the contract.

## Annexure A: Supply Requirements

*[Notes: The example given in the NEC3 Supply Contract Guidance Notes pages 15 to 20 inclusive is based on Incoterms 2000. However, users will probably wish to use Incoterms 2010 which the details below are based on. Users may need to adjust the information to comply with actual requirements. First decide whether Incoterms will be used or not, then delete the arrangement below which does not apply and delete these notes]*

### The Supply Requirements for this contract are based on the use of INCOTERMS:

The *Supplier* supplies the *goods* in accordance with INCOTERMS 2010<sup>3</sup> as follows:

[Select the group and then term within the group which applies and state the applicable delivery place. Delete all the other groups and this note]

Group	Category	Term	Delivery Place
E	departure	EXW	
F	main carriage unpaid	FCA, FAS, FOB	
C	main carriage paid	CFR, CIF, CPT, CIP	

<sup>3</sup> International Chamber of Commerce, Incoterms 2010, Paris, January 2011

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK  
REPLENISHMENT AT LETHABO POWER STATION

D	arrival	DAT, DAP, DDP	
---	---------	---------------	--

The Parties obligations described in Incoterms for the category and term selected are now incorporated into this contract as part of the Supply Requirements and hence the Goods Information.

The obligations of seller and buyer for the selected Incoterm determine each Party's costs, risks and insurance requirements incidental to the supply and transport of the *goods* from *Supplier* to *Purchaser*.

For each of the thirteen terms, Incoterms set out obligations of the seller (the *Supplier*) in ten paragraphs identified as A1 to A10 and the corresponding obligations of the buyer (the *Purchaser*) in paragraphs B1 to B10. These obligations cover the following subjects:

<b>A</b>	<b>The <i>Supplier's</i> obligations</b>	<b>B</b>	<b>The <i>Purchaser's</i> obligations</b>
<b>A1</b>	Provision of goods in conformity with contract	<b>B1</b>	Payment of the price
<b>A2</b>	Licences, authorisations and formalities	<b>B2</b>	Licences, authorisations and formalities
<b>A3</b>	Contracts of carriage and insurance	<b>B3</b>	Contracts of carriage and insurance
<b>A4</b>	Delivery	<b>B4</b>	Taking delivery
<b>A5</b>	Transfer of risks	<b>B5</b>	Transfer of risks
<b>A6</b>	Division of costs	<b>B6</b>	Division of costs
<b>A7</b>	Notice to the buyer	<b>B7</b>	Notice to the seller
<b>A8</b>	Proof of delivery, transport document or equivalent electronic message	<b>B8</b>	Proof of delivery, transport document or equivalent electronic message
<b>A9</b>	Checking - packing - marking	<b>B9</b>	Inspection of goods
<b>A10</b>	Other obligations	<b>B10</b>	Other obligations

*[Should there be a need to amplify any of the published obligations listed above for the chosen INCOTERM, add them here.]*

All other information NOT pertinent to the above is given in the balance of the Goods Information

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

### The Supply Requirements for this contract are as follows:

[Use these when INCOTERMS do not apply].

<b>1. The requirements for the supply are</b>	None	
<b>2. The requirements for transport are</b>	It is the Supplier's responsibility to ensure that the goods are delivered without defects	
<b>3. The delivery place is</b>	Lethabo Power Station Main Stores (Receiving)	
<b>4. Actions of the Parties during supply</b>	<b>Action</b>	<b>Party which does it</b>
	Giving notice of Delivery	Supplier
	Checking packing and marking before dispatch	Supplier
	Contracting for transport	Supplier
	Pay costs of transport	Supplier
	Arrange access to delivery place	Purchaser
	Loading the <i>goods</i>	Supplier
	Unloading the <i>goods</i>	Purchaser
<b>For international procurement</b>	Undertake export requirements	Supplier
	Undertake import requirements	Supplier
<b>5. Information to be provided by the Supplier</b>	<b>Title of document</b>	
	Packing lists for cases and their contents	
	Copy of invoice for the <i>goods</i>	
	Delivery Note	
	Test results and maintenance manuals	
<b>For international procurement</b>	Licences, authorisations and other formalities associated with export of the <i>goods</i>	
	Air Waybill or Bill of Lading with associated landing, delivery and forwarding order	
	The Bill of Entry endorsed by the importation authority	
	Customs work sheets, showing tax, duties and surcharges which the law of the country into which the <i>goods</i> are being imported requires the importer to pay	
	Invoice from the importation clearing agent showing airline fees, landing charges, wharfage and dock dues as applicable	
	Specify other import documents required by authorised officials.	

All other information NOT pertinent to the above is given in the balance of the Goods Information

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

## C1.2 Contract Data

### Part two - Data provided by the *Supplier*

Completion of the data in full, according to Options chosen, is essential to create a complete contract.

Clause	Statement	Data				
10.1	The <i>Supplier</i> is (Name):  Address  Tel No.  Fax No.					
11.2(8)	The Goods Information for the <i>Supplier's</i> design is in:					
11.2(11)	The tendered total of the Prices is					
11.2(12)	The <i>price schedule</i> is in:					
11.2(14)	The following matters will be included in the Risk Register					
25.2	The restrictions to access for the <i>Supply Manager</i> and Others to work being done for this contract are					
30.1	The <i>delivery date</i> of the <i>goods</i> is:	<table><tr><th><i>goods</i></th><th><i>delivery date</i></th></tr><tr><td>1 Supply and delivery of fasteners</td><td>As per agreed lead times</td></tr></table>	<i>goods</i>	<i>delivery date</i>	1 Supply and delivery of fasteners	As per agreed lead times
<i>goods</i>	<i>delivery date</i>					
1 Supply and delivery of fasteners	As per agreed lead times					
31.1	The programme identified in the Contract Data is contained in:					
63.2	The <i>percentage for overheads and profit</i> added to the Defined Cost is	%				

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK  
REPLENISHMENT AT LETHABO POWER STATION

## PART 2: PRICING DATA

### NEC3 Supply Contract

Document reference	Title	No of pages
C2.1	Pricing assumptions	2
C2.2	The <i>price schedule</i>	[•]

## C2.1 Pricing assumptions

### 1. How *goods* and *services* are priced and assessed for payment

Clause 11 in NEC3 Supply Contract, (SC3) core clauses states:

<b>Identified and defined terms</b>	11	
	11.2	(11) The Prices are the amounts stated in the price column of the Price Schedule. Where a quantity is stated for an item in the Price Schedule, the Price is calculated by multiplying the quantity by the rate.
		(12) The Price Schedule is the <i>price schedule</i> unless later changed in accordance with this contract.
<b>Assessing the amount due</b>	50.2	The amount due is
		<ul style="list-style-type: none"> <li>the Price for each lump sum item in the Price Schedule which the <i>Supplier</i> has completed,</li> <li>where a quantity is stated for an item in the Price Schedule, an amount calculated by multiplying the quantity which the <i>Supplier</i> has completed by the rate,</li> <li>plus other amounts to be paid to the <i>Supplier</i>,</li> <li>less amounts to be paid by or retained from the <i>Supplier</i>.</li> </ul> <p>Any tax which the law requires the <i>Purchaser</i> to pay to the <i>Supplier</i> is included in the amount due.</p>

This confirms that the Supply Contract is a priced contract where the Prices are derived from a list of items of *goods* and *services* which can be priced as lump sums or as expected quantities of *goods* and *services* multiplied by a rate, or a mix of both.

### 2. Function of the Price Schedule

Clause 53.1 states: "Information in the Price Schedule is not Goods Information". This confirms that instructions to do work or how it is to be done are not included in the Price Schedule but in the Goods Information. This is further confirmed by Clause 20.1 which states, "The *Supplier* Provides the Goods and Services in accordance with the Goods Information". Hence the *Supplier* does **not** Provide the Goods and Services in accordance with the Price Schedule. The Price Schedule is only a pricing document.

### 3. Preparing the *price schedule*

Items in the *price schedule* may have been inserted by the *Purchaser* and the tendering supplier should insert any additional items which he considers necessary. Whichever party provides the items in the *price schedule* the total of the Prices is assumed to be fully inclusive of everything necessary to Provide the Goods and Services as described at the time of entering into this contract.

It will be assumed that the tendering supplier has

- Read Pages 8, 11, 12 and Appendix 5 of the SC3 Guidance Notes before preparing the *price schedule*;
- Included in his Prices and rates for correction of Defects (core clause 43.1) as there is no compensation event for this unless the Defect is due to a *Supplier's* risk;



SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK  
REPLENISHMENT AT LETHABO POWER STATION

- Spread the cost of doing work he chooses not to list as separate items in the *price schedule* across other Prices and rates in order to fulfil the obligation to Provide the Goods and Services for the tendered total of the Prices;
- Understood that there is no adjustment to lump sum prices in the *price schedule* if the amount, or quantity, of work within that lump sum item later turns out to be different to that which the *Supplier* estimated at time of tender. The only basis for a change to the Prices is as a result of a compensation event per clause 60.1;
- Understood that the *Supplier* does not have to allow in his Prices and rates for matters that may arise as a result of a compensation event.

**3.1. Format of the *price schedule***

Entries in the first four columns in the *price schedule* in section C2.2 are made either by the *Purchaser* or the tendering supplier.

If the *Supplier* is to be paid an amount for the item which is not adjusted if the quantity of work in the item changes, the tendering supplier enters the amount in the Price column only, the Unit, Quantity and Rate columns being left blank.

If the *Supplier* is to be paid an amount for the item which is the rate for the item multiplied by the quantity completed, the tendering *Supplier* enters the rate which is then multiplied by the Quantity to produce the Price, which is also entered.

If the *Supplier* is to be paid an amount for an item proportional to the length of time for which the *goods* and *services* are provided, a unit of time is stated in the Unit column and the length of time (as a quantity of the stated units of time) is stated in the Quantity column.

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

## C2.2 the *price schedule*

Material No	Description	UMC	5 Year Forecast Quantity	Lead time
666	NIPPLE, PIPE: TYPE: BARREL; INSIDE DIAMETER: 15 MM; LENGTH: 51 MM; CONNECTION: THD; MATERIAL: STL GALV; RATING: 4830 KPA; SPECIFICATION: SABS 763; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	800	
667	NIPPLE, PIPE: TYPE: BARREL; INSIDE DIAMETER: 20 MM; LENGTH: 54 MM; CONNECTION: THD; MATERIAL: STL GALV; RATING: 4830 KPA; SPECIFICATION: SABS 763; 62-1971 TABLE 9 FIG 3C; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	600	
668	NIPPLE, PIPE: TYPE: BARREL; INSIDE DIAMETER: 25 MM; LENGTH: 60 MM; CONNECTION: THD; MATERIAL: STL GALV; RATING: 4830 KPA; SPECIFICATION: SABS 763; 62-1971; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	500	
1036	BOLT, ASSEMBLY: TYPE: VERANDAH; NOMINAL DIAMETER: M6; LENGTH: 25 MM; HEAD: MUSHROOM SLOTTED; MATERIAL: MS; THREAD: 1 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: ZN PLTD; GUTTER, SUPPLY D31; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
1046	SCREW, MACHINE: DIAMETER: 4BA; LENGTH: 50 MM; THREAD: 0.66 MM; HEAD: CHEESE; MATERIAL: BRS; GRADE: C10100; SPECIFICATION: BS 57 TABLE 1; REFERENCE NO: CHBR4BAX50; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	3000	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

1092	BOLT, MACHINE: DIAMETER: M16; LENGTH: 65 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 2 MM; SPECIFICATION: DIN 931; TYPE: ANCHOR; DOUBLE HEAT TREATED; COARSE THREAD; MEDIUM FIT; EFP BALANCE LINE ROUND FLANGE; LAC; APOOL; PART NO: M16, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	60000	
1986	BOLT, ANCHOR: TYPE: RAW LOOSE; DIAMETER: M10; THREAD LENGTH: 75 MM; MATERIAL: STL; LENGTH: 75 MM; THREAD: 1.5 MM; SIZE 60 MM SHIELD LENGTH, 20 MM FIXING THICKNESS, 1.5 MM PITCH, RECOMMENDED DRILL SIZE 18MM; REFERENCE NO: E19; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2000	
1987	BOLT, ANCHOR: TYPE: RAWL; DIAMETER: M8; THREAD LENGTH: 58 MM; MATERIAL: STL; LENGTH: 65 MM; LOOSE BOLT TYPE, 0MM MIN TO 10MM MAX FIXING THICKNESS, 60MM MIN DEPTH OF HOLE, DRILL SIZE: 14MM, ANCHOR SIZE: DIA 13 X LG 50; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	1500	
2014	BOLT, ANCHOR: TYPE: RAWL; DIAMETER: M8; MATERIAL: STL; LENGTH: 75 MM; 16MM DRILL SIZE, 14MM X 50MM ANCHOR SIZE, LOOSE BOLT TYPE, M8 25L, DIM DATA: 25MM MAX FIXING THICKNESS, 0MM MIN FIXING THICKNESS, 60MM MIN DEPTH OF HOLE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	1000	
18910	STUD, DOUBLE ENDED: LENGTH: 160 MM; DIAMETER-A: M30; DIAMETER-B: 26.5 MM; MATERIAL: CU; THREADS-A: 3.5 MM; THREADS-B: 3 MM; THREAD LENGTH-A: 20 MM; THREAD LENGTH-B: 42 MM; TURBINES STICK CONNECTION.; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

18914	STUD, DOUBLE ENDED: LENGTH: 275 MM; DIAMETER-A: 35.5 MM; DIAMETER-B: M36; MATERIAL: CU; THREADS-A: 4 MM; THREADS-B: 3 MM; THREAD LENGTH-A: 30 MM; THREAD LENGTH-B: 80 MM; STICK CONNECTION.; REFERENCE NO: 38-20267; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
18926	SCREW, SET: NOMINAL THREAD DIAMETER: M12; THREAD: 1.75 MM; THREAD LENGTH: 14 MM; HEAD STYLE: SLOTTED; MATERIAL: STL; POINT STYLE: FLAT; HEADLESS; AXLE; REFERENCE NO: D1238-128195; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
18985	STUD, ALL THREAD: DIAMETER: M24; LENGTH: 420 MM; THREAD: 3 MM; MATERIAL: STL; PROTECTIVE COATING: CD PLTD; STICK; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
32725	ANCHOR, STUD: TYPE: SLEEVE HEX NUT; DIAMETER: M12; LENGTH: 75 MM; THREAD: 1.75 MM; EMBEDDED LENGTH: 60 MM; THREAD LENGTH: 25 MM; MATERIAL: STL; HILTI PREFIX; REFERENCE NO: 12X75MM; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
32726	ANCHOR, STUD: TYPE: SLEEVE HEX NUT; DIAMETER: M10; LENGTH: 80 MM; THREAD: 1.5 MM; EMBEDDED LENGTH: 75 MM; THREAD LENGTH: 60 MM; MATERIAL: STL; HILTI PERFIX; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	400	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

32727	ANCHOR, STUD: TYPE: SLEEVE HEX NUT; DIAMETER: M12; LENGTH: 60 MM; THREAD: 1.75 MM; EMBEDDED LENGTH: 50 MM; THREAD LENGTH: 30 MM; MATERIAL: STL; HILTI PERFIX; REFERENCE NO: 16X60MM; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	500	
32728	ANCHOR, STUD: TYPE: SLEEVE HEX NUT; DIAMETER: M16; LENGTH: 140 MM; THREAD: 2 MM; EMBEDDED LENGTH: 130 MM; THREAD LENGTH: 53 MM; MATERIAL: STL; HILTI PERFIX; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
37797	STUD: TYPE: COAL FEEDER COUPLING DRIVE; DIAMETER: 22.22 MM; THREAD: 5/8 IN; LENGTH: 102 MM; MATERIAL: SS; THREAD LENGTH: 22 MM; THREAD 5/8" UNF, FOR USE ON THE RAW VOLUMETRIC FEEDER OF THE COAL CONVEYORS.; PART NO: 1-A3-000257, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
37799	SCREW, MACHINE: DIAMETER: M20; LENGTH: 586 MM; THREAD: 2.5 MM; HEAD: HEX; MATERIAL: SS GR 316; GRADE: 8.8; TYPE TAKE-UP; 27MM OVER FLATS, 12MM HIGH; THREAD LENGTH: 375MM; COMPLETE WITH GREASE PORT AND SPRING PIN HOLE; GREASE NIPPLE THREAD IN SCREW HEAD, SIZE 1/8 IN BSP; DRAWING NO: ESK 20.58/55028; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
37811	SCREW, MACHINE: DIAMETER: M20; LENGTH: 348 MM; THREAD: 2.5 MM; HEAD: HEX; MATERIAL: SS; THREAD LENGTH: 249 MM; TYPE TAKE-UP; M27 OVER FLATS, 12MM HIGH; FOR USE ON VOLUMETRIC COAL FEEDERS; PART NO: 1A3-000045, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

43021	SCREW, CAP: DIAMETER: M12; LENGTH: 82.5 MM; THREAD: 1.75 MM; HEAD: SOCKET HEX; MATERIAL: STL; CONNECTING ROD BOLT; FOR TYPE C4NIR COMPRESSOR; DIMEN: 70MM; REFERENCE NO: 9292; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
54476	WASHER, FLAT: NOMINAL SIZE: 16 MM; INSIDE DIAMETER: 15 MM; OUTER SIZE: 22 MM; THICKNESS: 1 MM; MATERIAL: PVC; GREY; REFERENCE NO: P81981; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
57307	NIPPLE, PIPE: TYPE: CLOSE; INSIDE DIAMETER: 150 MM; LENGTH: 78 MM; CONNECTION: NPT; MATERIAL: STL; GRADE: B; RATING: 4830 KPA; SPECIFICATION: SABS 62; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
57308	NIPPLE, PIPE: TYPE: CLOSE; INSIDE DIAMETER: 125 MM; LENGTH: 80 MM; CONNECTION: NPT; MATERIAL: STL; GRADE: B; RATING: 4830 KPA; SPECIFICATION: SABS 62; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
57309	NIPPLE, PIPE: TYPE: SHORT; INSIDE DIAMETER: 100 MM; LENGTH: 70 MM; CONNECTION: NPT; MATERIAL: STL; GRADE: B; RATING: 4830 KPA; SPECIFICATION: SABS 62; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
57310	NIPPLE, PIPE: TYPE: WELDED CLOSE; INSIDE DIAMETER: 80 MM; LENGTH: 65 MM; CONNECTION: THD; MATERIAL: STL; GRADE: B; RATING: 4830 KPA; SPECIFICATION: SABS 62; STEAM, FULL MALE THREADED; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

57311	NIPPLE, PIPE: TYPE: WELDED CLOSE; INSIDE DIAMETER: 65 MM; LENGTH: 51 MM; CONNECTION: THD; MATERIAL: STL; RATING: 4830 KPA; SPECIFICATION: SABS 62; STEAM PIPE RUNNING, FULL THREADED; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
57312	NIPPLE, PIPE: TYPE: WELDED CLOSE; INSIDE DIAMETER: 50 MM; LENGTH: 48 MM; CONNECTION: THD; MATERIAL: STL; RATING: 4830 KPA; SPECIFICATION: SABS 62; STEAM RUNNING, FULL THREADED; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
57313	NIPPLE, PIPE: TYPE: RUNNING; INSIDE DIAMETER: 40 MM; LENGTH: 38 MM; CONNECTION: NPT; MATERIAL: STL; GRADE: B; RATING: 4830 KPA; SPECIFICATION: SABS 62; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
57314	NIPPLE, PIPE: TYPE: RUNNING; INSIDE DIAMETER: 32 MM; LENGTH: 38 MM; CONNECTION: NPT; MATERIAL: STL; RATING: 4830 KPA; SPECIFICATION: SABS 62; STEAM, FULL THREADED; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
57315	NIPPLE, PIPE: TYPE: RUNNING; INSIDE DIAMETER: 25 MM; LENGTH: 33 MM; CONNECTION: THD; MATERIAL: STL; GRADE: 4.6; RATING: 4830 KPA; SPECIFICATION: SABS 62; FOR STEAM, FULLY THREADED; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
57316	NIPPLE, PIPE: TYPE: RUNNING; INSIDE DIAMETER: 20 MM; LENGTH: 30 MM; CONNECTION: THD; MATERIAL: STL; GRADE: 4.6; RATING: 4830 KPA; SPECIFICATION: SABS 62; STEAM; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	40	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

57317	NIPPLE, PIPE: TYPE: RUNNING; INSIDE DIAMETER: 15 MM; LENGTH: 27 MM; CONNECTION: THD; MATERIAL: STL; RATING: 4830 KPA; SPECIFICATION: SABS 62; STEAM PIPE, FULL THREADED; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	40	
57319	NIPPLE, PIPE: TYPE: RUNNING; INSIDE DIAMETER: 8 MM; LENGTH: 19 MM; CONNECTION: THD; MATERIAL: STL; GRADE: 4.6; RATING: 4830 KPA; SPECIFICATION: SABS 62-1971 TABLE 9 FIG 3; STEAM, FULLY THREADED; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	60	
57343	NIPPLE, PIPE: TYPE: BARREL; INSIDE DIAMETER: 6 MM; LENGTH: 32 MM; CONNECTION: NPT; MATERIAL: STL; RATING: 4830 KPA; SPECIFICATION: SABS 62; STEAM , MALE THREADED BOTH ENDS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	400	
57344	NIPPLE, PIPE: TYPE: BARREL; INSIDE DIAMETER: 8 MM; LENGTH: 38 MM; CONNECTION: THD; MATERIAL: STL; RATING: 4830 KPA; SPECIFICATION: SABS 62-1971 TABLE 9 FIG 3C; STEAM , MALE THREADED BOTH END; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	800	
57345	NIPPLE, PIPE: TYPE: BARREL; INSIDE DIAMETER: 15 MM; LENGTH: 51 MM; CONNECTION: THD; MATERIAL: STL; RATING: 4830 KPA; SPECIFICATION: SABS 62; STEAM PIPE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	1000	
57346	NIPPLE, PIPE: TYPE: BARREL; INSIDE DIAMETER: 10 MM; LENGTH: 38 MM; CONNECTION: THD; MATERIAL: STL; RATING: 4830 KPA; SPECIFICATION: SABS 62-1971 TABLE 9 FIG 3C; STEAM PIPE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	600	



SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

57347	NIPPLE, PIPE: TYPE: BARREL; INSIDE DIAMETER: 20 MM; LENGTH: 54 MM; CONNECTION: NPT; MATERIAL: STL; GRADE: 4.6; RATING: 4830 KPA; SPECIFICATION: SABS 62 TABLE 9 FIG 3C; FOR STEAM; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	500	
57348	NIPPLE, PIPE: TYPE: BARREL; INSIDE DIAMETER: 25 MM; LENGTH: 65 MM; CONNECTION: THD; MATERIAL: STL; GRADE: 4.6; RATING: 4830 KPA; SPECIFICATION: SABS 62-1971 TABLE 9 FIG 3C; FOR STEAM BARREL; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	600	
57349	NIPPLE, PIPE: TYPE: SEAMLESS SHORT; INSIDE DIAMETER: 32 MM; LENGTH: 70 MM; CONNECTION: NPT; MATERIAL: STL; GRADE: 4.6; RATING: 4830 KPA; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
57350	NIPPLE, PIPE: TYPE: BARREL; INSIDE DIAMETER: 40 MM; LENGTH: 70 MM; CONNECTION: FNPT; MATERIAL: STL; GRADE: 4.6; RATING: 4830 KPA; SPECIFICATION: SABS 62-1971; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	250	
57351	NIPPLE, PIPE: TYPE: BARREL; INSIDE DIAMETER: 50 MM; LENGTH: 79 MM; CONNECTION: NPT; MATERIAL: STL; RATING: 4830 KPA; SPECIFICATION: SABS 62; STEAM PIPE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	80	
57352	NIPPLE, PIPE: TYPE: SEAMLESS SHORT; INSIDE DIAMETER: 65 MM; LENGTH: 89 MM; CONNECTION: NPT; MATERIAL: STL; GRADE: 4.6; RATING: 4830 KPA; SPECIFICATION: SABS 62; FOR STEAM BARREL; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	40	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

57353	NIPPLE, PIPE: TYPE: BARREL; INSIDE DIAMETER: 80 MM; LENGTH: 102 MM; CONNECTION: THD; MATERIAL: STL; RATING: 4830 KPA; SPECIFICATION: SABS 62; MALE THREADED BOTH ENDS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
57354	NIPPLE, PIPE: TYPE: SEAMLESS SHORT; INSIDE DIAMETER: 105 MM; LENGTH: 114 MM; CONNECTION: THD; MATERIAL: STL; GRADE: B; RATING: 4830 KPA; SPECIFICATION: SABS 62; MATERIAL: STEAM PIPE BARREL; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
57355	NIPPLE, PIPE: TYPE: WELDED; INSIDE DIAMETER: 130 MM; LENGTH: 115 MM; CONNECTION: NPT; MATERIAL: STL; RATING: 4830 KPA; SPECIFICATION: SABS 62-1971 TABLE 9 FIG 3C; BARREL NIPPLE, ISO PIPE THREAD SIZE, THREADED BOTH ENDS, HYDRAULIC; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
57356	NIPPLE, PIPE: TYPE: SEAMLESS SHORT; INSIDE DIAMETER: 150 MM; LENGTH: 127 MM; CONNECTION: NPT; MATERIAL: STL; GRADE: 4.6; RATING: 4830 KPA; FOR STEAM BARREL; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
57360	NIPPLE, PIPE: TYPE: BARREL; INSIDE DIAMETER: 32 MM; LENGTH: 70 MM; CONNECTION: NPT; MATERIAL: STL GALV; RATING: 4830 KPA; SPECIFICATION: SABS 63-1971 TABLE 9; BARREL NIPPLE, THREADED BOTH ENDS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

57361	NIPPLE, PIPE: TYPE: SEAMLESS SHORT; INSIDE DIAMETER: 40 MM; LENGTH: 75 MM; CONNECTION: BSP; MATERIAL: STL GALV; RATING: 4830 KPA; SPECIFICATION: SABS 763/62-1971 TABLE 9 FIG 3C; BARREL NIPPLE, THREADED BOTH ENDS; GRADE B; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	800	
57362	NIPPLE, PIPE: TYPE: BARREL; INSIDE DIAMETER: 50 MM; LENGTH: 79 MM; CONNECTION: THD; MATERIAL: STL GALV; RATING: 4830 KPA; SPECIFICATION: SABS 763/62-1971 TABLE 9 FIG 3C; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
58598	NIPPLE, PIPE: TYPE: SEAMLESS SHORT; INSIDE DIAMETER: 25 MM; LENGTH: 46 MM; CONNECTION: NPT; MATERIAL: STL CD PLTD; UNION, USED FOR GENERATOR; PART NO: 25-14-003, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
59636	NIPPLE, PIPE: TYPE: SEAMLESS SHORT; LENGTH: 70 MM; CONNECTION: NPT; MATERIAL: IRON GALV; RATING: 4830 KPA; SPECIFICATION: SABS 763; BARREL STEEL 10MM NOMINAL SIZE; 10MM ISO THREAD; THREADED BOTH ENDS HYDRAULIC; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	200	
63437	WASHER, THRUST: INSIDE DIAMETER: 310 MM; OUTSIDE DIAMETER: 340 MM; MATERIAL: STL; FOR SEMPELL QUICK CLOSING THREE-WAY VALVES, ALPHA NUMERIC RL 20 S 001, RL 10 S 004; REFERENCE NO: 051042460; REFERENCE NO: AVS5.08.7.300.300.250.11. 43.35.36.37; REFERENCE NO: AVS5.08.7.300.400.400. 250.11.43.35.36.37; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

63442	WASHER, LOCK: INSIDE DIAMETER: 25.5 MM; OUTSIDE DIAMETER: 41 MM; THICKNESS: 3 MM; NOMINAL SIZE: 25 MM; MATERIAL: STL; TYPE: SPRING; CUP; FOR ANGULAR DESIGN; GATE CONTROL VALVE; ALPHA NUMERIC; REFERENCE NO: EKS1.400.25.25.10.33; REFERENCE NO: NB 25; REFERENCE NO: RL 10 S 201; REFERENCE NO: RL 10 S 301; REFERENCE NO: RL 20 S 301; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
63457	WASHER, THRUST: INSIDE DIAMETER: 45 MM; OUTSIDE DIAMETER: 52 MM; MATERIAL: STL; WITH CLAMP ELEMENT, FOR CHECK VALVE NB500; REFERENCE NO: 146-1G; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
71838	WASHER, SEALING: NOMINAL SIZE: 13 MM; INSIDE DIAMETER: 13 MM; OUTSIDE DIAMETER: 21 MM; THICKNESS: 1.5 MM; MATERIAL: RUBBER/STL; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79571	BIT, MASONRY: TYPE: PERCUSSION; DIAMETER: 16 MM; LENGTH: 340 MM; TIP: TUNGSTEN CARBIDE; PART NO: TEF16-34, SUPPLIER: UNKNOWN; PART NO: TE-F-16/34, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79658	BIT, MASONRY: TYPE: PERCUSSION; LENGTH: 340 MM; TIP: TUNGSTEN CARBIDE; HILTI; REFERENCE NO: 12-34; PART NO: TEF12-34, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79660	BIT, TWIST: DIAMETER: 33 MM; SHANK: MORSE TAPER NO 4; MATERIAL: HSS; LENGTH: 334 MM; STANDARD: BS 328; DIN 345; ISO 235; 185MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

79662	BIT, TWIST: DIAMETER: 34.5 MM; SHANK: MORSE TAPER NO 4; MATERIAL: HSS; LENGTH: 339 MM; STANDARD: BS 328; DIN 345; ISO 235; 190MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79664	BIT, TWIST: DIAMETER: 35.5 MM; SHANK: MORSE TAPER NO 4; MATERIAL: HSS; LENGTH: 339 MM; STANDARD: BS S328; DIN 345 TYPE N; ISO 235; 190MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79671	BIT, TWIST: DIAMETER: 41.5 MM; SHANK: MORSE TAPER NO 4; MATERIAL: HSS; LENGTH: 354 MM; STANDARD: BS S328; DIN 345 TYPE N; ISO 235; 205MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79672	BIT, TWIST: DIAMETER: 18.5 MM; SHANK: MORSE TAPER NO 2; MATERIAL: HSS; LENGTH: 233 MM; STANDARD: BS 328; DIN 345; ISO 235; 135 MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	60	
79673	BIT, TWIST: DIAMETER: 21.5 MM; SHANK: MORSE TAPER NO 2; MATERIAL: HSS; LENGTH: 248 MM; STANDARD: BS S328; DIN 345 TYPE N; ISO 235; 150MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79674	BIT, TWIST: DIAMETER: 22.5 MM; SHANK: MORSE TAPER NO 2; MATERIAL: HSS; LENGTH: 253 MM; STANDARD: BS 328; DIN 345; ISO 235; 155MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

79675	BIT, TWIST: DIAMETER: 23 MM; SHANK: MORSE TAPER NO 2; MATERIAL: HSS; LENGTH: 253 MM; STANDARD: BS 328; DIN 345; ISO 235; 155MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79677	BIT, TWIST: DIAMETER: 27 MM; SHANK: MORSE TAPER NO 3; MATERIAL: HSS; LENGTH: 291 MM; STANDARD: BS 328; DIN 345; ISO 235; 170MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79678	BIT, TWIST: DIAMETER: 28 MM; SHANK: MORSE TAPER NO 3; MATERIAL: HSS; LENGTH: 291 MM; STANDARD: BS 328; DIN 345; ISO 235; 170MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79691	BIT, TWIST: DIAMETER: 13 MM; SHANK: STRAIGHT 13 MM; MATERIAL: HSS; LENGTH: 151 MM; STANDARD: BS 328; DIN 338; ISO 235; 101MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	200	
79692	BIT, TWIST: DIAMETER: 13.5 MM; SHANK: STRAIGHT 13.5 MM; MATERIAL: HSS; LENGTH: 160 MM; STANDARD: BSS328; DIN 338 TYPE N; ISO 235; 108MM FLUTE LENGTH; PART NO: 1401350, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
79693	BIT, TWIST: DIAMETER: 14 MM; SHANK: STRAIGHT 14 MM; MATERIAL: HSS; LENGTH: 160 MM; STANDARD: BSS328; DIN 338 TYPE N; ISO 235; 108MM FLUTE LENGTH; PART NO: 1401400, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

79695	BIT, TWIST: DIAMETER: 3 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 115 MM; STANDARD: BS S328; DIN 345 TYPE N; ISO 235; 33MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79696	BIT, TWIST: DIAMETER: 3.5 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 120 MM; STANDARD: BS 328; DIN 345; ISO 235; 39MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	40	
79697	BIT, TWIST: DIAMETER: 4 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 124 MM; STANDARD: BS 328; DIN 345; ISO 235; 43MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
79698	BIT, TWIST: DIAMETER: 4.5 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 128 MM; STANDARD: BS 328; DIN 345; ISO 235; 47MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	60	
79699	BIT, TWIST: DIAMETER: 5.5 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 138 MM; STANDARD: BS S328; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	40	
79700	BIT, TWIST: DIAMETER: 6 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 138 MM; STANDARD: BSS 328; DIN 345; ISO 235; 57MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

79701	BIT, TWIST: DIAMETER: 6.5 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 144 MM; STANDARD: BS S328; DIN 345 TYPE N; ISO 235; 63MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	80	
79702	BIT, TWIST: DIAMETER: 7 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 150 MM; STANDARD: BS 328; DIN 345; ISO 235; 69MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	80	
79703	BIT, TWIST: DIAMETER: 7.5 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 150 MM; STANDARD: BS S328; DIN 345 TYPE N; ISO 235; 69MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	40	
79704	BIT, TWIST: DIAMETER: 8.5 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 156 MM; STANDARD: BS S328; DIN 345 TYPE N; ISO 235; 75MM FLUTE LENGTH; PART NO: 3510850, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
79705	BIT, TWIST: DIAMETER: 9 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 162 MM; STANDARD: BS 328; DIN 345; ISO 235; 81MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
79706	BIT, TWIST: DIAMETER: 9.5 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 162 MM; STANDARD: BS 328; DIN 345; ISO 235; 81MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	



SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

79707	BIT, TWIST: DIAMETER: 10 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 168 MM; STANDARD: BS 328; DIN 345; ISO 235; 87MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
79709	BIT, TWIST: DIAMETER: 10.5 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 168 MM; STANDARD: BS 328; DIN 345; ISO 235; 87MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
79710	BIT, TWIST: DIAMETER: 11.5 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 175 MM; STANDARD: BS 328; DIN 345; ISO 235; 94MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
79711	BIT, TWIST: DIAMETER: 12 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 182 MM; STANDARD: BS 328; DIN 345; ISO 235; 101MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
79712	BIT, TWIST: DIAMETER: 12.5 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 182 MM; STANDARD: BS 328; DIN 345; ISO 235; 101MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
79713	BIT, TWIST: DIAMETER: 13 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 182 MM; STANDARD: BS 328; DIN 345; ISO 235; 101 MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

79714	BIT, TWIST: DIAMETER: 17 MM; SHANK: MORSE TAPER NO 2; MATERIAL: HSS; LENGTH: 223 MM; STANDARD: BS 328; DIN 345; ISO 235; 125MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79716	BIT, TWIST: DIAMETER: 45 MM; SHANK: MORSE TAPER NO 4; MATERIAL: HSS; LENGTH: 359 MM; STANDARD: BS 328; DIN 345; ISO 235; 210MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79720	BIT, TWIST: DIAMETER: 48 MM; SHANK: MORSE TAPER NO 4; MATERIAL: HSS; LENGTH: 369 MM; STANDARD: BS 328; DIN 345; ISO 235; 220MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79721	BIT, TWIST: DIAMETER: 48.5 MM; SHANK: MORSE TAPER NO 4; MATERIAL: HSS; LENGTH: 369 MM; STANDARD: BS 328; DIN 345; ISO 235; 220MM FLUTE LONG; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79735	BIT, TWIST: DIAMETER: 10 MM; SHANK: STRAIGHT 10 MM; MATERIAL: HSS; LENGTH: 133 MM; STANDARD: BS 328; DIN 338; ISO 235; 87MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	200	
79740	BIT, MASONRY: TYPE: PERCUSSION; DIAMETER: 6 MM; LENGTH: 97 MM; MATERIAL: STL; SHANK: 10 MM; TIP: TUNGSTEN CARBIDE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	300	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

79741	BIT, MASONRY: TYPE: PERCUSSION; DIAMETER: 8 MM; LENGTH: 152 MM; MATERIAL: STL; SHANK: 10 MM; TIP: TUNGSTEN CARBIDE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	200	
79742	BIT, MASONRY: TYPE: HAND STAR; DIAMETER: 9.5 MM; LENGTH: 152 MM; TIP: TUNGSTEN CARBIDE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
79743	BIT, MASONRY: TYPE: HAND STAR; DIAMETER: 11 MM; LENGTH: 150 MM; TIP: TUNGSTEN CARBIDE; SINGLE TWIST FLUTED; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
79744	BIT, MASONRY: TYPE: PERCUSSION; DIAMETER: 13 MM; LENGTH: 130 MM; TIP: TUNGSTEN CARBIDE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
79750	BIT, TWIST: DIAMETER: 7.1 MM; SHANK: STRAIGHT 7.1 MM; MATERIAL: HSS; LENGTH: 109 MM; STANDARD: BS 328; DIN 338; ISO 235; 69MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
79752	BIT, TWIST: DIAMETER: 12.5 MM; SHANK: STRAIGHT 12.5 MM; MATERIAL: HSS; LENGTH: 151 MM; STANDARD: BSS 328; DIN 338; ISO 235; 101MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
79754	BIT, TWIST: DIAMETER: 5 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 133 MM; STANDARD: BS S328; DIN 345 TYPE N; ISO 235; 52MM FLUTE LENGTH; PART NO: 3510500, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

79756	BIT, TWIST: DIAMETER: 8 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 156 MM; STANDARD: BS 328; DIN 345; ISO 235; 75MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
79757	BIT, TWIST: DIAMETER: 11 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 175 MM; STANDARD: BS S328; DIN 345 TYPE N; ISO 235; 94MM FLUTE LENGTH; PART NO: 3511100, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79758	BIT, TWIST: DIAMETER: 16 MM; SHANK: MORSE TAPER NO 2; MATERIAL: HSS; LENGTH: 218 MM; STANDARD: BS 328; DIN 345; ISO 235; 120 MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79759	BIT, TWIST: DIAMETER: 17.5 MM; SHANK: MORSE TAPER NO 2; MATERIAL: HSS; LENGTH: 228 MM; STANDARD: BS 328; DIN 345; ISO 235; 130MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	30	
79760	BIT, TWIST: DIAMETER: 22.25 MM; SHANK: MORSE TAPER NO 2; MATERIAL: HSS; LENGTH: 248 MM; STANDARD: BS S328; DIN 345 TYPE N; ISO 235; 150MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79761	BIT, TWIST: DIAMETER: 24 MM; SHANK: MORSE TAPER NO 3; MATERIAL: HSS; LENGTH: 281 MM; STANDARD: BS 328; DIN 345; ISO 235; 160MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

79762	BIT, TWIST: DIAMETER: 25.5 MM; SHANK: MORSE TAPER NO 3; MATERIAL: HSS; LENGTH: 286 MM; STANDARD: BS 328; DIN 345; ISO 235; 165MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79765	BIT, TWIST: DIAMETER: 32 MM; SHANK: MORSE TAPER NO 4; MATERIAL: HSS; LENGTH: 334 MM; STANDARD: BS 328; DIN 345; ISO 235; 185MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79766	BIT, TWIST: DIAMETER: 14.5 MM; SHANK: STRAIGHT 14.5 MM; MATERIAL: HSS; LENGTH: 169 MM; TYPE: DRILL; STANDARD: BSS328; DIN 338 TYPE N; ISO 235; 114MM FLUTE LENGTH; PART NO: 1401450, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79767	BIT, MASONRY: TYPE: PERCUSSION; DIAMETER: 16 MM; LENGTH: 150 MM; TIP: TUNGSTEN CARBIDE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
79772	BIT, TWIST: DIAMETER: 3.1 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 117 MM; STANDARD: BS 328; DIN 345; ISO 235; 36MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79776	BIT, TWIST: DIAMETER: 27.5 MM; SHANK: MORSE TAPER NO 3; MATERIAL: HSS; LENGTH: 291 MM; STANDARD: BS S328; DIN 345 TYPE N; ISO 235; 170MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

79778	BIT, TWIST: DIAMETER: 31.5 MM; SHANK: MORSE TAPER NO 3; MATERIAL: HSS; LENGTH: 301 MM; STANDARD: BS 328; DIN 345; ISO 235; 180MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79779	BIT, TWIST: DIAMETER: 32.5 MM; SHANK: MORSE TAPER NO 4; MATERIAL: HSS; LENGTH: 334 MM; STANDARD: BS S328; DIN 345 TYPE N; ISO 235; 185MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79782	BIT, TWIST: DIAMETER: 40 MM; SHANK: MORSE TAPER NO 4; MATERIAL: HSS; LENGTH: 349 MM; STANDARD: BS 328; DIN 345; ISO 235; 200MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79785	BIT, TWIST: DIAMETER: 44 MM; SHANK: MORSE TAPER NO 4; MATERIAL: HSS; LENGTH: 359 MM; STANDARD: BS S328; DIN 345 TYPE N; ISO 235; 210MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79796	BIT, TWIST: DIAMETER: 11 MM; MATERIAL: HSS; LENGTH: 64 MM; TYPE: CENTER DRILL; STANDARD: BS 5; DOUBLE END, 60 DEGREE, INCLUDING ANGLE ON BOTH ENDS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	40	
79798	BIT, TWIST: DIAMETER: 2.5 MM; MATERIAL: HSS; LENGTH: 52 MM; TYPE: CENTER DRILL; DOUBLE END, 6.3MM BODY DIAMETER, 60 DEGREE INCL ANGLE BOTH ENDS; PART NO: BS3, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

79800	BIT, TWIST: MATERIAL: HSS; LENGTH: 76 MM; TYPE: CENTER DRILL; STANDARD: BS 6; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79801	BIT, MASONRY: TYPE: PERCUSSION; DIAMETER: 4.5 MM; LENGTH: 83 MM; TIP: TUNGSTEN CARBIDE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	200	
79803	BIT, TWIST: DIAMETER: 14 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 189 MM; 108MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	80	
79805	BIT, TWIST: DIAMETER: 20.5 MM; SHANK: MORSE TAPER NO 2; MATERIAL: HSS; LENGTH: 243 MM; STANDARD: BS 328; DIN 345; ISO 235; 145MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79806	BIT, TWIST: DIAMETER: 21 MM; SHANK: MORSE TAPER NO 2; MATERIAL: HSS; LENGTH: 243 MM; STANDARD: BS 328; DIN 345; ISO 235; 145 MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79808	BIT, TWIST: DIAMETER: 10.5 MM; SHANK: STRAIGHT 10.5 MM; MATERIAL: HSS; LENGTH: 133 MM; STANDARD: BS 328; DIN 338; ISO 235; 87MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	150	
79809	BIT, TWIST: DIAMETER: 11 MM; SHANK: STRAIGHT 11 MM; MATERIAL: HSS; LENGTH: 142 MM; STANDARD: BS 328; DIN 338; ISO 235; 94 MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

79810	BIT, TWIST: DIAMETER: 11.5 MM; SHANK: STRAIGHT 11.5 MM; MATERIAL: HSS; LENGTH: 142 MM; STANDARD: BS 328; DIN 338; ISO 235; 94MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
79811	BIT, TWIST: DIAMETER: 12 MM; SHANK: STRAIGHT 12 MM; MATERIAL: HSS; LENGTH: 151 MM; STANDARD: BS 328; DIN 328; ISO 235; 101MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	120	
79813	BIT, TWIST: DIAMETER: 16 MM; SHANK: STRAIGHT 16 MM; MATERIAL: HSS; LENGTH: 178 MM; STANDARD: BSS328; DIN 338 TYPE N; ISO 235; 120MM FLUTE LENGTH, TYP N; PART NO: 1401600, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
79814	BIT, TWIST: DIAMETER: 17.5 MM; SHANK: STRAIGHT 17.5 MM; MATERIAL: HSS; LENGTH: 195 MM; STANDARD: BSS328; DIN 338 TYPE N; ISO 235; 130MM FLUTE LENGTH; PART NO: 1401750, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79816	BIT, TWIST: DIAMETER: 19 MM; SHANK: STRAIGHT 19 MM; MATERIAL: HSS; LENGTH: 198 MM; STANDARD: BSS328; DIN 338 TYPE N; ISO 235; 135MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
79818	BIT, MASONRY: TYPE: PERCUSSION; DIAMETER: 20 MM; LENGTH: 150 MM; SHANK: 12 MM; TIP: TUNGSTEN CARBIDE; SINGLE TWIST FLUTED; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	



SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

79827	BIT, TWIST: DIAMETER: 26 MM; SHANK: MORSE TAPER NO 3; MATERIAL: HSS; LENGTH: 286 MM; STANDARD: BS 328; DIN 345; ISO 235; 165MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79828	BIT, TWIST: DIAMETER: 19 MM; SHANK: MORSE TAPER NO 2; MATERIAL: HSS; LENGTH: 233 MM; STANDARD: BS 328; DIN 345; ISO 235; 135 MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79829	BIT, TWIST: DIAMETER: 20 MM; SHANK: MORSE TAPER NO 2; MATERIAL: HSS; LENGTH: 238 MM; STANDARD: BS 328; DIN 345; ISO 235; 140 MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79830	BIT, TWIST: DIAMETER: 24.5 MM; SHANK: MORSE TAPER NO 3; MATERIAL: HSS; LENGTH: 281 MM; STANDARD: BS S328; DIN 345 TYPE N; ISO 235; 160MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79831	BIT, TWIST: DIAMETER: 29 MM; SHANK: MORSE TAPER NO 3; MATERIAL: HSS; LENGTH: 296 MM; STANDARD: BS 328; DIN 345; ISO 235; 175MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79832	BIT, TWIST: SHANK: STRAIGHT 0.9 MM; MATERIAL: HSS; LENGTH: 32 MM; STANDARD: BSS328; DIN 338 TYPE N; ISO 235; 11MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

79833	BIT, TWIST: DIAMETER: 0.6 MM; SHANK: STRAIGHT 0.6 MM; MATERIAL: HSS; LENGTH: 24 MM; STANDARD: BSS328; DIN 338 TYPE N; ISO 235; 7MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79834	BIT, TWIST: DIAMETER: 0.55 MM; SHANK: STRAIGHT 0.55 MM; MATERIAL: HSS; LENGTH: 24 MM; STANDARD: BSS 328-1959 PART 1; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	30	
79846	BIT, TWIST: DIAMETER: 0.8 MM; SHANK: STRAIGHT 0.8 MM; MATERIAL: HSS; LENGTH: 30 MM; STANDARD: BS 328; DIN 338; ISO 235; FLUTE LENGTH: 10MM; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	60	
79849	BIT, TWIST: DIAMETER: 1 MM; SHANK: STRAIGHT 1 MM; MATERIAL: HSS; LENGTH: 34 MM; STANDARD: BSS328; DIN 338 TYPE N; ISO 235; 12MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
79850	BIT, TWIST: DIAMETER: 0.5 MM; SHANK: 0.5 MM; MATERIAL: HSS; LENGTH: 22 MM; STANDARD: BSS328; DIN 338 TYPE N; ISO 235; 6MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	60	
79851	BIT, TWIST: DIAMETER: 0.75 MM; SHANK: STRAIGHT 0.75 MM; MATERIAL: HSS; LENGTH: 29 MM; STANDARD: BS S328; PART NO: 1/1959, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

79892	BIT, TWIST: DIAMETER: 19.5 MM; SHANK: MORSE TAPER NO 2; MATERIAL: HSS; LENGTH: 238 MM; STANDARD: BS 328; DIN 345; ISO 235; 140 MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79893	BIT, TWIST: DIAMETER: 15.5 MM; SHANK: MORSE TAPER NO 2; MATERIAL: HSS; LENGTH: 218 MM; STANDARD: BS 328; DIN 345; ISO 235; 120 MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79894	BIT, TWIST: DIAMETER: 22 MM; SHANK: MORSE TAPER NO 2; MATERIAL: HSS; LENGTH: 248 MM; STANDARD: BS 328; DIN 345; ISO 235; 150MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79897	BIT, TWIST: DIAMETER: 1.5 MM; SHANK: STRAIGHT 1.5 MM; MATERIAL: HSS; LENGTH: 40 MM; STANDARD: BSS328; DIN 338 TYPE N; ISO 235; 18MM FLUTE LENGTH; PART NO: 1400150, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
79900	BIT, TWIST: DIAMETER: 2 MM; SHANK: STRAIGHT 2 MM; MATERIAL: HSS; LENGTH: 49 MM; STANDARD: BS 328; DIN 338; ISO 235; 24MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	300	
79902	BIT, TWIST: DIAMETER: 2.5 MM; SHANK: STRAIGHT 2.5 MM; MATERIAL: HSS; LENGTH: 57 MM; STANDARD: BS 328; DIN 338; ISO 235; 30 MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	300	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

79904	BIT, TWIST: DIAMETER: 2.75 MM; SHANK: STRAIGHT 2.75 MM; MATERIAL: HSS; LENGTH: 61 MM; STANDARD: BSS328; DIN 338 TYPE N; ISO 235; 33MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	80	
79905	BIT, TWIST: DIAMETER: 3 MM; SHANK: STRAIGHT 3 MM; MATERIAL: HSS; LENGTH: 61 MM; STANDARD: BS 328; DIN 338; ISO 235; 33 MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	1000	
79908	BIT, TWIST: DIAMETER: 3.5 MM; SHANK: STRAIGHT 3.5 MM; MATERIAL: HSS; LENGTH: 70 MM; STANDARD: BS 328; DIN 338; ISO 235; 39MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	400	
79911	BIT, TWIST: DIAMETER: 4 MM; SHANK: STRAIGHT 4 MM; MATERIAL: HSS; LENGTH: 75 MM; STANDARD: BS 328; DIN 338; ISO 235; 43MM FLUTE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	800	
79914	BIT, TWIST: DIAMETER: 4.5 MM; SHANK: STRAIGHT 4.5 MM; MATERIAL: HSS; LENGTH: 80 MM; STANDARD: BS 328; DIN 338; ISO 235; 47MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	500	
79917	BIT, TWIST: DIAMETER: 5 MM; SHANK: STRAIGHT 5 MM; MATERIAL: HSS; LENGTH: 86 MM; STANDARD: BSS 328; DIN 338 TYPE N; ISO 235; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	800	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

79919	BIT, TWIST: DIAMETER: 5.5 MM; SHANK: STRAIGHT 5.5 MM; MATERIAL: HSS; LENGTH: 93 MM; STANDARD: BS 328; DIN 338; ISO 235; 57MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	300	
79921	BIT, TWIST: DIAMETER: 6 MM; SHANK: STRAIGHT 6 MM; MATERIAL: HSS; LENGTH: 93 MM; STANDARD: BS 328; DIN 338; ISO 235; 57MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	600	
79922	BIT, TWIST: DIAMETER: 6.5 MM; SHANK: STRAIGHT 6.5 MM; MATERIAL: HSS; LENGTH: 101 MM; STANDARD: BSS328; DIN 338 TYPE N; ISO 235; 63MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	300	
79923	BIT, TWIST: DIAMETER: 7 MM; SHANK: STRAIGHT 7 MM; MATERIAL: HSS; LENGTH: 109 MM; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	300	
79924	BIT, TWIST: DIAMETER: 7.5 MM; SHANK: STRAIGHT 7.5 MM; MATERIAL: HSS; LENGTH: 109 MM; STANDARD: BSS328; DIN 338 TYPE N; ISO 235; 69MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	150	
79925	BIT, TWIST: DIAMETER: 8 MM; SHANK: STRAIGHT 8 MM; MATERIAL: HSS; LENGTH: 117 MM; STANDARD: BSS328; DIN 338 TYPE N; ISO 235; 75MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	300	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

79926	BIT, TWIST: DIAMETER: 8.5 MM; SHANK: STRAIGHT 8.5 MM; MATERIAL: HSS; LENGTH: 117 MM; STANDARD: BSS328; DIN 338 TYPE N; ISO 235; 75MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	300	
79928	BIT, TWIST: DIAMETER: 9 MM; SHANK: STRAIGHT 9 MM; MATERIAL: HSS; LENGTH: 125 MM; STANDARD: BS 328; DIN 338; ISO 235; 81MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	200	
79929	BIT, TWIST: DIAMETER: 9.5 MM; SHANK: STRAIGHT 9.5 MM; MATERIAL: HSS; LENGTH: 125 MM; STANDARD: BS 328; DIN 338; ISO 235; 81MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
79930	BIT, TWIST: DIAMETER: 13.5 MM; SHANK: MORSE TAPER NO 1; MATERIAL: HSS; LENGTH: 189 MM; STANDARD: BS S328; DIN 345 TYPE N; ISO 235; 108MM FLUTE LENGTH; PART NO: 3511350, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79932	BIT, TWIST: DIAMETER: 16.5 MM; SHANK: MORSE TAPER NO 2; MATERIAL: HSS; LENGTH: 223 MM; STANDARD: BS 328; DIN 345; ISO 235; 125 MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79933	BIT, TWIST: DIAMETER: 18 MM; SHANK: MORSE TAPER NO 2; MATERIAL: HSS; LENGTH: 228 MM; STANDARD: BS 328; DIN 345; ISO 235; 130 MM FLUTE LENGTH, IN ACCORDANCE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

79934	BIT, TWIST: DIAMETER: 26.5 MM; SHANK: MORSE TAPER NO 3; MATERIAL: HSS; LENGTH: 286 MM; STANDARD: BS 328; DIN 345; ISO 235; 165MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79935	BIT, TWIST: DIAMETER: 29.5 MM; SHANK: MORSE TAPER NO 3; MATERIAL: HSS; LENGTH: 296 MM; STANDARD: BS 328; DIN 345; ISO 235; 175MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79937	BIT, TWIST: DIAMETER: 36 MM; SHANK: MORSE TAPER NO 4; MATERIAL: HSS; LENGTH: 344 MM; STANDARD: BS 328; DIN 345; ISO 235; 195MM FLUTE LENGTH; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79939	TAP SET, THREAD CUTTING: TAP SIZE: M3; THREAD: 0.6 MM; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND PITCH HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79942	TAP SET, THREAD CUTTING: TAP SIZE: M6; THREAD: 1 MM; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND PITCH HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
79943	TAP SET, THREAD CUTTING: TAP SIZE: M7; THREAD: 1 MM; MATERIAL: HSS; QUANTITY: 3; TYPE: TAPER; SECOND; BOTTOM; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	30	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

79944	TAP SET, THREAD CUTTING: TAP SIZE: M8; THREAD: 1.25 MM; MATERIAL: HSS; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	80	
79945	TAP SET, THREAD CUTTING: TAP SIZE: M10; THREAD: 1.5 MM; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; GROUND THREADS; COMPRISING OF ONE DIAMETER AND PITCH HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	80	
79946	TAP SET, THREAD CUTTING: TAP SIZE: M12; THREAD: 1.25 MM; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND PITCH HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	80	
79947	TAP SET, THREAD CUTTING: TAP SIZE: M14; THREAD: 1.5 MM; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND PITCH HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79948	TAP SET, THREAD CUTTING: TAP SIZE: M16; THREAD: 1.5 MM; MATERIAL: HSS; QUANTITY: 3; TYPE: TAPER; SECOND; BOTTOM; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79950	TAP SET, THREAD CUTTING: TAP SIZE: M20; THREAD: 1.5 MM; MATERIAL: HSS; QUANTITY: 3; TYPE: TAPER; SECOND; BOTTOM; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	80	
79957	TAP SET, THREAD CUTTING: THREAD: 0BA; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	



SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

79958	TAP SET, THREAD CUTTING: TAP SIZE: 1BA; MATERIAL: HSS; QUANTITY: 3; TYPE: TAPER; SECOND; BOTTOM; HAND; REFERENCE NO: 1BA; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79959	TAP SET, THREAD CUTTING: THREAD: 2BA; MATERIAL: HSS; TYPE: HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79960	TAP SET, THREAD CUTTING: TAP SIZE: 3BA; MATERIAL: HSS; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79961	TAP SET, THREAD CUTTING: TAP SIZE: 4BA; MATERIAL: HSS; QUANTITY: 3; TYPE: TAPER; SECOND; BOTTOM; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79962	TAP SET, THREAD CUTTING: TAP SIZE: 5BA; MATERIAL: HSS; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79963	TAP SET, THREAD CUTTING: TAP SIZE: 6BA; MATERIAL: HSS; QUANTITY: 3; TYPE: TAPER; SECOND; BOTTOM; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79964	TAP SET, THREAD CUTTING: TAP SIZE: 7BA; MATERIAL: HSS; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79965	TAP SET, THREAD CUTTING: TAP SIZE: 9BA; MATERIAL: HSS; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

79966	TAP SET, THREAD CUTTING: TAP SIZE: 10BA; MATERIAL: HSS; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79967	TAP SET, THREAD CUTTING: TAP SIZE: 1/4 IN; THREAD: BSF; MATERIAL: HSS; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79968	TAP SET, THREAD CUTTING: TAP SIZE: 3/8 IN; THREAD: BSF; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79969	TAP SET, THREAD CUTTING: THREAD: BSF 7/16 IN; MATERIAL: HSS; TYPE: HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79971	TAP SET, THREAD CUTTING: TAP SIZE: 9/16 IN; THREAD: BSF; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79977	TAP SET, THREAD CUTTING: THREAD: BSP 1/8 IN; MATERIAL: HSS; TYPE: HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	60	
79978	TAP SET, THREAD CUTTING: THREAD: BSP 1/4 IN; MATERIAL: HSS; TYPE: HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

79981	TAP SET, THREAD CUTTING: TAP SIZE: 1/2 IN; THREAD: BSP; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND HAND; REFERENCE NO: 1- 2INCHBSPX14TPI; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79982	TAP SET, THREAD CUTTING: TAP SIZE: 3/4 IN; THREAD: BSP; MATERIAL: HSS; QUANTITY: 3; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE TAPER; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79983	TAP SET, THREAD CUTTING: TAP SIZE: 7/8 IN; THREAD: 11BSF; MATERIAL: HSS; QUANTITY: 3; TYPE: BOTTOMING/TAPER; SOMTA BRAND, HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79988	TAP SET, THREAD CUTTING: TAP SIZE: M9; THREAD: 1.25 MM; MATERIAL: HSS; QUANTITY: 3; TYPE: TAPER; SECOND; BOTTOM; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79989	TAP SET, THREAD CUTTING: TAP SIZE: M11; THREAD: 1.5 MM; MATERIAL: HSS; QUANTITY: 3; TYPE: TAPER; SECOND; BOTTOM; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79990	TAP SET, THREAD CUTTING: TAP SIZE: M22; THREAD: 2.5 MM; MATERIAL: HSS; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
79994	TAP SET, THREAD CUTTING: TAP SIZE: 5/16 IN; THREAD: BSW; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

80003	TAP SET, THREAD CUTTING: TAP SIZE: 8BA; MATERIAL: HSS; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80017	TAP SET, THREAD CUTTING: TAP SIZE: M48; THREAD: 5 MM; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND PITCH HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80018	TAP SET, THREAD CUTTING: TAP SIZE: M4; THREAD: 0.7 MM; MATERIAL: HSS; QUANTITY: 3; TYPE: TAPER; SECOND; BOTTOM; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	60	
80019	TAP SET, THREAD CUTTING: TAP SIZE: M1; THREAD: 0.35 MM; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND PITCH HAND.; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80020	TAP SET, THREAD CUTTING: TAP SIZE: M1.4; THREAD: 0.3 MM; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND PITCH HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80021	TAP SET, THREAD CUTTING: TAP SIZE: M1.6; THREAD: 0.35 MM; MATERIAL: HSS; QUANTITY: 3; TYPE: TAPER; SECOND; BOTTOM; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80022	TAP SET, THREAD CUTTING: TAP SIZE: M1; THREAD: 0.25 MM; MATERIAL: HSS; QUANTITY: 3; TYPE: TAPER; SECOND; BOTTOM; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

80036	TAP SET, THREAD CUTTING: TAP SIZE: M3.5; THREAD: 0.35 MM; MATERIAL: HSS; QUANTITY: 3; TYPE: TAPER; SECOND; BOTTOM; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80083	TAP SET, THREAD CUTTING: TAP SIZE: 5/16 IN; THREAD: BSF; MATERIAL: HSS; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80107	TAP SET, THREAD CUTTING: TAP SIZE: M16; THREAD: 2 MM; MATERIAL: HSS; QUANTITY: 3; TYPE: TAPER; SECOND; BOTTOM; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	80	
80112	TAP SET, THREAD CUTTING: TAP SIZE: M3.5; THREAD: 0.6 MM; MATERIAL: HSS; QUANTITY: 3; TYPE: TAPER; SECOND; BOTTOM; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80113	TAP SET, THREAD CUTTING: TAP SIZE: M4.5; THREAD: 0.75 MM; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND PITCH HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80114	TAP SET, THREAD CUTTING: TAP SIZE: M26; THREAD: 3 MM; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND PITCH HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80115	TAP SET, THREAD CUTTING: TAP SIZE: M30; THREAD: 3.5 MM; MATERIAL: HSS; QUANTITY: 3; TYPE: TAPER; SECOND; BOTTOM; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	30	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

80120	TAP SET, THREAD CUTTING: TAP SIZE: 1-1/4 IN; THREAD: BSP; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
80126	TAP SET, THREAD CUTTING: TAP SIZE: M8; THREAD: 1 MM; MATERIAL: HSS; QUANTITY: 3; TYPE: TAPER; SECOND; BOTTOM; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
80127	TAP SET, THREAD CUTTING: TAP SIZE: M14; THREAD: 1.25 MM; MATERIAL: HSS; QUANTITY: 3; TYPE: TAPER; SECOND; BOTTOM; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	30	
80128	TAP SET, THREAD CUTTING: TAP SIZE: M22; THREAD: 1.5 MM; MATERIAL: HSS; TYPE: HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80129	TAP SET, THREAD CUTTING: TAP SIZE: M24; THREAD: 3 MM; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND PITCH HAND; REFERENCE NO: M24X1-5MMTAPS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	30	
80130	TAP SET, THREAD CUTTING: TAP SIZE: M30; THREAD: 2 MM; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80131	TAP SET, THREAD CUTTING: TAP SIZE: M33; THREAD: 3.5 MM; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

80133	TAP SET, THREAD CUTTING: TAP SIZE: M3; THREAD: 0.5 MM; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND PITCH HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
80134	TAP SET, THREAD CUTTING: TAP SIZE: M5; THREAD: 0.8 MM; MATERIAL: HSS; QUANTITY: 3; TYPE: TAPER; SECOND; BOTTOM; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	60	
80135	TAP SET, THREAD CUTTING: TAP SIZE: M10; THREAD: 1 MM; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND PITCH HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	60	
80136	TAP SET, THREAD CUTTING: TAP SIZE: M12; THREAD: 1.75 MM; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND PITCH HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	80	
80137	TAP SET, THREAD CUTTING: TAP SIZE: M20; THREAD: 2.5 MM; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND PITCH HAND; REFERENCE NO: M20X2-5MMTAPS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	40	
80141	TAP SET, THREAD CUTTING: TAP SIZE: 1/4 IN; THREAD: NPT; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

80218	TAP SET, THREAD CUTTING: TAP SIZE: M20; THREAD: 2 MM; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND PITCH HAND.; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80220	TAP SET, THREAD CUTTING: TAP SIZE: M25; THREAD: 1.5 MM; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND PITCH HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80229	TAP SET, THREAD CUTTING: TAP SIZE: M2.5; THREAD: 0.45 MM; MATERIAL: HSS; QUANTITY: 3; TYPE: TAPER; SECOND; BOTTOM; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80230	TAP SET, THREAD CUTTING: TAP SIZE: M3; THREAD: 0.35 MM; MATERIAL: HSS; QUANTITY: 3; TYPE: TAPER; SECOND; BOTTOM; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80231	TAP SET, THREAD CUTTING: TAP SIZE: M6; THREAD: 0.75 MM; MATERIAL: HSS; TYPE: TAPER, BOTTOM; METRIC FINE, ISO 529, DIAMETER PITCH; FLUTES STRAIGHT; LENGTH 66MM; THREADS GROUND HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80232	TAP SET, THREAD CUTTING: TAP SIZE: M9; THREAD: 1 MM; MATERIAL: HSS; QUANTITY: 3; TYPE: TAPER; SECOND; BOTTOM; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	



SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

80233	TAP SET, THREAD CUTTING: TAP SIZE: M10; THREAD: 1.25 MM; MATERIAL: HSS; TYPE: TAPER; SECOND; BOTTOM; COMPRISING OF ONE DIAMETER AND PITCH HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
80238	TAP SET, THREAD CUTTING: TAP SIZE: M36; THREAD: 4 MM; MATERIAL: HSS; QUANTITY: 3; TYPE: TAPER; SECOND; BOTTOM; HAND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	40	
80365	SCREW, MACHINE: DIAMETER: M6; LENGTH: 20 MM; THREAD: 1.25 MM; HEAD: RD SLOTTED; MATERIAL: STL; GAS CON UNIT WATER/PLANT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80366	SCREW, CAP: DIAMETER: M16; LENGTH: 70 MM; THREAD: 2 MM; HEAD: SOCKET HEX; MATERIAL: HTS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80367	SCREW, WOOD: LENGTH: 50 MM; HEAD: CSK FLAT SLOTTED; MATERIAL: STL; COMMERCIAL SIZE: NO 12; SPECIFICATION: SABS 1171; 540MPA TENSILE STRENGTH; REFERENCE NO: 1171:1979/AMEND2TALBE6; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80429	SCREW, MACHINE: DIAMETER: 2BA; LENGTH: 50 MM; THREAD: 0.81 MM; HEAD: CHEESE SLOTTED; MATERIAL: BRS; GRADE: C10100; SPECIFICATION: BS 57 TABLE 1; SCREW, MACHINE; DIAMETER 2BA, LENGTH 50 MM, HEAD CHEESE SLOTTED, MATERIAL BRS, SPECIFICATION BS57 TABLE 1~SCREW,MACH;2BA,LG 50 MM,CHEESE SLOTTED; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	8000	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

80431	SCREW, MACHINE: DIAMETER: 3BA; LENGTH: 50 MM; THREAD: 0.73 MM; HEAD: CHEESE SLOTTED; MATERIAL: BRS; GRADE: C10100; SPECIFICATION: BS 57 TABLE 1; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	5000	
80449	SCREW, WOOD: DIAMETER: 5 MM; LENGTH: 60 MM; HEAD: CSK FLAT SLOTTED; MATERIAL: STL; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	200	
80472	SCREW, MACHINE: DIAMETER: 0BA; LENGTH: 50 MM; THREAD: 0BA; HEAD: CHEESE SLOTTED; MATERIAL: BRS; GRADE: 8.8; SPECIFICATION: BS 57; REFERENCE NO: CHBROBAX50; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2000	
80476	SCREW, WOOD: DIAMETER: 4.5 MM; LENGTH: 90 MM; HEAD: CSK FLAT SLOTTED; MATERIAL: STL; COMMERCIAL SIZE: NO 10; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80711	SCREW, MACHINE: DIAMETER: M6; LENGTH: 12 MM; THREAD: 1 MM; HEAD: HEX; MATERIAL: MS; GRADE: 4.6; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80760	SCREW, CAP: DIAMETER: M6; LENGTH: 25 MM; THREAD: 1 MM; HEAD: SOCKET HEX; MATERIAL: HTS; GRADE: 12.9; SPECIFICATION: BS 4168-1981 PART 1; KNURLED HEAD; ISO METRIC THREAD; MEDIUM FIT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	500	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

80763	SCREW, CAP: DIAMETER: M8; LENGTH: 16 MM; THREAD: 1.25 MM; HEAD: SOCKET HEX; MATERIAL: HTS; GRADE: 8.8; SPECIFICATION: BS 4168; KNURLED; MATERIAL: 21CRMOV57V; GROUP NUMBER 2480; USED ON HP GLAND; TENSILE STRENGTH: 130KG F/MM2 MIN; 78KG F/MM2 SHEAR; DRAWING NO: B42.24800-0079; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80765	SCREW, CAP: DIAMETER: M8; LENGTH: 40 MM; THREAD: 1.25 MM; HEAD: SOCKET HEX; MATERIAL: HTS; GRADE: 12.9; SPECIFICATION: BS 4168-1981 PART 1; KNURLED HEAD, ISO METRIC THREAD; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	80	
80766	SCREW, CAP: DIAMETER: M10; LENGTH: 20 MM; THREAD: 1.5 MM; HEAD: SOCKET HEX; MATERIAL: STL ALLOY HIGH GR; GRADE: 12.9; SPECIFICATION: BS 4168; 130KG F/MM2 MIN TS; 78KGF/MM2 SHEAR; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	200	
80767	SCREW, CAP: DIAMETER: M10; LENGTH: 25 MM; THREAD: 1.5 MM; HEAD: SOCKET HEX; MATERIAL: HTS; GRADE: 12.9; SPECIFICATION: BS 4168; KNURLED HEAD; ISO METRIC THREAD; COARSE THREAD; MEDIUM FIT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80770	SCREW, CAP: DIAMETER: M10; LENGTH: 50 MM; THREAD: 1.5 MM; HEAD: SOCKET HEX; MATERIAL: HTS; GRADE: 8.8; SPECIFICATION: BS 4168 PART 1; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	800	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

80782	SCREW, CAP: DIAMETER: M16; LENGTH: 50 MM; THREAD: 2 MM; HEAD: SOCKET HEX; MATERIAL: HTS; GRADE: 12.9; SPECIFICATION: BS 4168-1981 PART 1; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	500	
80783	SCREW, CAP: DIAMETER: M8; LENGTH: 25 MM; THREAD: 1.25 MM; HEAD: SOCKET HEX; MATERIAL: HTS; GRADE: 12.9; SPECIFICATION: BS 4168-1981 PART 1; SOLE SOURCE: CLYDE BERGEMANN AFRICA PTY LTD; 130KGF PER SQUARE MILLIMETRE MINIMUM TENSILE STRENGTH; KNURLED HEAD; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	1000	
80784	SCREW, CAP: DIAMETER: M8; LENGTH: 30 MM; THREAD: 1.25 MM; HEAD: SOCKET HEX; MATERIAL: HTS; GRADE: 12.9; SPECIFICATION: BS 4168-1981 PART 1; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	500	
80788	SCREW, CAP: DIAMETER: M20; LENGTH: 60 MM; THREAD: 2.5 MM; HEAD: SOCKET HEX; MATERIAL: HTS; GRADE: 12.9; SPECIFICATION: BS 4168; REFERENCE NO: 3790-120; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
80812	SCREW, SET: NOMINAL THREAD DIAMETER: M4; THREAD: 0.7 MM; THREAD LENGTH: 8 MM; HEAD STYLE: SOCKET HEX; MATERIAL: STL; POINT STYLE: CUP; HEADLESS, GRUB, HIGH GRADE ALLOY STEEL; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	80	
80816	SCREW, SET: NOMINAL THREAD DIAMETER: M5; THREAD: 0.8 MM; THREAD LENGTH: 10 MM; HEAD STYLE: SOCKET HEX; MATERIAL: HTS; POINT STYLE: CUP; (C.O.C; Q4:NSF:NC:NEV); HALLOW; GRUB; GRADE 8.8; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	300	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

80823	SCREW, SET: NOMINAL THREAD DIAMETER: M8; THREAD: 1.25 MM; THREAD LENGTH: 8 MM; HEAD STYLE: SOCKET HEX; MATERIAL: AS GR HIGH; POINT STYLE: CUP; SPECIFICATION: BS4168; GRUB, ROCKWELL HARDNESS C45; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	80	
80829	SCREW, SET: NOMINAL THREAD DIAMETER: M10; THREAD: 1.5 MM; THREAD LENGTH: 10 MM; HEAD STYLE: SOCKET HEX; MATERIAL: AS GR HIGH; POINT STYLE: CUP; SPECIFICATION: BS4168; GRUB.; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	300	
80855	SCREW, CAP: DIAMETER: M6; LENGTH: 12 MM; THREAD: 1 MM; HEAD: CSK FLAT SOCKET HEX; MATERIAL: STL ALLOY HIGH GR; GRADE: 8.8; SPECIFICATION: BS 4168; 110KGF/MM2 TS; TIGHTENING TORQUE 0.987KGF.M; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	40	
80865	SCREW, CAP: DIAMETER: M24; LENGTH: 60 MM; THREAD: 3 MM; HEAD: SOCKET HEX; MATERIAL: HTS; GRADE: 8.8; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
80971	SCREW, MACHINE: DIAMETER: M8; LENGTH: 10 MM; THREAD: 1.25 MM; HEAD: HEX; MATERIAL: MS; GRADE: 4.6; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
81435	SCREW, SET: NOMINAL THREAD DIAMETER: M8; THREAD: 1.25 MM; THREAD LENGTH: 22 MM; HEAD STYLE: SOCKET HEX; MATERIAL: STL; POINT STYLE: CUP; GRUB, M8 X 25MM; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

81462	SCREW, MACHINE: DIAMETER: M5; LENGTH: 30 MM; THREAD: 0.8 MM; HEAD: PAN SLOTTED; MATERIAL: SS; MACH RECESSED HEAD; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	40	
81506	SCREW, THUMB: DIAMETER: 7/8 IN; PITCH: 14UNF; FASTENER LENGTH: 7/8 IN; HEAD STYLE: RD KNURLED; MATERIAL: PLASTIC; TYPE SEAL CLAMP; REFERENCE NO: P37663; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
81508	SCREW, SET: NOMINAL THREAD DIAMETER: M24; THREAD: 3 MM; THREAD LENGTH: 50 MM; HEAD STYLE: SOCKET HEX; MATERIAL: STL; POINT STYLE: FLAT; GRUB.; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
81509	SCREW, SET: NOMINAL THREAD DIAMETER: M16; THREAD: 2 MM; THREAD LENGTH: 18 MM; HEAD STYLE: SOCKET HEX; MATERIAL: STL; POINT STYLE: DOG HALF; SPECIFICATION: DIN915; GRUB, GRADE 10.9; USED ON HP/IP ROTOR COUPLING TO LOCK BUSHES, GROUP NUMBER 1300; DRAWING NO: C42.13000-0001 POS 019; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	40	
81523	SCREW, MACHINE: DIAMETER: M10; LENGTH: 40 MM; THREAD: 1.5 MM; HEAD: SQ; MATERIAL: TUFNOL; FOR TURBINE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

81593	SCREW, MACHINE: DIAMETER: 41 MM; LENGTH: 48 MM; THREAD: 4 MM; HEAD: FLANGE HEX; MATERIAL: CRMOV57V GR 21; GRADE: 8.8; 36 MM SOCKET HEAD, USED ON HP EMERGENCY STOP VALVE; DRAWING NO: 5120063/1043, 7120041/1354, E42.59295-0095; REFERENCE NO: FM90; PART NO: 5120-063; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
81648	SCREW, MACHINE: DIAMETER: M8; LENGTH: 24 MM; THREAD: 1.25 MM; HEAD: HEX; MATERIAL: STL; OIL WIPERDRIVE TRAIN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
81707	SCREW, CAP: DIAMETER: M16; LENGTH: 130 MM; THREAD: 2 MM; HEAD: SOCKET HEX; MATERIAL: 21CRM0V57V; GRADE: 21CRM0V57V; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
81718	SCREW, MACHINE: DIAMETER: M16; LENGTH: 110 MM; THREAD: 2 MM; HEAD: HEX; MATERIAL: HTS; GRADE: 8.8; SPECIFICATION: SABS 136; 800MPA TENSILE STRENGTH; COARSE THREAD MEDIUM FIT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
81816	BOLT, MACHINE: DIAMETER: M24; LENGTH: 100 MM; HEAD: HEX; GRADE: 21CRM0V57V; MATERIAL: 21CRM0V57V; THREAD: 3 MM; TYPE: HP EMERGENCY STOP VALVE; GROUP NO: 7120-057; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	200	
81817	SCREW, MACHINE: DIAMETER: M16; LENGTH: 40 MM; THREAD: 2 MM; HEAD: HEX; MATERIAL: 21CRM0V57V; GRADE: 21CRM0V57V; GROUP NUMBER 7320 POS 087; USED ON IP EMERGENCY STOP VALVE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

81921	SCREW, SET: NOMINAL THREAD DIAMETER: M16; THREAD: 2 MM; THREAD LENGTH: 35 MM; HEAD STYLE: SOCKET HEX; MATERIAL: STL; POINT STYLE: DOG HALF; SPECIFICATION: DIN915; GRUB; GRADE 10.9; D915; FOR USE ON LP2 GENERATOR ROTOR COUPLING ON TURBINE; REFERENCE NO: 1732-011; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
81922	BOLT, MACHINE: DIAMETER: M8; LENGTH: 12 MM; HEAD: HEX; GRADE: 21CRMOV57V; MATERIAL: 21CRMOV57V; THREAD: 1.25 MM; SPECIFICATION: DIN 912; TYPE: HP SHAFT GLAND INLET; CYLINDER; DRAWING NO: MAIN B42.24800-0079, SUB F42.35952-0301; PART NO: 2480-018; PART NO: 2680-052; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	120	
81946	SCREW, MACHINE: DIAMETER: M2; LENGTH: 4 MM; THREAD: 0.4 MM; HEAD: CSK FLAT SLOTTED; MATERIAL: STL; 2-56 AT 16100FH; USED ON THE WESTRONIC RECORDERS IN; REFERENCE NO: HW011202-03; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	60	
81948	SCREW, CAP: DIAMETER: 6/32 IN; LENGTH: 1/8 IN; THREAD: 32BSF; HEAD: SOCKET HEX; MATERIAL: STL; CUP POINT; REFERENCE NO: HW037706-02; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
81961	SCREW, SET: NOMINAL THREAD DIAMETER: 3/8 IN; THREAD: 16UNC; THREAD LENGTH: 3/8 IN; HEAD STYLE: SOCKET HEX; MATERIAL: HTS; POINT STYLE: CUP; GRUB.; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	



SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

81967	SCREW, SET: NOMINAL THREAD DIAMETER: 1/2 IN; THREAD: 13UNC; THREAD LENGTH: 2 IN; HEAD STYLE: SOCKET HEX; MATERIAL: HTS; POINT STYLE: CUP; GRUB.; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
81972	SCREW, SET: NOMINAL THREAD DIAMETER: M8; THREAD: 1.25 MM; THREAD LENGTH: 25 MM; HEAD STYLE: SOCKET HEX; MATERIAL: STL; POINT STYLE: CONE; SPECIFICATION: DIN553; GRUB; GRADE 5.8; USED ON OVERSPEED TRIP; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
81974	SCREW, CAP: DIAMETER: M8; LENGTH: 40 MM; THREAD: 1.25 MM; HEAD: SOCKET HEX; MATERIAL: STL; GRADE: 8.8; GROUP NUMBER 5160 ITEM 227; USED ON HP CONTROL VALVE SERVOMOTOR; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	120	
81978	SCREW, MACHINE: DIAMETER: M10; LENGTH: 20 MM; THREAD: M10 X 1.5; HEAD: HEX; MATERIAL: STL CD PLTD; GRADE: 8.8; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
82089	SCREW, CAP: DIAMETER: M8; LENGTH: 70 MM; THREAD: 1.25 MM; HEAD: SOCKET HEX; MATERIAL: HTS; GRADE: 8.8; THREAD LENGTH: 22 MM; SPECIFICATION: ISO 9002-1987; SABS 0157 PART 11; THREAD LENGTH TO BE MEASURED FROM BOLT TIP, NON THREADED AREA TO HAVE DIAMETER OF 8MM, MATERIAL GRADE MUST CLEARLY BE INDICATED ON THE BOLTS, QUALITY ASSURANCE TO BE CARRIED OUT ACCORDING TO SABS OR ISO; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

82152	SCREW, MACHINE: DIAMETER: M6; LENGTH: 20 MM; THREAD: 1 MM; HEAD: CSK SLOTTED; MATERIAL: BRS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
82288	SCREW, SET: NOMINAL THREAD DIAMETER: M12; THREAD: 1.75 MM; THREAD LENGTH: 30 MM; HEAD STYLE: SOCKET HEX; MATERIAL: HTS; SPECIFICATION: BS4168-1967 TABLE 6; TYPE GRUB; HEADLESS; GRADE 8.8; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	300	
82936	SCREW, MACHINE: DIAMETER: M4.5; LENGTH: 40 MM; THREAD: 1 MM; HEAD: PAN SLOTTED; MATERIAL: SS; W/PLANT; REFERENCE NO: P37548; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
83459	SCREW, CAP: DIAMETER: M12; LENGTH: 30 MM; THREAD: 1.75 MM; HEAD: SOCKET HEX; MATERIAL: HTS; GRADE: 12.9; SPECIFICATION: BS 4168; PART NO: NR100-100-16-038, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
83491	SCREW, THUMB: DIAMETER: M18; PITCH: 2 MM; FASTENER LENGTH: 22 MM; MATERIAL: NYLON; 26MM HEAD WIDTH; PART NO: 12-638-41, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
83569	ANCHOR, STUD: TYPE: KWIK; DIAMETER: M6; LENGTH: 25 MM; THREAD: 1 MM; EMBEDDED LENGTH: 10 MM; THREAD LENGTH: 8 MM; MATERIAL: STL; HILTI PERFIX; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

83570	ANCHOR, STUD: TYPE: KWIK; DIAMETER: M8; LENGTH: 68 MM; THREAD: 1.25 MM; EMBEDDED LENGTH: 55 MM; THREAD LENGTH: 65 MM; MATERIAL: STL; HILTI PERFIX; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	300	
83571	ANCHOR, STUD: TYPE: EXPANSION WEDGE; DIAMETER: M10; LENGTH: 75 MM; THREAD: 1.5 MM; EMBEDDED LENGTH: 60 MM; THREAD LENGTH: 70 MM; MATERIAL: STL; HILTI PERFIX; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	120	
83572	ANCHOR, STUD: TYPE: EXPANSION WEDGE; DIAMETER: M12; LENGTH: 115 MM; THREAD: 1.75 MM; EMBEDDED LENGTH: 20 MM; THREAD LENGTH: 38 MM; MATERIAL: STL; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
83576	BOLT, MACHINE: DIAMETER: M12; LENGTH: 40 MM; HEAD: HEX; GRADE: 21CRMOV57V; MATERIAL: 21CRMOV57V; THREAD: 1.75 MM; TYPE: HP/IP EMERGENCY STOP VALVE; REFERENCE NO: 7120-086; REFERENCE NO: 7320-086; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
83577	SCREW, MACHINE: DIAMETER: M24; LENGTH: 70 MM; THREAD: 3 MM; HEAD: HEX; MATERIAL: SS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
83583	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M16; LENGTH: 50 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 50 MM; THREAD: 2 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; COARSE THREAD FREE FIT, ISOMETRIC; SPECIFICATION: SABS135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	14000	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

83584	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M16; LENGTH: 65 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 40 MM; THREAD: 2 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; BOLT PROTECTIVE COATING: BLACK; SOLE SOURCE: CLYDE BERGEMANN AFRICA PTY LTD; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	4000	
83585	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M16; LENGTH: 40 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 25 MM; THREAD: 2 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	10000	
83586	BOLT, ASSEMBLY: NOMINAL DIAMETER: M16; LENGTH: 90 MM; HEAD: HEX; MATERIAL: MS; THREAD: 2 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	16000	
83587	BOLT, ASSEMBLY: LENGTH: 400 MM; HEAD: HEX; MATERIAL: MS; THREAD: 2 MM; BOLT PROTECTIVE COATING: BLACK; I.S.O. METRIC TO SABS135; NUTS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	100	
83588	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M20; LENGTH: 40 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 30 MM; THREAD: 2.5 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SOLE SOURCE: CLYDE BERGEMANN AFRICA PTY LTD; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	100	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

83591	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M12; LENGTH: 30 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 30 MM; THREAD: 1.75 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	25000	
83593	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M8; LENGTH: 20 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 20 MM; THREAD: 1.25 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	20	
83594	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M10; LENGTH: 25 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 25 MM; THREAD: 1.5 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; PROTECTIVE COATING: BLACK; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS135: 1985; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	300	
83596	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M10; LENGTH: 200 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: MS; THREAD LENGTH: 35 MM; THREAD: 1.5 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	20	
83597	BOLT, ASSEMBLY: NOMINAL DIAMETER: M16; LENGTH: 140 MM; HEAD: HEX; MATERIAL: MS; THREAD: 2 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	1000	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

83599	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M20; LENGTH: 50 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 33 MM; THREAD: 2.5 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	600	
83600	BOLT, ASSEMBLY: NOMINAL DIAMETER: M20; LENGTH: 55 MM; HEAD: HEX; MATERIAL: MS; THREAD: 2.5 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	800	
83601	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M20; LENGTH: 65 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 50 MM; THREAD: 2.5 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	1000	
83602	BOLT, ASSEMBLY: NOMINAL DIAMETER: M20; LENGTH: 180 MM; HEAD: HEX; MATERIAL: MS; THREAD: 2.5 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	300	
83623	BOLT, MACHINE: DIAMETER: M16; LENGTH: 40 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 2 MM; SPECIFICATION: DIN 931; DOUBLE HEAT TREATED, METRIC COARSE THREAD MEDIUM FIT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	150	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

83625	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M16; LENGTH: 30 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 27 MM; THREAD: 2 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	4000	
83626	BOLT, ASSEMBLY: TYPE: FINISHED; NOMINAL DIAMETER: M20; LENGTH: 60 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS BLACK; THREAD LENGTH: 50 MM; THREAD: 2.5 MM; NUT QUANTITY: 1; TYPE THREADED, SPECIFICATION SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	500	
83627	BOLT, ASSEMBLY: NOMINAL DIAMETER: M20; LENGTH: 90 MM; HEAD: HEX; MATERIAL: MS; THREAD: 2.5 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; ISO METRIC THREAD, COARSE THREAD FREE FIT, TO THE LATEST EDITION OF SABS135 AND BEARING THE SABS MARK OF APPROVAL; SPECIFICATION: SABS135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	5000	
83645	BOLT, MACHINE: DIAMETER: M16; LENGTH: 45 MM; HEAD: HEX; MATERIAL: SS GR 316; THREAD: 2 MM; SPECIFICATION: SABS 136-1985 TABLE 11; COARSE THREADS, MEDIUM FIT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	800	
83646	BOLT, MACHINE: DIAMETER: M16; LENGTH: 60 MM; HEAD: HEX; GRADE: 316; MATERIAL: SS; THREAD: 2 MM; THREAD LENGTH: 40 MM; SPECIFICATION: SABS 136; COARSE THREAD, MEDIUM FIT, MATERIAL CERTIFICATE TO BE SUPPLIED WITH EVERY DELIVERY; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	400	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

83652	BOLT, MACHINE: DIAMETER: M6; LENGTH: 65 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 1 MM; SPECIFICATION: DIN 931; DOUBLE HEAT TREATED COARSE THREAD, MEDIUM FIT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
83653	BOLT, MACHINE: DIAMETER: M6; LENGTH: 70 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 1 MM; SPECIFICATION: DIN 931; DOUBLE HEAT TREATED, COARSE THREAD, MEDIUM FIT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
83655	BOLT, ASSEMBLY: TYPE: MULTI PURPOSE; NOMINAL DIAMETER: M8; LENGTH: 50 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD LENGTH: 50 MM; THREAD: 1.25 MM; NUT QUANTITY: 1; SPECIFICATION: DIN931; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	400	
83656	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M8; LENGTH: 65 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD LENGTH: 25 MM; THREAD: 1.25 MM; NUT QUANTITY: 1; SPECIFICATION: DIN 931; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	150	
83657	BOLT, ASSEMBLY: NOMINAL DIAMETER: M8; LENGTH: 75 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 1.25 MM; NUT QUANTITY: 1; SPECIFICATION: DIN931; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	80	
83658	BOLT, MACHINE: DIAMETER: M10; LENGTH: 40 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 1.5 MM; SPECIFICATION: DIN 931; TYPE: HEX; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	3000	



SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

83659	BOLT, MACHINE: DIAMETER: M10; LENGTH: 50 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 1.5 MM; THREAD LENGTH: 48 MM; SPECIFICATION: DIN 931; PROTECTIVE COATING: BLACK; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	500	
83662	BOLT, MACHINE: DIAMETER: M12; LENGTH: 40 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 1.75 MM; THREAD LENGTH: 30 MM; SPECIFICATION: DIN 931; PROTECTIVE COATING: BLACK; WITHOUT NUT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	4000	
83663	BOLT, MACHINE: DIAMETER: M12; LENGTH: 45 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 1.75 MM; SPECIFICATION: DIN 931; DOUBLE HEAT TREATED , METRIC COARSE THREAD, MEDIUM FIT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	5000	
83665	BOLT, ASSEMBLY: TYPE: MULTI PURPOSE; NOMINAL DIAMETER: M16; LENGTH: 65 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD LENGTH: 65 MM; THREAD: 2 MM; NUT QUANTITY: 1; SPECIFICATION: DIN931; WITH NUTS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	80000	
83666	BOLT, MACHINE: DIAMETER: M12; LENGTH: 100 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 1.75 MM; SPECIFICATION: DIN 931; DOUBLE HEAT TREATED , COURSE THREAD; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
83667	BOLT, ASSEMBLY: TYPE: HTS; NOMINAL DIAMETER: M16; LENGTH: 50 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD LENGTH: 50 MM; THREAD: 2 MM; NUT QUANTITY: 1; SPECIFICATION: DIN931; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

83669	BOLT, MACHINE: DIAMETER: M16; LENGTH: 100 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 2 MM; THREAD LENGTH: 45 MM; SPECIFICATION: SABS 136; PROTECTIVE COATING: BLACK; TYPE: HTS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	200000	
83670	BOLT, MACHINE: DIAMETER: M20; LENGTH: 65 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 2.5 MM; SPECIFICATION: DIN 931; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	3000	
83672	BOLT, MACHINE: DIAMETER: M20; LENGTH: 75 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 2.5 MM; SPECIFICATION: DIN 931; COARSE THREAD, MEDIUM FIT, DOUBLE HEAT TREATED; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	12000	
83693	BOLT, MACHINE: DIAMETER: M10; LENGTH: 25 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 1.5 MM; THREAD LENGTH: 23 MM; SPECIFICATION: DIN 931; PROTECTIVE COATING: BLACK; DOUBLE HEAT TREATED, COARSE THREAD, MEDIUM FIT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	1500	
83695	BOLT, MACHINE: DIAMETER: M12; LENGTH: 30 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 1.75 MM; SPECIFICATION: DIN 931; DOUBLE HEAT TREATED; METRIC COARSE THREAD, MEDIUM FIT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	45000	
83710	BOLT, MACHINE: DIAMETER: M6; LENGTH: 25 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 1 MM; SPECIFICATION: DIN 931; DOUBLE HEAT TREATED, COARSE THREAD, MEDIUM FIT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	150	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

83711	BOLT, MACHINE: DIAMETER: M8; LENGTH: 25 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 1.25 MM; DOUBLE HEAT TREATED, COARSE THREAD, MEDIUM FIT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	400	
83934	BOLT, MACHINE: DIAMETER: M10; LENGTH: 150 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 1.5 MM; SPECIFICATION: DIN 931; DOUBLE HEAT TREATED; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
83936	BOLT, MACHINE: DIAMETER: M16; LENGTH: 150 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 2 MM; SPECIFICATION: DIN 931; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
83937	BOLT, MACHINE: DIAMETER: M12; LENGTH: 200 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 1.75 MM; SPECIFICATION: DIN 931; DOUBLE HEAT TREATED, METRIC COARSE THREAD, MEDIUM FIT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	60	
83938	BOLT, MACHINE: DIAMETER: M12; LENGTH: 75 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 1.75 MM; THREAD LENGTH: 32 MM; SPECIFICATION: SABS 136; PROTECTIVE COATING: BLACK; METRIC COARSE THREAT, MEDIUM FIT, DOUBLE HEAT TREATED; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	5000	
83939	BOLT, MACHINE: DIAMETER: M12; LENGTH: 150 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 1.75 MM; SPECIFICATION: DIN 931; DOUBLE HEAT TREATED; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

83940	BOLT, MACHINE: DIAMETER: M10; LENGTH: 100 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 1.5 MM; SPECIFICATION: DIN 931; TYPE: MACHINE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	60	
83941	BOLT, MACHINE: DIAMETER: M16; LENGTH: 200 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 2 MM; SPECIFICATION: DIN 931; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
83942	BOLT, MACHINE: DIAMETER: M20; LENGTH: 150 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 2.5 MM; SPECIFICATION: DIN 931; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	400	
83944	BOLT, MACHINE: DIAMETER: M20; LENGTH: 200 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 2.5 MM; SPECIFICATION: DIN 931; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	40	
83949	BOLT, MACHINE: DIAMETER: 3/8 IN; LENGTH: 1-1/4 IN; HEAD: HEX; MATERIAL: SS GR 316; THREAD: 16BSW; ALL THREADS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
83952	BOLT: TYPE: COUPLING 1=1 EA; LENGTH: 48 MM; HEAD: SEMI ROUND; GRADE: 8.8; MATERIAL: STL; THREAD: 1.5 MM; WITH WASHERS AND NUTS; MODEL NO: ZES-3J & 4J; PART NO: 706-5204-04, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

83953	BOLT: TYPE: COUPLING 1=1 EA; LENGTH: 36 MM; HEAD: SEMI ROUND; GRADE: 8.8; MATERIAL: STL; THREAD: 1.5 MM; WASHER AND NUT; MODEL NO: ZES-3J; PART NO: 706-5201-02, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
83954	BOLT: TYPE: COUPLING 1=1 EA; LENGTH: 46 MM; HEAD: SEMI ROUND; GRADE: 12.9; MATERIAL: STL; THREAD: 1.75 MM; WITH WASHER AND NUT; FOR USE ON MAAG COUPLING; ONE BOLT = 1 EA; MODEL NO: ZES-4.5YK; ARTICLE NO: 119-023-061-353; PART NO: 706-5202-16, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
83958	BOLT, ASSEMBLY: NOMINAL DIAMETER: M8; LENGTH: 40 MM; HEAD: HEX; MATERIAL: MS; THREAD: 1.25 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: GALV; WITH NYLOCK NUT; M1.25 GALVANISED; K-K; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
83975	BOLT, ASSEMBLY: TYPE: COUPLING; NOMINAL DIAMETER: M12; LENGTH: 36 MM; HEAD: HEX; MATERIAL: STL; THREAD: 1.75 MM; NUT QUANTITY: 1; TAPERLOCK WITH WASHER; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
83988	STUD: TYPE: CLAMP; DIAMETER: M42; THREAD: 3 MM; LENGTH: 290 MM; MATERIAL: 21CRMOV57V; GROUP NUMBER 5660 POS 148, USED ON IP BYPASS CONTROL VALVE SERVOMOTOR; HEADLESS HEAD; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

83989	BOLT: TYPE: IP SERVO MOTOR; DIAMETER: M16; LENGTH: 170 MM; HEAD: SQ; MATERIAL: ST50-2; THREAD: 2 MM; STUD, USED ON HP CONTROL VALVE SERVOMOTOR; DRAWING NO: F42.59695-0003; REFERENCE NO: 5160-093; REFERENCE NO: 5360-093; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
83997	BOLT, ASSEMBLY: NOMINAL DIAMETER: M6; LENGTH: 27 MM; HEAD: HEX; MATERIAL: MS; THREAD: 1 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: CD PLTD; FOR USE ON SAUNDERS VALVE BONNET; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
84002	BOLT, MACHINE: DIAMETER: M24; LENGTH: 100 MM; HEAD: HEX; MATERIAL: 21CRMOV57V; THREAD: 3 MM; SPECIFICATION: DIN 561; FOR USE ON HP TURBINE CONTROL VALVE AND EMERGENCY STOP VALVE; DRAWING NO: 7120057/1362; PART NO: 7120-057; 5120-082; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
84012	STUD: TYPE: TURBINE; DIAMETER: 100 MM; THREAD: 6 MM; LENGTH: 885 MM; MATERIAL: 21CRMOV57V; THREAD LENGTH: 100 MM; GROUP NUMBER: 2610, USED ON IP OUTER CASING, UNIT 1 ONLY; DRAWING NO: B42.26100-0028; DRAWING NO: F42.99995-5434; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
84015	BOLT, MACHINE: DIAMETER: M12; LENGTH: 35 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 1.75 MM; TYPE: TURBINE; REFERENCE NO: 7166-021; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	8000	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84020	BOLT, MACHINE: DIAMETER: M12; LENGTH: 45 MM; HEAD: HEX; GRADE: 21CRMOV57V; MATERIAL: 21CRMOV57V; THREAD: 1.75 MM; TYPE: IP BYPASS CONTROL VALVE; IP BYPASS EMERGENCY VALVE; REFERENCE NO: 5620-072; REFERENCE NO: 7620-052; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	60	
84021	BOLT: TYPE: IP CASING ASSY; DIAMETER: M16; LENGTH: 75 MM; HEAD: HEX; GRADE: 21CRMOV57V; MATERIAL: 21CRMOV57V; THREAD: 2 MM; PART NO: 2690-066; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	40	
84024	BOLT, MACHINE: DIAMETER: M20; LENGTH: 70 MM; HEAD: HEX; GRADE: 21CRMOV57V; MATERIAL: 21CRMOV57V; THREAD: 2.5 MM; TYPE: IP CONTROL VALVE; PART NO: 5320-087; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
84026	BOLT: TYPE: PRECISION; DIAMETER: M16; LENGTH: 80 MM; HEAD: SOCKET; GRADE: 21CRMOV57V; MATERIAL: 21CRMOV57V; THREAD: 2 MM; MAN GROUP NUMBER 2690-059; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
84030	BOLT, MACHINE: DIAMETER: M36; LENGTH: 120 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 4 MM; TYPE: TURBINE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
84031	BOLT, MACHINE: DIAMETER: M12; LENGTH: 25 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 1.75 MM; HT12.9; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84032	BOLT, MACHINE: DIAMETER: M6; LENGTH: 20 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 1 MM; TYPE: TURBINE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
84034	BOLT, MACHINE: DIAMETER: M12; LENGTH: 60 MM; HEAD: HEX; GRADE: 18-8; MATERIAL: SS; THREAD: 1.75 MM; TYPE: TURBINE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
84035	BOLT, ASSEMBLY: TYPE: T; NOMINAL DIAMETER: M20; LENGTH: 80 MM; HEAD: TAPERED RECT; GRADE: A ASTM A307; MATERIAL: MS ASTM A307; THREAD LENGTH: 30 MM; THREAD: 2.5 MM; NUT QUANTITY: 1; GRADE A; COACH TYPE HEAD MILD STEEL; FOR LINERS ON MILLS AND DRIVE UNIT (HEAD INCLUDED); DRAWING NO: 0.63/54781; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	3500	
84036	BOLT, ASSEMBLY: TYPE: LINER; NOMINAL DIAMETER: M20; LENGTH: 65 MM; HEAD: T; GRADE: A; MATERIAL: STL ASTM A307; THREAD LENGTH: 30 MM; THREAD: 2.5 MM; NUT QUANTITY: 1; COMPLETE WITH NUT; ITEM 07; FOR LINERS ON MILL AND DRIVE UNITS; DRAWING NO: 0.63/54781; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	5000	
84052	BOLT, MACHINE: DIAMETER: M12; LENGTH: 60 MM; HEAD: HEX; MATERIAL: STL; THREAD: 1.75 MM; TYPE: FLEXIBLE COUPLING; USED ON GEARBOX AND DRIVE UNIT GEARBOX: 260 BTW, RATIO: 40-1; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	



SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84081	BOLT: TYPE: MILL LINER SHELL; DIAMETER: M36; LENGTH: 175 MM; HEAD: HAMMER; MATERIAL: STL; THREAD: 4 MM; FOR USE ON DRIVE TRAIN EQUIPMENT MILL AND DRIVE UNITS, OPL 63163, OR SABELCO ENGINEERING; PART NO: A3-124220/1, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
84084	BOLT: TYPE: MILL LINER SHELL; DIAMETER: M36; LENGTH: 200 MM; HEAD: HAMMER; MATERIAL: STL; THREAD: 4 MM; FOR USE ON DRIVE TRAIN EQUIPMENT ON MILLS AND DRIVE UNITS; PART NO: A3-124220/2, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
84101	BOLT, MACHINE: DIAMETER: M12; LENGTH: 30 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: STL BRIGHT; THREAD: 1.75 MM; HIGH TENSILE; PART NO: 59032 ITEM290, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
84112	BOLT, ASSEMBLY: TYPE: ELEVATOR; NOMINAL DIAMETER: M12; LENGTH: 50 MM; MATERIAL: STL GALV; THREAD: 1.75 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: GALV; WITH ALLEN KEY SLOT IN LARGE BOLT HEAD, COMPLETE WITH LARGE DOMED WASHER AND CLEAVE-LOCK TO ISO GRADE 5.8, USED ON BUCKET ELEVATOR; PART NO: NDP150-001, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50000	
84138	BOLT, ASSEMBLY: NOMINAL DIAMETER: M10; LENGTH: 40 MM; HEAD: HEX; GRADE: 3.7; MATERIAL: AL ALLOY; THREAD: 1.5 MM; NUT QUANTITY: 1; FOR USE ON WATER PLANT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84164	BOLT, U: NOMINAL SIZE: 40 MM; DIAMETER: M10; LOAD RATING: 1800 KG; INSIDE LENGTH: 70 MM; THREAD LENGTH: 32 MM; THREAD: 1.5 MM; MATERIAL: STL; INSIDE WIDTH: 40 MM; FOR RAPPING HAMMER COMPLETE TYPE: LH2/1-6D; C/L 50MM; HT 51MM; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10000	
84165	BOLT, U: NOMINAL SIZE: 60 MM; DIAMETER: M12; LOAD RATING: 2700 KG; INSIDE LENGTH: 90 MM; THREAD LENGTH: 35 MM; THREAD: 1.75 MM; MATERIAL: STL; INSIDE WIDTH: 60 MM; FOR RAPPING HAMMER; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	15000	
84194	BOLT, MACHINE: DIAMETER: M16; LENGTH: 80 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: STL; THREAD: 2 MM; TYPE: MACHINE; FOR PRECIPITATOR COLLECTOR HAMMER; TYPE LH5/1-6/C; TYPE: FULCRUM; DRAWING NO: 2E/1086; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2500	
84196	STUD, DOUBLE ENDED: LENGTH: 126 MM; DIAMETER-A: 15.95 MM; DIAMETER-B: M12; MATERIAL: STL; THREADS-A: 2 MM; THREADS-B: 1.75 MM; THREAD LENGTH-A: 20 MM; THREAD LENGTH-B: 14 MM; COUPLING BOLTS WITH LOCK NUTS; REFERENCE NO: UE15975; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
84214	SCREW, MACHINE: DIAMETER: M42; LENGTH: 189 MM; THREAD: 4 MM; HEAD: HEX; MATERIAL: ST50-2; GRADE: ST50-2; OEM P/N: 2890-007, OEM: GE STEAM POWER SERVICE; DRAWING NO: B42.28900-0034, F42.29594-0006; TYPE RETAINER; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84253	STUD, DOUBLE ENDED: LENGTH: 275 MM; DIAMETER-A: M12; DIAMETER-B: M12; MATERIAL: 9SMNPB28K; THREADS-A: 1.75 MM; THREADS-B: 1.75 MM; THREAD LENGTH-A: 24 MM; THREAD LENGTH-B: 16 MM; USED ON IP EMERGENCY STOP VALVE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
84254	STUD, DOUBLE ENDED: LENGTH: 110 MM; DIAMETER-A: M12; DIAMETER-B: M12; MATERIAL: 9SMNPB28K; THREADS-A: 1.75 MM; THREADS-B: 1.75 MM; THREAD LENGTH-A: 24 MM; THREAD LENGTH-B: 16 MM; USED ON IP EMERGENCY STOP VALVE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
84255	STUD, DOUBLE ENDED: LENGTH: 230 MM; DIAMETER-A: M12; DIAMETER-B: M12; MATERIAL: 9SMNPB28K; THREADS-A: 1.75 MM; THREADS-B: 1.75 MM; THREAD LENGTH-A: 24 MM; THREAD LENGTH-B: 16 MM; USED ON IP BYPASS EMERGENCY STOP VALVE; REFERENCE NO: 7620-048; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
84256	BOLT, MACHINE: DIAMETER: M12; LENGTH: 55 MM; HEAD: HEX; GRADE: 21CRMMOV57V; MATERIAL: 21CRMMOV57V; THREAD: 1.75 MM; SPECIFICATION: DIN 561; TYPE: HP CONTROL VALVE; GROUP NUMBER 087; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	80	
84257	BOLT, MACHINE: DIAMETER: M12; LENGTH: 35 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 1.75 MM; SPECIFICATION: DIN 933; TYPE: HP CONTROL VALVE SERVOMOTOR; WITHOUT NUT; REFERENCE NO: 5160-239; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84263	BOLT, MACHINE: DIAMETER: M20; LENGTH: 100 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 2.5 MM; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	5000	
84300	SCREW, SET: SUPPL P/N: 17; HEADLESS; FOR USE ON WELLAND AND TUXHORN LEAK-OFF VALVE DN100PN400 AND DN400PN400; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
84307	BOLT: TYPE: COUPLING; DIAMETER: 12 MM; LENGTH: 28 MM; HEAD: HALF RD; GRADE: 12.9; MATERIAL: HTS; THREAD: 1.25 MM; THREAD LENGTH: 14 MM; SPECIFICATION: ISO 9001; PROTECTIVE COATING: TECTILE; FURNISHED ITEMS: SELLOCK NUT; MODEL NO: ZLS2; PART NO: 706 5200.08.4, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
84308	BOLT: TYPE: COUPLING 12/SET; DIAMETER: M6; LENGTH: 12 MM; WASHER, FOR MAAG GEAR COUPLING , TO BE SUPPLIED AS A SET; MODEL NO: ZLS-2; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
84310	BOLT: TYPE: COUPLING 12/SET; DIAMETER: 10 MM; LENGTH: 20 MM; MATERIAL: STL; FOR USE ON MAAG GEAR; TO BE SUPPLIED AS A SET OF 12; MODEL NO: ZLF-4; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
84311	BOLT: TYPE: COUPLING 12/SET; DIAMETER: M10; LENGTH: 20 MM; THREAD: 1.5 MM; TO BE SUPPLIED AS A SET OF 12; MODEL NO: ZXF-9.5; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84401	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M12; LENGTH: 50 MM; HEAD: HEX; MATERIAL: SS GR 316; THREAD LENGTH: 30 MM; THREAD: 1.75 MM; NUT QUANTITY: 1; NUT MATERIAL: SS; COARSE THREAD MEDIUM FIT; SPECIFICATION: SABS136: TABLE 11, MATERIAL CERTIFICATE TO BE SUPPLIED WITH EVERY CONSIGNMENT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	400	
84404	BOLT, MACHINE: DIAMETER: M16; LENGTH: 40 MM; HEAD: HEX; GRADE: 316; MATERIAL: SS; THREAD: 2 MM; THREAD LENGTH: 40 MM; MATERIAL CERTIFICATE TO BE SUPPLIED WITH EVERY CONSIGNMENT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
84405	BOLT, MACHINE: DIAMETER: M16; LENGTH: 50 MM; HEAD: HEX; GRADE: 316; MATERIAL: SS; THREAD: 2 MM; THREAD LENGTH: 40 MM; SPECIFICATION: SABS 136; MATERIAL CERTIFICATE TO BE SUPPLIED WITH EVERY DELIVERY; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
84443	BOLT, MACHINE: DIAMETER: M16; LENGTH: 70 MM; HEAD: HEX; GRADE: 316; MATERIAL: SS; THREAD: 2 MM; THREAD LENGTH: 55 MM; SPECIFICATION: SABS 136; COARSE THREAD MEDIUM FIT, MATERIAL CERTIFICATE TO BE SUPPLIED WITH EVERY CONSIGNMENT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	3000	
84479	BOLT, MACHINE: DIAMETER: M6; LENGTH: 30 MM; HEAD: HEX; MATERIAL: STL; THREAD: 1 MM; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	200	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84531	BOLT, ASSEMBLY: NOMINAL DIAMETER: M6; LENGTH: 125 MM; HEAD: HEX; MATERIAL: MS; THREAD: 1 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	20	
84532	BOLT, ASSEMBLY: NOMINAL DIAMETER: M8; LENGTH: 125 MM; HEAD: HEX; MATERIAL: MS; THREAD: 1.25 MM; BOLT PROTECTIVE COATING: BLACK; AND NUTS; SPECIFICATION: SABS135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	100	
84534	BOLT, ASSEMBLY: NOMINAL DIAMETER: M10; LENGTH: 30 MM; HEAD: HEX; MATERIAL: MS; THREAD: 1.5 MM; BOLT PROTECTIVE COATING: BLACK; WITH NUTS; SPECIFICATION: SABS135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	1000	
84536	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M16; LENGTH: 45 MM; HEAD: HEX; MATERIAL: MS; THREAD LENGTH: 25 MM; THREAD: 2 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; BOLT PROTECTIVE COATING: BLACK; COARSE THREADED, FREE FIT, SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	18000	
84537	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M16; LENGTH: 55 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 25 MM; THREAD: 2 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; COARSE THREAD FREE FIT; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	15000	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84538	BOLT, ASSEMBLY: NOMINAL DIAMETER: M16; LENGTH: 165 MM; HEAD: HEX; MATERIAL: MS; THREAD: 2 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	800	
84539	BOLT, ASSEMBLY: NOMINAL DIAMETER: M20; LENGTH: 85 MM; HEAD: HEX; MATERIAL: MS; THREAD: 2.5 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; REFERENCE NO: HXBOLTSTBLKM20X85; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	800	
84540	BOLT, MACHINE: DIAMETER: M22; LENGTH: 75 MM; HEAD: HEX; MATERIAL: MS; THREAD: 2.5 MM; SPECIFICATION: SABS 135; PROTECTIVE COATING: BLACK; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	20	
84541	BOLT, ASSEMBLY: NOMINAL DIAMETER: M22; LENGTH: 100 MM; HEAD: HEX; MATERIAL: MS; THREAD: 2.5 MM; BOLT PROTECTIVE COATING: BLACK; NUTS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	20	
84542	BOLT, ASSEMBLY: NOMINAL DIAMETER: M22; LENGTH: 150 MM; HEAD: HEX; MATERIAL: MS; THREAD: 2.5 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; I.S.O.METRIC TO SABS135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	20	
84543	BOLT, MACHINE: DIAMETER: M22; LENGTH: 125 MM; HEAD: HEX; MATERIAL: MS; THREAD: 2.5 MM; PROTECTIVE COATING: BLACK; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	100	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84545	BOLT, ASSEMBLY: NOMINAL DIAMETER: M24; LENGTH: 300 MM; HEAD: HEX; MATERIAL: MS; THREAD: 3 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	100	
84547	BOLT, ASSEMBLY: NOMINAL DIAMETER: M30; LENGTH: 130 MM; HEAD: HEX; MATERIAL: MS; THREAD: 3.5 MM; BOLT PROTECTIVE COATING: BLACK; NUTS; SPECIFICATION: SABS135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	600	
84548	BOLT, MACHINE: DIAMETER: M30; LENGTH: 165 MM; HEAD: HEX; MATERIAL: MS; THREAD: 3.5 MM; PROTECTIVE COATING: BLACK; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	400	
84550	BOLT, ASSEMBLY: NOMINAL DIAMETER: M36; LENGTH: 130 MM; HEAD: HEX; MATERIAL: MS; THREAD: 4 MM; BOLT PROTECTIVE COATING: BLACK; NUTS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	100	
84551	BOLT, ASSEMBLY: NOMINAL DIAMETER: M6; LENGTH: 140 MM; HEAD: HEX; MATERIAL: MS; THREAD: 1 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; SABS135/DIN555; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	20	
84552	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M6; LENGTH: 150 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 30 MM; THREAD: 1 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	20	



SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84553	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M8; LENGTH: 25 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 25 MM; THREAD: 1.25 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; DIN555; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	5000	
84554	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M8; LENGTH: 40 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 25 MM; THREAD: 1.25 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	800	
84557	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M8; LENGTH: 75 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 25 MM; THREAD: 1.25 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	400	
84558	BOLT, ASSEMBLY: NOMINAL DIAMETER: M8; LENGTH: 90 MM; HEAD: HEX; MATERIAL: MS; THREAD: 1.25 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; COARSE THREAD MEDIUM FIT, TO THE LATEST EDITION OF SABS 135 AND BEARING THE SABS MARK OF APPROVAL; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	180	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84561	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M10; LENGTH: 40 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 40 MM; THREAD: 1.5 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	600	
84562	BOLT, ASSEMBLY: NOMINAL DIAMETER: M10; LENGTH: 45 MM; HEAD: HEX; MATERIAL: MS; THREAD: 1.5 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	500	
84563	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M10; LENGTH: 50 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 30 MM; THREAD: 1.5 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	2000	
84564	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M10; LENGTH: 65 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 28 MM; THREAD: 1.5 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	1200	
84566	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M10; LENGTH: 90 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 30 MM; THREAD: 1.5 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	300	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84567	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M10; LENGTH: 100 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 27 MM; THREAD: 1.5 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	100	
84568	BOLT, ASSEMBLY: NOMINAL DIAMETER: M10; LENGTH: 115 MM; HEAD: HEX; MATERIAL: MS; THREAD: 1.5 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; WITH NUT; COARSE THREAD FREE FIT; SPECIFICATION: SABS135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	20	
84569	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M10; LENGTH: 125 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 32 MM; THREAD: 1.5 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	100	
84570	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M10; LENGTH: 150 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 28 MM; THREAD: 1.5 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84571	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M12; LENGTH: 25 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 25 MM; THREAD: 1.75 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; BOLT PROTECTIVE COATING: BLACK; COARSE THREAD FREE FIT; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	1000	
84572	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M12; LENGTH: 40 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 30 MM; THREAD: 1.75 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	1800	
84573	BOLT, ASSEMBLY: NOMINAL DIAMETER: M12; LENGTH: 45 MM; HEAD: HEX; MATERIAL: MS; THREAD: 1.75 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS135: 1985; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	8000	
84574	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M12; LENGTH: 50 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 30 MM; THREAD: 1.75 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	3000	
84575	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M12; LENGTH: 65 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 33 MM; THREAD: 1.75 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	500	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84576	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M12; LENGTH: 75 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 35 MM; THREAD: 1.75 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	800	
84577	BOLT, ASSEMBLY: NOMINAL DIAMETER: M12; LENGTH: 90 MM; HEAD: HEX; MATERIAL: MS; THREAD: 1.75 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	250	
84578	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M12; LENGTH: 100 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 35 MM; THREAD: 1.75 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	300	
84580	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M12; LENGTH: 125 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 40 MM; THREAD: 1.75 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	100	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84581	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M12; LENGTH: 140 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 40 MM; THREAD: 1.75 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	300	
84582	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M12; LENGTH: 150 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS BLACK; THREAD LENGTH: 35 MM; THREAD: 1.75 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION SABS 135, COARSE THREAD FREE FIT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	200	
84584	BOLT, ASSEMBLY: NOMINAL DIAMETER: M12; LENGTH: 180 MM; HEAD: HEX; MATERIAL: MS; THREAD: 1.75 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	100	
84585	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M12; LENGTH: 200 MM; HEAD: HEX; GRADE: 4.6 MM; MATERIAL: MS; THREAD LENGTH: 40 MM; THREAD: 1.75 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION SABS135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84586	BOLT, ASSEMBLY: NOMINAL DIAMETER: M12; LENGTH: 230 MM; HEAD: HEX; MATERIAL: MS; THREAD: 1.75 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	4000	
84588	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M16; LENGTH: 70 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 40 MM; THREAD: 2 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; COARSE THREAD FREE FIT; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	3000	
84589	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M16; LENGTH: 75 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 38 MM; THREAD: 2 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	1500	
84590	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M16; LENGTH: 100 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 40 MM; THREAD: 2 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	500	
84591	BOLT, ASSEMBLY: NOMINAL DIAMETER: M16; LENGTH: 115 MM; HEAD: HEX; MATERIAL: MS; THREAD: 2 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	100	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84592	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M16; LENGTH: 125 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 40 MM; THREAD: 2 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; COARSE THREAD FREE FIT; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	400	
84593	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M16; LENGTH: 150 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 45 MM; THREAD: 2 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	500	
84595	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M16; LENGTH: 200 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 47 MM; THREAD: 2 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	20	
84598	BOLT, ASSEMBLY: LENGTH: 300 MM; HEAD: HEX; MATERIAL: MS; THREAD: 2 MM; BOLT PROTECTIVE COATING: BLACK; NUTS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	20	
84599	BOLT, MACHINE: DIAMETER: M16; LENGTH: 350 MM; HEAD: HEX; MATERIAL: MS; THREAD: 2 MM; PROTECTIVE COATING: BLACK; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	20	



SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84600	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M20; LENGTH: 75 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 48 MM; THREAD: 2.5 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	4000	
84601	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M20; LENGTH: 100 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 55 MM; THREAD: 2.5 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	800	
84602	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M20; LENGTH: 115 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 48 MM; THREAD: 2.5 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	350	
84603	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M20; LENGTH: 125 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 50 MM; THREAD: 2.5 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS1 35; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	300	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84604	BOLT, ASSEMBLY: TYPE: MULTI PURPOSE; NOMINAL DIAMETER: M20; LENGTH: 140 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 55 MM; THREAD: 2.5 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION SABS135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	700	
84605	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M20; LENGTH: 150 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 55 MM; THREAD: 2.5 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	600	
84607	BOLT, MACHINE: DIAMETER: M20; LENGTH: 230 MM; HEAD: HEX; MATERIAL: MS; THREAD: 2.5 MM; PROTECTIVE COATING: BLACK; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	300	
84608	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M20; LENGTH: 255 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 70 MM; THREAD: 2.5 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	20	
84609	BOLT, ASSEMBLY: NOMINAL DIAMETER: M20; LENGTH: 300 MM; HEAD: HEX; MATERIAL: MS; THREAD: 2.5 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	100	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84610	BOLT, ASSEMBLY: NOMINAL DIAMETER: M20; LENGTH: 355 MM; HEAD: HEX; MATERIAL: MS; THREAD: 2.5 MM; BOLT PROTECTIVE COATING: BLACK; AND NUTS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	20	
84611	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M24; LENGTH: 75 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 75 MM; THREAD: 3 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	1000	
84612	BOLT, ASSEMBLY: NOMINAL DIAMETER: M24; LENGTH: 90 MM; HEAD: HEX; THREAD: 3 MM; NUT QUANTITY: 1; SPECIFICATION: SABS135: 1985; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	800	
84613	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M24; LENGTH: 100 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 57 MM; THREAD: 3 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; COARSE THREAD FREE FIT.; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	800	
84614	BOLT, ASSEMBLY: NOMINAL DIAMETER: M24; LENGTH: 115 MM; HEAD: HEX; MATERIAL: MS; THREAD: 3 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	600	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84616	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M24; LENGTH: 150 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 65 MM; THREAD: 3 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	800	
84617	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M24; LENGTH: 180 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 65 MM; THREAD: 3 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	800	
84618	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M6; LENGTH: 25 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 23 MM; THREAD: 1 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	300	
84619	BOLT, ASSEMBLY: NOMINAL DIAMETER: M6; LENGTH: 30 MM; HEAD: HEX; MATERIAL: MS; THREAD: 1 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	300	
84620	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M6; LENGTH: 40 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 20 MM; THREAD: 1 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	100	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84621	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M6; LENGTH: 50 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 23 MM; THREAD: 1 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	20	
84622	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M6; LENGTH: 65 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 20 MM; THREAD: 1 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	200	
84623	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M6; LENGTH: 75 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 20 MM; THREAD: 1 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	100	
84624	BOLT, ASSEMBLY: NOMINAL DIAMETER: M6; LENGTH: 90 MM; HEAD: HEX; MATERIAL: MS; THREAD: 1 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; ISO METRIC COARSE THREAD FREE FIT, TO THE LATEST EDITION OF SABS135 AND BEARING THE SABS MARK OF APPROVAL; SPECIFICATION: SABS135: 1985; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	20	
84628	BOLT, MACHINE: DIAMETER: M16; HEAD: HEX; MATERIAL: SS GR 316; THREAD: 2 MM; THREAD LENGTH: 40 MM; SPECIFICATION: SABS 136; COARSE THREAD, MEDIUM FIT, TABLE 11; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	1500	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84653	BOLT, MACHINE: DIAMETER: M16; LENGTH: 90 MM; HEAD: HEX; GRADE: 316; MATERIAL: SS; THREAD: 2 MM; THREAD LENGTH: 40 MM; SPECIFICATION: SABS 136; COARSE THREAD MEDIUM FIT, MATERIAL CERTIFICATE TO BE SUPPLIED WITH EVERY CONSIGNMENT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2000	
84655	BOLT, ASSEMBLY: NOMINAL DIAMETER: M12; LENGTH: 55 MM; HEAD: HEX; MATERIAL: MS; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; COARSE THREAD FREE FIT, TO THE LATEST EDITION OF SABS 135 AND BEARING THE SABS MARK OF APPROVAL; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	3000	
84656	BOLT, MACHINE: DIAMETER: 1/4 IN; LENGTH: 2 IN; HEAD: HEX; MATERIAL: SS GR 316; THREAD: 20BSW; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
84658	BOLT, ASSEMBLY: NOMINAL DIAMETER: M6; HEAD: HEX; MATERIAL: MS; THREAD: 1 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	50	
84659	BOLT, ASSEMBLY: NOMINAL DIAMETER: M6; LENGTH: 20 MM; HEAD: HEX; MATERIAL: MS; THREAD: 1 MM; BOLT PROTECTIVE COATING: BLACK; NUT, I.S.O; SPECIFICATION: SABS 135:1985; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	100	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84660	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M10; LENGTH: 20 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 20 MM; THREAD: 1.5 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; SABS135:1985; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	100	
84671	BOLT, ASSEMBLY: NOMINAL DIAMETER: M20; LENGTH: 350 MM; HEAD: HEX; MATERIAL: MS; THREAD: 2.5 MM; BOLT PROTECTIVE COATING: BLACK; NUTS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	100	
84673	BOLT, ASSEMBLY: NOMINAL DIAMETER: M10; LENGTH: 140 MM; HEAD: HEX; MATERIAL: MS; THREAD: 1.5 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	20	
84681	BOLT, ASSEMBLY: NOMINAL DIAMETER: M8; LENGTH: 30 MM; HEAD: HEX; MATERIAL: MS; THREAD: 1.25 MM; BOLT PROTECTIVE COATING: BLACK; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	1000	
84682	BOLT, ASSEMBLY: NOMINAL DIAMETER: M10; LENGTH: 250 MM; HEAD: HEX; THREAD: 1.5 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	100	
84683	BOLT, ASSEMBLY: NOMINAL DIAMETER: M16; LENGTH: 190 MM; HEAD: HEX; MATERIAL: MS; THREAD: 2 MM; BOLT PROTECTIVE COATING: BLACK; NUTS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

84684	BOLT, ASSEMBLY: TYPE: GENERAL PURPOSE; NOMINAL DIAMETER: M24; LENGTH: 50 MM; HEAD: HEX; GRADE: 4.6; MATERIAL: MS; THREAD LENGTH: 40 MM; THREAD: 3 MM; NUT QUANTITY: 1; NUT MATERIAL: MS; NUT GRADE: 4.6; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS 135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	500	
84685	BOLT, ASSEMBLY: NOMINAL DIAMETER: M24; LENGTH: 65 MM; HEAD: HEX; MATERIAL: MS; THREAD: 3 MM; NUT QUANTITY: 1; BOLT PROTECTIVE COATING: BLACK; SPECIFICATION: SABS135; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	250	
84686	BOLT, ASSEMBLY: NOMINAL DIAMETER: M30; LENGTH: 75 MM; HEAD: HEX; MATERIAL: MS; THREAD: 3.5 MM; BOLT PROTECTIVE COATING: BLACK; NUTS IN 25KG BAGS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	100	
84885	BOLT, MACHINE: DIAMETER: M12; LENGTH: 54 MM; HEAD: HEX; MATERIAL: STL; THREAD: 1.75 MM; TYPE: MULTI DISC ASSY; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	40	
84886	BOLT: DIAMETER: M16; THREAD: 2 MM; USED ON THE MULTI DISC ASSEMBLY ON THE FLUID DRIVE COUPLING 20SRC; REFERENCE NO: 17/75I; SERIAL NO: C54214-C221746B9; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
85585	BOLT, MACHINE: DIAMETER: M16; LENGTH: 80 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; THREAD: 2 MM; SPECIFICATION: DIN 931; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	15000	



SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

85731	STUD, DOUBLE ENDED: LENGTH: 65 MM; DIAMETER-A: M12; DIAMETER-B: M12; MATERIAL: STL; THREADS-A: 1.75 MM; THREADS-B: 1.75 MM; THREAD LENGTH-A: 42 MM; THREAD LENGTH-B: 16 MM; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
85732	STUD, ASSEMBLY: DIAMETER: M32; THREAD: 3.5 MM; LENGTH: 170 MM; STUD MATERIAL: STL; NUT QUANTITY: 1; M170 X 32MM; FOR SWING CHECK VALVE; NB450; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
85733	STUD, DOUBLE ENDED: LENGTH: 120 MM; DIAMETER-A: M25; DIAMETER-B: M25; MATERIAL: STL; THREADS-A: 3 MM; THREADS-B: 3 MM; THREAD LENGTH-A: 35 MM; THREAD LENGTH-B: 35 MM; NUT M120 X 25MM, FOR SWING CHECK VALVE, NB150; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
85734	STUD, ALL THREAD: DIAMETER: M24; LENGTH: 140 MM; THREAD: 3 MM; MATERIAL: STL; BOLT, FOR SWING CHECK VALVE NB250.; REFERENCE NO: NB250; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
86314	STUD, DOUBLE ENDED: LENGTH: 35 MM; DIAMETER-A: M8; DIAMETER-B: M8; MATERIAL: MS; THREADS-A: 1.25 MM; THREADS-B: 1.25 MM; THREAD LENGTH-A: 8 MM; THREAD LENGTH-B: 20 MM; TYPE: TAP END; PROTECTIVE COATING: CD PLTD; WITH HEXAGON NUT.; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

86315	STUD, ASSEMBLY: DIAMETER: M12; THREAD: 1.75 MM; LENGTH: 45 MM; STUD MATERIAL: STL; NUT QUANTITY: 1; MATERIAL: MILD STEEL; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
86322	STUD, DOUBLE ENDED: LENGTH: 40 MM; DIAMETER-A: M10; DIAMETER-B: M10; MATERIAL: MS CD PLTD; THREADS-A: 1.5 MM; THREADS-B: 1.5 MM; THREAD LENGTH-A: 12 MM; THREAD LENGTH-B: 20 MM; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
86350	STUD, DOUBLE ENDED: LENGTH: 150 MM; DIAMETER-A: M33; DIAMETER-B: M33; MATERIAL: STL; THREADS-A: 3.5 MM; THREADS-B: 3.5 MM; THREAD LENGTH-A: 52 MM; THREAD LENGTH-B: 68 MM; TYPE: BARREL; TURBINE; MATERIAL SPEC DURAHETE 1055; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
86351	STUD, DOUBLE ENDED: LENGTH: 145 MM; DIAMETER-A: M33; DIAMETER-B: M33; MATERIAL: STL; THREADS-A: 3.5 MM; THREADS-B: 3.5 MM; THREAD LENGTH-A: 50 MM; THREAD LENGTH-B: 66 MM; TYPE: BARREL; TURBINE; MATERIAL SPEC DURAHETE 1055; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
86352	STUD, DOUBLE ENDED: LENGTH: 80 MM; DIAMETER-A: M20; DIAMETER-B: M20; MATERIAL: STL; THREADS-A: 2.5 MM; THREADS-B: 2.5 MM; THREAD LENGTH-A: 42 MM; THREAD LENGTH-B: 32 MM; TYPE: BARREL; FOR TURBINE GENERATOR; REFERENCE NO: M2004POSTE105; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

86353	STUD: TYPE: TURBINE GENERATOR; DIAMETER: M24; THREAD: 3 MM; LENGTH: 135 MM; MATERIAL: STL; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
86354	STUD, DOUBLE ENDED: LENGTH: 120 MM; DIAMETER-A: M30; DIAMETER-B: M30; MATERIAL: STL; THREADS-A: 3.5 MM; THREADS-B: 3.5 MM; THREAD LENGTH-A: 60 MM; THREAD LENGTH-B: 46 MM; TYPE: TURBINE GENERATOR; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
86355	STUD, DOUBLE ENDED: LENGTH: 145 MM; DIAMETER-A: M30; DIAMETER-B: M30; MATERIAL: STL; THREADS-A: 3.5 MM; THREADS-B: 3.5 MM; THREAD LENGTH-A: 68 MM; THREAD LENGTH-B: 48 MM; TYPE: TURBINE GENERATOR; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
86356	STUD, DOUBLE ENDED: LENGTH: 240 MM; DIAMETER-A: M30; DIAMETER-B: M30; MATERIAL: STL; THREADS-A: 3.5 MM; THREADS-B: 3.5 MM; THREAD LENGTH-A: 70 MM; THREAD LENGTH-B: 45 MM; TYPE: TURBINE GENERATOR; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
86357	STUD, DOUBLE ENDED: LENGTH: 110 MM; DIAMETER-A: M22; DIAMETER-B: M22; MATERIAL: STL; THREADS-A: 2.5 MM; THREADS-B: 2.5 MM; THREAD LENGTH-A: 44 MM; THREAD LENGTH-B: 34 MM; TYPE: TURBINE GENERATOR; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
86358	STUD, DOUBLE ENDED: LENGTH: 155 MM; DIAMETER-A: M27; DIAMETER-B: M27; MATERIAL: STL; THREAD LENGTH-A: 60 MM; THREAD LENGTH-B: 30 MM; TURBINE GENERATOR; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

86359	STUD, DOUBLE ENDED: LENGTH: 126 MM; DIAMETER-A: M30; DIAMETER-B: M30; MATERIAL: STL; THREADS-A: 3.5 MM; THREADS-B: 3.5 MM; THREAD LENGTH-A: 44 MM; THREAD LENGTH-B: 34 MM; TYPE: TURBINE GENERATOR; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
86360	STUD, DOUBLE ENDED: LENGTH: 165 MM; DIAMETER-A: M33; DIAMETER-B: M33; MATERIAL: STL; THREADS-A: 3.5 MM; THREADS-B: 3.5 MM; THREAD LENGTH-A: 70 MM; THREAD LENGTH-B: 52 MM; TURBINE GENERATOR; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
86361	STUD, DOUBLE ENDED: LENGTH: 150 MM; DIAMETER-A: M27; DIAMETER-B: M27; MATERIAL: STL; THREADS-A: 3 MM; THREADS-B: 3 MM; THREAD LENGTH-A: 68 MM; THREAD LENGTH-B: 30 MM; TYPE: TURBINE GENERATOR; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
86362	STUD, DOUBLE ENDED: LENGTH: 105 MM; DIAMETER-A: M30; DIAMETER-B: M30; MATERIAL: STL; THREADS-A: 3.5 MM; THREADS-B: 3.5 MM; THREAD LENGTH-A: 44 MM; THREAD LENGTH-B: 30 MM; TYPE: BARREL; FOR TURBINE GENERATOR; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
86363	STUD, DOUBLE ENDED: LENGTH: 125 MM; DIAMETER-A: M30; DIAMETER-B: M30; MATERIAL: STL; THREADS-A: 3.5 MM; THREADS-B: 3.5 MM; THREAD LENGTH-A: 60 MM; THREAD LENGTH-B: 48 MM; TYPE: TURBINE GENERATOR; REFERENCE NO: M30R8574POSTE128; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

86364	STUD, DOUBLE ENDED: LENGTH: 185 MM; DIAMETER-A: M33; DIAMETER-B: M33; MATERIAL: STL; THREADS-A: 3.5 MM; THREADS-B: 3.5 MM; THREAD LENGTH-A: 68 MM; THREAD LENGTH-B: 52 MM; TYPE: TURBINE; TURB GENERATOR; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
86566	STUD: TYPE: VALVE SLIDE, RETAINING DISC; DIAMETER: M14; THREAD: 2 MM; LENGTH: 108 MM; MATERIAL: STL; THREAD LENGTH: 22 MM; USED ON PARALLEL SLIDE VALVE TYPE P93LV225CFDA-B.; REFERENCE NO: 0282322; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
86569	STUD, DOUBLE ENDED: LENGTH: 248 MM; DIAMETER-A: 3/4 IN; DIAMETER-B: 3/4 IN; MATERIAL: STL; THREADS-A: 10 TPI; THREADS-B: 10 TPI; THREAD LENGTH-A: 3/4 IN; THREAD LENGTH-B: 4-1/4 IN; TYPE: MSSV; USED ON THE MSSV.; REFERENCE NO: 0440034; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
86650	STUD, DOUBLE ENDED: LENGTH: 254 MM; DIAMETER-A: M24; DIAMETER-B: M24; MATERIAL: 24CRM05; THREADS-A: 3 MM; THREADS-B: 3 MM; THREAD LENGTH-A: 38 MM; THREAD LENGTH-B: 28 MM; SPECIFICATION: DIN 2510; HRM24X254DIN2510 24CRM05; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
86651	STUD, DOUBLE ENDED: LENGTH: 139 MM; DIAMETER-A: M24; DIAMETER-B: M24; MATERIAL: 24CRM05; THREADS-A: 3 MM; THREADS-B: 3 MM; THREAD LENGTH-A: 40 MM; THREAD LENGTH-B: 26 MM; SPECIFICATION: DIN 2510; HRM 24X139; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

86652	STUD: TYPE: VOLUMETRIC COAL FEEDER; MATERIAL: STL; SWITCH MOUNT INLET; USED ON THE INLET AND DISCHARGE ALARM GROUP ON THE VOLUMETRIC COAL FEEDERS; PART NO: 112-A1-341, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
86653	STUD, ALL THREAD: DIAMETER: M4; LENGTH: 102 MM; THREAD: 0.8 MM; MATERIAL: STL; (SWITCH MOUNT DISCHARGE) ITEM USED ON THE INLET AND DISCHARGE ALARM GROUP ON THE VOLUMETRIC COAL FEEDERS.; PART NO: 129-A1-341, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
87435	WASHER, FLAT: NOMINAL SIZE: M6; INSIDE DIAMETER: 6 MM; OUTER SIZE: 27 MM; THICKNESS: 3 MM; MATERIAL: SS; GRADE: 316; SCHEDULE NUMBER 160, ESKOM EQUIPMENT NUMBER 10UB31/32/33 G001/5 FOR DEMIN TRAIN; REFERENCE NO: DE22035-16192-29008; REFERENCE NO: OPT 59700; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
87459	WASHER: TYPE: CLAMP DISC; NOMINAL SIZE: M10; INSIDE DIAMETER: 10 MM; OUTSIDE DIAMETER: 22 MM; THICKNESS: 1.5 MM; MATERIAL: STL; USED ON THE GAS AIR IGNITOR; DRAWING NO: 2208; REFERENCE NO: 23; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
87462	WASHER, FLAT: NOMINAL SIZE: M6; INSIDE DIAMETER: 6 MM; OUTER SIZE: 14 MM; THICKNESS: 0.8 MM; MATERIAL: SS; GRADE: 316; GAS CONT; REFERENCE NO: P16556B; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

87463	WASHER, FLAT: NOMINAL SIZE: 5 MM; INSIDE DIAMETER: 5 MM; OUTER SIZE: 10 MM; THICKNESS: 0.8 MM; MATERIAL: SS; GRADE: 316; GAS CONT; REFERENCE NO: PC5663B; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
87471	WASHER, FLAT: NOMINAL SIZE: M8; INSIDE DIAMETER: 8 MM; OUTER SIZE: 17 MM; THICKNESS: 1.6 MM; MATERIAL: STL GALV; GRADE: EN2; SPECIFICATION: BS EN 10139; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	10	
87475	WASHER, FLAT: NOMINAL SIZE: M27; INSIDE DIAMETER: 27 MM; OUTER SIZE: 50 MM; THICKNESS: 2.5 MM; MATERIAL: STL BRIGHT; SPECIFICATION: BS 1449 PART 3B; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
87476	WASHER, FLAT: NOMINAL SIZE: M22; INSIDE DIAMETER: 22 MM; OUTER SIZE: 48 MM; THICKNESS: 3 MM; MATERIAL: STL BLACK; PERIPHERAL SHAPE STYLE: RD; SPECIFICATION: BS 1449 PART 3B; CUT ROUND; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	150	
87477	WASHER, FLAT: NOMINAL SIZE: M6; OUTER SIZE: 12.5 MM; THICKNESS: 0.8 MM; MATERIAL: BRS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	250	
87478	WASHER, FLAT: NOMINAL SIZE: M8; OUTER SIZE: 17 MM; THICKNESS: 1 MM; MATERIAL: BRS BS 265; GRADE: CZ108; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
87480	WASHER, FLAT: NOMINAL SIZE: M12; THICKNESS: 1.5 MM; MATERIAL: BRS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

87503	WASHER, LOCK: INSIDE DIAMETER: 6.8 MM; OUTSIDE DIAMETER: 10 MM; THICKNESS: 1.25 MM; NOMINAL SIZE: M6; MATERIAL: STL ELECTRO GALV; TYPE: HELICAL SPRING; MATERIAL SPRING STEEL.; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2000	
87504	WASHER, LOCK: INSIDE DIAMETER: 8 MM; OUTSIDE DIAMETER: 12.8 MM; THICKNESS: 1.9 MM; NOMINAL SIZE: M8; MATERIAL: STL GALV; TYPE: HELICAL SPRING; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	1500	
87506	WASHER, LOCK: INSIDE DIAMETER: 12 MM; OUTSIDE DIAMETER: 17.9 MM; THICKNESS: 2.35 MM; NOMINAL SIZE: M12; MATERIAL: STL GALV; TYPE: HELICAL SPRING; GRADE 4.5; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	150	
87508	WASHER, LOCK: INSIDE DIAMETER: 20 MM; OUTSIDE DIAMETER: 30.5 MM; THICKNESS: 4.3 MM; NOMINAL SIZE: M20; MATERIAL: STL; TYPE: HELICAL SPRING; GALVANISED ELECTRO, TITAN.; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	230	
87509	WASHER, LOCK: INSIDE DIAMETER: 25 MM; OUTSIDE DIAMETER: 35.7 MM; THICKNESS: 4.8 MM; NOMINAL SIZE: M24; MATERIAL: STL GALV; TYPE: HELICAL SPRING; LOCK; ID 25 MM; OD 35.7 MM; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
87510	WASHER, LOCK: INSIDE DIAMETER: 5.2 MM; OUTSIDE DIAMETER: 8.2 MM; THICKNESS: 1.3 MM; NOMINAL SIZE: M5; MATERIAL: STL; TYPE: HELICAL SPRING, SPLIT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	



SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

87512	WASHER, LOCK: INSIDE DIAMETER: 8.6 MM; OUTSIDE DIAMETER: 12.8 MM; THICKNESS: 2 MM; NOMINAL SIZE: M8; MATERIAL: SPRING STL; TYPE: HELICAL SPRING, SPLIT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	450	
87513	WASHER, LOCK: INSIDE DIAMETER: 10.5 MM; OUTSIDE DIAMETER: 15.5 MM; NOMINAL SIZE: M10; MATERIAL: STL; TYPE: SPRING; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	1000	
87514	WASHER, LOCK: INSIDE DIAMETER: 12.4 MM; OUTSIDE DIAMETER: 17.9 MM; THICKNESS: 2.35 MM; NOMINAL SIZE: M12; MATERIAL: STL; TYPE: HELICAL SPRING, SPLIT; GRADE: 4.6; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
87515	WASHER, LOCK: INSIDE DIAMETER: 17 MM; OUTSIDE DIAMETER: 24.3 MM; THICKNESS: 3.6 MM; NOMINAL SIZE: M16; MATERIAL: STL; TYPE: HELICAL SPRING, SPLIT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	200	
87516	WASHER, LOCK: INSIDE DIAMETER: 21 MM; OUTSIDE DIAMETER: 30.5 MM; THICKNESS: 4.3 MM; NOMINAL SIZE: M20; MATERIAL: STL; TYPE: HELICAL SPRING, SPLIT; GRADE 4.6; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
87517	WASHER, LOCK: INSIDE DIAMETER: 23 MM; OUTSIDE DIAMETER: 33.7 MM; THICKNESS: 4.8 MM; NOMINAL SIZE: M22; MATERIAL: STL; TYPE: SPLIT HELICAL RING; GRADE: 4.6; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

87518	WASHER, LOCK: INSIDE DIAMETER: 25 MM; OUTSIDE DIAMETER: 35.7 MM; THICKNESS: 4.8 MM; NOMINAL SIZE: M24; MATERIAL: STL; TYPE: HELICAL SPRING, SPLIT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
87519	WASHER, LOCK: INSIDE DIAMETER: 24.8 MM; OUTSIDE DIAMETER: 35.7 MM; THICKNESS: 4.8 MM; NOMINAL SIZE: M24; MATERIAL: SPRING STL; TYPE: HELICAL SPRING; GRADE 4.6; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
87520	WASHER, LOCK: INSIDE DIAMETER: 31.5 MM; OUTSIDE DIAMETER: 43.9 MM; THICKNESS: 5.8 MM; NOMINAL SIZE: M30; MATERIAL: STL; TYPE: HELICAL SPRING, SPLIT; GRADE: 4.6; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
87522	WASHER, FLAT: NOMINAL SIZE: M14; INSIDE DIAMETER: 14 MM; OUTER SIZE: 28 MM; THICKNESS: 3 MM; MATERIAL: SS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
87523	WASHER, FLAT: NOMINAL SIZE: M18; INSIDE DIAMETER: 18 MM; OUTER SIZE: 34 MM; THICKNESS: 3 MM; MATERIAL: SS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	200	
87525	WASHER, LOCK: INSIDE DIAMETER: 41 MM; OUTSIDE DIAMETER: 56 MM; THICKNESS: 8 MM; NOMINAL SIZE: 39 MM; MATERIAL: STL; TYPE: HELICAL SPRING; GRADE 4.6; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

87528	WASHER, BEVEL: NOMINAL SIZE: M20; INSIDE DIAMETER: 22 MM; SQUARE SIZE: 38 MM; THICKNESS: 3-6 MM; MATERIAL: STL; TAPER, LARGEST, SMALLEST; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	10	
87532	WASHER, FLAT: NOMINAL SIZE: 3BA; INSIDE DIAMETER: 4.2 MM; OUTER SIZE: 10.5 MM; THICKNESS: 0.56 MM; MATERIAL: BRS; PERIPHERAL SHAPE STYLE: RD; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2500	
87533	WASHER, FLAT: NOMINAL SIZE: 4BA; INSIDE DIAMETER: 4 MM; OUTER SIZE: 9 MM; THICKNESS: 1 MM; MATERIAL: BRS; PERIPHERAL SHAPE STYLE: RD; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2000	
87644	WASHER, LOCK: OUTSIDE DIAMETER: 18 MM; THICKNESS: 2.2 MM; NOMINAL SIZE: M10; MATERIAL: SS; TYPE: HELICAL SPRING; SPLIT RING.; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	1500	
87645	WASHER, LOCK: OUTSIDE DIAMETER: 21 MM; THICKNESS: 2.5 MM; NOMINAL SIZE: M12; MATERIAL: SS; TYPE: HELICAL SPRING; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2500	
87646	WASHER, LOCK: OUTSIDE DIAMETER: 24.1 MM; THICKNESS: 3.1 MM; NOMINAL SIZE: M14; MATERIAL: SS; TYPE: HELICAL SPRING; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

87647	WASHER, LOCK: INSIDE DIAMETER: 17 MM; OUTSIDE DIAMETER: 27.3 MM; THICKNESS: 3.5 MM; NOMINAL SIZE: M16; MATERIAL: SS; TYPE: HELICAL SPRING; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	200	
87648	WASHER, LOCK: INSIDE DIAMETER: 19 MM; OUTSIDE DIAMETER: 29.4 MM; THICKNESS: 3.5 MM; NOMINAL SIZE: M18; MATERIAL: SS; TYPE: HELICAL SPRING; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	350	
87649	WASHER, LOCK: INSIDE DIAMETER: 21 MM; OUTSIDE DIAMETER: 33.5 MM; THICKNESS: 4 MM; NOMINAL SIZE: M20; MATERIAL: SS; TYPE: HELICAL SPRING; SPLIT RING LOCKING; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
87650	WASHER, LOCK: INSIDE DIAMETER: 23 MM; OUTSIDE DIAMETER: 35.7 MM; THICKNESS: 4 MM; NOMINAL SIZE: M22; MATERIAL: SS; TYPE: HELICAL SPRING; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
87651	WASHER, LOCK: INSIDE DIAMETER: 25 MM; OUTSIDE DIAMETER: 39.8 MM; THICKNESS: 5 MM; NOMINAL SIZE: M24; MATERIAL: SS; TYPE: HELICAL SPRING; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	1500	
87652	WASHER, LOCK: INSIDE DIAMETER: 28 MM; OUTSIDE DIAMETER: 43 MM; THICKNESS: 5 MM; NOMINAL SIZE: M27; MATERIAL: SS; TYPE: HELICAL SPRING; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

87653	WASHER, LOCK: INSIDE DIAMETER: 31 MM; OUTSIDE DIAMETER: 48 MM; THICKNESS: 6 MM; NOMINAL SIZE: M30; MATERIAL: SS; TYPE: HELICAL SPRING; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
87654	WASHER, FLAT: NOMINAL SIZE: M10; INSIDE DIAMETER: 10.6 MM; OUTER SIZE: 21 MM; THICKNESS: 2.2 MM; MATERIAL: SS; PERIPHERAL SHAPE STYLE: RD; BOLT.; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10000	
87655	WASHER, FLAT: NOMINAL SIZE: M16; INSIDE DIAMETER: 17 MM; OUTER SIZE: 30 MM; THICKNESS: 3.3 MM; MATERIAL: SS; GRADE: 316; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50000	
87656	WASHER, FLAT: NOMINAL SIZE: M12; INSIDE DIAMETER: 13 MM; OUTER SIZE: 24 MM; THICKNESS: 2.7 MM; MATERIAL: SS; PERIPHERAL SHAPE STYLE: RD; GRADE: 316; BOLT.; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	5000	
87685	WASHER, FLAT: NOMINAL SIZE: M30; INSIDE DIAMETER: 33 MM; OUTER SIZE: 57 MM; THICKNESS: 4 MM; MATERIAL: MS BLACK; SPECIFICATION: BS 1440 PART 3B; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	200	
87698	WASHER, FLAT: NOMINAL SIZE: M6; INSIDE DIAMETER: 6.2 MM; OUTER SIZE: 12.5 MM; THICKNESS: 1.6 MM; MATERIAL: MS BLACK; GRADE: 4.6; SPECIFICATION: BS 1449 PART 3B; APPLICABLE STANDARD TO WHICH THE GOODS SUPPLIED WAS MANUFACTURED; REFERENCE NO: WASHFLBLKM6; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	100	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

87701	WASHER, FLAT: NOMINAL SIZE: M12; INSIDE DIAMETER: 13.5 MM; OUTER SIZE: 24 MM; THICKNESS: 2.5 MM; MATERIAL: MS BLACK; SPECIFICATION: BS 1449 PART 3B; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	1500	
87702	WASHER, FLAT: NOMINAL SIZE: M16; INSIDE DIAMETER: 17 MM; OUTER SIZE: 35 MM; THICKNESS: 3 MM; MATERIAL: MS BLACK; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	2000	
87703	WASHER, FLAT: NOMINAL SIZE: M20; INSIDE DIAMETER: 21 MM; OUTER SIZE: 37 MM; THICKNESS: 3 MM; MATERIAL: MS BLACK BS 1449PT3B; , MANUFACTURER: GILL AND RAMSDON PTY; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	1000	
87704	WASHER, FLAT: NOMINAL SIZE: M24; INSIDE DIAMETER: 25 MM; OUTER SIZE: 44 MM; THICKNESS: 4.5 MM; MATERIAL: MILD STEEL; , MANUFACTURER: ALSTHOM; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	300	
87707	WASHER, FLAT: NOMINAL SIZE: M6; INSIDE DIAMETER: 6.2 MM; OUTER SIZE: 12.5 MM; THICKNESS: 1.6 MM; MATERIAL: STL BRIGHT; SPECIFICATION: BS 1449; REFERENCE NO: WASFLFINM6; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	1500	
87708	WASHER, FLAT: NOMINAL SIZE: M8; INSIDE DIAMETER: 8.4 MM; OUTER SIZE: 17 MM; THICKNESS: 1 MM; MATERIAL: STL BRIGHT; SPECIFICATION: BS 1449 PART 3B; CS4 HARDNESS; IN PACKETS OF 100; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	1500	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

87709	WASHER, FLAT: NOMINAL SIZE: M10; INSIDE DIAMETER: 10.6 MM; OUTER SIZE: 21 MM; THICKNESS: 1.25 MM; MATERIAL: STL BRIGHT; SPECIFICATION: BS 1449 PART 3B; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10000	
87710	WASHER, FLAT: NOMINAL SIZE: M12; INSIDE DIAMETER: 13.2 MM; OUTER SIZE: 24 MM; THICKNESS: 1.6 MM; MATERIAL: STL BRIGHT; SPECIFICATION: BS 1449 PART 3B; CS4 HARDNESS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	1000	
87711	WASHER, FLAT: NOMINAL SIZE: M16; INSIDE DIAMETER: 17 MM; OUTER SIZE: 30 MM; THICKNESS: 2 MM; MATERIAL: STL BRIGHT; SPECIFICATION: BS 1449 PART 3B; CS4 HARDNESS; REFERENCE NO: WASHFLFINM16; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	60000	
87712	WASHER, FLAT: NOMINAL SIZE: M20; INSIDE DIAMETER: 21 MM; OUTER SIZE: 37 MM; THICKNESS: 2 MM; MATERIAL: STL BRIGHT; SPECIFICATION: BS 1449 PART 3B; CS4 HARDNESS; REFERENCE NO: WASHFLFINM20; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	5000	
87713	WASHER, FLAT: NOMINAL SIZE: M24; INSIDE DIAMETER: 25.4 MM; OUTER SIZE: 44 MM; THICKNESS: 2.5 MM; MATERIAL: STL BRIGHT; SPECIFICATION: BS 1449 PART 3B; CS4 HARDNESS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	500	
88643	WASHER, FLAT: NOMINAL SIZE: 29 MM; INSIDE DIAMETER: 29 MM; OUTER SIZE: 51 MM; THICKNESS: 3 MM; MATERIAL: STL; ST.; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

88654	WASHER, FLAT: NOMINAL SIZE: 12.6 MM; INSIDE DIAMETER: 12.6 MM; OUTER SIZE: 39.4 MM; THICKNESS: 1 MM; MATERIAL: SS; GRADE: 316; FOR HP GATE VALVE RL51/52; PART NO: OPL 54843, SUPPLIER: UNKNOWN; PART NO: 3.6857.000007, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
88724	WASHER, LOCK: INSIDE DIAMETER: 70 MM; OUTSIDE DIAMETER: 98 MM; THICKNESS: 1.5 MM; NOMINAL SIZE: M70; MATERIAL: STL; TYPE: INTERNAL TOOTH; GRADE: 1.0330.03; SPECIFICATION: ISO 2982; TYPE SKF ONLY, ANY BEARING SUPPLIER; PART NO: MB14, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
88726	WASHER, LOCK: INSIDE DIAMETER: 92 MM; OUTSIDE DIAMETER: 100 MM; THICKNESS: 2 MM; NOMINAL SIZE: M91; MATERIAL: MS; TYPE: EXTERNAL TOOTH; PWOV 17 AW 18; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
88789	WASHER, TAB: NOMINAL SIZE: 9 MM; INSIDE DIAMETER: 9 MM; OUTSIDE DIAMETER: 15 MM; THICKNESS: 0.8 MM; MATERIAL: STL; TWO; REFERENCE NO: 23898154; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
88800	WASHER, LOCK: INSIDE DIAMETER: 90 MM; OUTSIDE DIAMETER: 108 MM; THICKNESS: 1.75 MM; NOMINAL SIZE: M90; MATERIAL: STL; TYPE: ADAPTOR SLEEVE; SPECIFICATION: ISO 2982; PART NO: MB18, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	



SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

88807	WASHER, LOCK: INSIDE DIAMETER: 43 MM; OUTSIDE DIAMETER: 68 MM; THICKNESS: 0.5 MM; NOMINAL SIZE: 43 MM; MATERIAL: STL; TYPE: WASHER; PART NO: 12880A, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
88808	WASHER, LOCK: INSIDE DIAMETER: 30 MM; OUTSIDE DIAMETER: 50 MM; THICKNESS: 0.5 MM; MATERIAL: STL; PART NO: 2450-002, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
88809	WASHER, LOCK: INSIDE DIAMETER: 50 MM; OUTSIDE DIAMETER: 80 MM; THICKNESS: 1 MM; NOMINAL SIZE: 50 MM; MATERIAL: STL; TYPE: WASHER; PART NO: 2450-003, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
88856	WASHER, FLAT: NOMINAL SIZE: 50 MM; INSIDE DIAMETER: 50 MM; OUTER SIZE: 80 MM; THICKNESS: 1 MM; MATERIAL: STL; TURBINES; REFERENCE NO: 38-137923; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
88857	WASHER: TYPE: INSULATING; NOMINAL SIZE: M45; INSIDE DIAMETER: 45 MM; OUTSIDE DIAMETER: 78 MM; THICKNESS: 6.3 MM; MATERIAL: FIBER IMPREGNATED; ISOLATING; REFERENCE NO: 78X45X6-3; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
88863	WASHER, FLAT: NOMINAL SIZE: 40 MM; INSIDE DIAMETER: 40 MM; OUTER SIZE: 85 MM; THICKNESS: 1 MM; MATERIAL: BRS; TURBINE; REFERENCE NO: 38-137924; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

88879	WASHER, TAB: TYPE: PANT LEG; NOMINAL SIZE: M10; INSIDE DIAMETER: 10 MM; OUTSIDE DIAMETER: 16 MM; THICKNESS: 1 MM; MATERIAL: SS; LOCK; FOR MAIN EXITER; REFERENCE NO: M10; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
88880	WASHER, FLAT: NOMINAL SIZE: 37 MM; INSIDE DIAMETER: 37 MM; OUTER SIZE: 72 MM; THICKNESS: 5 MM; MATERIAL: STL; M37 TURBINE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
88881	WASHER: TYPE: DIAPHRAGM; NOMINAL SIZE: M10; INSIDE DIAMETER: 10 MM; OUTSIDE DIAMETER: 40 MM; THICKNESS: 3 MM; MATERIAL: STL; TURBINE; REFERENCE NO: 24-20-026; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
88882	WASHER: TYPE: INSULATING; NOMINAL SIZE: M18; INSIDE DIAMETER: 18 MM; OUTSIDE DIAMETER: 32 MM; THICKNESS: 6 MM; MATERIAL: FIBER IMPREGNATED; FOR TURBINE GENERATORS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
88883	WASHER: TYPE: INSULATING; NOMINAL SIZE: 23 MM; INSIDE DIAMETER: 23 MM; OUTSIDE DIAMETER: 57 MM; THICKNESS: 5 MM; MATERIAL: FIBER IMPREGNATED; TURBINE; REFERENCE NO: 100-62; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
88884	WASHER: TYPE: DIAPHRAGM TURBINE; NOMINAL SIZE: M7; INSIDE DIAMETER: 7 MM; OUTSIDE DIAMETER: 57 MM; THICKNESS: 3 MM; MATERIAL: STL; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

88885	WASHER: TYPE: INSULATING; NOMINAL SIZE: M22; INSIDE DIAMETER: 22 MM; OUTSIDE DIAMETER: 40 MM; THICKNESS: 6 MM; MATERIAL: FIBER IMPREGNATED; SLEEVE; ID 16.5MM; LENGTH 60MM; MATERIAL TUFENOL; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
88886	WASHER: TYPE: INSULATING; NOMINAL SIZE: 77 MM; INSIDE DIAMETER: 77 MM; OUTSIDE DIAMETER: 123 MM; THICKNESS: 5 MM; MATERIAL: FIBER IMPREGNATED; USED ON GENERATOR; REFERENCE NO: 100-107; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
88887	WASHER: TYPE: INSULATING; NOMINAL SIZE: 77 MM; INSIDE DIAMETER: 77 MM; OUTSIDE DIAMETER: 138 MM; THICKNESS: 5 MM; MATERIAL: FIBER IMPREGNATED; GENERATOR; REFERENCE NO: 100-108; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
88888	WASHER, FLAT: NOMINAL SIZE: M20; INSIDE DIAMETER: 20 MM; OUTER SIZE: 26 MM; THICKNESS: 1.5 MM; MATERIAL: CU; TURBINE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
88889	WASHER, LOCK: INSIDE DIAMETER: 21 MM; OUTSIDE DIAMETER: 44 MM; THICKNESS: 1 MM; NOMINAL SIZE: 21 MM; MATERIAL: SS; TYPE: DISC SPRING; GRADE: 316; TURBINE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

88962	WASHER, THRUST: INSIDE DIAMETER: 134.15 MM; OUTSIDE DIAMETER: 200 MM; THICKNESS: 10 MM; MATERIAL: FERROBESTOS; CROSS SECTION SHAPE: ROUND; SURFACE CONDITION: SMOOTH; NOMINAL SIZE 134.15MM; TO BE USED ON SUBMERGED CHAIN CONVEYOR SHAFT; DRAWING NO: BABCOCK 5733/77322033; REFERENCE NO: 77-22033-5; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
88967	WASHER, FLAT: NOMINAL SIZE: 6.25 MM; INSIDE DIAMETER: 6.25 MM; OUTER SIZE: 16 MM; THICKNESS: 3.25 MM; MATERIAL: CU; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
88971	WASHER, LOCK: INSIDE DIAMETER: 16 MM; OUTSIDE DIAMETER: 32 MM; THICKNESS: 1 MM; MATERIAL: MS; 90 DEGREE; WD 15 MM X 15 MM X 15 MM X 6MM; RIGHT ANGLE; REFERENCE NO: 21275-310; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
88972	WASHER, BEVEL: NOMINAL SIZE: 14 MM; INSIDE DIAMETER: 14 MM; THICKNESS: 4.8 MM; MATERIAL: SS; GRADE: EN43; 29MM O/D; IN STACKS OF 4 WITH BRS INSERT; TYPE;TREP; PART NO: 4L XC 75BR14 21253-320, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	1000	
88973	WASHER, BEVEL: NOMINAL SIZE: 21.5 MM; INSIDE DIAMETER: 21.5 MM; THICKNESS: 4.8 MM; MATERIAL: SPRING STL GR EN 43; IN STACKS OF FOUR WITH BRS INSERTS; OUTSIDE DIAMETER: 41 MM; TYPE: TREP; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	1000	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

88974	WASHER, LOCK: INSIDE DIAMETER: 20 MM; OUTSIDE DIAMETER: 37 MM; THICKNESS: 1 MM; MATERIAL: MS; 90 DEGREE; RIGHT ANGLE; PART NO: 90DEG20, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
89113	WASHER, BEVEL: NOMINAL SIZE: M10; INSIDE DIAMETER: 10 MM; THICKNESS: 1 MM; MATERIAL: SS; WITH STACKS OF FOUR WASHERS AND A BRASS INSERT, EN43, TREP; OUTSIDE DIAMETER: 22.5 MM; PART NO: 4LXC75BR10 21253-316, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	150	
89114	WASHER, BEVEL: NOMINAL SIZE: 12 MM; INSIDE DIAMETER: 12 MM; MATERIAL: SS; GRADE: EN43; WASHERS; IN STACKS OF FOUR WITH BRASS INSERT; TYPE TREP; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	1000	
89115	WASHER, BEVEL: NOMINAL SIZE: M16; INSIDE DIAMETER: 16 MM; THICKNESS: 4.8 MM; MATERIAL: SPRING STL; IN STACKS OF FOUR WITH BRASS INSERT, EN43, TREP; 32 OUTSIDE DIAMETER; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2500	
89116	WASHER, BEVEL: NOMINAL SIZE: M20; INSIDE DIAMETER: 20 MM; MATERIAL: SS; WITH STACKS OF FOUR AND A BRASS INSERT, TREP; PART NO: 4L XC 21253326, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2000	
89117	WASHER, BEVEL: NOMINAL SIZE: 6 MM; INSIDE DIAMETER: 6 MM; THICKNESS: 1 MM; MATERIAL: SS; GRADE: EN43; TREP; 16MM O/D; WASHERS IN STACKS OF FOUR WITH BRS INSERT; REFERENCE NO: 4LXC75BR6 21253-312; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	600	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

89119	WASHER, FLAT: NOMINAL SIZE: 11 MM; INSIDE DIAMETER: 11 MM; OUTER SIZE: 27 MM; THICKNESS: 2 MM; MATERIAL: AL; FOR USE ON WATER PLANT SUP; REFERENCE NO: 27X11; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
89121	WASHER, BEVEL: NOMINAL SIZE: M56; INSIDE DIAMETER: 56 MM; THICKNESS: 12 MM; MATERIAL: STL; TYPE: TREP; IN STACKS OF FOUR WITH BRASS INSERT; OUTSIDE DIAMETER: 95 MM; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
89122	WASHER, BEVEL: NOMINAL SIZE: M30; INSIDE DIAMETER: 30 MM; THICKNESS: 4 MM; MATERIAL: STL; IN STACKS OF FOUR WITH BRASS WITH INSERT, TREP; OUTSIDE DIAMETER: 60 MM; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	220	
89124	WASHER, BEVEL: NOMINAL SIZE: M8; INSIDE DIAMETER: 8 MM; THICKNESS: 1 MM; MATERIAL: STL; IN STACKS OF FOUR WITH BRASS INSERT, TREP; OUTSIDE DIAMETER: 20 MM; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
89125	WASHER: TYPE: TREP; NOMINAL SIZE: 24 MM; INSIDE DIAMETER: 24 MM; OUTSIDE DIAMETER: 50 MM; THICKNESS: 2 MM; MATERIAL: STL; SPRING; WASHERS IN STACKS OF FOUR WITH BRASS INSERT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	400	
89134	WASHER, FLAT: NOMINAL SIZE: M8; INSIDE DIAMETER: 8 MM; OUTER SIZE: 17 MM; THICKNESS: 1.5 MM; MATERIAL: NYLON; FOR 11KV BREAKER PANELS ON CONVEYOR BOARDS 1 AND 2; REFERENCE NO: 07860; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

89184	SCREW, MACHINE: DIAMETER: 12.5 MM; LENGTH: 50 MM; THREAD: 2 MM; HEAD: HEX; MATERIAL: STL; GRADE: 8.8; USED ON OIL PURIFIER TYPE ALFA LAVAL MAB209S; REFERENCE NO: 221094702; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
89195	WASHER, LOCK: INSIDE DIAMETER: 12 MM; OUTSIDE DIAMETER: 28 MM; THICKNESS: 3 MM; NOMINAL SIZE: M12; MATERIAL: STL CD PLTD; TYPE: DISC SPRING BELLEVILLE; 301 SS, FULLY HARDENED SIZE, 12.5MM ID X 27MM OD X 3.2MM THK; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
89249	WASHER, LOCK: INSIDE DIAMETER: 25 MM; OUTSIDE DIAMETER: 25 MM; THICKNESS: 1.6 MM; NOMINAL SIZE: M24; MATERIAL: STL; TYPE: EXTERNAL TAB; SPECIFICATION: DIN 432; GROUP NO ITEM 110; USED ON BEARINGS 1-8; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
89251	WASHER, LOCK: INSIDE DIAMETER: 31 MM; OUTSIDE DIAMETER: 63 MM; THICKNESS: 1.6 MM; NOMINAL SIZE: 31 MM; MATERIAL: STL; TYPE: CENTRE GUIDE AND BEARINGS; GROUP NUMBERS 2894 -006 AND 2894-057; USED ON CENTRE GUIDE AND BEARINGS 1-8; BEARING SUPPORT; REFERENCE NO: 4911-010; REFERENCE NO: D432; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
89252	WASHER, TAB: TYPE: LOCK; NOMINAL SIZE: 50 MM; INSIDE DIAMETER: 50 MM; OUTSIDE DIAMETER: 100 MM; THICKNESS: 1.5 MM; MATERIAL: STL; SINGLE, D432, GROUP NUMBERS 4913-010 AND 4930-006, USED ON BEARINGS 1-8 AND ON THE THRUST BEARING; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

89315	WASHER, LOCK: INSIDE DIAMETER: 13 MM; OUTSIDE DIAMETER: 30 MM; THICKNESS: 1 MM; NOMINAL SIZE: 13 MM; MATERIAL: STL; TYPE: EARTHING BRUSH; SPECIFICATION: DIN 93; GROUP NUMBERS; USED ON BRUSHES INSTALLATION; HP CV; HP ESV AND IP BYPASS ESV SERVOMOTOR; REFERENCE NO: 4990-002; REFERENCE NO: 5160-183; REFERENCE NO: 7160- 089; REFERENCE NO: 7660-082; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
89318	WASHER, LOCK: INSIDE DIAMETER: 21 MM; OUTSIDE DIAMETER: 42 MM; THICKNESS: 1 MM; NOMINAL SIZE: 21 MM; MATERIAL: X5CRNI 189; TYPE: VALVE IP CONTROL; SPECIFICATION: DIN 93; GROUP NUMBER: 5320; USED ON ITEM 090; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
89322	WASHER, LOCK: INSIDE DIAMETER: 6.4 MM; OUTSIDE DIAMETER: 19 MM; THICKNESS: 0.5 MM; NOMINAL SIZE: 6.4 MM; MATERIAL: STL; TYPE: IP BYPASS ESV SERVO MOTOR; SPECIFICATION: DIN 93; GROUP NUMBER 7660 POS 071, USED ON IP BYPASS EMERGENCY STOP VALVE; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
89358	WASHER, LOCK: INSIDE DIAMETER: 10.5 MM; OUTSIDE DIAMETER: 26 MM; THICKNESS: 0.75 MM; NOMINAL SIZE: 10.5 MM; MATERIAL: X5CRNI 189; TYPE: CASING ASSEMBLY; SPECIFICATION: DIN 93; USED ON THE CASING ASSEMBLY; GROUP NUMBER 2690-069; IP CASING ASSY; REFERENCE NO: 2690-069; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	25	



SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

89375	WASHER, TAB: TYPE: PANT LEG; NOMINAL SIZE: M14; INSIDE DIAMETER: 14 MM; OUTSIDE DIAMETER: 30 MM; THICKNESS: 1 MM; MATERIAL: STL; AS PER COMPLETE LOCK-WASHER SET; FOR FRANCIS TURBINE/BOOSTER PUMP; DRAWING NO: KSB 5107503601; REFERENCE NO: ETA150-26VL & ETA125-26VL; SERIAL NO: LETHABO UNIT 1=2-241-631-801/1/802/2; PART NO: 931, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
89398	WASHER, FLAT: NOMINAL SIZE: M6; INSIDE DIAMETER: 6 MM; OUTER SIZE: 12 MM; THICKNESS: 1 MM; MATERIAL: BRS; REFERENCE NO: OBA; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2000	
89399	WASHER, FLAT: NOMINAL SIZE: M5; INSIDE DIAMETER: 5 MM; OUTER SIZE: 9 MM; THICKNESS: 0.8 MM; MATERIAL: BRS; REFERENCE NO: 2BA; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	5000	
89427	WASHER, FLAT: NOMINAL SIZE: M12; INSIDE DIAMETER: 12 MM; OUTER SIZE: 25 MM; THICKNESS: 2 MM; MATERIAL: STL; SEAL USED ON THE OIL PURIFIER TYPE; REFERENCE NO: 70492; REFERENCE NO: MAB204S; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	11000	
89431	WASHER: TYPE: LP INNER CASING; NOMINAL SIZE: 17 MM; INSIDE DIAMETER: 17 MM; OUTSIDE DIAMETER: 36 MM; THICKNESS: 1.2 MM; MATERIAL: X5CRNI189; USED ON THE LP1 AND LP2; INNER CASING; REFERENCE NO: 2850-017; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

89432	WASHER: TYPE: LP INNER CASING; NOMINAL SIZE: 31 MM; INSIDE DIAMETER: 31 MM; OUTSIDE DIAMETER: 63 MM; THICKNESS: 1.6 MM; MATERIAL: X5CRNI189; LOCK; USED ON LP1+LP2; GROUP NUMBER; REFERENCE NO: 2850-018; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
89436	WASHER, FLAT: NOMINAL SIZE: 17 MM; INSIDE DIAMETER: 17 MM; OUTER SIZE: 30 MM; THICKNESS: 3 MM; MATERIAL: STL; SPECIFICATION: DIN 125; GROUP NO ITEM 191; USED ON HP CONTROL VALVE SERVOMOTOR; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
89466	WASHER, SEALING: NOMINAL SIZE: M20; INSIDE DIAMETER: 20 MM; OUTSIDE DIAMETER: 38 MM; THICKNESS: 5 MM; MATERIAL: STL; WITH 2MM DEEP RECESS AND KLINGERITE SEAL; 33MM OD X 4MM THICK; DRAWING NO: 0.63/54781; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	8000	
89469	WASHER, LOCK: INSIDE DIAMETER: 11 MM; OUTSIDE DIAMETER: 12 MM; THICKNESS: 1 MM; NOMINAL SIZE: M12; MATERIAL: SPRING STL; TYPE: RING; USED ON HP SERVO MOTOR; REFERENCE NO: 5160-197; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
89471	WASHER, LOCK: INSIDE DIAMETER: 18.7 MM; OUTSIDE DIAMETER: 20 MM; THICKNESS: 1.2 MM; NOMINAL SIZE: 19 MM; MATERIAL: SPRING STL; TYPE: LOCKING RING; USED ON THE HP SERVOMOTOR; REFERENCE NO: 5160-199; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

89472	WASHER, LOCK: INSIDE DIAMETER: 22 MM; OUTSIDE DIAMETER: 23.5 MM; THICKNESS: 1 MM; NOMINAL SIZE: M22; MATERIAL: SPRING STL; TYPE: RING; USED ON THE HP SERVOMOTOR; REFERENCE NO: 5160-200; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
89525	WASHER, LOCK: INSIDE DIAMETER: 35 MM; OUTSIDE DIAMETER: 57 MM; THICKNESS: 1.25 MM; NOMINAL SIZE: 35 MM; MATERIAL: STL; TYPE: ADAPTOR SLEEVE; SPECIFICATION: ISO 2982; PART NO: MB 7, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
89537	WASHER, FLAT: NOMINAL SIZE: M22; INSIDE DIAMETER: 22 MM; OUTER SIZE: 39 MM; THICKNESS: 3 MM; MATERIAL: STL BRIGHT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	250	
89578	WASHER, FLAT: NOMINAL SIZE: M14; INSIDE DIAMETER: 14 MM; OUTER SIZE: 24 MM; THICKNESS: 2.5 MM; MATERIAL: STL; PERIPHERAL SHAPE STYLE: RD; SPECIFICATION: BS 1449 PART 3B; HOT DIP GALV TO SABA; REFERENCE NO: 763; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	10	
89579	WASHER, LOCK: INSIDE DIAMETER: 15 MM; OUTSIDE DIAMETER: 24.1 MM; THICKNESS: 3 MM; NOMINAL SIZE: M14; MATERIAL: STL GALV; TYPE: HELICAL SPRING; ZINC COATED FINISH, SPLIT RING LOCKING, END DETAIL DESCRIPTION; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
89589	WASHER, FLAT: NOMINAL SIZE: M22; INSIDE DIAMETER: 22 MM; OUTER SIZE: 48 MM; THICKNESS: 4 MM; MATERIAL: BRS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	15	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

89592	WASHER, FLAT: NOMINAL SIZE: M4; INSIDE DIAMETER: 4 MM; OUTER SIZE: 9 MM; THICKNESS: 0.9 MM; MATERIAL: MS BLACK; PERIPHERAL SHAPE STYLE: RD; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	KG	10	
90962	WASHER, THRUST: INSIDE DIAMETER: 23 MM; OUTSIDE DIAMETER: 30 X 54 MM; THICKNESS: 8 MM; MATERIAL: STL; CROSS SECTION SHAPE: ROUND; SURFACE CONDITION: SMOOTH; NOMINAL SIZE 18 MM; REFERENCE NO: JP82502; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
91050	WASHER, LOCK: INSIDE DIAMETER: 18 MM; OUTSIDE DIAMETER: 36 MM; THICKNESS: 0.5 MM; MATERIAL: SS; TYPE: INTERNAL TOOTH; AIR/BRKR, ABB; REFERENCE NO: 8452; REFERENCE NO: AG 547894 P1; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	15	
91111	WASHER: TYPE: BACKING; NOMINAL SIZE: M36; INSIDE DIAMETER: 36 MM; OUTSIDE DIAMETER: 111 MM; THICKNESS: 0.5 MM; MATERIAL: TEFLON; REFERENCE NO: JP81263; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
91166	WASHER, LOCK: INSIDE DIAMETER: 30 MM; OUTSIDE DIAMETER: 49 MM; THICKNESS: 1.25 MM; NOMINAL SIZE: M30; MATERIAL: STL; TYPE: ADAPTOR SLEEVE; SPECIFICATION: ISO 2982; USED ON OIL PURIFIER; PART NO: MB6, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

91279	WASHER, LOCK: INSIDE DIAMETER: 13 MM; OUTSIDE DIAMETER: 22 MM; THICKNESS: 1 MM; NOMINAL SIZE: M12; MATERIAL: STL; TYPE: STAR INTERNAL; 1/2 IN, ITEM 78, FOR CARRIAGE ASSEMBLY ON IK 545B SOOTBLOWER; REFERENCE NO: 869010-2900; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
91329	WASHER, TAB: TYPE: SINGLE TAB; NOMINAL SIZE: M16; INSIDE DIAMETER: 17 MM; OUTSIDE DIAMETER: 40 MM; THICKNESS: 0.6 MM; MATERIAL: SS; FOR 22KV GENERATOR CIRCUIT BREAKER TYPE DR36U1750D; PART NO: 6142, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
91330	WASHER, TAB: NOMINAL SIZE: M16; INSIDE DIAMETER: 17 MM; OUTSIDE DIAMETER: 40 MM; THICKNESS: 0.6 MM; MATERIAL: SS; LOCKING DISC; FOR 22KV GENERATOR CIRCUIT BREAKER TYPE; REFERENCE NO: 5321; REFERENCE NO: DR36U1750D; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
91808	WASHER, LOCK: INSIDE DIAMETER: 12 MM; OUTSIDE DIAMETER: 15 MM; THICKNESS: 2 MM; NOMINAL SIZE: M12; MATERIAL: STL; TYPE: HELICAL SPRING; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	60	
91891	WASHER, LOCK: INSIDE DIAMETER: 16 MM; OUTSIDE DIAMETER: 38 MM; THICKNESS: 4 MM; NOMINAL SIZE: M16; MATERIAL: SS; TYPE: DISC SPRING BELVILLE; GRADE: 301; SPECIFICATION: DIN 16; FULLY HARDENED SIZE, 16.5MM ID X 32MM OD X 3.2MM THK; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	3300	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

91892	WASHER, FLAT: NOMINAL SIZE: M16; INSIDE DIAMETER: 16 MM; OUTER SIZE: 45 MM; THICKNESS: 3 MM; MATERIAL: SS; CONTACT NUT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	800	
92110	ANCHOR, STUD: TYPE: SLEEVE; DIAMETER: M6; LENGTH: 65 MM; THREAD: 1 MM; EMBEDDED LENGTH: 50 MM; THREAD LENGTH: 25 MM; MATERIAL: STL; HILTI HSA; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
92111	ANCHOR, STUD: TYPE: SLEEVE; DIAMETER: M8; LENGTH: 75 MM; THREAD: 1.25 MM; EMBEDDED LENGTH: 60 MM; THREAD LENGTH: 26 MM; MATERIAL: STL; HILTI HSA; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	
92112	ANCHOR, STUD: TYPE: EXPANSION WEDGE; DIAMETER: M10; LENGTH: 90 MM; THREAD: 1.5 MM; EMBEDDED LENGTH: 72 MM; THREAD LENGTH: 30 MM; MATERIAL: STL; HILTI TYPE HSA; REFERENCE NO: HSA; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	60	
92113	ANCHOR, STUD: TYPE: EXPANSION WEDGE; DIAMETER: M12; LENGTH: 110 MM; THREAD: 1.75 MM; EMBEDDED LENGTH: 72 MM; THREAD LENGTH: 52 MM; MATERIAL: STL; HILTI HSA; REFERENCE NO: ANCHORSTUD12X100MM; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	200	
92894	ANCHOR, SCREW: TYPE: CONCRETE NAIL; SCREW SIZE: M6; ANCHOR SIZE: DIA 3.7 X LG 10 MM; LENGTH: 27 MM; THREAD LENGTH: 11 MM; ANCHOR MATERIAL: STL; FOR HILTI MODEL NUMBER DX450 OR DX400B; REFERENCE NO: M-11-27 D12; PART NO: 24208/1, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	30	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

92895	ANCHOR, STUD: TYPE: SLEEVE; DIAMETER: M10; LENGTH: 72 MM; THREAD: 1.5 MM; EMBEDDED LENGTH: 57 MM; THREAD LENGTH: 30 MM; MATERIAL: STL; USED ON MODEL DX450 OR DX400B; REFERENCE NO: EM6-11-12 P12; PART NO: 21516/0, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
94488	WASHER: TYPE: HEAVY DUTY TAP; INSIDE DIAMETER: 6 MM; OUTSIDE DIAMETER: 25 MM; THICKNESS: 5.5 MM; MATERIAL: RUBBER SYNTHETIC; 55MM NOMINAL SIZE, DUEL PURPOSE TAP WASHERS; SIZE:20MM; FOR USE WITH HEAVY DUTY TAPS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
98472	WASHER, FLAT: NOMINAL SIZE: M10; INSIDE DIAMETER: 10.6 MM; OUTER SIZE: 22 MM; THICKNESS: 2 MM; MATERIAL: STL; FOR PORT PURIFIER.; MODEL NO: MAB 103B; REFERENCE NO: 41456-00; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
98475	SCREW, SET: NOMINAL THREAD DIAMETER: M10; THREAD: 1.5 MM; THREAD LENGTH: 16 MM; HEAD STYLE: SOCKET HEX; MATERIAL: STL; POINT STYLE: CUP; HEADLESS, FOR BFPT OIL PURIFIER MAB103B; REFERENCE NO: 221581-16; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
100138	WASHER, LOCK: INSIDE DIAMETER: 13 MM; OUTSIDE DIAMETER: 20 MM; THICKNESS: 2 MM; NOMINAL SIZE: M12; MATERIAL: STL; TYPE: SPRING WAVY; FOR USE ON OIL PURIFIER, TYPE ALFA LAVAL MAB209S; REFERENCE NO: 62094; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

108499	ANCHOR, SCREW: TYPE: NAIL; SCREW SIZE: M4; ANCHOR SIZE: DIA 5 X LG 43 MM; DRILL SIZE: 5 MM; THREAD LENGTH: 48 MM; ANCHOR MATERIAL: PLASTIC; PRODUCT CODE 63540-9, SUPPLIED IN BOXES OF 200; REFERENCE NO: HPS 5-15; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2000	
108500	ANCHOR, SCREW: TYPE: IMPACT NAIL; SCREW SIZE: M5; ANCHOR SIZE: DIA 6 X LG 35 MM; THREAD LENGTH: 38 MM; ANCHOR MATERIAL: NYLON; ST VZ, BEST NO:1122603; REFERENCE NO: HPS 6/5; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	5000	
108501	ANCHOR, SCREW: TYPE: NAIL; SCREW SIZE: M5; ANCHOR SIZE: DIA 6 X LG 55 MM; LENGTH: 58 MM; DRILL SIZE: 6 MM; THREAD LENGTH: 45 MM; HEAD: COUNTERSUNK; ANCHOR MATERIAL: PLASTIC; QUANTITY OF 100 PER BOX; REFERENCE NO: HPS 6/25; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2500	
108502	ANCHOR, SCREW: TYPE: NAIL; SCREW SIZE: M7; ANCHOR SIZE: DIA 8 X LG 75 MM; LENGTH: 55 MM; DRILL SIZE: 8 MM; THREAD LENGTH: 78 MM; ANCHOR MATERIAL: PLASTIC; QTY PER BOX 100; REFERENCE NO: HPS 8/30; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	5000	
108737	BOLT, ANCHOR: TYPE: EXPANSION WEDGE; DIAMETER: M6; THREAD LENGTH: 38 MM; MATERIAL: STL; LENGTH: 38 MM; THREAD: 1 MM; 43MM EMBEDDED LENGTH, RAWL BOLT, LOOSE TYPE; CATALOGUE NO: 46-015; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2000	
108864	BOLT, ANCHOR: TYPE: RAWL; DIAMETER: M10; MATERIAL: STL; LENGTH: 50 MM; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2000	



SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

110065	WASHER, LOCK: INSIDE DIAMETER: 127 MM; OUTSIDE DIAMETER: 249 MM; THICKNESS: 14.5 MM; NOMINAL SIZE: M12; MATERIAL: STL; TYPE: SPRING; CUP 250 X 16 BY-PASS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
110066	WASHER, LOCK: INSIDE DIAMETER: 81 MM; OUTSIDE DIAMETER: 149.5 MM; THICKNESS: 7 MM; MATERIAL: STL; TYPE: SPRING; CUP 150 X 81 X 8 BY-PASS; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
110305	WASHER, LOCK: INSIDE DIAMETER: 13.8 MM; OUTSIDE DIAMETER: 45 MM; THICKNESS: 0.5 MM; MATERIAL: STL; TYPE: SPRING; SUCTION VALVE; FOR COMPRESSOR TYPE C3N2F; NO48-137; ON H2 PLANT; REFERENCE NO: 4198; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
110306	WASHER, LOCK: INSIDE DIAMETER: 61 MM; OUTSIDE DIAMETER: 75 MM; THICKNESS: 0.5 MM; MATERIAL: STL; TYPE: SPRING; DISCHARGE VALVE; FOR COMPRESSOR TYPE C3N2F; ON H2 PLAN; REFERENCE NO: 4200; REFERENCE NO: NO48-137; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
110307	WASHER, LOCK: INSIDE DIAMETER: 22 MM; OUTSIDE DIAMETER: 33 MM; THICKNESS: 0.5 MM; MATERIAL: STL; SUCTION VALVE SPRING; FOR COMPRESSOR TYPE C3N2F; NO48-137; ON H2 PLANT; PART NO: 4209, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

110308	WASHER, LOCK: INSIDE DIAMETER: 44 MM; OUTSIDE DIAMETER: 56.5 MM; THICKNESS: 0.5 MM; MATERIAL: STL; TYPE: SPRING; DISCHARGE VALVE; FOR COMPRESSOR TYPE C3N2F; ON H2 PLANT; REFERENCE NO: 4210; REFERENCE NO: NO48-137; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
110309	WASHER: TYPE: SPRING; INSIDE DIAMETER: 12 MM; OUTSIDE DIAMETER: 21.5 MM; THICKNESS: 0.5 MM; MATERIAL: STL; SUCTION VALVE; FOR COMPRESSOR TYPE; ON H2 PLANT; REFERENCE NO: C3N2F; REFERENCE NO: NO48-137 Y PD ESK_AWV; PART NO: 4219, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
110310	WASHER, LOCK: INSIDE DIAMETER: 28 MM; OUTSIDE DIAMETER: 43.5 MM; THICKNESS: 0.5 MM; MATERIAL: STL; DISCHARGE VALVE SPRING; FOR COMPRESSOR TYPE C3N2F NO48-137 ON H2 PLANT; SULZER BURCKHARDT; REFERENCE NO: 4220; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
111683	WASHER, LOCK: INSIDE DIAMETER: 30 MM; OUTSIDE DIAMETER: 60 MM; THICKNESS: 3 MM; NOMINAL SIZE: M30; TYPE: DISC SPRING; FLAT USED ON THE SULZER BURCKHART COMPRESSOR TYPE C4N2F, MAIN EQUIPMENT 20KV BREAKER; REFERENCE NO: 4259; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
113276	WASHER, FLAT: NOMINAL SIZE: 13 MM; INSIDE DIAMETER: 13 MM; OUTER SIZE: 23 MM; THICKNESS: 2.5 MM; MATERIAL: STL; SPECIFICATION: DIN 125; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

151133	TAP, THREAD CUTTING: TAP SIZE: 13 MM; OVERALL LENGTH: 30 MM; MATERIAL: SS; SCHEDULE NUMBER: C1-27-02; FOR USE ON H2 ANALYSER; KENT; TYPE ANALYSER ZERO; PART NO: 6410-240, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
175006	WASHER, LOCK: TYPE: SPRING, 22 KV DR36U1750D ABB CIRCUIT BREAKER; REFERENCE NO: DR36U1750D; REFERENCE NO: HAGT 445977 P9; PART NO: 2735, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	30	
175012	WASHER, LOCK: TYPE: SPRING, 22 KV DR36U1750D ABB CIRCUIT BREAKER; REFERENCE NO: NB 335850 P108; PART NO: 6095, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
175019	WASHER, LOCK: TYPE: SPRING, 22 KV DR36U1750D ABB CIRCUIT BREAKER; PART NO: 6021, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	200	
175029	SCREW, MACHINE: HEAD: CSK; 22KV CIRCUIT BREAKER; REFERENCE NO: HATM 405447 P1; PART NO: DR36U1750D, MANUFACTURER: ABB; PART NO: 5097, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
175031	SCREW, MACHINE: HEAD: CSK; 22KV CIRCUIT BREAKER; REFERENCE NO: HATM 405446 P1; PART NO: DR36U1750D, MANUFACTURER: ABB; PART NO: 5204, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

175037	SCREW, MACHINE: DIAMETER: M6; LENGTH: 16 MM; HEAD: CSK; 22KV CIRCUIT BREAKER; PART NO: DR36U1750D, MANUFACTURER: ABB; PART NO: 7244, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	30	
175815	BOLT, MACHINE: DIAMETER: M12; LENGTH: 40 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HTS; WITHOUT NUT; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20000	
184394	SCREW: TYPE: LOCKING; DIAMETER: M16; LENGTH: 13 MM; THREAD: 5/8 IN-BSF; HEAD: LOCKING; MATERIAL: STL; THREAD LENGTH: LOCKING; THREADS 18 5/16 IN; FOR USE ON SOOTBLOWER SAFETY VALVE MODEL NUMBER 26KA33-120; MODEL NO: 26KA33-120; PART NO: 3411-35072, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
212285	WASHER: TYPE: TERMINAL UPPER RD; FOR USE ON HYDROGEN GENERATION PLANT; 7 PLATE CELL ELECTROLYSER; PART NO: 201607, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
212286	WASHER: TYPE: TERMINAL, LOWER SQUARE; FOR USE ON HYDROGEN GENERATION PLANT; 7 PLATE CELL ELECTROLYSER; PART NO: 201605, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
213601	SCREW: TYPE: O.T.E END WINDING; FOR ALSTOM POWER GENERATOR STATOR; PART NO: D381630-19000, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

213602	SCREW: TYPE: O.T.E END WINDING; FOR ALSTOM POWER GENERATOR STATOR; PART NO: D381630-20000, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
213689	WASHER: TYPE: WINDING WEDGE; INSIDE DIAMETER: 14 MM; OUTSIDE DIAMETER: 28 MM; THICKNESS: 3.2 MM; FOR ALSTOM POWER GENERATOR STATOR; PART NO: EPGC 203, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
217686	BOLT, ASSEMBLY: TYPE: COUPLING; NOMINAL DIAMETER: M12; LENGTH: 39.5 MM; HEAD: CSK; MATERIAL: HTS; THREAD LENGTH: 21.5 MM; THREAD: 1.75 MM; CONSISTING OF 6 SELF-LOCKING NUTS 24MM HEAD SIZE, USED FOR DRIVING BOSS AND SPIDER PLATE ON BUCKET ELEVATORS; FCU 16.25, TO BE MARKED AND PACKED AS A SET; SHANK DIAMETER: 12.5MM; SHANK LENGTH: 8.5MM; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
217687	BOLT, ASSEMBLY: TYPE: COUPLING; NOMINAL DIAMETER: M12; LENGTH: 54 MM; HEAD: HEX; MATERIAL: HTS; THREAD LENGTH: 22.5 MM; THREAD: 1.75 MM; NUT QUANTITY: 6; CONSISTING OF 6 HEXAGONAL BOLTS, 6 SPHERICAL COLLARS, COLLARS BARREL WIDTH 11MM X 34.5MM OD, USED FOR BUCKET ELEVATOR HALF COUPLINGS, TO BE MARKED AND PACKED AS A SET; SHANK DIAMETER: 12.5 MM; SHANK LENGTH: 31 MM; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	50	
231335	WASHER, LOCK: TYPE: SOOTBLOWER; PART NO: 901098-0005, SUPPLIER: UNKNOWN; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

501142	SCREW: TYPE: WING; THREAD: 8 MM; PART NO: AW20109-2; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
501903	BOLT: TYPE: ACID PIPES/PUMPS; DIAMETER: M12; LENGTH: 25 MM; HEAD: HEX; GRADE: 316; MATERIAL: SS; THREAD: 1.75 MM; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
501904	BOLT: TYPE: ACID PIPES/PUMPS; DIAMETER: M12; LENGTH: 30 MM; HEAD: HEX; GRADE: 316; MATERIAL: SS; THREAD: 1.75 MM; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
570021	WASHER, LOCK: INSIDE DIAMETER: 4.1 MM; OUTSIDE DIAMETER: 7 MM; THICKNESS: 1.2 MM; NOMINAL SIZE: 3.1 MM; MATERIAL: HARDENED SPRING STEEL; TYPE: VALVE; IDENTIFICATION NO: 335850P0104; REFERENCE NO: A-4; PART NO: 2736; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	150	
570024	WASHER, LOCK: INSIDE DIAMETER: 14.2 MM; OUTSIDE DIAMETER: 24.1 MM; THICKNESS: 3 MM; NOMINAL SIZE: 13.2 MM; MATERIAL: SS; TYPE: VALVE; IDENTIFICATION NO: NB 335805 P0515; REFERENCE NO: A14; PART NO: 7414; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
570660	WASHER: TYPE: SPRING; NOMINAL SIZE: 16 MM; INSIDE DIAMETER: 17 MM; OUTSIDE DIAMETER: 26 MM; THICKNESS: 1.8 MM; MATERIAL: HARDENED SPRING STEEL; IDENTIFICATION NO: AG 434787 P0009; PART NO: 2918; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	60	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

570661	WASHER, LOCK: INSIDE DIAMETER: 16.2 MM; OUTSIDE DIAMETER: 24.6 MM; THICKNESS: 3.5 MM; NOMINAL SIZE: 15.2 MM; MATERIAL: HARDENED SPRING STEEL; TYPE: VALVE; IDENTIFICATION NO: NB 335840 P0012; REFERENCE NO: 16.2/24; PART NO: 2314; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	60	
570662	WASHER: TYPE: SPRING; NOMINAL SIZE: 9.5 MM; INSIDE DIAMETER: 10.5 MM; OUTSIDE DIAMETER: 22 MM; THICKNESS: 1.2 MM; MATERIAL: HARDENED SPRING STEEL; IDENTIFICATION NO: NB 336407 P0214; MODEL NO: 10.5/22NR; PART NO: 2522; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	150	
570663	WASHER: TYPE: SPRING; NOMINAL SIZE: 9.5 MM; INSIDE DIAMETER: 10.5 MM; OUTSIDE DIAMETER: 17 MM; THICKNESS: 1.2 MM; MATERIAL: HARDENED SPRING STEEL; IDENTIFICATION NO: AG434787 P0006; MODEL NO: 17/10.5; PART NO: 7378; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	400	
570665	WASHER: TYPE: SPRING; NOMINAL SIZE: 9.5 MM; INSIDE DIAMETER: 10.5 MM; OUTSIDE DIAMETER: 22 MM; THICKNESS: 2.6 MM; MATERIAL: HARDENED SPRING STEEL; IDENTIFICATION NO: NB 336410 P0120; REFERENCE NO: 10.5/22NR; PART NO: 7138; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	900	
570666	WASHER: TYPE: SPRING; NOMINAL SIZE: 9.5 MM; INSIDE DIAMETER: 10.5 MM; OUTSIDE DIAMETER: 20.25 MM; THICKNESS: 2.6 MM; MATERIAL: HARDENED SPRING STEEL; IDENTIFICATION NO: AM 405012 P0009; REFERENCE NO: 20.25/10.5; PART NO: 5008; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

570667	WASHER: TYPE: SPRING; NOMINAL SIZE: 16 MM; INSIDE DIAMETER: 17 MM; OUTSIDE DIAMETER: 34 MM; THICKNESS: 1.8 MM; MATERIAL: HARDENED SPRING STEEL; IDENTIFICATION NO: NB 336407 P0217; MODEL NO: 17/34NR; PART NO: 10159; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	1000	
570668	WASHER: TYPE: SPRING; NOMINAL SIZE: 5.4 MM; INSIDE DIAMETER: 6.4 MM; OUTSIDE DIAMETER: 12 MM; THICKNESS: 1.6 MM; MATERIAL: HARDENED SPRING STEEL; IDENTIFICATION NO: NB 335050 P0107; PART NO: 3032; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	80	
570669	WASHER: TYPE: SPRING; NOMINAL SIZE: 5.4 MM; INSIDE DIAMETER: 6.4 MM; OUTSIDE DIAMETER: 14 MM; THICKNESS: 0.8 MM; MATERIAL: HARDENED SPRING STEEL; IDENTIFICATION NO: 336407 P0211; REFERENCE NO: 6.4/14NR; PART NO: 2523; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	200	
570670	WASHER: TYPE: SPRING; NOMINAL SIZE: 7.4 MM; INSIDE DIAMETER: 8.4 MM; OUTSIDE DIAMETER: 18 MM; THICKNESS: 1 MM; MATERIAL: HARDENED SPRING STEEL; IDENTIFICATION NO: NB 336407 P0213; REFERENCE NO: 8.4/18NR; PART NO: 2823; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	200	
570671	WASHER, LOCK: INSIDE DIAMETER: 6.1 MM; OUTSIDE DIAMETER: 11.8 MM; THICKNESS: 1.6 MM; NOMINAL SIZE: 5.1 MM; MATERIAL: HARDENED SPRING STEEL; TYPE: VALVE; IDENTIFICATION NO: NB 335800 P0110; MODEL NO: B6; PART NO: 7347; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	100	



SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

570718	WASHER, LOCK: INSIDE DIAMETER: 10.2 MM; OUTSIDE DIAMETER: 18.1 MM; THICKNESS: 1.8 MM; NOMINAL SIZE: M9.2 MM; MATERIAL: STL ZN COATED; TYPE: VALVE; REFERENCE NO: NB335805P0062; PART NO: 7082; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
586846	BOLT: TYPE: COUPLING 1ST=32; DIAMETER: M12; LENGTH: 46 MM; HEAD: SEMI ROUND; GRADE: 12.9; MATERIAL: STL; THREAD: 1.75 MM; EACH BOLT COMPLETE WITH WASHER AND NUT; FOR USE ON MAAG COUPLING; MODEL NO: ZES-4.5 / 6.5YK; PART NO: 706-5202-16; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
600166	STUD: TYPE: RADIAL; DIAMETER: M16; THREAD: BSW; LENGTH: 164 MM; MATERIAL: 21C12MOV57V; THREAD LENGTH: 164 MM; MASS 0.6 KG; PART NO: D36400495P10, MANUFACTURER: GE POWER SERVICES; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
600172	STUD: TYPE: RADIAL; DIAMETER: M16; THREAD: 7BSF; LENGTH: 100 MM; MATERIAL: 21CRMV57V; THREAD LENGTH: 100 MM; MASS 0.3KG; EXATER STALK BOLTS; PART NO: D36401397000, MANUFACTURER: GE POWER SERVICES; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
604529	WASHER, FLAT: NOMINAL SIZE: M12; INSIDE DIAMETER: 13 MM; OUTER SIZE: 24 MM; THICKNESS: 2.5 MM; MATERIAL: B16; DIN 126; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2500	
604532	WASHER, FLAT: NOMINAL SIZE: M20; INSIDE DIAMETER: 21 MM; OUTER SIZE: 37 MM; THICKNESS: 3 MM; MATERIAL: B16; DIN 126; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	500	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

604534	WASHER, FLAT: NOMINAL SIZE: M16; INSIDE DIAMETER: 17 MM; OUTER SIZE: 30 MM; THICKNESS: 3 MM; MATERIAL: B16; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2500	
604535	WASHER, FLAT: NOMINAL SIZE: M14; INSIDE DIAMETER: 15 MM; OUTER SIZE: 28 MM; THICKNESS: 2.5 MM; MATERIAL: B16; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	200	
604536	WASHER, FLAT: NOMINAL SIZE: M12; INSIDE DIAMETER: 13 MM; OUTER SIZE: 24 MM; THICKNESS: 2.5 MM; MATERIAL: SS; GRADE: CL 2; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	200	
604537	WASHER, FLAT: NOMINAL SIZE: M16; INSIDE DIAMETER: 17 MM; OUTER SIZE: 30 MM; THICKNESS: 3 MM; MATERIAL: SS; GRADE: CL 2; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2000	
604538	WASHER, FLAT: NOMINAL SIZE: M20; INSIDE DIAMETER: 21 MM; OUTER SIZE: 27 MM; THICKNESS: 3 MM; MATERIAL: SS; GRADE: CL 2; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2000	
607612	STUD: TYPE: ROD COMBUSTION AIR VALVE; DIAMETER: M16; THREAD: RH 2 PITCH; LENGTH: 115 MM; MATERIAL: B16; THREAD LENGTH: 16 MM; INCLUDING 2 CORRESPONDING NUTS OF SAME SPECIFICATION AS STUD TO BE PROVIDED WITH EACH STUD; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2000	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

607667	STUD: TYPE: ROD LARGE BURNER FLANGE; DIAMETER: M12; THREAD: 12 MM; LENGTH: 70 MM; MATERIAL: B16; THREAD LENGTH: 70 MM; INCLUDING 2 CORRESPONDING NUTS OF SAME SPECIFICATION AS STUD TO BE PROVIDED WITH EACH STUD; REFERENCE NO: QBB712 0702H; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2000	
607668	STUD: TYPE: ROD BURNER T/C POCKET LARGE FLANGE; DIAMETER: M14; THREAD: 14 MM; LENGTH: 75 MM; MATERIAL: B16; THREAD LENGTH: 75 MM; INCLUDING 2 CORRESPONDING NUTS OF SAME SPECIFICATION AS STUD TO BE PROVIDED WITH EACH STUD; REFERENCE NO: QBB7140752H; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	600	
607669	STUD: TYPE: ROD LANCE T/C POCKET; DIAMETER: M16; THREAD: 16 MM; LENGTH: 100 MM; MATERIAL: SS GR B8 CL 2; THREAD LENGTH: 100 MM; INCLUDING 2 CORRESPONDING NUTS OF SAME SPECIFICATION AS STUD TO BE PROVIDED WITH EACH STUD; REFERENCE NO: QBB8160858; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2200	
607670	STUD: TYPE: ROD FIGURE OF 8; DIAMETER: M16; THREAD: 16 MM; LENGTH: 90 MM; MATERIAL: SS GR B8 CL 2; THREAD LENGTH: 90 MM; INCLUDING 2 CORRESPONDING NUTS OF SAME SPECIFICATION AS STUD TO BE PROVIDED WITH EACH STUD; REFERENCE NO: QBB8160858; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	1000	
607671	STUD: TYPE: ROD LANCE DISTANCE PIECE; DIAMETER: M16; THREAD: 16 MM; LENGTH: 80 MM; MATERIAL: SS GR B8 CL 2; THREAD LENGTH: 80 MM; INCLUDING 2 CORRESPONDING NUTS OF SAME SPECIFICATION AS STUD TO BE PROVIDED WITH EACH STUD; REFERENCE NO: QBB8160808; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2500	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

607682	STUD: TYPE: ROD LANCE LARGE FLANGE; DIAMETER: M20; THREAD: 20 MM; LENGTH: 110 MM; MATERIAL: SS GR B8 CL 2; THREAD LENGTH: 110 MM; INCLUDING 2 CORRESPONDING NUTS OF SAME SPECIFICATION AS STUD TO BE PROVIDED WITH EACH STUD; REFERENCE NO: QBB8200958; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	5000	
607683	STUD: TYPE: ROD POCKET FLANGES; DIAMETER: M12; THREAD: 12 MM; LENGTH: 75 MM; MATERIAL: SS GR B8 CL 2; THREAD LENGTH: 75 MM; INCLUDING 2 CORRESPONDING NUTS OF SAME SPECIFICATION AS STUD TO BE PROVIDED WITH EACH STUD; REFERENCE NO: QBB8120758; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	1000	
607684	STUD: TYPE: ROD MIXING CHAMBER PIPE PART VALVE; DIAMETER: M16; THREAD: 16 MM; LENGTH: 80 MM; MATERIAL: B16; THREAD LENGTH: 80 MM; INCLUDING 2 CORRESPONDING NUTS OF SAME SPECIFICATION AS STUD TO BE PROVIDED WITH EACH STUD; THE FOLLOWING IS REQUIRED WITH EVERY DELIVERY; SHELF LIFE; DATE OF MANUFACTURE AND METHOD OF STORAGE; REFERENCE NO: QBB161616354; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	1000	
607685	STUD: TYPE: ROD COMBUSTION AIR VALVE VERTICAL BELLOWS; DIAMETER: M20; THREAD: 20 MM; LENGTH: 85 MM; MATERIAL: B16; THREAD LENGTH: 85 MM; INCLUDING 2 CORRESPONDING NUTS OF SAME SPECIFICATION AS STUD TO BE PROVIDED WITH EACH STUD; REFERENCE NO: QBB7200852H; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	800	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

607686	STUD: TYPE: ROD COMBUSTION AIR PIPE MEDIUM FLANGE; DIAMETER: M20; THREAD: 20 MM; LENGTH: 80 MM; MATERIAL: B16; THREAD LENGTH: 80 MM; INCLUDING 2 CORRESPONDING NUTS OF SAME SPECIFICATION AS STUD TO BE PROVIDED WITH EACH STUD; REFERENCE NO: QBB7200802H; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	1000	
607699	STUD, ALL THREAD: DIAMETER: M16; LENGTH: 135 MM; THREAD: 16 MM; MATERIAL: B16; ROD MIXING CHAMBER V/V'S; INCLUDING 2 CORRESPONDING NUTS OF SAME SPECIFICATION AS STUD TO BE PROVIDED WITH EACH STUD; REFERENCE NO: QBB16161354; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	2000	
666285	WASHER: TYPE: TERMINAL BOX ADJUSTED TUBE; NOMINAL SIZE: 100 MM; INSIDE DIAMETER: 20 MM; OUTSIDE DIAMETER: 26 MM; THICKNESS: 3 MM; MATERIAL: SS; DRAWING NO: 38256335 AG; PART NO: E38R31374G01; E; 1, MANUFACTURER: GE POWER SERVICES; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
666286	WASHER: TYPE: TERMINAL BOX PHASE DROPPER; INSIDE DIAMETER: 21 MM; OUTSIDE DIAMETER: 40 MM; THICKNESS: 3 MM; MATERIAL: SS; USED ON GENERATOR; DRAWING NO: 38256335 AP; PART NO: RDLX2CRNI18/003; B; 1, MANUFACTURER: GE POWER SERVICES; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	
666815	SCREW: TYPE: GENERATOR TERMINAL BOX; DIAMETER: 20 MM; LENGTH: 140 MM; THREAD: 1/2 IN; HEAD: HEX; MATERIAL: SS; DRAWING NO: 38256335 AM; PART NO: D38R41798P50; G; 2, MANUFACTURER: GE POWER SERVICES; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	10	

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

669851	BOLT, ASSEMBLY: TYPE: LINEAR; NOMINAL DIAMETER: M36; LENGTH: 320 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HIGH TENSILE STEEL; THREAD LENGTH: 120 MM; THREAD: METRIC; NUT QUANTITY: 1; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	
669852	BOLT, ASSEMBLY: TYPE: LINEAR; NOMINAL DIAMETER: M36; LENGTH: 250 MM; HEAD: HEX; GRADE: 8.8; MATERIAL: HIGH TENSILE STEEL; THREAD LENGTH: 120 MM; THREAD: METRIC; NUT QUANTITY: 1; VENDORS ARE RESPONSIBLE FOR ENSURING THAT THEY ARE PERFORMING AGAINST THE CORRECT DRAWING REVISION NUMBER (IF APPLICABLE).	EA	20	

## PART 3: SCOPE OF WORK

PART C3: SCOPE OF WORK cxxxvi C3 SC3 COVER PAGE

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

## **C3.1: *PURCHASER'S*GOODS INFORMATION**

### **1 Overview and purpose of the *goods* and *services***

Supply and delivery of Fasteners as and when required basis for a five-year period for Stock Replenishment at Lethabo Power Station

### **2 Specification and description of the *goods***

Supply and delivery of Fasteners as and when required basis for a five-year period for Stock Replenishment at Lethabo Power Station

Please refer to price schedule, under description

#### **1 Supply Requirements**

The supplier shall be responsible to provide the following:

- Provide data sheets per item supplied

#### **2 Specification of the *goods* to be provided**

- Supply of the goods must be on time of required order date
- Transported by road on supplier's costs and transport
- End user to be informed when delivery will be done at least 2 days upfront
- No deliveries to be done on a Friday, Weekend or public holiday (Unless otherwise agreed upon)



SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

### 3 Constraints on how the *Supplier* Provides the Goods

#### 3.1 Programming constraints

- Supply of the goods must be on time of required order date

#### 3.2 Work to be done by the Delivery Date

Ensure that the goods meet the specifications described in section 2.

#### 3.3 Marking the goods

goods to be clearly marked, labelled and packed according to the required specifications

#### 3.4 Constraints at the delivery place and place of use

- End user will determine the offloading point at the time of delivery
- Offloading will be done by the supplier.

#### 3.5 Cooperating with Others

N/A

#### 3.6 Services & other things to be provided by the *Purchaser* or *Supplier*

N/A

#### 3.7 Management meetings

Regular meetings of a general nature may be convened and chaired by the *Supply Manager* as follows:

Title and purpose	Approximate time & interval	Location	Attendance by:
Risk register and compensation events	Weekly on _____ at _____		
Overall contract progress and feedback	Monthly on _____ at _____		<i>Purchaser, Supplier, and _____</i>

Meetings of a specialist nature may be convened as specified elsewhere in this Goods Information or if not so specified by persons and at times and locations to suit the Parties, the nature and the progress of the manufacture of the *goods*. Records of these meetings shall be submitted to the *Supply Manager* by the person convening the meeting within five days of the meeting.

All meetings shall be recorded using minutes or a register prepared and circulated by the person who convened the meeting. Such minutes or register shall not be used for the purpose of confirming actions or instructions under the contract as these shall be done separately by the person identified in the *conditions of contract* to carry out such actions or instructions.

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT  
AT LETHABO POWER STATION

### 3.8 Documentation control

- Each instruction, test certificate, acceptance, notification, reply and other communication which this contract requires is to be communicated in a form which can be read, copied and recorded.
- Writing is in the Language of this contract.
- All reports to be discussed, compiled and handed over to Eskom
- All method statements to be discussed compiled and handed over to Eskom where applicable.
- All communications, Certificates, Method Statements must be printed and filed in the Purchaser's Data file

### 3.9 Health and safety risk management

The *Supplier* shall comply with the Occupational Health and Safety Act and relevant regulations, Eskom Contractor Health and Safety Requirements, Eskom Lifesaving rules, National Road Traffic Act and Eskom Vehicle Safety Specifications. The supplier shall submit its internal offloading safe-work procedures to the client prior contract awarding. It is also necessary for the supplier to be in Good Standing with COIDA

### 3.10 Environmental constraints and management

The *Supplier* shall comply with the environmental regulations as well as the following:

- Contractor to be familiarised with Environmental Statement of Commitment.
- Delivery schedule to be strictly followed to avoid unnecessary delays.
- Contractor shall report all incidents or risks whilst on site to the Eskom Project leader who will inform the environmental department.

### 3.11 Quality

To ensure compliance to Quality Management System requirements, the following requirements shall be adhered to:

- 240-68099512 Form A : The tenderer must complete and sign this form to acknowledge and accept Eskom Supplier Quality Requirements as per QM 58 Specification and ISO 9001 Standard
- Category 3 - Quality Assessment Criteria : Stipulated documented information to be provided for evaluation purposes
- QM 58\_240-105658000 – Supplier Quality Management Specifications
- Documented information that permits the Supplier to provide highest level of quality assurance to confidentially state that the method used on the product are accurate, documented and validated.
- Documented information which allows the Supplier to legally transport hazardous goods
- Documented information on determining the knowledge, skill and competency required for the achieved conformity of product/ service (Driver, handling of hazardous goods...)

### 3.12 Invoicing and payment

Within one week of receiving a payment certificate from the *Supply Manager* in terms of core clause 51.1, the *Supplier* provides the *Purchaser* with a tax invoice showing the amount due for payment equal to that stated in the *Supply Manager's* certificate.

The *Supplier* shall address the tax invoice to *Purchaser* and include on each invoice the following information:

- Name and address of the *Supplier* and the *Supply Manager*;

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

- The contract number and title;
- *Supplier's* VAT registration number;
- The *Purchaser's* VAT registration number.
- Description of *goods* and *services* provided for each item invoiced based on the Price Schedule;
- Total amount invoiced excluding VAT, the VAT and the invoiced amount including VAT;

### **3.13 Insurance provided by the *Purchaser***

N/A

### **3.14 Contract change management**

N/A

### **3.15 Provision of bonds and guarantees**

The form in which a bond or guarantee required by the *conditions of contract* (if any) is to be provided by the *Supplier* is given in Part 1 Agreements and Contract Data, document C1.3, Sureties.

The *Purchaser* may withhold payment of amounts due to the *Supplier* until the bond or guarantee required in terms of this contract has been received and accepted by the person notified to the *Supplier* by the *Supply Manager* to receive and accept such bond or guarantee. Such withholding of payment due to the *Supplier* does not affect the *Purchaser's* right to termination stated in this contract.

### **3.16 Records of Defined Cost, payments & assessments of compensation events to be kept by the *Supplier***

Shall be provided to *Supply Manager* in hard copy or electronically.

## **4 Procurement**

### **4.1 Subcontracting**

#### **6.1.1 Supplier Development, Localisation and Industrialisation (SDL&I)**

## **5 List of drawings**

### **5.1 Drawings issued by the *Purchaser***

Datasheet to be provided

## **C3.2 SUPPLIER'S GOODS INFORMATION**

This section of the Goods Information will always be contract specific depending on the nature of the goods and services.

It is most likely to be required for supply contracts where the tendering supplier will have proposed specifications and schedules for the goods and services, which once accepted by the Purchaser prior to award of contract now become obligations of the Supplier per core clause 20.1.

This section could also be compiled as a separate file.

---

## C4 Site Information

### C4.1: Information about the *site* at time of tender which may affect the work in this contract:

#### 1. Site Procedures and Regulations

##### 1.1 Health and Safety Requirements

The *Contractor* and his sub-*Contractors* ensure at all times compliance with safety regulations imposed by any Act of Parliament, ordinance or any regulation or by-law of any local or statutory authority.

- The *Contractor* acts in accordance with the health and safety requirements stated in the Works Information.
- In carrying out its obligations to the *Employer* in terms of this contract; in providing the Works; in using Plant, Materials and Equipment; and while at the Site for any reason, the *Contractor* complies and procures and ensures the compliance by its employees, agents, Sub-*Contractors* and mandataries with:
- the provisions of the Occupational Health and Safety Act 85 of 1993 (as amended) and all regulations in force from time to time in terms of that Act ("the OHSA"); and the Eskom "Health, Safety and Environmental specifications for *Contractors*" document attached to the Works Information (as amended from time to time) and such other Eskom Safety Regulations as are applicable to the Works and are provided in writing to the *Contractor* (collectively "the Eskom Regulations"). The Eskom Regulations may be amended from time to time by the *Employer* and all amendments will be provided in writing to the *Contractor*. The *Contractor* complies with the provisions of the latest written version of the Eskom Regulations with which it has been provided; and the health and safety plan prepared by the *Contractor* in accordance with the SHEQ Requirements  
(The OHSA and the Eskom Regulations are collectively referred to as the "SHEQ Requirements".)
- The *Contractor*, at all times, considers itself to be the "*Employer*" for the purposes of the OHSA and shall not consider itself under the supervision or management of the *Employer* with regard to compliance with the SHEQ Requirements, the *Contractor* shall furthermore not consider itself to be a subordinate or under the supervision of the *Employer* in respect of these matters. The *Contractor* is at all times responsible for the supervision of its employees, agents, Sub-*Contractors* and mandataries and takes full responsibility and accountability for ensuring they are competent, aware of the SHEQ Requirements and execute the Works in accordance with the SHEQ Requirements
- The *Contractor* acknowledges that it is fully aware of the requirements of all the above and undertakes to employ only people who have been duly authorized in terms thereof and who have received sufficient training to ensure that they can comply therewith.
- The *Contractor* ensures that all statutory appointments and appointments required by any Eskom Regulations are made and that all appointees fully understand their responsibilities and are trained and competent to execute their duties. The *Contractor* supervises the execution of their duties by all such appointees.
- The *Contractor* shall appoint a person who will liaise with the Eskom Safety Officer responsible for the premises relevant to this contract. The person so appointed shall, on request: supply the Eskom Safety Officer with copies of minutes of all Health And Safety Committee meetings, whenever he is required to do so; supply the Eskom Safety Officer with copies of all appointments in respect of employees employed on this contract, in terms of the Act and Regulations and shall advise the Eskom Safety Officer of any changes thereto.

The *Employer*, or any person appointed by the *Employer*, may, at any stage during the duration of this contract:

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

- conduct health and safety audits regarding all aspects of compliance with the SHEQ Requirements, at any off-site place of work, or the site establishment of the *Contractor*;
  - refuse any employee, Sub *Contractor* or agent of the *Contractor* access to the premises if such person has been found to commit an unsafe act or any unsafe working practice or is found not to be qualified or authorised in terms of the SHEQ Requirements;
  - issue the *Contractor* with a stop order should the *Employer* become aware of any unsafe working procedure or condition or any non-compliance with any provision of the SHEQ Requirements.
  - The *Contractor* immediately reports any disabling injury as well as any threat to health or safety of which it becomes aware at the Works or on the Site to the *Employer's Representative*.
- The *Contractor* undertakes not to do, or not to allow anything to be done which will contravene any of the provisions of the Act, Regulations or Safety and Operating Procedures.
  - The *Contractor* appoints a person, qualified in accordance with the SHEQ Requirements, as the liaison with the Eskom Safety Officer for all matters related to health and safety, this person shall be reachable 24 hours a day.
  - The *Contractor* confirms that it has been provided with sufficient written information regarding the health and safety arrangements and procedures applicable to the Works to ensure compliance by it and all employees, agents, Sub-*Contractors* or mandataries with the SHEQ Requirements while providing the Works in terms of this contract. As such, the *Contractor* confirms that this contract and the relevant Eskom Regulations referred to in this contract constitute written arrangements and procedures between the *Contractor* and the *Employer* regarding health and safety for the purposes of section 37(2) of the OHSA.
  - The *Contractor* agrees that the *Employer* is relieved of any and all of its responsibilities and liabilities in terms of Section 37(1) of OHSA in respect of any acts or omissions of the *Contractor*, and the *Contractor's* employees, agents or Sub-*Contractors*, to the extent permitted by the OHSA.
  - The *Contractor* hereby indemnifies the *Employer* and holds the *Employer* harmless in respect of any and all loss, costs, claims, demands, liabilities, damage, penalties or expense that may be made against the *Employer* and/or suffered or incurred by the *Employer* (as the case may be) as a result of, any failure of the *Contractor*, its employees, agents, Sub-*Contractors* and/or mandataries to comply with their obligations in terms of clause 16, and/or the failure of the *Employer* to procure the compliance by the *Contractor*, its employees, agents, Sub *Contractors* and/or mandataries with their responsibilities and/or obligations in terms of or arising from the OHSA.
  - In carrying out his obligation as the mandatory to the *Employer* for this contract in terms of the National Environmental Management Act No.107 of 1998, the *Contractor* ensures that he complies with the Act when Providing the Services or using plant, materials or equipment.

## 1.2 Permit to Work System

- NO work shall be carried out without a "PERMIT TO WORK"
- The *Contractor's* Responsible Person must satisfy himself that all sources of possible danger are isolated. Details of the Permit to Work system can be found in the Plant Safety Regulations for Lethabo Power Station, Eskom OPR 3305. The *Contractor* must also make provision for a Authorise supervisor that is trained according to the procedure mentioned above.
- A Master Permit to Work is used on declared major outages, details can be found in local procedure LBA 00085. Permit changes are made during the dead time, if it is required by the *Contractor* that a certain supply be made available or plant tested than this can be applied for at the Outage Management Meeting at least 1 day in advance.
- Plant with a prohibitive sign attached may only be operated by appointed Eskom personnel. Any *Contractor* employee found tampering with such plant will be permanently removed from Site.

## 1.3 Safety Induction Course

- All the employees of the *Contractor* must attend a safety induction course before they will be allowed to work on the Site. It is the responsibility of the *Contractor* to ensure that all employees have attended the safety induction.

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

- A list of employees requiring safety induction must be submitted at least 2 days in advance of arrival on site with the date and time of arrival so that the safety induction can be arranged.

#### 1.4 IBI Awareness Techniques

- "To prevent incidents and ensure continuous improvement of Lethabo Power Stations business performance in all areas affecting safety, reliability and production, it is expected of all **CONTRACTORS** service personnel, to attend a three(3) hour training session on Integrated Business Improvement Awareness, which has to be done as soon as work has commenced; This is to ensure familiarisation and use of error-prevention tools/techniques inclusive of, Pre and Post-job briefs, Risk Assessments, Self-checks(STAR principle), Job observations, Effective communications e.g.3- way, Questioning attitude, Procedural adherence, Hand overs and other related topics.
- A monthly IBI scorecard to be completed indicating the use of error prevention tools/ techniques; The assigned employee fulfilling the role of IBI representative has to attend the IBI representative's forum fortnightly, on Tuesdays, duration one hour.
- An IBI representative appointed by the *Contractor/Supplier/Consultant* to attend the IBI Representative Forum One (1) hour every Tuesday (forth nightly).
- IBI Awareness training will be provided by Lethabo Power Station personnel, free of charge, course bookings can be arranged by contacting Rabie Heymans on extension 5094".

#### 1.5 Transportation of passengers: open LDV's:

No *Eskom employee* or *Contractor* would be allowed to transport passengers on the back of open light delivery vehicles (LDV's).

It is a legal requirement to provide safe transportation of *Eskom* and *Contractor* employees – therefore the following will be enforced:

- All passengers must be transported in a closed vehicle with proper and adequate seating, fitted with safety belt for the number of passengers to be transported. NO passengers may be transported on the back of a light delivery vehicle (LDV) whether open or closed.
- Tools and equipment must be properly secured.
- Only authorised drivers may transport passengers.
- Proof must be submitted on request in terms of valid roadworthiness of the vehicle/s.
- The above must apply to on site and off site transportation of passengers.

#### 1.6 Eskom Cardinal Rules:

Five Cardinal Rules have been developed that will apply to all Eskom employees, agents, consultants and *Contractors*.

- **Rule 1:** Open, Isolate, Test, Earth, Bond, and/Or Insulate before touch - that is any plant operating above 1 000 V.
- **Rule 2:** Hook up at heights - no person may work at height where there is a risk of falling.
- **Rule 3:** Buckle up – no person may drive any vehicle on Eskom business and/or on Eskom premises: unless the driver and all passengers are wearing seat belts.
- **Rule 4:** Be sober (no person is allowed to work under the influence of drugs and alcohol.
- **Rule 5:** Use a permit to work – where an authorization limitations exists, no person shall work without the required permit to work.

#### 1.7 Local Safety Procedures

- The *Contractor* adheres to all local procedures. A list of local procedures are available on request from the *Employer*.

#### 1.8 Incidents / Accidents

- Incidents and accidents must be reported and investigated as detailed in LBA 00030. All incidents must also be reported to the *Employer* within 24 hours.

## SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

- First aid must be made available either by the *Contractor* or use can be made of the Lethabo medical centre at a fee. The availability of the *Contractor's* own first aid does not relieve the *Contractor* of his obligation to report and investigate the incident in accordance with Lethabo Procedure.

**1.9 Fire Prevention**

- Fire prevention and protection requirements to which *Contractors* must comply are detailed in LBA 00030.

**1.10 Protective Equipment and Clothing**

- The *Contractor* supplies his own personal protective equipment necessary to carry out the *works* and the *Contractor* shall ensure that all overalls for his staff have clearly identifying **company LOGO's**
- The *Contractor* is also responsible to inspect and maintain such equipment as required in terms of the OHS Act and local procedures.

**1.11 Inspection of Equipment**

- The *Contractor's* equipment is inspected by an authorised Eskom employee on arrival at the site.
- The following documentation is required to accompany the equipment where applicable: copies of all test certificates and maintenance records.
- Lifting equipment and electrical equipment must be marked with a unique number, code or colour code for identification. If the equipment is found to be in an unsatisfactory condition or if insufficient maintenance has been carried out on the equipment then it will not be approved for use on Site. A list of all lifting equipment and electrical equipment must be submitted to the *Employer* at least 2 days prior to the occupation date. This list must indicate the unique number and description of the equipment.

**1.12 Documentation**

The *Contractor* is responsible to have the following documentation available on site in accordance with LBA 00030:

- A copy of the OHS Act.
- Copies of all site accident report forms as required by the OHS Act.
- Copies of minutes of health and safety meetings held on site.
- Copies of inspection reports produced by the accident prevention officer

**1.13 Environmental Policy and Waste Handling**

Lethabo Environmental Statement of commitment must be adhered to.

The contractor shall submit to Eskom an EMP to be reviewed and approved by Eskom environmental officer, one week before the commencement of works.


**1.14 Disposal of Waste**

Waste shall be removed promptly to the designated disposal area. No stockpiling will be permitted.

- Domestic waste to the white waste bins
- Production waste in the marked bins i.e. coal and ash only
- Paper and cans to their respective recycling bins
- Contact Civil Engineering for the disposal of building rubble
- Scrap metal, Wood & Rubber, Redundant Valves, Pipes, Equipment etc. to be placed in the marked bins in the new Salvage Yard. Solvents and cloths used to the Cleaning Bay.



SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

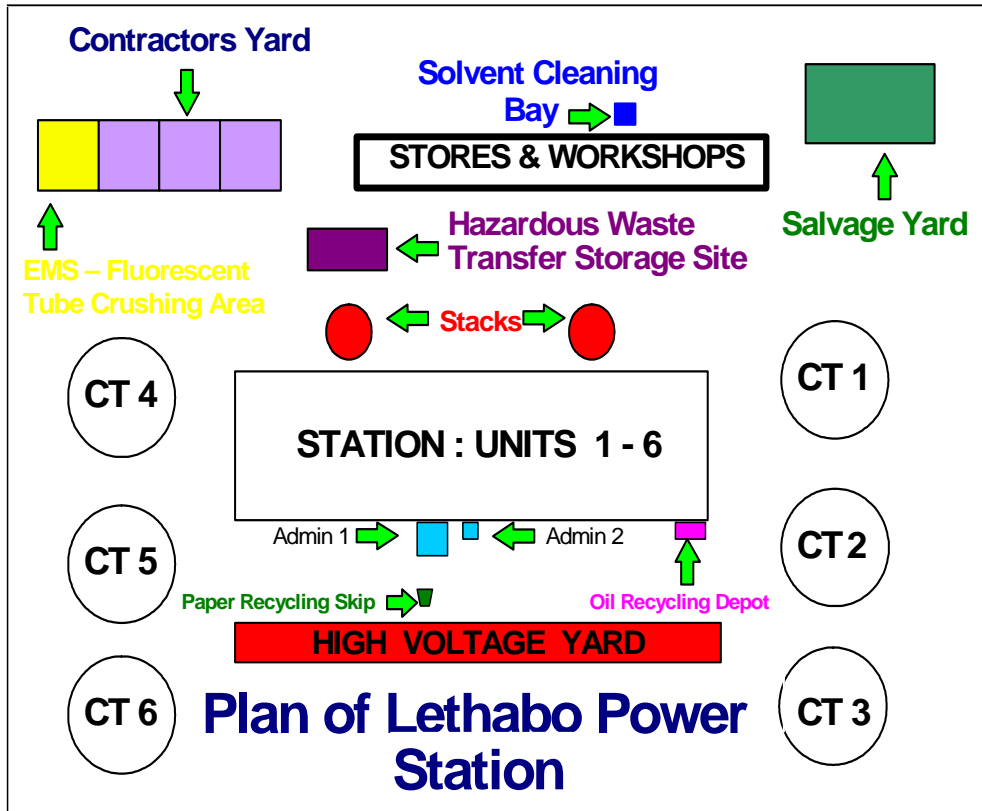

### 1.15 Hazardous Waste Disposal and Handling

- Hazardous / toxic waste includes all waste which contains elements or compounds listed as hazardous substances in terms of the Hazardous Substances Act No. 15 of 1973.
- Any *Contractor* who produces hazardous waste on site will be responsible for the safe removal of such waste to a registered Class I site by a waste removal and disposal body.
- The *Contractor* is required to produce a certificate of safe disposal in accordance with LBA 00054.
- The *Contractor* must ensure that persons handling hazardous waste have undergone suitable training and are acquainted with cleaning methods in case of a spillage.
- The *Contractor* is also responsible for the safe removal of their hazardous waste to Lethabo's Hazardous Waste Store. Other requirements for hazardous waste are detailed in LBA 00030.
- In order to ensure effective hazardous waste management, a copy of the *Contractors'* hazardous waste inventory must be supplied to the *Employer* at least 2 days prior to the occupation date.

### Abbreviated list of Hazardous Materials

Acids and alkalis	Hydrocarbons	Pesticides & insecticides
Antimony and its compounds	Inorganic cyanides	Pharmaceuticals
Arsenic compounds	Inorganic compounds containing halogens	Phosphorus and its compounds
Asbestos	Inorganic compounds containing sulphur	Selenium and its compounds
Barium compounds	Laboratory chemicals	Silver compounds
Beryllium compounds	Lead compounds	Tarry & petroleum products

## SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

Biocides & phytopharmaceutics	Medical wastes	Tellurium and its compounds
Boron compounds	Mercury compounds	Thallium and its compounds
Cadmium and its compounds	Nickel and its compounds	Vanadium compounds
Chromium compounds	Organic halogen compounds	Zinc compounds
Copper compounds	Paints and paint sludges	Waste with flash point < 60°C
Heterocyclic organic compounds	Peroxides, chlorates	

**1.16 Plant & Materials**

- The *Employer* may at his own discretion, supply any Plant and Materials as may be required by the *Contractor* to Provide the Works.
- The *Contractor* is to notify the *Employer* in writing, 48 hrs in advance, of such Plant and Materials required.

**1.17 Access to and Departure from the Site:**

- The Site is at Lethabo Power Station situated  $\pm$  18 km South of Vereeniging on the Viljoensdrift - Deneyville Road, Free State. Access to the site will be via the main security gate only. The *Employer* informs the *Contractor* of the access procedures, and it should be expected that such procedures may change depending on the prevailing security situation.
- The *Contractor* allows in his price and program for delays at the security gate. The *Employer* reserves the right for its Security personnel to search persons or vehicles entering or leaving the premises. This includes, but is not limited to briefcases and toolboxes.

**1.18 Temporary Gate Permits**

- The *Contractor* provides the *Employer* with the personal details of their staff at least two days prior to the occupation date. All names and details to be submitted to the *Employer* who arranges for all gate permits.

**1.19 Equipment or Material Access and Removal****Access**

- The *Contractor* ensures that all equipment and materials brought through the security gate is signed in at the main security gate on an OV18 form.

**Removal**

- The *Contractor* is not allowed to remove any equipment or materials from site without producing the relevant OV18 forms or the equipment lists.
- If the equipment or material is to be removed the same day, on which they were brought on to site, then the OV18 form will need to be produced at the gate when leaving the site.
- If the equipment or material is removed after this time then a Non-Returnable Gate Release will be provided by the *Employer's Representative*, on receipt of the original OV18, with which the *Contractor* brought the equipment on site.

**1.20 Site or Area Establishment and Evacuation****Application for Site Establishment:**

- Sites are allocated according to availability, the period for which the *Contractor* is going to be on site, or if special circumstances warrant the allocation of a site. Documentation to support this application can be submitted.
- The location of the site or area is indicated during the site or area take-over inspection.

## SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

**Site Establishment:**

- The *Contractor* does not occupy any site or area other than that allocated to him.
- The *Contractor* does not occupy the site or area prior to the take-over inspection.
- The *Contractor* maintains the site or area provided to him to the satisfaction of the *Employer*.
- The *Employer* subjects the *Contractor's* site or area to periodic inspection.

**Site Evacuation:**

- The *Contractor* advises the *Employer* in writing, five (5) days in advance of evacuation in accordance with LBA 00030. Immediately prior to evacuation the necessary take-over inspection must take place.

**1.21 Electrical Equipment / Appliances, Lighting and Power:**

- Any electrical equipment or appliances used by the *Contractor* must comply with all relevant safety regulations and requirements as detailed in LBA 00030, and be maintained in safe and proper working condition.
- The *Employer* has the right to stop the *Contractor's* use of any electrical equipment or appliance, which in the *Employer's* opinion does not conform to the foregoing.
- The *Contractor* provides at his own expense any temporary local lighting, and ensures that it is in accordance with the requirements of the Factories Inspector.
- The *Contractor* provides at his own expense, all temporary wiring and cabling to route power from the point of supply to the various points where it is required, maintain same and remove on completion.

**1.22 Water**

- The *Contractor* provides at his own cost, all connection fittings, pipe-work, temporary plumbing, and pumps necessary to lead the water from the point of supply to the various points where it is required, maintain same and remove on completion.
- Such fittings must be compatible with the *Employer's* fittings so that galvanic corrosion of pipe-work is prevented
- Water wastage due to un-maintained pipe work or fittings provided by the *Contractor* will be calculated and will be for the cost of the *Contractor*.

**1.23 Compressed Air**

- The *Contractor* provides at his own cost, all connection fittings and pipe-work necessary to lead the compressed air from the point of supply to the various points where it is required, maintain same and remove on completion. Such fittings must be compatible with the *Employer's* fittings so that galvanic corrosion of pipe-work is prevented
- Compressed air wastage due to un-maintained pipe work or fittings provided by the *Contractor* will be calculated and will be for the cost of the *Contractor*.

**1.24 Ventilation**

- The *Contractor* is responsible for adequate ventilation of the works.

**1.25 Security**

- The *Contractor* is responsible for all security on *site*, fencing off, night watch and access control in order to secure all plant, materials and the *works* itself. All these measures must be in accordance with any relevant regulations and standards and subject to the *Employer's* approval.
- It is also the *Contractors* responsibility to ensure the security of all completed portions of the *works* prior to Completion.

**1.26 Offices, Workshops and Stores**

- The *Contractor* shall provide, erect and maintain for his own use, any additional office accommodation and stores he requires, together with drainage, lighting, heating, and hot and cold-water services as required.

SUPPLY AND DELIVERY OF FASTNERS AS AND WHEN REQUIRED BASIS FOR A FIVE-YEAR PERIOD FOR STOCK REPLENISHMENT AT LETHABO POWER STATION

- The *Contractor's* site establishment price includes all treatment of the site that he considers necessary for his entire operation throughout his period of occupation and under all weather conditions.
- The *Contractor* also includes for all security and access arrangements that he considers necessary.

#### **1.27 Sanitary Facilities**

- The *Contractor* shall provide service, maintain and remove on completion any additional facilities required and allow for it in his *Price*.
- The *Contractor's* employees who work with asbestos are not allowed to use the *Employer's* ablution or messing facilities at the workplace during and after stripping of lagging materials, for fibres that may be attached to workers clothing, or to any other article.