


1

2

3


4

A

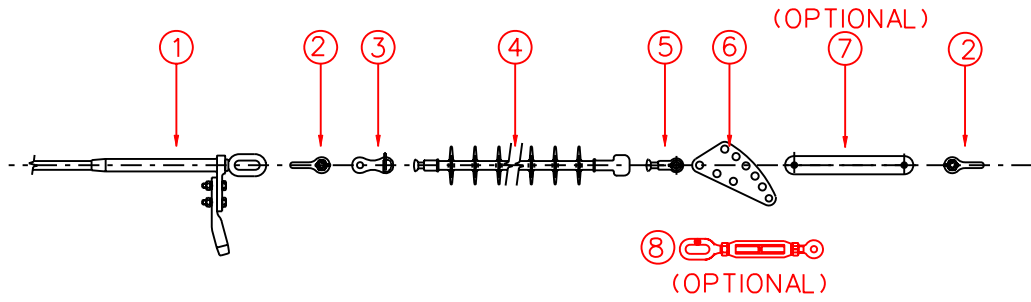

ADJUSTABLE INSULATOR STRING

B

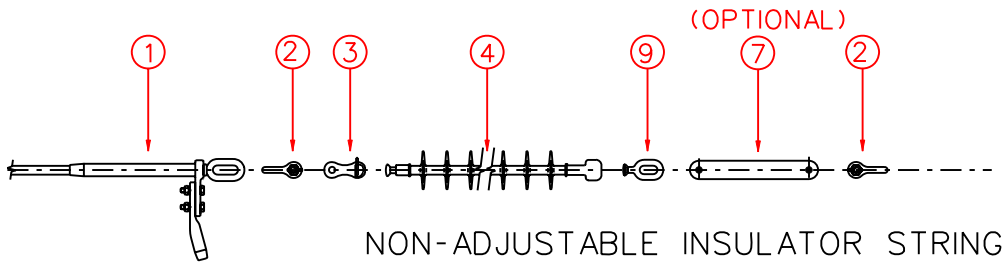

NON-ADJUSTABLE INSULATOR STRING

C

NOTE :

ITEM 2, SHACKLE STRAIGHT (D-DT-7017), MAY BE REPLACED WITH A SHACKLE TWISTED (D-DT-7019), WHERE THE TAKE-OFF PLATE IS ORIENTATED VERTICALLY.

D

No.	DESCRIPTION	DRAWING No.
1	COMPRESSION DEAD END	D-DT-7000
2	SHACKLE STRAIGHT 120kN	D-DT-7017
3	SOCKET TONGUE 120kN	D-DT-6061
4	INSUL,L/ROD 132kV 120kN	D-DT-7014
5	BALL CLEVIS 120kN	D-DT-6059
6	SAG ADJUSTER 16mm	D-DT-7042
7	EXTENSION LINK DOUBLE (OPTIONAL)	D-DT-7041
8	TURNBUCKLE EYE TONGUE (OPTIONAL)	D-DT-7007
9	BALL EYE OVAL 120kN	D-DT-7008

E

1	ITEM 7 MADE OPTIONAL AND OPTION FOR TURNBUCKLE ADDED	P.A.T.	S.MASHABA	B. HILL	06.10.2010	
REV	REVISION DESCRIPTION	BY	CHKD	AUTH	DATE	PROJECT NO.

F

		DISTRIBUTION TECHNOLOGY SUB-TRANSMISSION LINES ADJUSTABLE AND NON-ADJUSTABLE INSULATOR STRAIN STRING ASSEMBLY DRAWING				
AUTH: S. MASHABA		D-DT-7311				
DATE: 18.05.2009						
CHKD: S. MASHABA						
DATE: 18.05.2009						
DRAWN: P.A. TRUBLET L.M.P.						
DATE: 27.11.2008		SET	SHEET	REVISION		
		1	1	1		

1

2

3

4 A4L