





**Site Specific Health and Safety Specification in terms of 2014  
Construction Regulations 5.1(b)**

Document Title	Site Specific Health and Safety Specification
Client	EThekweni Municipality–Development Engineering South.
Project title	The Construction of Illovo Dangerous Goods Heavy Vehicle Inspection Facility (Ward 109).
Contract Number	3V-29012.
Revision	00
Date	03 April 2024
Internal Reference no.	SSHSS 258/04/2024
Compiled by (Safety officer)	Name and surname: Phumlani Mabaso Signature:  Date: 03/04/2024
Reviewed by (Manager: Safety & Risk)	Name and surname: Arty Zondi Signature:  Date: 03/04/2024

PROJECT LOCALITY

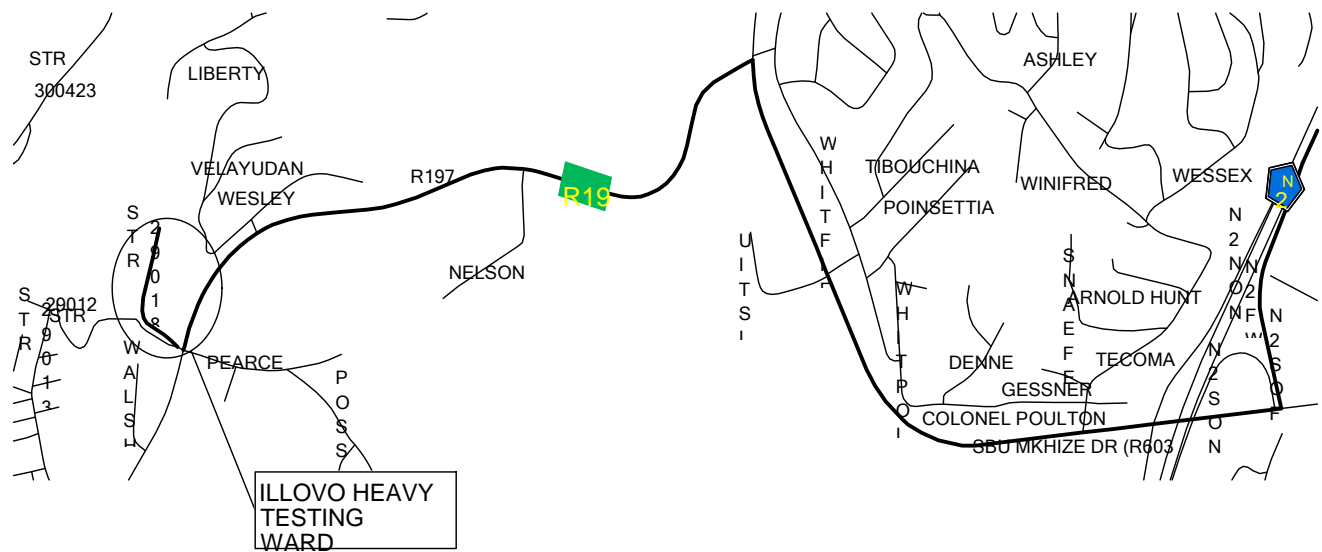

## Table of contents

1. Definitions
2. Project Description
  - 2.1 Description Site and Access
3. Limitation of liability
4. Purpose of the Construction Health and Safety Specification
5. Project Health and Safety Cost
6. Scope and Description of Work
7. Compensation for Occupational Injuries and Diseases Act, 130 of 1993
8. Application for construction work permit
9. Notification of Construction work
10. Management and Supervision of Construction
  - 10.1 Construction Manager
  - 10.2 Construction Safety Officer
  - 10.3 Construction Supervisor
11. Principal Contractor's Health and Safety Plan
12. Hazard Identification and Risk Assessment
13. Health and Safety File
14. Close-out and Consolidated Health and Safety File
15. Health and Safety Training
  - 15.1 Induction Training
  - 15.2 Health and Safety Training
16. Incidents Management & First Aid
17. Health & Safety Audits
18. Fire Precautions on Construction Site
19. Electrical Installations on Construction Sites
20. Personal Protective Equipment (PPE) and Clothing
21. Occupational Health and Safety Signage
22. Duties of Principal Contractors and Contractors
23. Excavation Work
24. Public Health and Safety
25. Construction Employees Facilities
26. Storage and use of Flammable liquids
27. Hazardous Chemical Substances
28. Housekeeping and General Safe Guarding on Construction Site
29. Construction Medicals
30. Stacking and Storage on Construction Site
31. Induction and Toolbox Talk Programme
32. Contingency/Emergency Plan, Procedure and Contact Numbers
33. Traffic Management Plan
34. Covid-19 Compliance

### **Annexure A. (Medical Certificate of Fitness) Annexure 3**

## 1. DEFINITIONS

For the purpose of this Construction Health and Safety Specification, all definitions in the Occupational Health and Safety Act and Regulations, the abbreviations and the definitions given hereunder shall apply; where definitions may overlap, the most onerous requirement shall apply:

Acronym or Definition	Meaning
Agent	Refer to the Agent appointed by the Client to act on its behalf, and who is appointed in writing
CHSS	Refers to this document as the Construction Health and Safety Specification
Client	Refers to eThekweni Municipality
COIDA	Means Compensation for Occupational Injuries and Diseases Act 130 of 1993
Construction Site	Means the premises and grounds where construction work is being performed
Principal Contractor	Means an employer appointed by the Client to perform construction works
CR	Refers to the Construction Regulations of 2014
DSTI	Refer to a documented daily safe task instruction compiled and issued by a contractor and trained to all relevant employees
H&S	Refers to Health and Safety
Medical Certificate of Fitness	Means a valid medical certificate of fitness issued by an occupational medicine practitioner, such medical testing shall be relevant to the risks of the construction work on the construction site and shall conform to the Occupational Health and Safety Act and Regulations and to the requirement of this Health and Safety Specification
Method Statement	Refer to a document detailing the key activities to be performed in order to reduce as reasonably as practicable the hazards identified in the Risk Assessment
OHSA	Refer to the Occupational Health and Safety Act
Regulations	Refer to the Regulations stipulated in the OHSA
S	Refer to a section in the OHSA
SACPCMP	Means the South African Council for the Project and Construction Management Professions
Sub-Contractor	Means an employer appointed by the Principal Contractor
SADC	Southern Africa Development Community

## **2. PROJECT DESCRIPTION**

### **2.1 Description of Site and Access**

The address of the site is 2 Liberty Road, Illovo. Access the project area by travelling south on the N2 highway and taking Exit 133 toward R102/Kingsway/Kingsburgh/Umbumbulu. Turn onto R603 towards Umbumbulu and drive for approximately 1.8km. Turn left on Main road and after 1.7km turn right onto the project area. Coordinates: S 30° 5'32.74" and E 30°49'35.15".

## **3.LIMITATIONS OF LIABILITY**

The Client or its Agent shall not be responsible for any acts or omissions of any contractor which may directly or indirectly result from the application of the CHSS or any project specific version thereof.

All contractors must ensure that articles, work, equipment, machinery, plant and work practices are, at all times compliant to the legal requirements as these apply.

The Client or its Agent shall limit its responsibility to the application of the Construction Regulations Clients Requirements only.

The Principal Contractor shall enter into a Mandatory Agreement with the Client, as defined in Section 37(2) of the Occupational Health and Safety Act.

The Principal Contractor shall ensure that each contractor appointed by the Principal Contractor and each sub-contractor appointed by a contractor also into a Mandatory Agreement with the Principal Contractor, as defined in Section 37(2) of the Occupational Health and Safety Act. These agreements shall be included in the Principal Contractor's H&S File on site and be valid for the duration of the contractors' work on the construction site.

## **4. PURPOSE OF THE CONSTRUCTION H&S SPECIFICATION**

This document defines the minimum management requirement that is to be implemented by the Principal Contractor/Contractor for the management of Health and Safety on any eThekweni Municipality project.

The aim of this document is to present the health and safety aspects that need to be controlled and managed on the project.

This Health and Safety specification identifies and encompasses the working behaviours and safe work practices that are expected of all employees, Vendors and Contractors, Sub-Contractors and Visitors, engaged on construction site.

Providing a guideline to comply with best Health & Safety practices and the Occupational Health and Safety Act 85/1993 as amended, including reference to applicable legislative requirement.

## **5. PROJECT HEALTH AND SAFETY COST**

The Client must ensure that potential Principal Contractor submitting tenders have made adequate provision for the cost of health and safety measures.

The Principal Contractor shall allow in their cost provision for complying with the requirements of this CHSS; resources for the following H&S controls shall be in place.

	H&S cost item	Description
1.	Construction Safety Officer.	Construction safety officer is required to ensure that the health and safety plan is implemented on site.
2.	Medical certificate of fitness.	Medical examination of all employees and certification of fitness by an Occupational Medicine Practitioner
3.	Personal Protective Equipment.	PPE to be provided as per risk exposure, including but not limited to : respiratory, adapted hearing protection, adapted hand protection, adapted eye and head protection.
4.	Public protection and barricading.	To reduce risk exposure to the employees and members of the public.
5.	Training and competency.	Occupational Health and Safety Training in accordance with the skills matrix included in the approved H&S Plan.
6.	Dust mitigation.	To reduce dust exposure to the employees and the public
7.	Employee facilities.	Refer to the Facilities Regulations (drinking water, change facility, personal lockers, and wash facilities, eating facilities.
8.	First Aiders.	Standard first aid training.
9.	Other.	Items not indicated in the Specification

## 6. SCOPE AND DESCRIPTION OF WORK

Type of Works	Description of Works
i) Site Clearance	General clearance including the following: <ul style="list-style-type: none"> <li>• Removal of existing asphalt paved areas</li> <li>• Removal of existing concrete paved areas</li> <li>• Demolition and removal of existing building structures</li> <li>• Removal of existing brick paved structures</li> <li>• Removal of existing fence</li> <li>• Removal of existing concrete staircases</li> <li>• Removal of existing bush and trees.</li> </ul>
ii) Testing Platform and Parking Area	Approximate total area = 6700m <sup>2</sup> . A concrete surfaced testing platform will be constructed as per the following layerworks with the following thicknesses: <ul style="list-style-type: none"> <li>• 150mm Subgrade rip &amp; recompact</li> <li>• 250mm G7 Subgrade improvement</li> <li>• 150mm C1 Stabilised Subbase</li> <li>• 200mm Plain Jointed Concrete Pavement</li> </ul>

	This will include road painting and road signs.
iii) Sidewalks and Paving	Approximate total length = 400m 150mm G4 layer, Mini kerb and haunch, Clay brick pavers and precast concrete steps shall form part of the works.
iv) Drainage	Approximate total length = 50m Laying of 375mm stormwater pipe including catchpits and headwalls.
v) Protection Works	Approximate total length = 350m Installation of medium security Clear view fencing (2.4m high) to include vehicular gate and pedestrian gate to match the fence.

## 7. COMPENSATION FOR OCCUPATIONAL INJURIES AND DISEASES ACT

The Principal Contractor, each contractor and each sub-contractor shall submit proof of Good Standing with COIDA Commissioner or a Mutual Association licensed in terms of Section 30 of COIDA, prior to starting any work on site.

A copy of the Letter of Good Standing with COIDA Commissioner must be included in the H&S Plan of each contractor working on the site and must remain updated for the duration of the construction work.

## 8. APPLICATION FOR CONSTRUCTION WORK PERMIT

The Principal Contractor shall assist the Client in compiling the evidence required by the Department of Labor for the issuing of the Construction Work Permit.

The Principal Contractor shall ensure that the H&S Plan presented for approvals includes:

- Evidence that the Principal Contractor made adequate provision for the cost of H&S measures
- Evidence that the Principal Contractor has the necessary competencies and resources to carry out the construction work safely.
- A copy of the Letter of appointment of the Construction Manager in terms of CR 8(1) + proof of his qualification, competence and registration where applicable.
- Proof of the registration of the Principal Contractors safety officer with the SACPCMP.

The Principal Contractor shall display the work permit number at the main site entrance. This display must be conspicuous to the satisfaction of the Department of Labor. The permit must be noticeable.

The construction works can only commence once the construction work permit is issued by the Department of Labor.

## 9. NOTIFICATION OF CONSTRUCTION WORK

The Principal Contractor must at least 7 days before that work is to be carried out notify the provincial director in writing in a form similar to Annexure 2 if the intended construction work will—

Include excavation work;

Include working at a height where there is risk of falling;

Include the demolition of a structure; or

Include the use of explosives to perform construction work.

A contractor who intends to carry out construction work that involves construction of a single storey dwelling for a client who is going to reside in such dwelling upon completion, must at least 7 days before that work is to be carried out notify the provincial director in writing in a form similar to Annexure 2

## **10. MANAGEMENT AND SUPERVISION OF CONSTRUCTION WORK**

### **10.1 Construction Manager**

The Principal Contractor shall appoint a full time competent person as the construction manager with the duty of managing all construction on the site including the duty of ensuring occupational health and safety compliance.

The Construction Manager must demonstrate competency in relation to work being performed and the ability to manage construction work which may include making all statutory appointments in terms of health and safety.

### **10.2. Construction Safety Officer**

The Principal Contractor shall appoint a competent Construction Safety Officer for the construction work. The Construction Safety Officer shall be full/part time on the construction site for this project.

The Safety Officer shall be registered with the South African Council for the Projects and Construction Management Professions. Proof of competence and registration of the appointed Construction Safety Officer must be included in the H&S Plan.

### **10.3. Construction Supervisor**

A Construction Manager must in writing appoint construction supervisors responsible for construction activities and ensuring occupational health and safety compliance on the construction site.

A contractor must, upon having considered the size of the project, in writing appoint one or more competent employees for different sections thereof to assist the construction supervisor contemplated in subregulation (7), and every such employee has, to the extent clearly defined by the contractor in the letter of appointment, the same duties as the construction supervisor: Provided that the designation of any such employee does not relieve the construction supervisor of any personal accountability for failing in his or her supervisory duties in terms of this regulation.

## **11. PRINCIPAL CONTRACTOR'S HEALTH AND SAFETY PLAN**

The Principal Contractor shall submit a suitable, sufficiently documented and coherent specific health and safety plan based on the Client documented Health and Safety Specification. The health and safety plan shall include but not limited to the following:

- **Project Title.** (Cover page-Client details and Principal Contractor details)



- Project Details (As per contract document)
- Scope of Works
- Abbreviations.
- Reference Documents.
- Introduction.
- Policy Statements.
- Objectives and Targets.
- Compliance with Compensation of Occupational Injuries and Diseases Act 130 of 1993 (COIDA).
- Notifying Department of Employment and Labour about the intended construction work.
- Site Specific Organogram of reporting structure all persons appointed in terms of OHS Act No. 85 of 1993.
- Legal Requirements and Documentation(Applicable appointments and proof of competence)
- Management of construction and supervision.
- Administrative control (keeping of the safety file).
- Site inspection and keeping of records/registers.
- Hazard Identification and Risk Assessment & Risk Control as well as monitoring and review plan and Daily Safety Task Instruction.
- Written Safe Working/operating Procedures.
- Education and Training (Induction).
- Safety awareness.
- Sub-Contractor and Supplier Management.
- Emergency evacuation procedure and emergency Preparedness on site.
- Monthly compliance Assessment (Internal and external (client) Audit).
- Welfare Facilities.
- Use and Temporary Storage of Flammable Liquids on Construction Site
- Fire Prevention & Protection on Construction Site.
- Incident Management & First Aid.
- Waste Management on site.
- PPE Provision and Maintenance on Construction Site.
- Management of environmental risks.
  - Heat stress measures on site.
  - Dust control measures.
- Hand &Electrical Tools Management.
- Health and Safety Plan Health and Safety plan implementation and review.
- Site establishment.
- Monitoring and review plan.
- Excavation/earthworks.
- Public/Pedestrian Safety.
- Site establishment.
- Health & Safety Signage on Construction Site.
- Traffic accommodation on site.
- Construction Vehicles and Mobile Plants on Construction Site.
- Health and safety training & competencies.

- Housekeeping and general safeguarding on construction site.
- Handling and Storage of Hazardous chemicals substances.
- Site barricading.
- Medicals certification of employee's fitness.
- Site Security and access control.
- Stacking and storage on construction site.
- Transportation of employees to site.
- Manual handling of heavy objects.

## **12. HAZARD IDENTIFICATION AND RISK ASSESSMENT**

The Principal Contractor shall before commencement of any construction and during such construction works have risk assessments performed by appointed competent person in writing which forms part of the health and safety plan to be applied.

**The provisions of Regulation 9 of the Construction Regulations shall be followed in every detail.**

## **13. HEALTH AND SAFETY FILE**

The Client must discuss and negotiate with a Principal Contractor the content of the Health and Safety Plan and thereafter finally approve the Health and Safety plan for implementation. The recommended Health and Safety file shall include the following:

- Award letter from SCM
- Notification of Construction Work
- Client Health & Safety Specification
- SHE Policy
- Principal Contractor Health & Safety Plan
- Updated letter of good standing with Commissioner
- Section 37.2 Mandatory Agreement
- Contractor appointment letter in terms of CR 5.1(k)
- Organogram as per appointments
- Legal appointment letters and competencies (Construction Manager, Construction Supervisor, Traffic/Construction Safety Officer, Risk assessor, Incident Investigator, First aider, Fire equipment Inspector, Construction Vehicle and Mobile Plant, Excavation Supervisor and Health and safety representative) etc.
- Risk Assessments as per scope of work & Risk Control and Monitoring and review plan.
- Written Safe Working Procedures as per scope of work
- Applicable Inspection Registers
- Incident/Accident Management Procedure/Policy, Register and relevant forms (Annexure 1, Wcl2) etc.
- Latest copy of OHS Act and other relevant regulations
- Environmental Management Plan Procedures (Dumpsite, Water provision, Ablution, Waste management, Concrete works, Refueling and spillage management, hazardous chemicals storage and disposal, Environmental awareness training, Protection of heritage, site demarcation etc)
- Health and Safety Induction manual.
- Site Emergency Preparedness Plan
- Key Personnel contact numbers
- Site Safety Rules

- Medical Records – Medical Fitness Certificate
- Tool box talks awareness
- Material Safety Data Sheets and Hazardous Chemical Register.
- First Aid box and competent first aider
- Traffic management plan
- Subcontractor appointments and the subcontractors list.
- Site SHE internal and external audit records.
- Personal protective equipment issuing and maintenance records.
- Covid-19 Documentation (In line with Code of practice for managing SARS-COV2 in the workplace.)

## **14. CLOSE-OUT CONSOLIDATED HEALTH AND SAFETY FILE**

The Principal Contractor shall compile a consolidated H&S file and hand over to the Business Unit, OHS Unit will conduct a project close out using the appropriate checklist before the completion of the project.

## **15. INDUCTION AND HEALTH AND SAFETY AWARENESS**

### **15.1 Induction Training**

The Principal Contractor shall ensure that all employees have gone through the induction training before commencing duties on site.

The Principal Contractor must ensure that all visitors to the construction undergo health and safety induction pertaining hazards prevalent on the site and ensure that visitors have appropriate PPE. The Principal Contractor must at all times on his or her construction site keep records of health and safety induction training.

### **15.2 Health and Safety Training**

The Principal Contractor shall ensure that employees are trained on health and safety measures this shall include but not limited to:

- Written Safe Working Procedures
- Risk Assessments
- Health and Safety Plan and other policies
- Emergency Management Plan
- Incident management procedures
- Environmental management procedures
- Toolbox Talks
- MSDS
- Traffic management plan

## **16. INCIDENTS MANAGEMENT & FIRST AID**

All incidents and accidents as per Section of the Act must be reported, recorded and investigated as per General Administration Regulation 8 & 9

Where a fatality or permanent disabling injury or incident occurs on the Construction site, the Client must ensure that the Principal Contractor provides the Provincial Director with a report

contemplated in Section 24 of the Act and the report includes the measures that the Principal Contractor intends to implement to ensure a safe construction site.

## **17. HEALTH AND SAFETY AUDITS**

The Client must ensure that periodic health and safety audits are conducted at intervals mutually agreed upon between the Principal Contractor and the Client at least every 30 days, the copy of the health and safety audit report must be provided to the Principal Contractor within seven days after the audit.

## **18. FIRE PRECAUTIONS ON CONSTRUCTION SITE**

The Principal Contractor shall provide suitable fire extinguishers which shall be serviced regularly in accordance with the manufactures recommendations.

Safety signage shall be prominently displayed in all areas where fire extinguishers are located. The Principal Contractor shall arrange for training of the relevant personnel, in the use of fire extinguishers.

**The provisions of Regulation 29 of the Construction Regulations as well as Regulation 9 of Environmental Regulation for Workplaces shall be followed in every detail.**

## **19. ELECTRICAL INSTALLATIONS AND MACHINERY ON CONSTRUCTION SITE.**

The Principal Contractor shall designate a competent electrician in writing who shall control all electrical installations.

All temporary electrical installations used by the contractor are inspected at least once a week by a competent person and the inspection findings are recorded in a register kept on the construction site.

All Electrical machinery is inspected by the authorized operator or user on daily basis using a relevant checklist prior to use and the inspection findings are recorded in a register kept on the construction site.

**The provisions of Regulation 5, 6 & 9 of the Electrical Installation Regulations shall be followed in every detail.**

## **20. PERSONAL PROTECTIVE EQUIPMENT AND CLOTHING.**

The Principal Contractor shall ensure that every employee is issued with, and wears SANS-approved P.P.E. as per the conducted risk assessment.

Failure to use protective equipment as per the risk assessment shall require disciplinary intervention and this process shall be documented in the induction.

No employer shall in respect of anything which he is in terms of this Act required to provide or to do in the interest of health or safety of an employee make any deductions from any employee's remuneration or require or permit any employee to make any payment to him or to any other person.

**The provisions of Regulation 2 of the General Safety Regulations shall be followed in every detail.**

## **21. OCCUPATIONAL HEALTH AND SAFETY SIGNAGE**

The Principal Contractor shall erect and maintain quality safety signage

The signage shall include but is not limited to:

- Traffic control signs.
- Emergency telephone number(s)
- PPE to be worn at the particular site
- When falling objects may occur, relevant barricading and warning signs must be erected

## **22. DUTIES OF PRINCIPAL CONTRACTORS AND CONTRACTORS**

Contractors and sub-contractors must be given a copy of the H&S specification and any additional specification issued by the Client and shall comply with these specifications integrally. All employers working on the site shall conform to the standard in the CHSS. All the duties of the Principal Contractor in this CHSS equally apply, in full, to contractors of such Principal Contractor and to sub-contractors of such contractors.

The Principal Contractor shall ensure that the comprehensive and updated list of all the contractors and sub-contractors on site includes:

- A reference to the agreements between the parties, including all contractors Section 37(2) agreements with the Principal Contractor
- The type of work being done
- The date of the approval of the H&S Plan
- The date of expiry of the COIDA certificate of good standing
- Appointments and competencies.
- Medical certification of employees.
- The date of the last monthly audit.

**The provisions of Regulation 7 of the Construction Regulations shall be followed in every detail.**

## **23. EXCAVATION WORK**

- The Principal Contractor must ensure that all excavation work is carried out under the supervision of a competent person who has been appointed in writing for that purpose.
- The Principal Contractor shall take cognisance of the geotechnical study pertaining to the conditions of the construction site and must plan all excavation work in accordance with the recommendations of the professional engineer.
- The Principal Contractor must ensure that every excavation, including all bracing and shoring, is inspected daily, prior to the commencement of each shift and that no person enters the excavation or works in a risk zone until the excavation is assessed and declared safe.
- All excavations must be left open for the minimum of time required and those that are left open on the site must be protected by a barrier or a fence of at least one meter in height as close to the excavation as is practicable. The protective barrier or fence must adequately prevent persons from falling into the excavation and barrier taping is not sufficient for this purpose

- Excavation shoring and bracing, if required shall be designed by a designer appointed in writing who shall inspect and approve the installed shoring and bracing
- Where persons work, inspect or test excavations, warning signs must be in place next to an excavation

**The provisions of Regulation 13 of the Construction Regulations shall be followed in every detail.**

## **24. PUBLIC HEALTH AND SAFETY**

The site shall at all times be secured to prevent the unauthorized access of persons to construction risk areas.

Appropriate health and safety signage shall be posted and access control to site must be exercised via a single access point.

All members entering the site must indicate in what capacity they are visiting the site.

The access point must be designed and constructed to allow for temporary parking, entry of construction vehicles, entry of personnel transport vehicles and entry of individual workers and other persons.

The principal Contractor shall ensure that each person visiting the site shall be inducted to the site and such abridged induction shall outline the hazards from on-site activities and the precautions to be observed to avoid or minimize those risks

Visitors must only enter when accompanied by a responsible person designated by the Principal Contractor.

## **25. CONSTRUCTION EMPLOYEES FACILITIES**

The Principal Contractor shall provide at or within reasonable access of every construction site, the following clean, hygienic and maintained facilities:

- (a) Shower facilities after consultation with the employees or employees representatives, or at least one shower facility for every 15 persons;
- (b) at least one sanitary facility for each sex and for every 30 workers;
- (c) changing facilities for each sex; and
- (d) sheltered eating areas.

**The provisions of Regulation 2, 3, 4, 6, 7, 9 of the Facilities Regulations shall be followed in every detail.**

## **26. STORAGE AND USE OF FLAMMABLE LIQUIDS**

No flammable substances must be stored on site unless these are stored in a flammable store or cabinet approved by the Municipal Chief Fire Officer, no other materials shall be stored in the flammable store or cabinet

Where required the H&S Plan shall include a method statement detailing the safe use, storage, decanting and spill controls for all flammable liquids used and stored on site.

**The provisions of Regulation 25 of the Construction Regulations shall be followed in every detail.**

## **27. HAZARDOUS CHEMICAL SUBSTANCE**

With respect to hazardous chemical substances used, the contractor shall ensure that:

- All MSDS are included in the H&S File
- A HCS risk assessment is included in the H&S Plan
- The safe use, storage, emergency procedures and safe disposal of hazardous substances are addressed in a method statement(s) included in the H&S Plan.
- Proof of competency and signed letters of appointment of the person responsible for chemical handling is included in the H&S File.

Any hazardous chemical substance intended to be applied on site during the project (i.e. after approval of the H&S Plan) shall be subject to an issue-based risk assessment and method statement which must be presented to the Client Agent prior to the substance being introduced on site.

**The provisions of Regulation 3, 5, 7, 8, 9, 9A, 10, 11, 14, 15 of the Hazardous Chemical Substances Regulations shall be followed in every detail.**

## **28. HOUSEKEEPING AND GENERAL SAFE GUARDING ON CONSTRUCTION SITE**

The Principal Contractor shall appoint a person responsible for general housekeeping and stacking and storage of materials and equipment on the entire site.

**The provisions of Regulation 27 of the Construction Regulations shall be followed in every detail.**

## **29. CONSTRUCTION MEDICALS**

A Principal Contractor must ensure that all his or her employees have a valid medical certificate of fitness specific to the construction work to be performed and issued by an Occupational Health Practitioner in the form of Annexure 3.

## **30. STACKING AND STORAGE ON CONSTRUCTION SITE**

A Principal Contractor must, in addition to compliance with the provisions for the stacking of articles in the General Safety Regulations, 2003, ensure that—

A competent person is appointed in writing with the duty of supervising all stacking and storage on a construction site;

Adequate storage areas are provided;

There are demarcated storage areas; and storage areas are kept neat and under control.

## **31. TOOLBOX TALKS AWARENESS**



The Principal Contractor must ensure that the toolbox talks are conducted on weekly basis and the training records kept on the safety file

### **32. CONTINGENCY/EMERGENCY PLAN, PROCEDURE AND CONTACT NUMBERS**

Principal Contractor shall prepare an emergency procedure which will address any emergency situation that is likely to occur on a project site.

The Emergency Preparedness Plan deals with the emergency situation as fast and efficiently as possible, to minimise loss of life, the protection of property and the maintenance of services necessary for the wellbeing of employees. The plan shall include valid local emergency contact numbers and must be easily accessible.

### **33. TRAFFIC MANAGEMENT PLAN.**

#### **PRIMARY RESPONSIBILITIES**

##### **PRINCIPAL CONTRACTOR**

The following are the Principal Contractor's primary responsibilities for traffic accommodation

- Develop a traffic accommodation strategy and submit it for evaluation prior to commencement of work.
- This will be sent to the client for approval
- Included to the traffic management strategy must be drawings of how traffic will be managed
- Implement traffic accommodation measures in accordance with the traffic accommodation strategy.
- Ensure that all sub-contractors comply with the traffic accommodation strategy.
- Monitor the work zone to ensure that the traffic accommodation strategy is effective for both day and night time conditions during period of construction.
- Maintain all traffic control devices.
- Modify the traffic accommodation strategy if necessary. Take appropriate and timely action to correct any deficiencies by the contractor, in case of imminent danger, corrective action must immediate.
- All Traffic accommodation contractors shall have at least one First aider (Level 1) for each section of work.
- If the traffic Safety Officer have got the necessary first aid competency it will be accepted.
- It is also a recommendation and good practice that a Fire fighter be appointed for the site.
- Report all third party vehicle accidents immediately to the Client. Provide a copy of the completed accident report within 48 hours of the occurrence.
- On construction projects, submit completed daily reports of the traffic accommodation details (location, date, time, signs, barricades) on weekly basis.
- On construction projects attend meetings to address any concerns regarding the performance of the traffic accommodation strategy.
- Provide a knowledgeable individual at the work zone to maintain the traffic control devices and address any traffic accommodation issues which arises, the contractor must identify the individual at the pre-construction meeting.
- All traffic controllers must have the necessary competency to be able to control traffic.

**The provisions of Southern Africa Development Community (SADC) Road Traffic Signs Manual Volume 2: Chapter 13 and eThekweni Transport Authority Road works signing shall be followed in every detail.**



### **34. COVID-19 COMPLIANCE.**

The Principal Contractor shall ensure that the measures for the protection of employees against exposure to Covid-19 are complied with in accordance with the Code of Practice: Managing Exposure to SARS-COV-2 in the Workplace,2022, The below listed SARS-COV-2 documents shall be included in the safety file to be submitted to the client (but not limited to the following)

- A copy Code of Practice: Managing Exposure to SARS-COV-2 in the workplace,2022
- SARS-COV-2 Site Management Plan.
- SARS-COV-2 Risk Assessment.

**N.B: For more information please do not hesitate to contact Phumlani Mabaso on 078 4567 892 or 031 311 4160 or email [Phumlani.mabaso@durban.gov.za](mailto:Phumlani.mabaso@durban.gov.za)**

# ANNEXURE 3

OCCUPATIONAL HEALTH AND SAFETY ACT, 85 of 1993

Construction Regulations. 2014

## Medical Certificate of Fitness

Name of Employee ..... ID Number ..... Co Number .....

	*Possible Exposure																* Job specific Requirement										* Protective Equipment				
	e.g. noise, heat, fall, risk, confined space, etc.																e.g. Operating Mobile Crane, Digging Trenches, Erecting formwork & Support work, etc.										e.g. Dust respirator( Light Duty) Welding Gloves, etc.				
*Occupation  e.g. General worker , Welder, Bricklayer, Steel fixer, Mobile Crane, Operator, etc.																															

**\* The employer to complete the information in the spaces marked with an before sending the employee for a medical examination**

**Declaration by the Medical Examiner:**  
 I certify that I have, by examination and testing, using the above criteria specified by the employer, satisfied myself that the abovementioned employee is fit to perform the duties by the employer in the matrix above.  
 Occupational Medicine Practitioner/ Occupational Health Nursing Practitioner: (Please Print Name).....

Signature ..... Practice Number ..... Date .....

Address .....