


NOTES

- (1) ALL NUTS & BOLTS TO BE BRASS OR STAINLESS STEEL. FLAT & SPRING WASHERS TO BE INCLUDED.
 - (2) MCB'S TO BE CURVE 1 ORANGE TOGGLE COMPLETE WITH SHROUDS AND CLIPS.
- THE THREE POINT LOCKING MECHANISM SHALL FIRMLY SECURE THE DOOR AND NOT ALLOW LEVERAGE FOR VANDALISM.

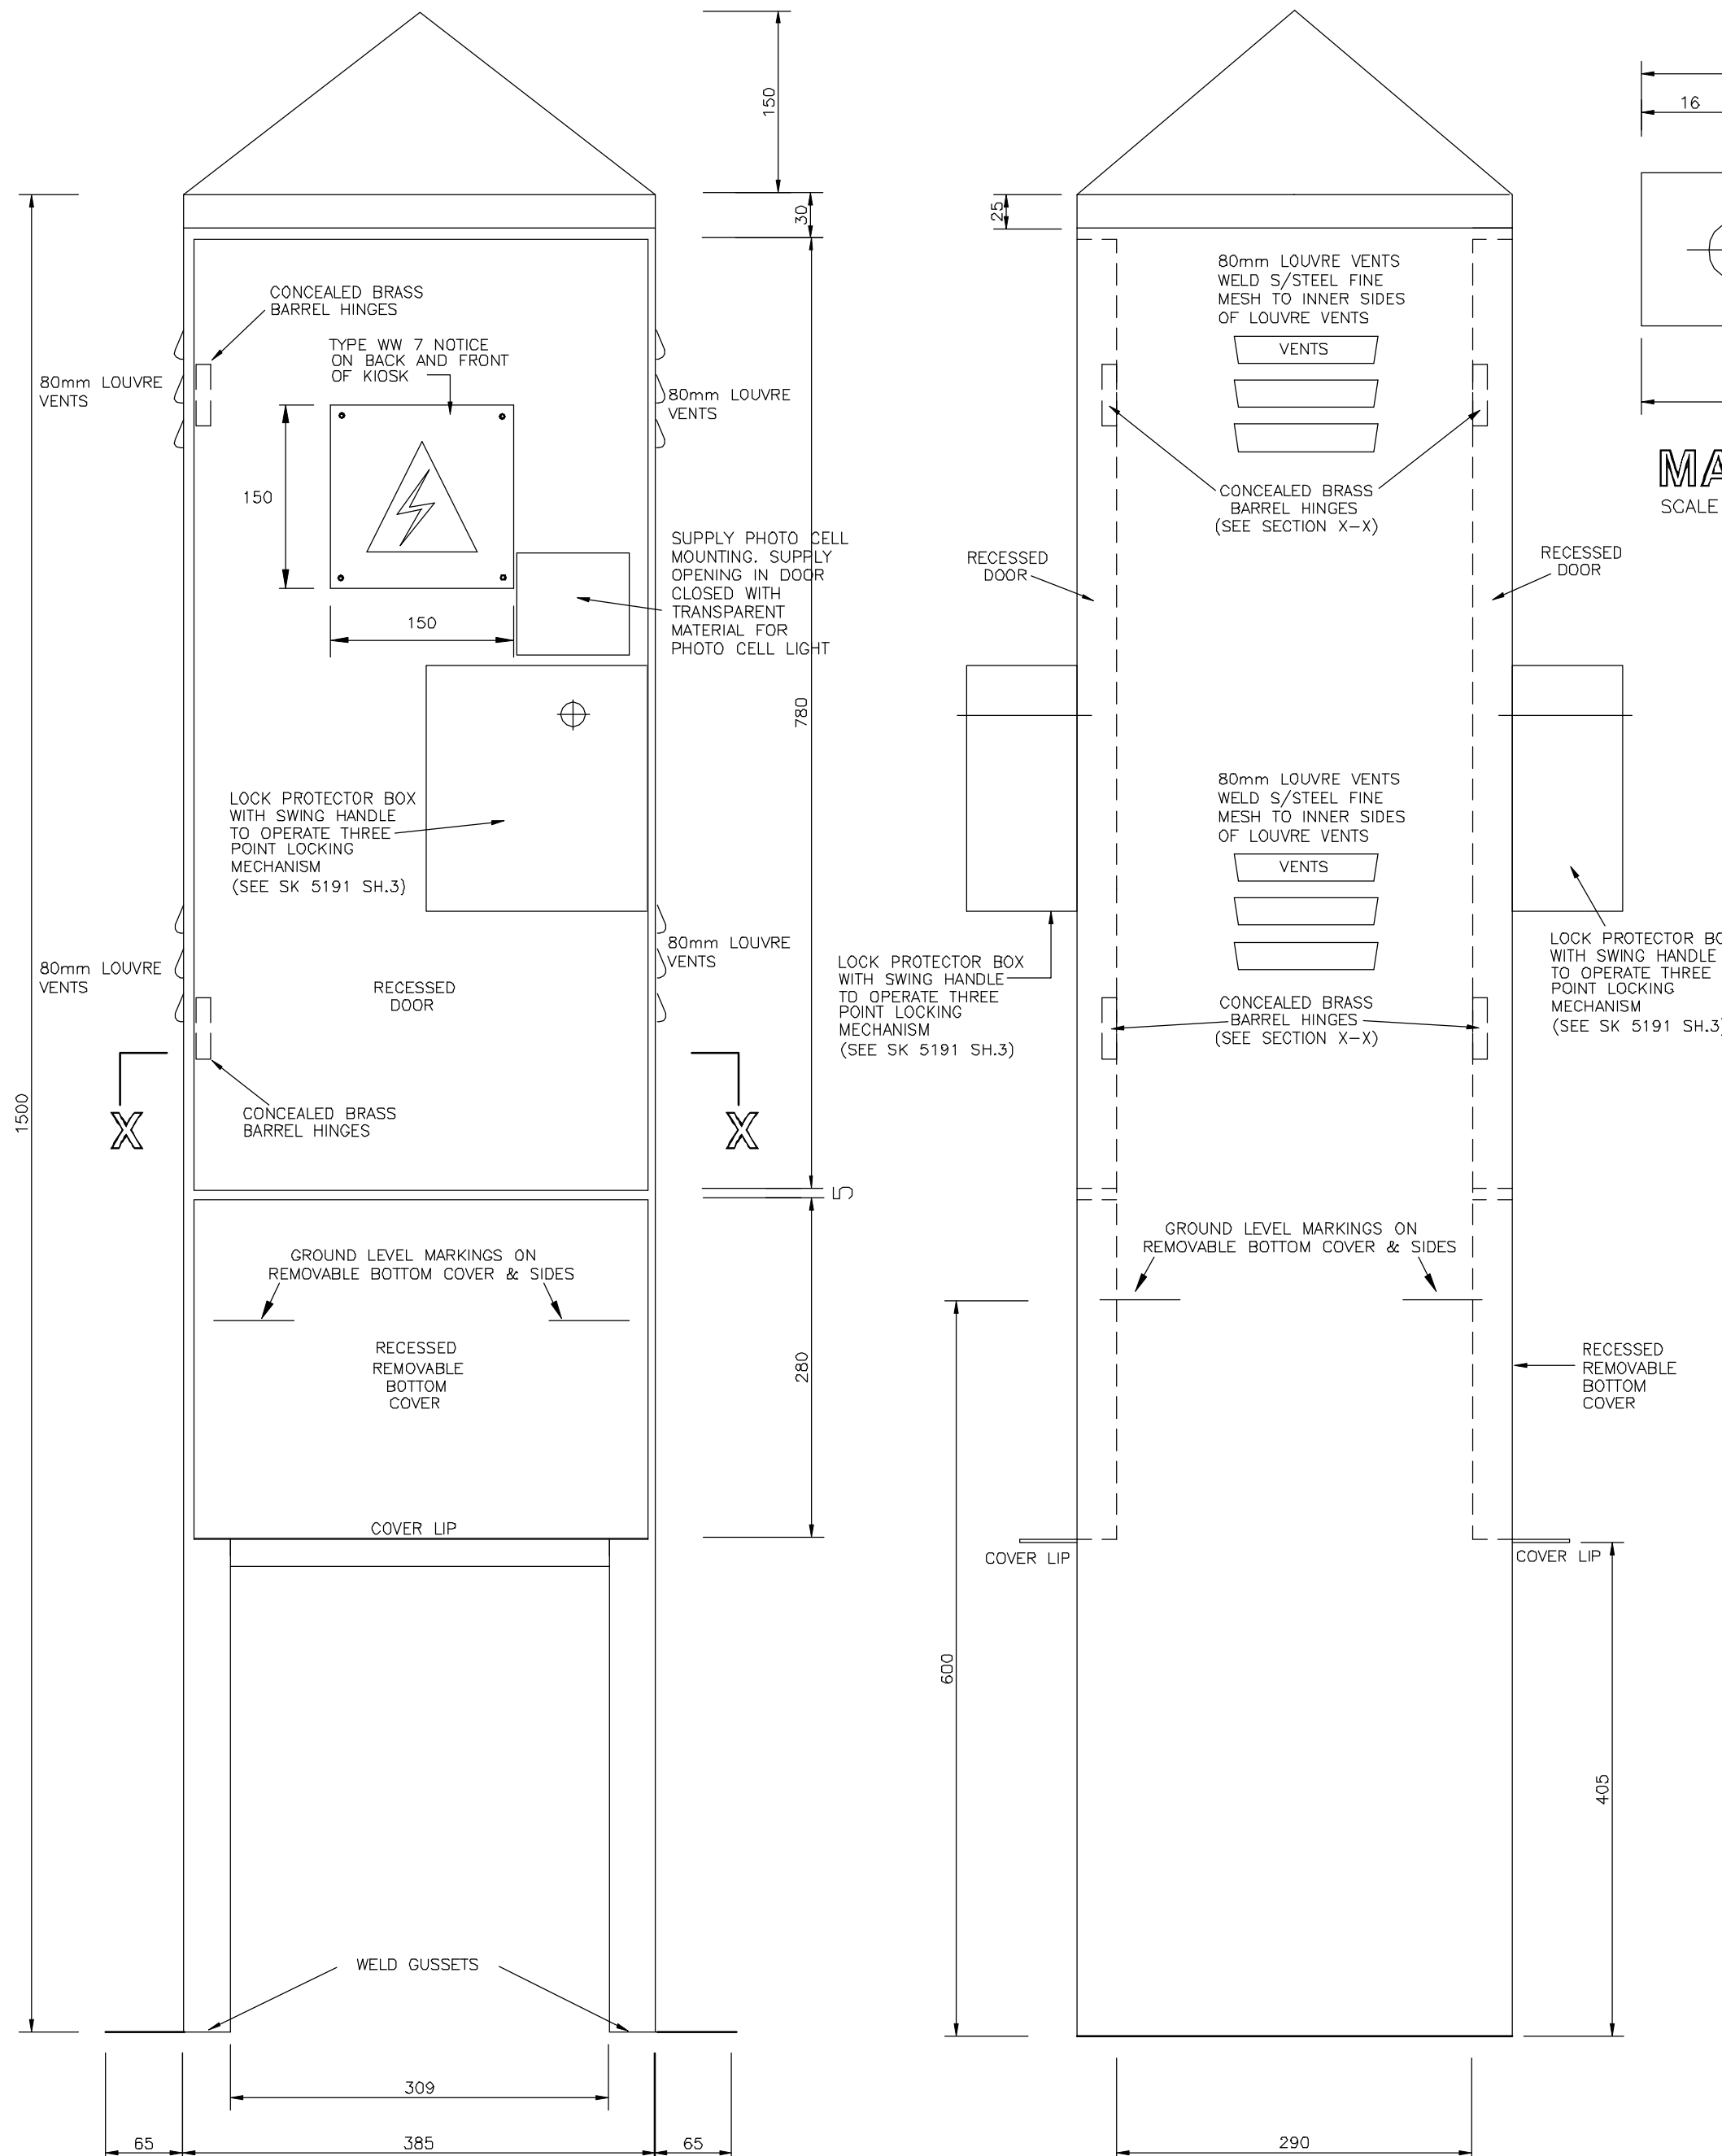


MAIN EARTH BAF

SCALE 1:




SCALE 1:1

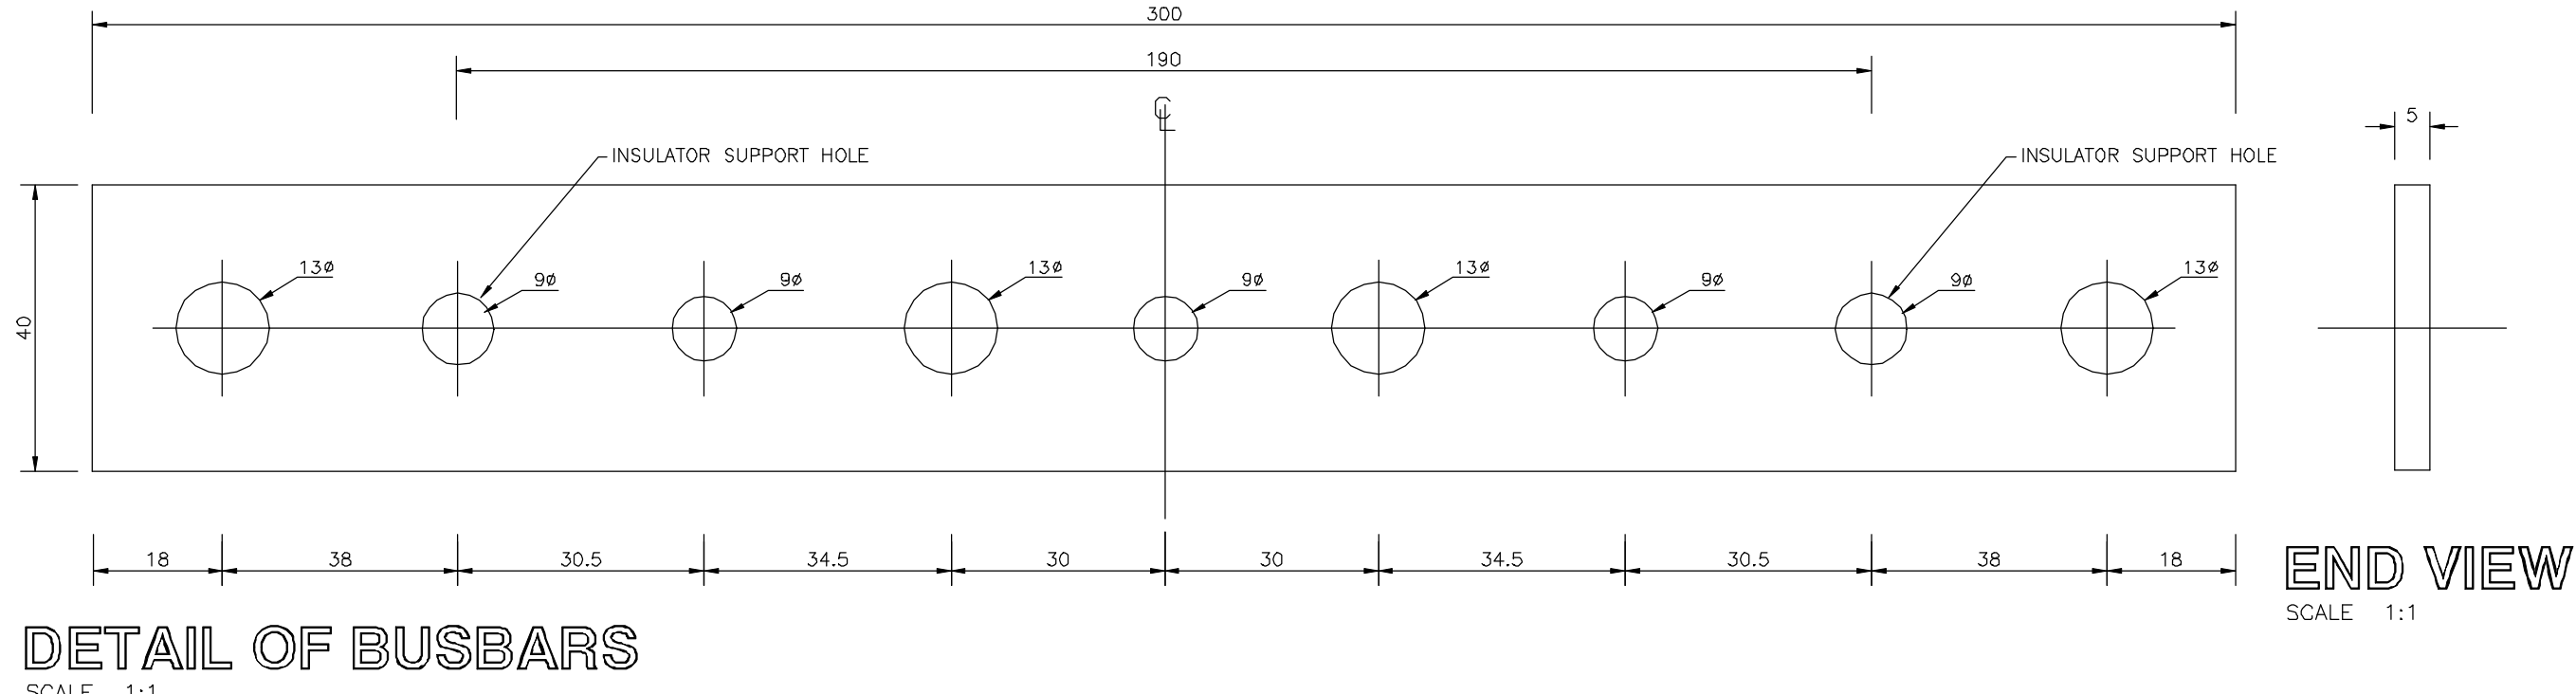

DETAIL OF BUSBARS

SCALE 1:

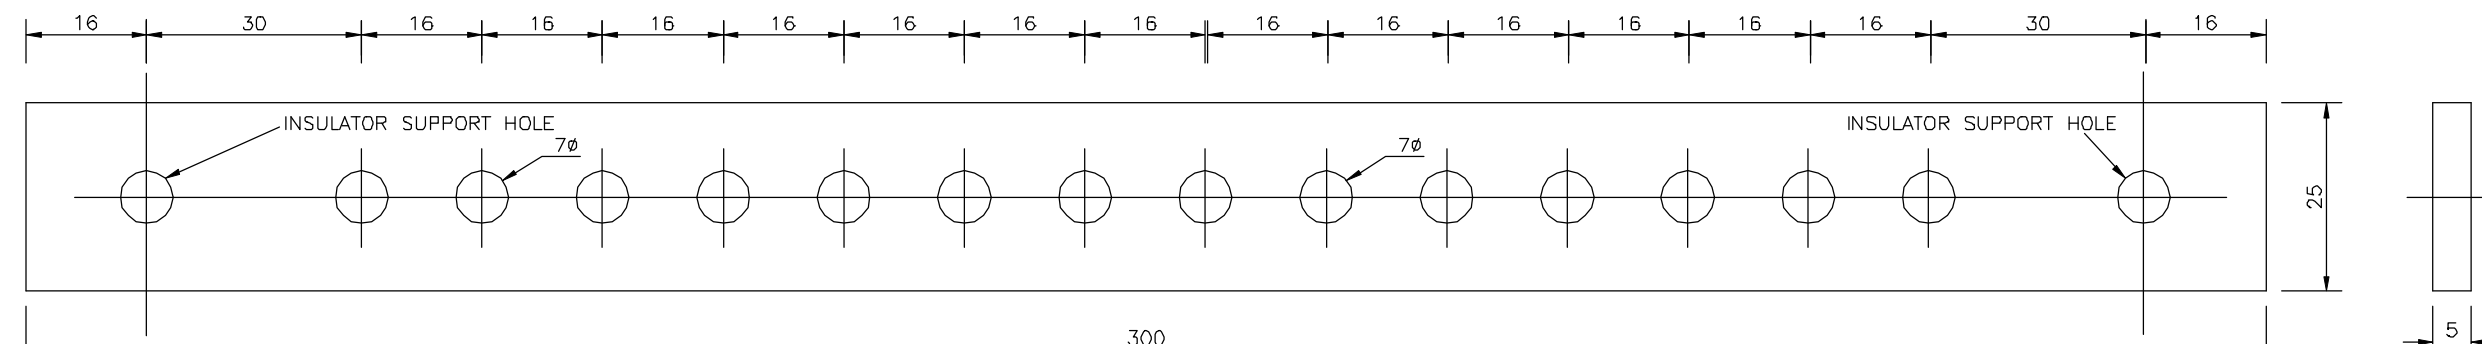

MAIN NEUTRAL BAF


SCALE 1:



SCALE 1:1




SIDE VIEW

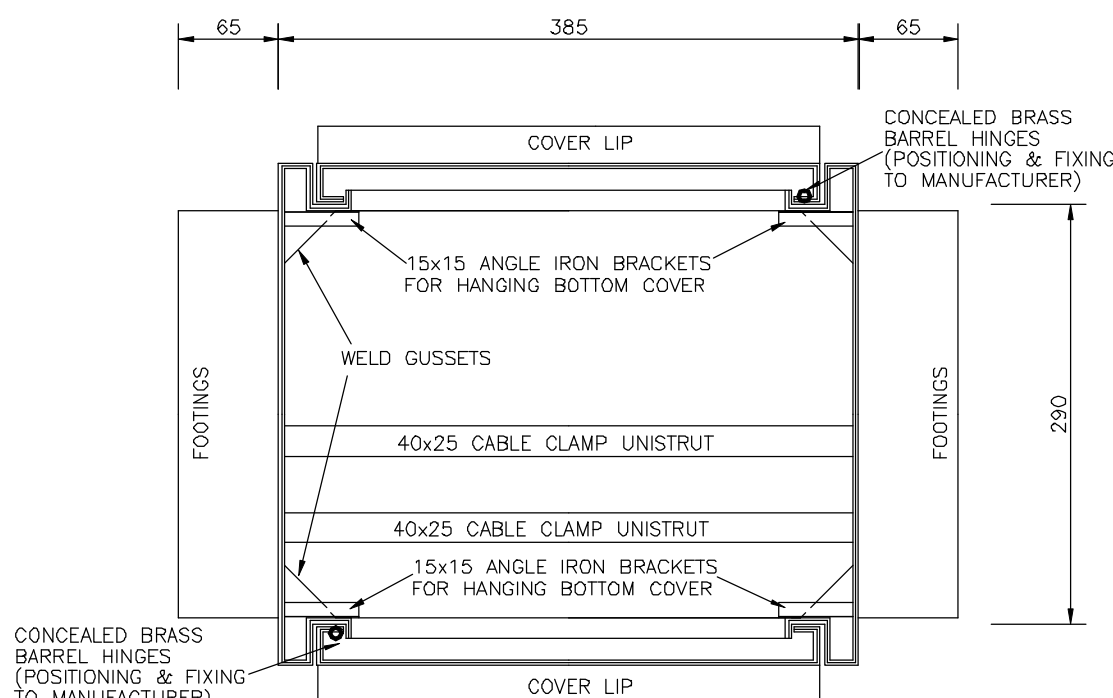

SECTION X-X


SCALE 1:5

(MOUNTING PLATE AND
BUSBARS NOT SHOWN)

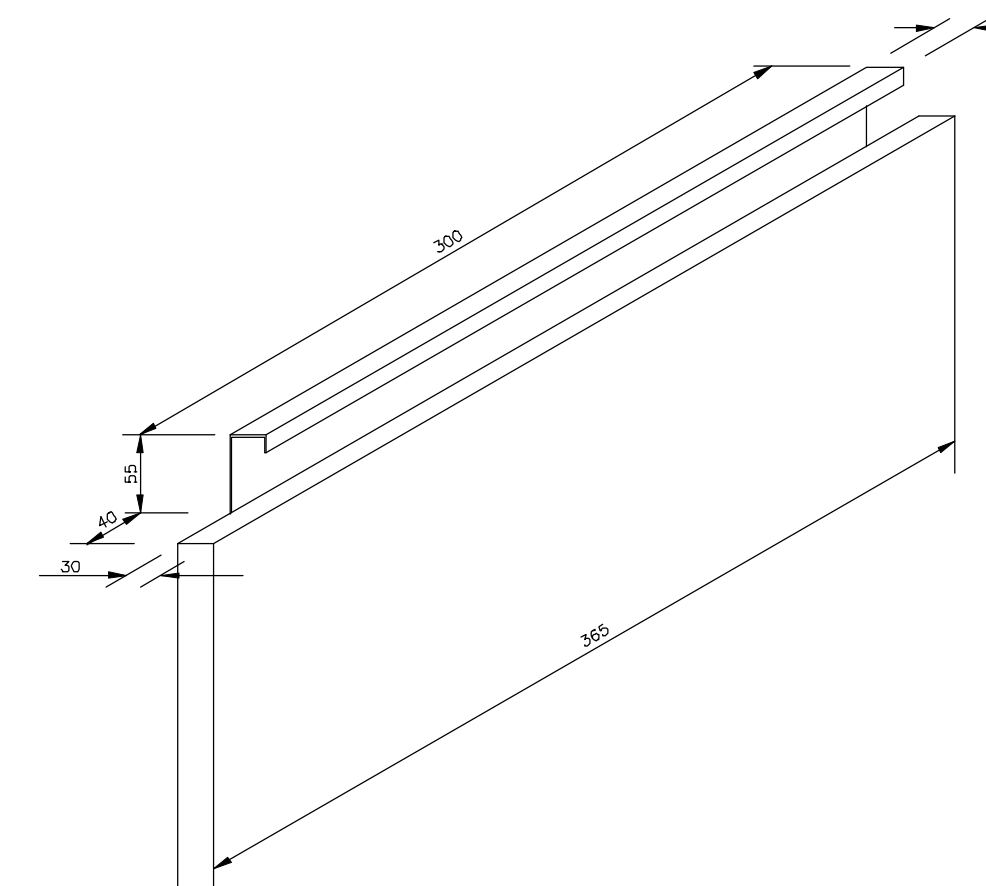


DETAIL OF TOP SECTION OF REMOVABLE BOTTOM COVER

SCALE : NTS

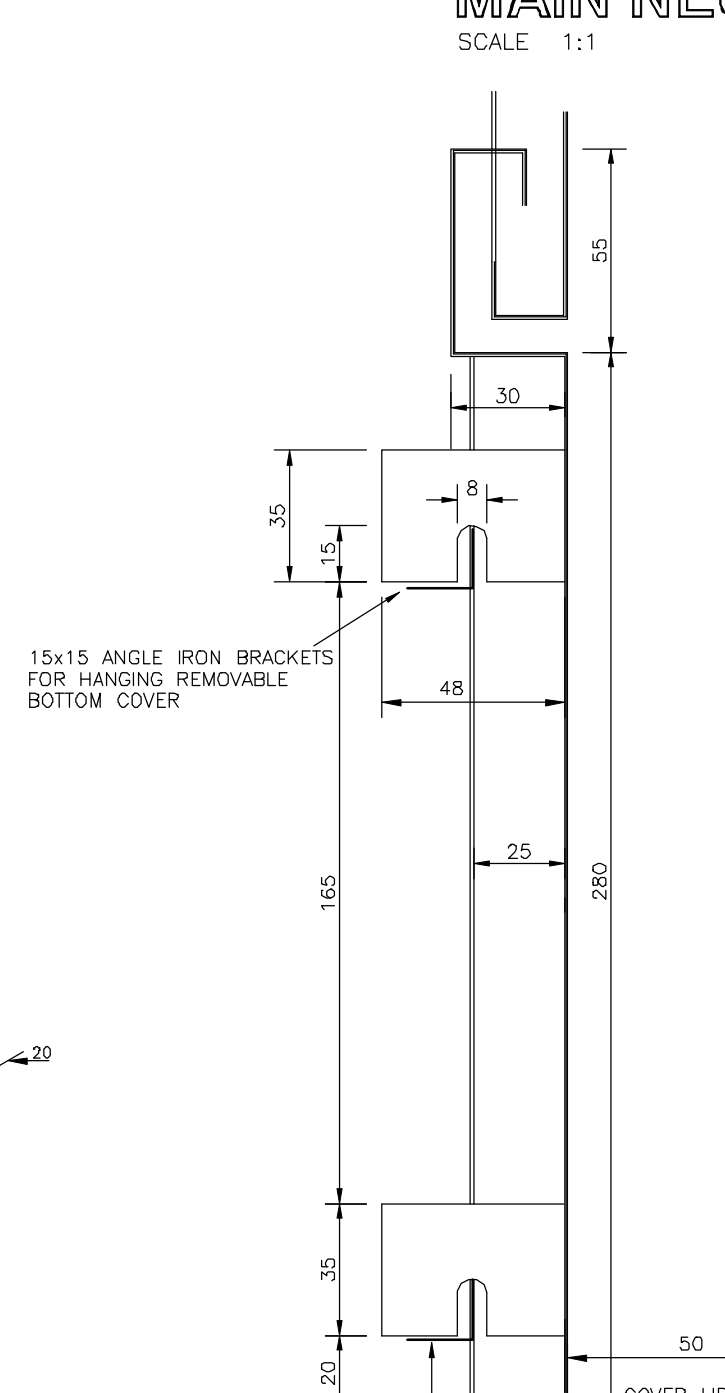


DETAIL OF REMOVEABLE BOTTOM COVER

SCALE 1:

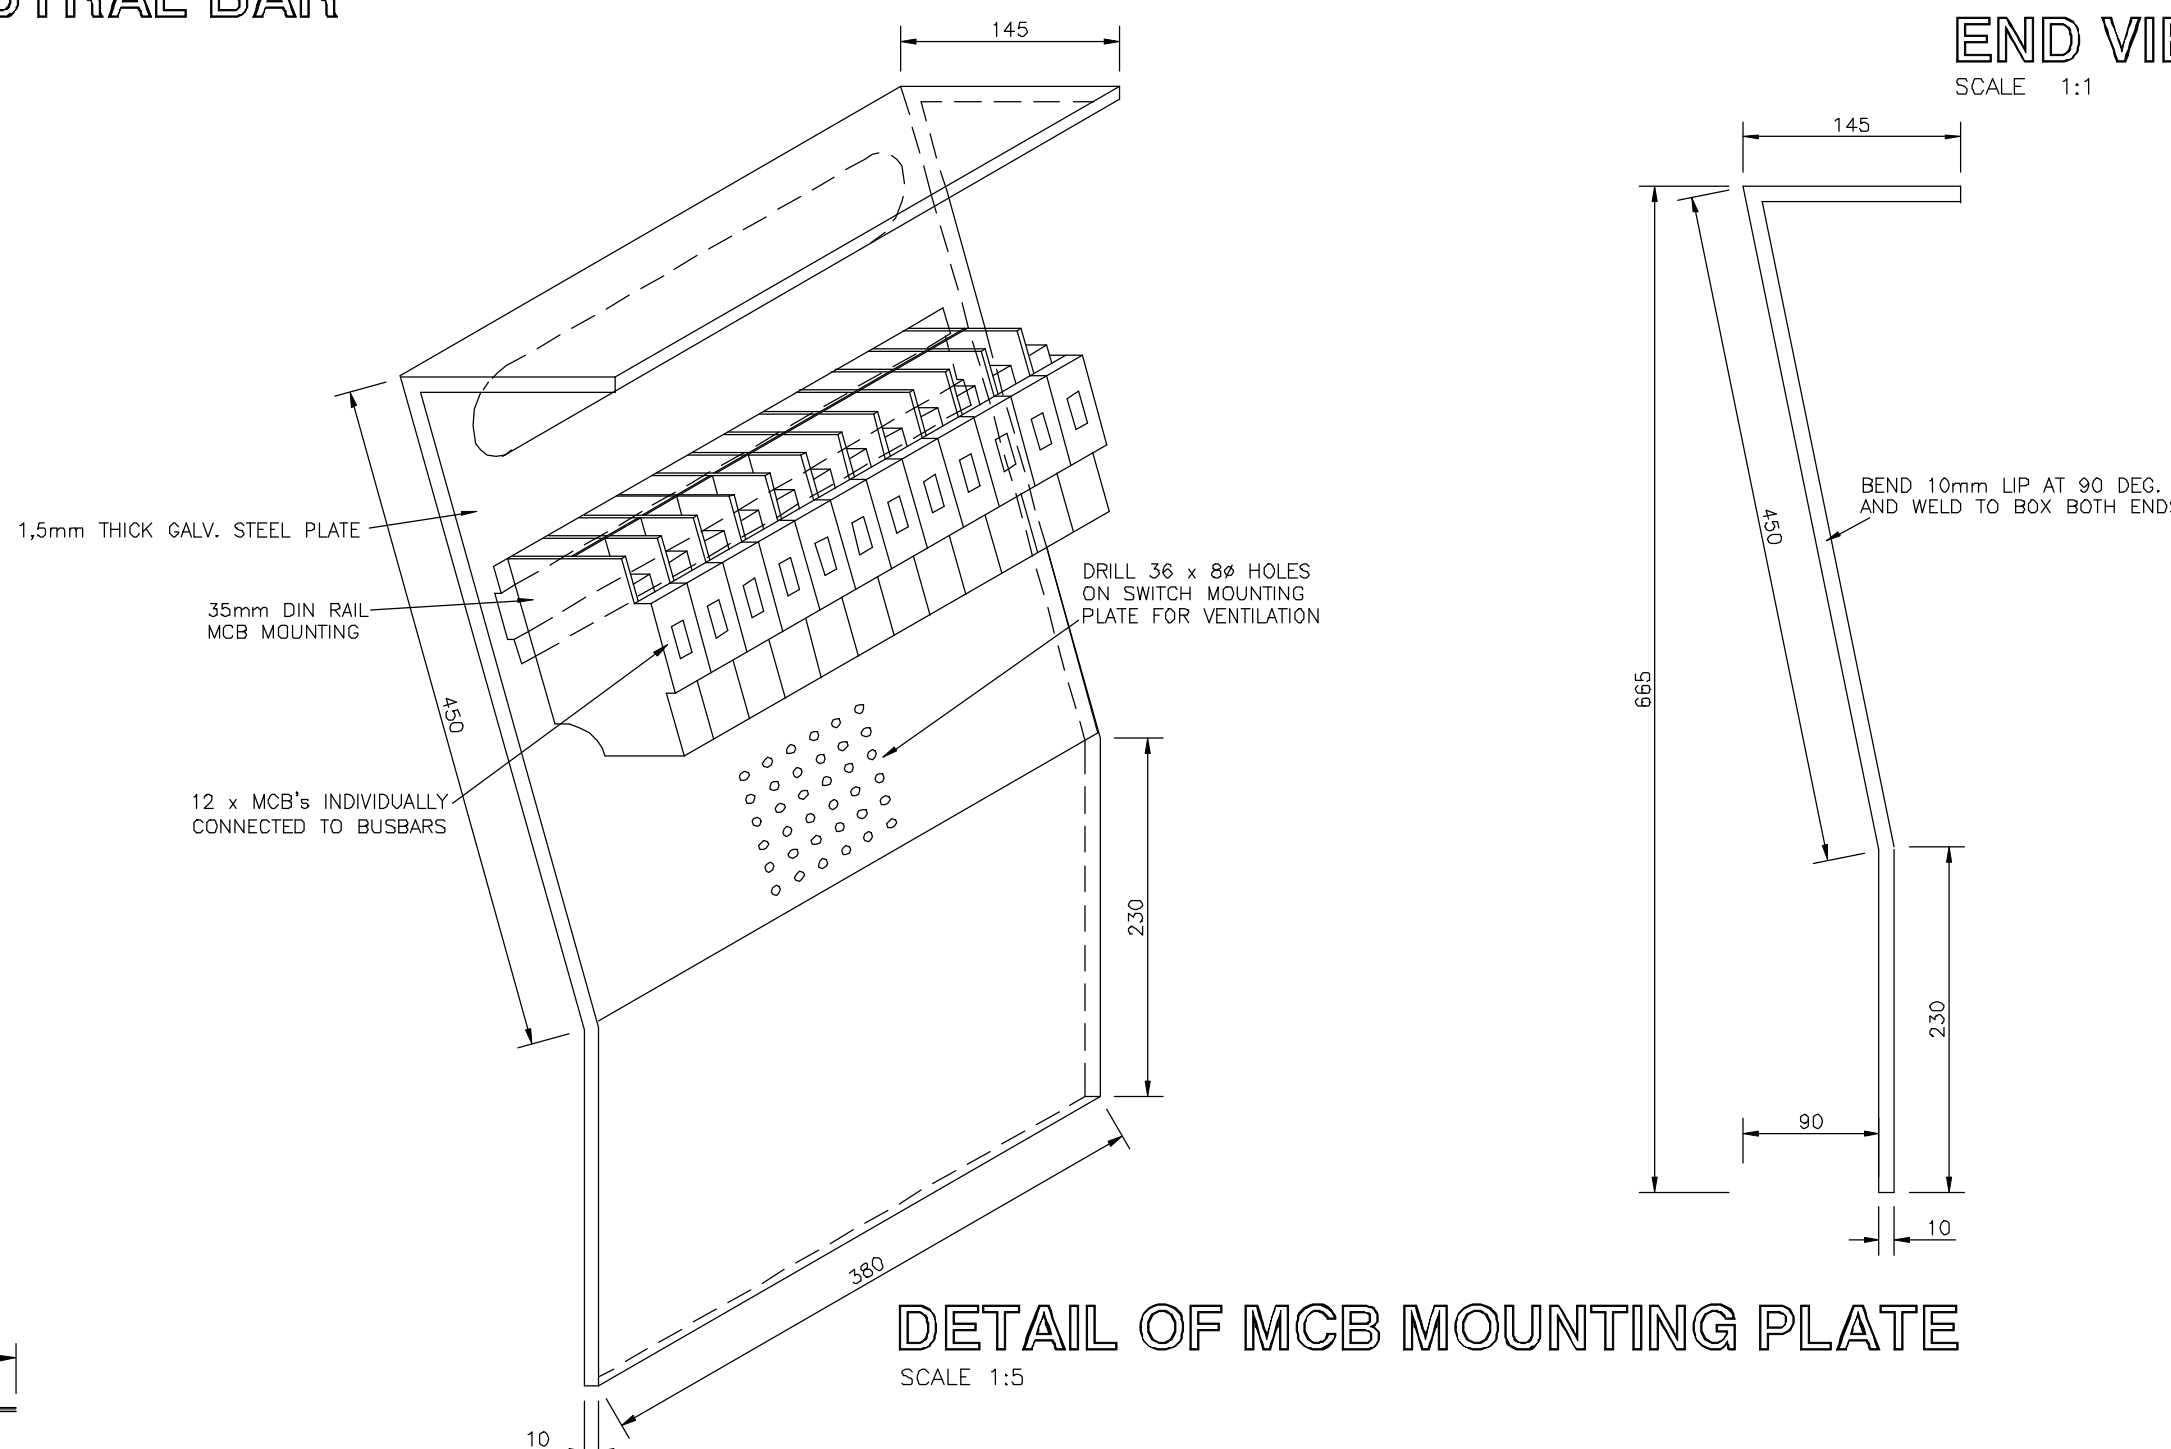

DETAIL OF MCB MOUNTING PLATE

SCALE 1:5

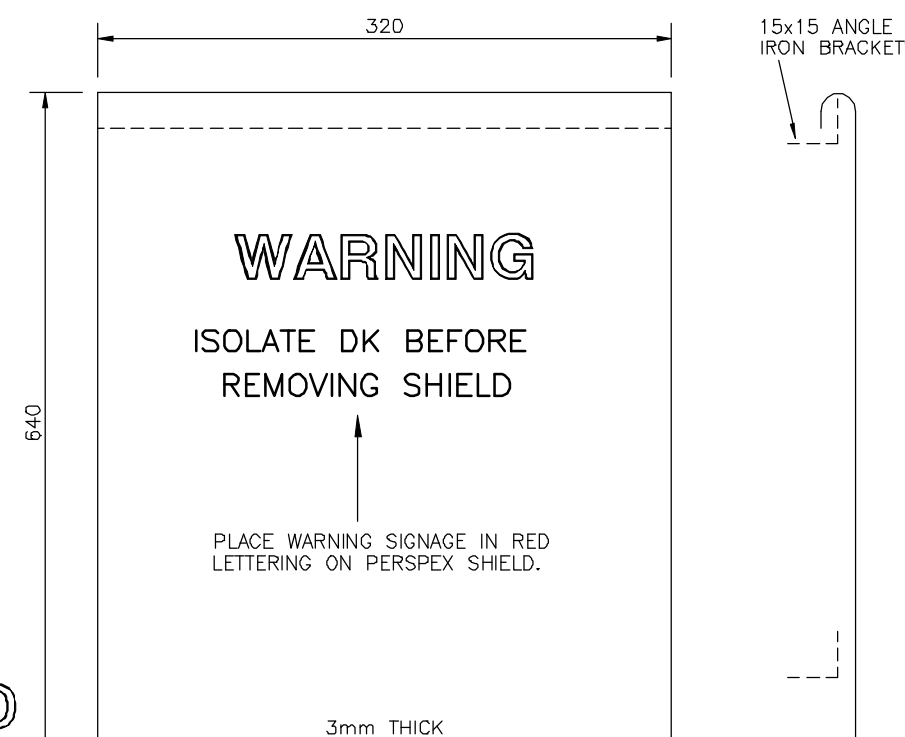

PERSPEX SHIELD

(3mm THICK)

SCALE - NT

640x310x3mm PERSPEX
SHIELD PROTECTOR HUNG ON
ON 15x15 ANGLE IRON BRACKET

- NOTE:—

1. MATERIAL TO BE 3CR12 OR EQUIVALENT STAINLESS STEEL OF A MINIMUM THICKNESS OF 1.6mm.
2. ALL STEEL PARTS TO BE HOT DIPPED GALVANISED
3. COPPER BUSBARS TO BE TINNED.
4. ALL SCREWS & BOLTS COMPLETE WITH NUTS & FLAT SPRING WASHERS SHALL BE BRASS OR STAINLESS STEEL.
5. BOLTS SUPPLIED WITH BUSBARS TO BE MIN. 40 LONG.
6. M6 & M8 BOLTS TO BE 25mm LONG.
7. FINE MESH S/STEEL EXPANDED METAL TO BE WELDED TO INNER SIDES OF LOUIVRE VENTS.

MANUFACTURING DRAWING

THE COPYRIGHT OF THIS PLAN AND DESIGN RESIDES WITH THE CITY OF CAPE TOWN AND
MAY NOT BE REPRODUCE ISSUED OR USED FOR ANY PURPOSE OTHER
THAN IT WAS INTENDED FOR ORIGINALLY



DIRECTOR: ELECTRICITY	Dr. L. RENCONTRE	
MANAGER: ENGINEERING	E. CAPES	
HEAD: DRAWING & RECORD CENTRE	A. M. VAN ZYL	PH (021) 444 8339

PROJECT TITLE
**GROUND MOUNTED STREET LIGHT
CONTROL DUAL DOOR KIOSK**

APPROVED BY:			
COMPILED:	A. HALL		
SCALE:	AS SHOWN	DATE:	07/07/2022
DRAWING No.		SHEET	SHEET SIZE
DR 3384		2 OF 3	A1