



NOTES:


1. CONCRETE SHALL HAVE A MINIMUM 28 DAY COMPRESSIVE CUBE STRENGTH OF 40 MPA AND A MINIMUM MODULUS OF RUPTURE STRENGTH (FLEXURAL STRENGTH) OF 4 MPA.
2. COVER TO REINFORCEMENT SHALL BE 60mm.

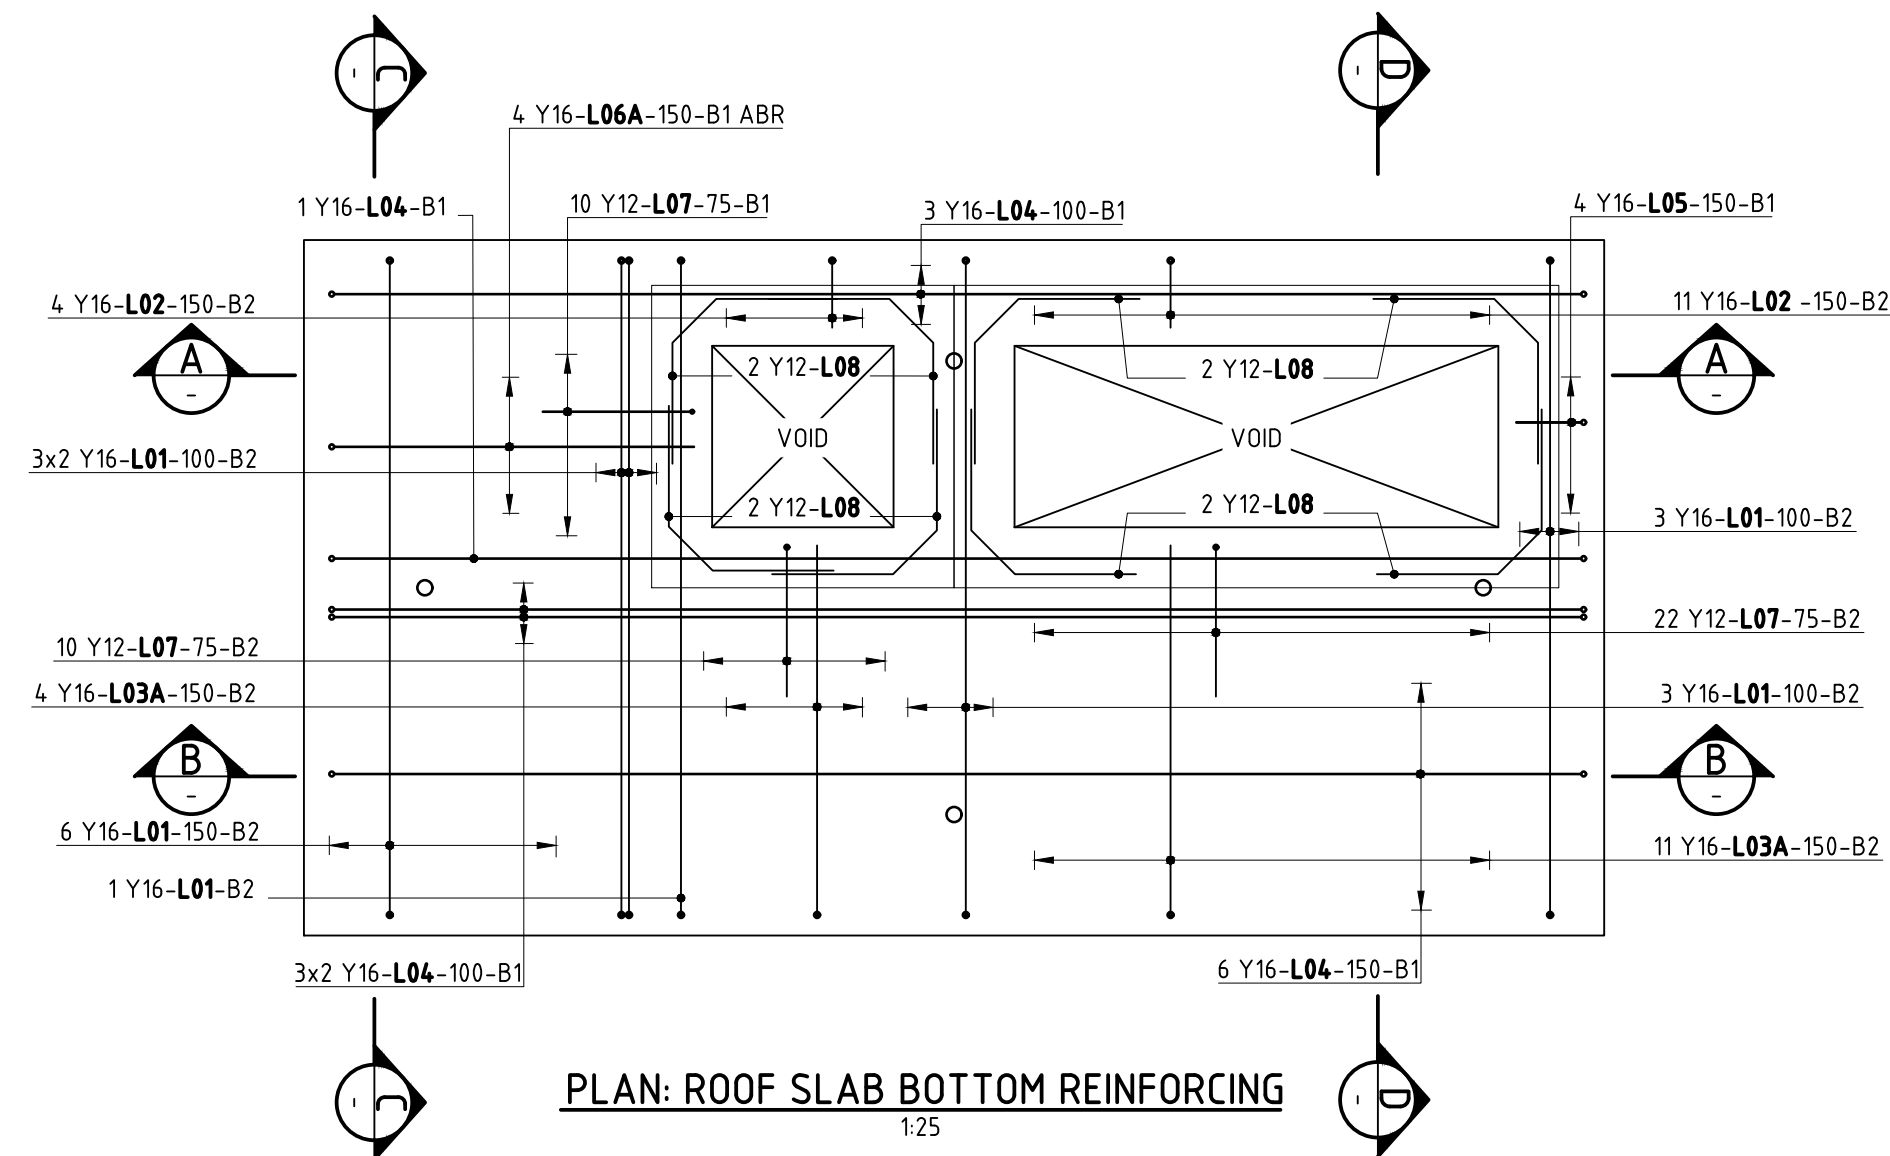


PLAN: ROOF SLAB BOTTOM REINFORCING

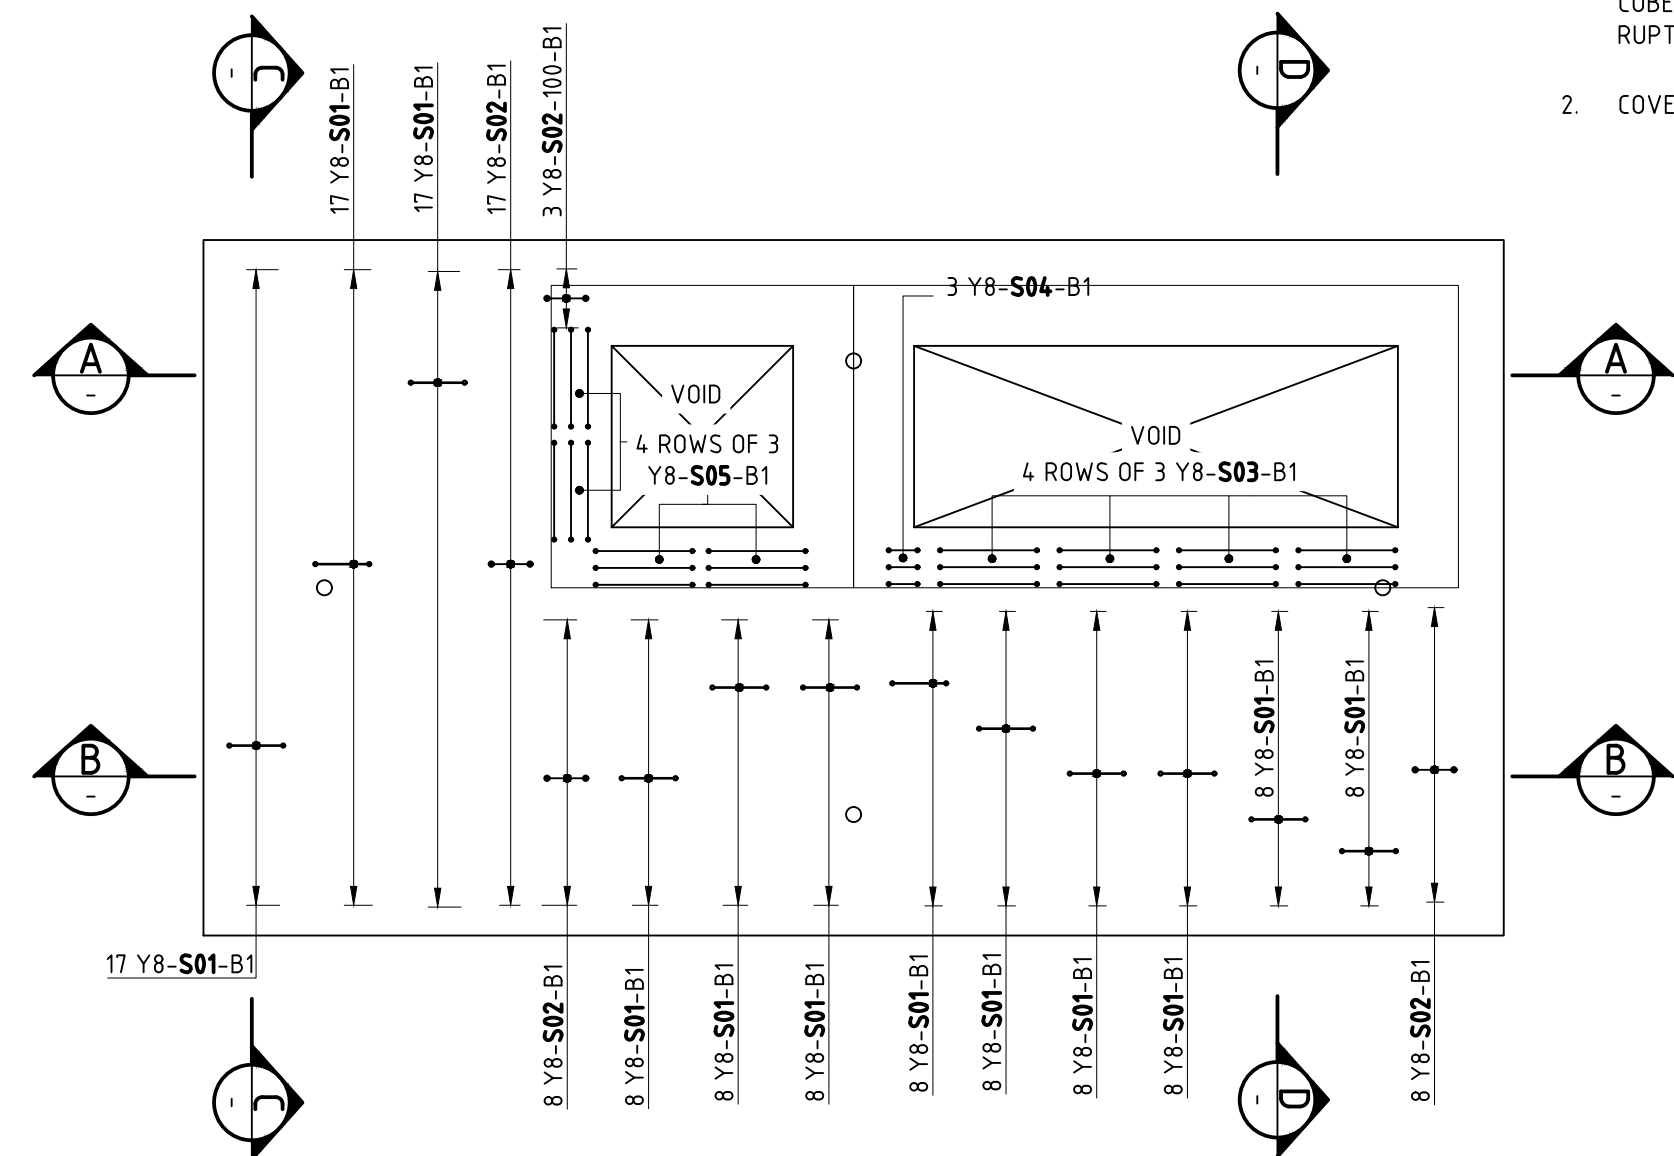


PLAN: ROOF SLAB SHEAR REINFORCING

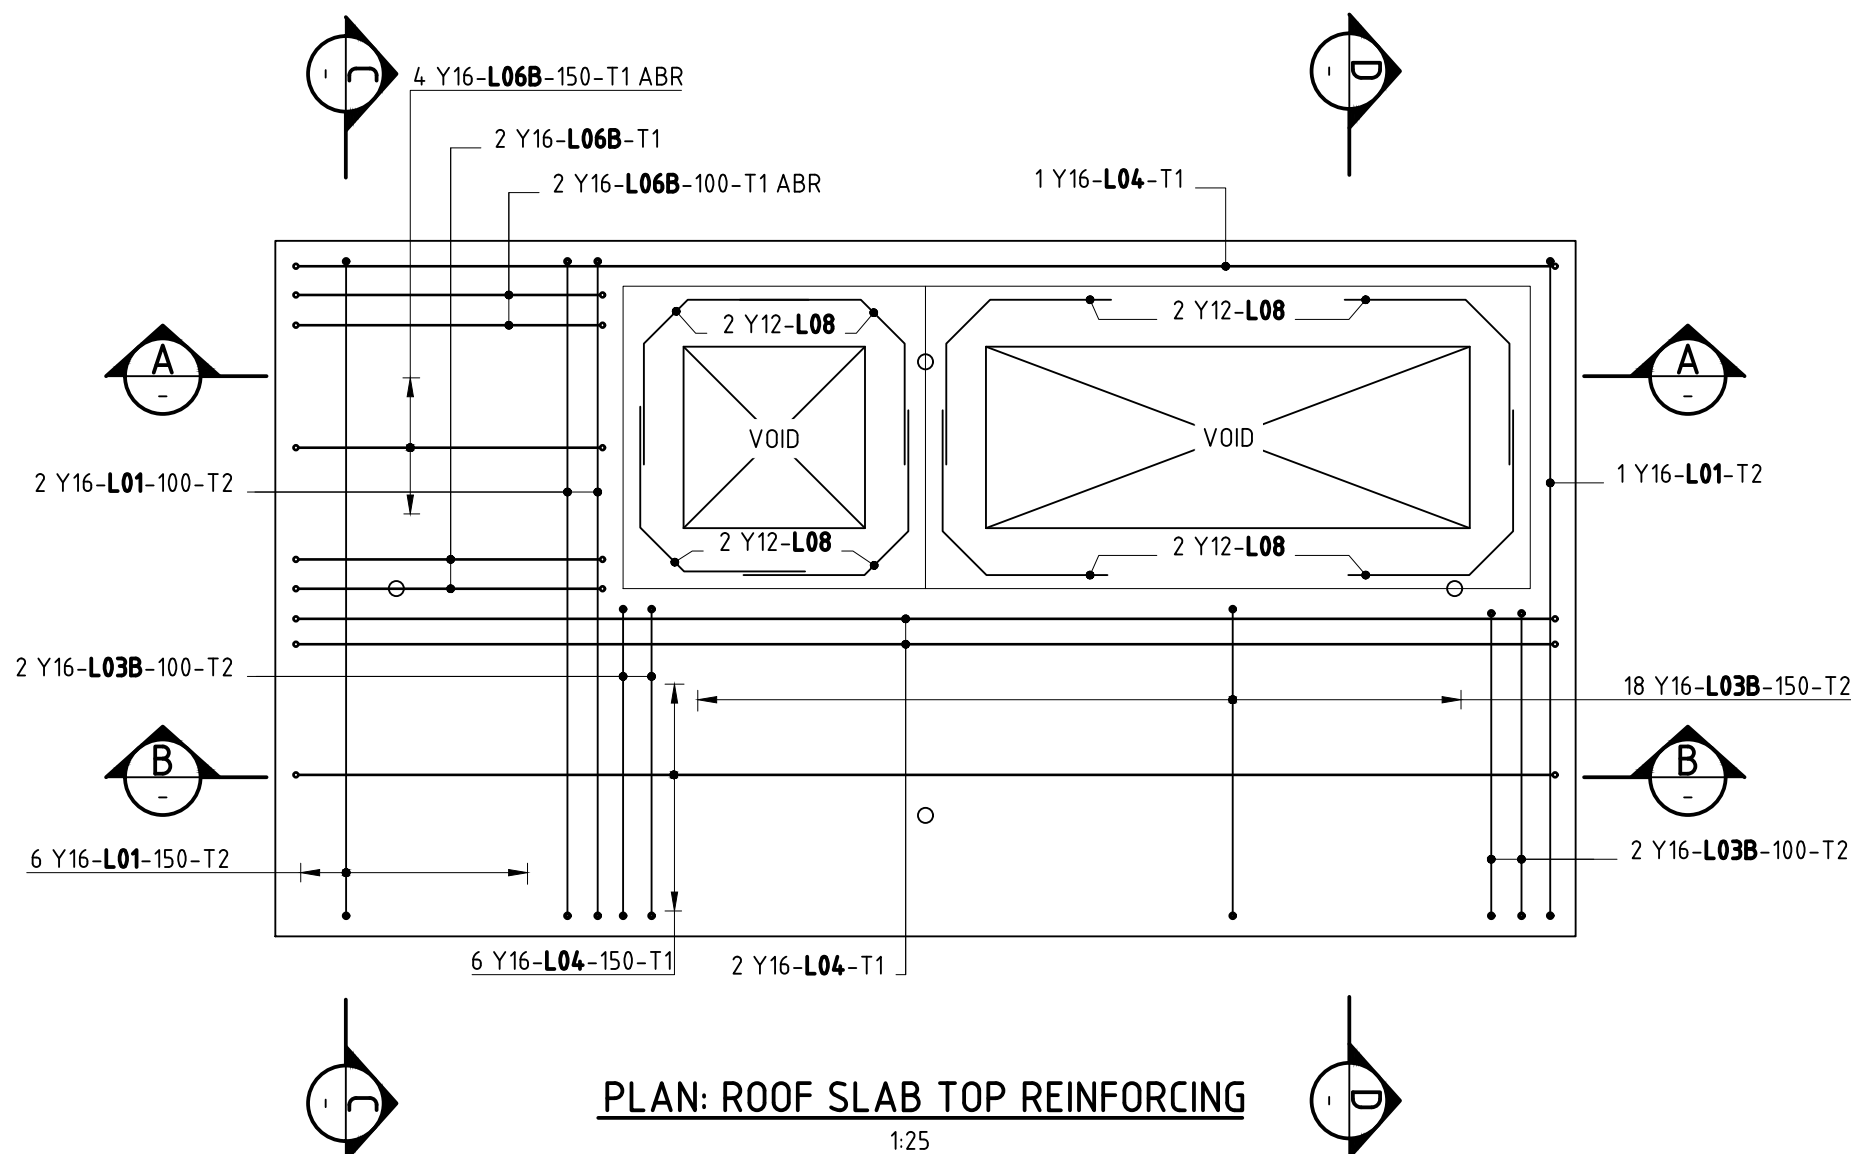


PLAN: ROOF SLAB TOP REINFORCING

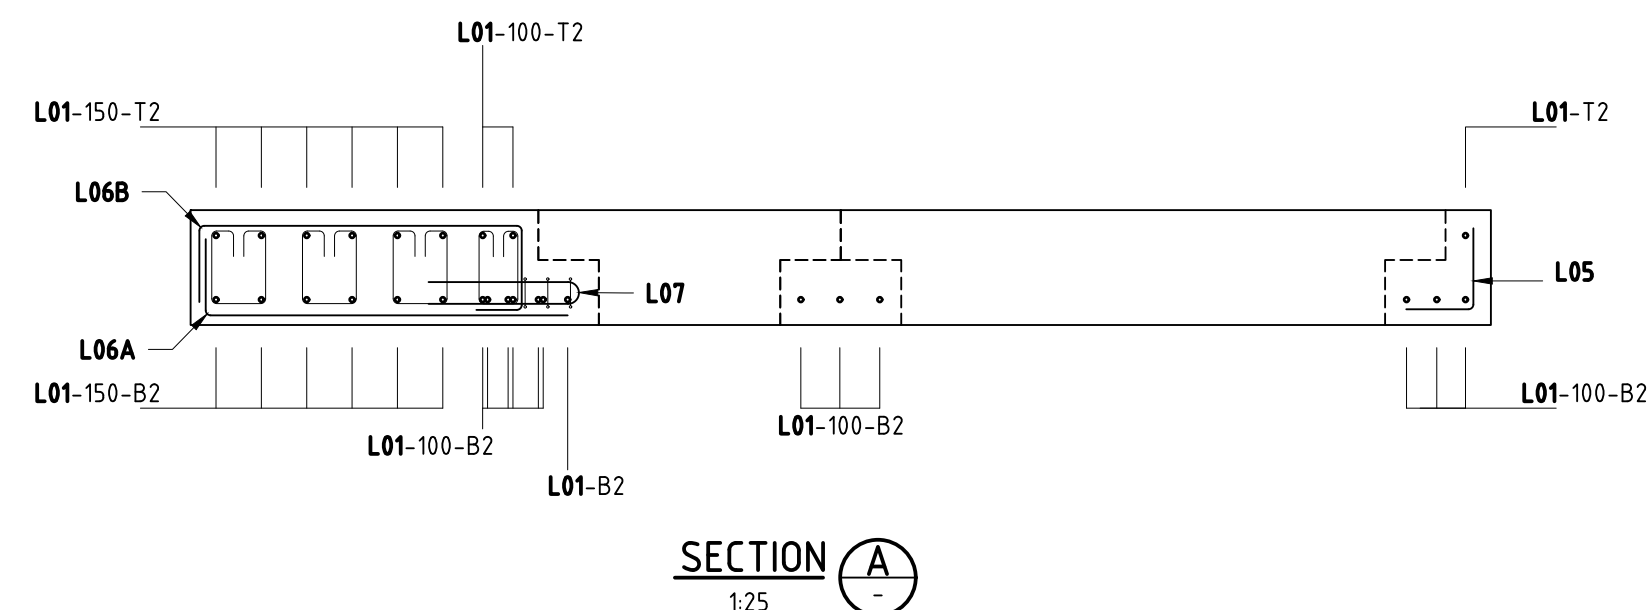


SECTION A

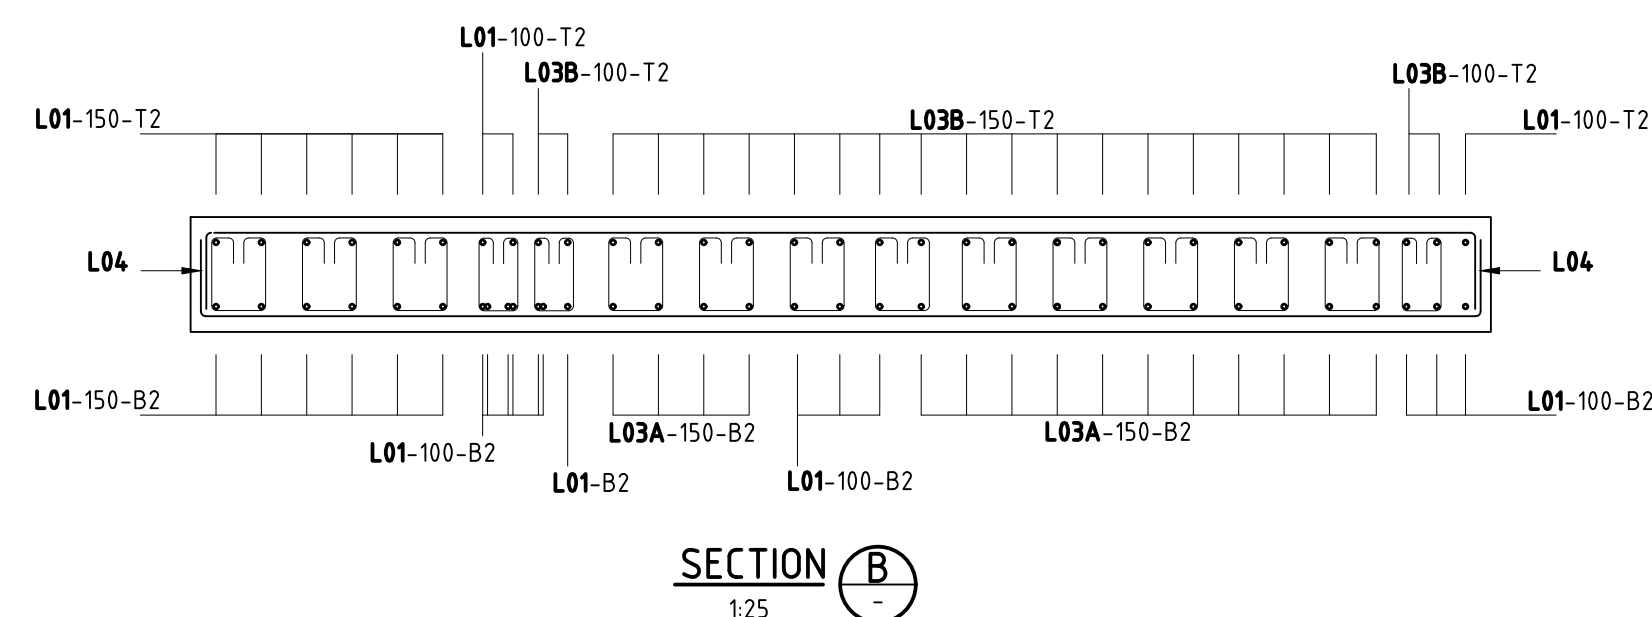

SECTION B

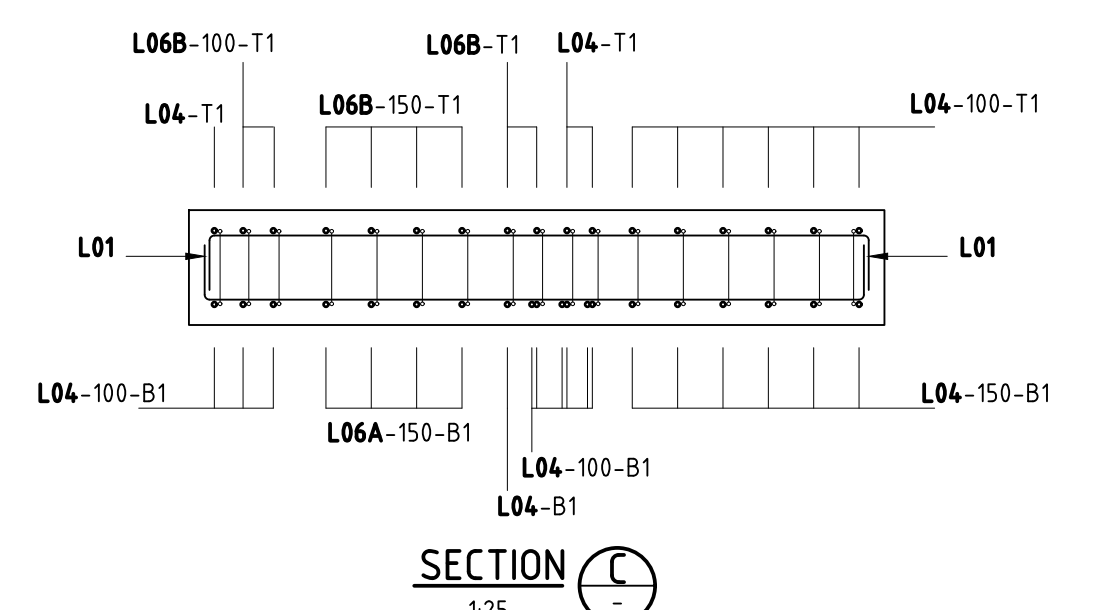

SECTION 1

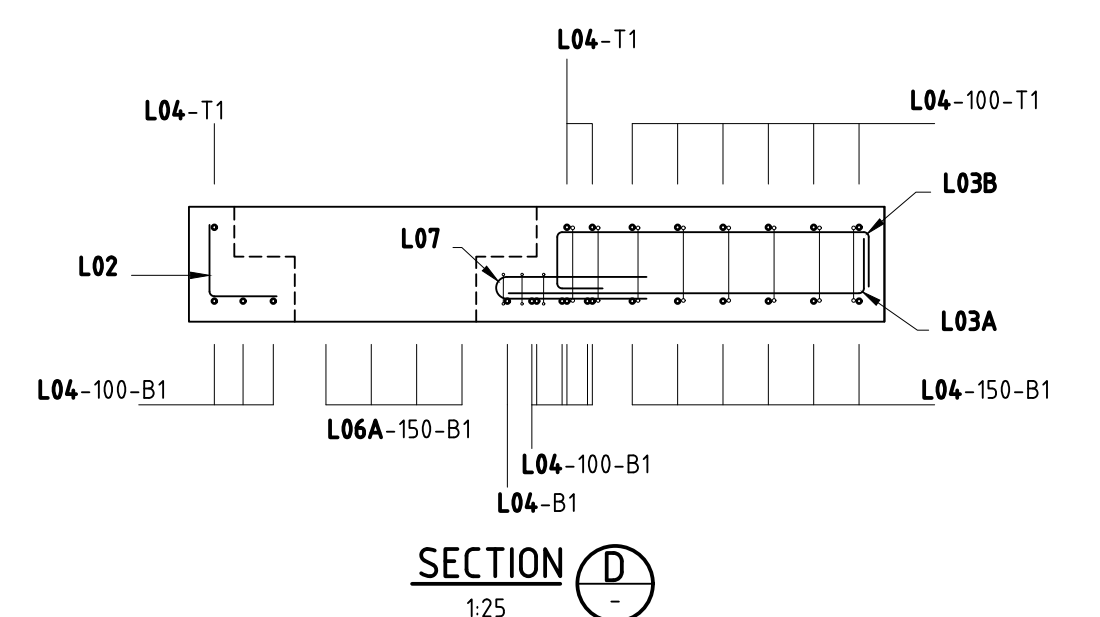SECTION [illegible]