


HIGH VOLTAGE				
Position	Voltage (V)	Current (A)	Conn.	Notes on change or on test selector
17	118 800	63/8		9
16	120 450	63/1		7
15	122 100	87/3	A	0
14	122 550	608/5		6
13	125 400	588/5		5
12	127 050	580/2		4
11	128 200	580/2		3
10	130 350	575/8		2
9				1
8	132 000	568/6	B	0
7				9
6	133 650	561/6		7
5	135 300	554/7		6
4	136 950	548/5		5
3	138 600	541/5		4
2	140 250	532/2	C	0
1	141 900	528/8		9
0	143 550	522/9		8
	145 200	516/9		7

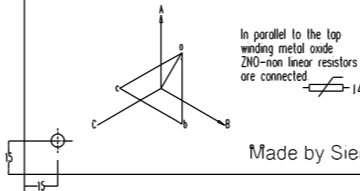

Material : Stainless steel X6CrNiMoTi 17-12-2 (W.Nr. 1.4571), 2mm thickness
Engraved with black letters on a white background.

[illegible]