
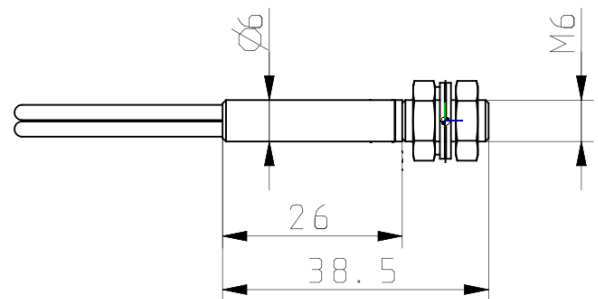


Fibre-optic cable 1

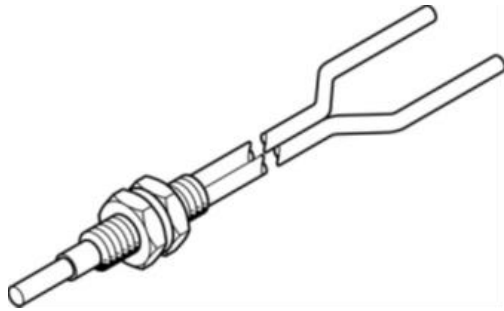

Data Sheet

Feature	Value
Note on materials	RoHS- compliant
Measurement method	Diffuse sensor
Min . Object diameter	0,1mm
Fibre optic special feature	Standard
Operating distance	140mm
Ambient temperature	50 -70
Head size	M6
Fibre optic length	1m
Min. bending radius	25mm
Max tightening toque	3 Nm
outside diameter	2,2mm
Material housing	Copper alloy PVC Nickle-plated
Material fibre optic	PE
Degree of protection	IP66
Corrosion resistance class CRC	1-Low corrosion stress
LABS (PWIS) conformity	VDNA24364 zone III