

ASSESSMENT OF SEDIMENT QUALITY IN THE PORT OF EAST LONDON – 2022



September 2022



Report prepared for:

Mr Basil Ngcobo
Chief Engineer
Transnet National Ports Authority

Ms Cebile Nzuza
Senior Manager: Environment and Sustainability
Transnet National Ports Authority

Report prepared by:

Coastal Systems and Earth Observation
Sustainable Ecosystems
CSIR

Report authors:

Brent Newman
Sebastian Brown

Contact person:

Brent Newman
Coastal Systems Research Group
CSIR
P.O. Box 59081
Umbilo 4075
Durban
South Africa
Telephone: (031) 242 2377
Email: Bnewman@csir.co.za

Recommended report citation:

CSIR (2022) Assessment of sediment quality in the Port of East London - 2022. CSIR Report CSIR/SPLA/SECO/ER/2022/0042/C.

Conditions of use of this report:

1. This report is the property of Transnet National Ports Authority, who may publish it provided:
 - a. The CSIR is acknowledged in the publication;
 - b. The report is published in full or, where only extracts therefrom or a summary or an abridgment thereof is published, prior written approval is obtained from the CSIR for the use of the extracts, summary, or abridged report; and
 - c. The CSIR is indemnified against any claims for damages that may result from publication.
2. The CSIR will not publish this report or the detailed results without prior consent of Transnet National Ports Authority. The CSIR is, however, entitled to use technical information from the investigation but undertakes, in doing so, not to identify the sponsor or the subject of this investigation.
3. The contents of the report may not be used for purposes of sale or publicity or in advertising by any party without prior written approval of the CSIR.

Table of Contents

1. Background and Report Purpose	1
2. Material and Methods	1
2.1. General description of the Port of East London.....	1
2.2. Fieldwork	2
2.3. Laboratory analyses	3
2.3.1. Analytical laboratory	3
2.3.2. Grain size composition	3
2.3.3. Total organic content	3
2.3.4. Metals	3
3. Results and Discussion.....	3
3.1. Grain size composition	3
3.2. Total organic content	4
3.3. Metals.....	5
3.4. Comparison of chemical concentrations to sediment quality guidelines.....	12
4. Conclusions	13
5. References	14
6. Appendices.....	15

1. Background and Report Purpose

Sediment naturally accumulates in ports. The sediment may originate on land, from where it is transported by rivers and surface (stormwater) runoff into a port, or it may originate in the sea, from where it is entrained into a port by tidal action. Irrespective of its origin, if sediment is allowed to accumulate unchecked in a port, a situation may be reached wherein the depth of navigation channels, turning basins, berths, and other waters are reduced to the extent that safe vessel movement is no longer possible. Port authorities are thus required to maintain navigation channels, berths, and basins to their design depths. In many ports and navigable waterways maintenance dredging is required on an on-going basis. The material dredged in coastal ports is usually disposed at designated open water dredged spoil disposal sites. In some countries, contaminated sediment is disposed in confined land or waterside facilities (*e.g.* capping). The latter is not a practice that has been followed to date in South Africa, and virtually all dredged sediment is disposed at offshore open water dredged spoil disposal sites (a minor volume is used for shoreline nourishment or port construction).

Dredging poses numerous, predictable and in many cases unavoidable environmental impacts. These include an increase in the suspended sediment concentration and turbidity in the water column, the removal, injury, and disturbance of biological communities in the dredging footprint, and the remobilisation of toxic chemicals that might have accumulated in the dredged sediment into the water column. There is no environmental legislation that governs the act of dredging in South Africa, but the dredging party is expected to exercise a duty of care to limit environmental degradation. The National Environmental Management Act: Integrated Coastal Management Act, 2008 (Act No. 24 of 2008) governs the open water disposal of dredged material. The open water disposal of dredged material requires a permit from the Department of Forestry, Fisheries and the Environment. The permitting procedure is in line with the Convention on the Prevention of Marine Pollution by Dumping of Wastes and Other Matter

of 1972 (the London Convention) and 1996 Protocol thereto, to which South Africa is a signatory. To comply with the Act, Transnet National Ports Authority annually makes an application to the Department to dispose sediment dredged in the Buffalo River estuary at a registered open water dredged spoil disposal site off East London. The Department decides if the dredged sediment may be disposed at the open water site based largely on the concentration of metals in the sediment.

This report analyses and discusses the findings of the physical and chemical analysis of sediment sampled in the Buffalo River estuary in July 2022. The purpose of the report is to provide Transnet National Ports Authority with information required for the completion of a permit application to the Department of Forestry, Fisheries and the Environment to cover the open water disposal of sediment maintenance dredged in the Buffalo River estuary for the next permit cycle. The report also provides officials from the Department of Forestry, Fisheries and the Environment with information for reaching an informed decision on the permit application.

2. Material and Methods

2.1. General description of the Port of East London

The Port of East London is situated in the Buffalo River estuary, in the city of East London on the southeast coast of South Africa (27°55'S, 33°01'E; Figure 1). The estuary bisects the port into what are traditionally referred to as the West and East Banks, although these technically lie on a north-south axis as the estuary lies on a general west-east axis (see Figure 1). The entrance channel is dredged to a depth of about 12 m, with draughts at berths for large cargo vessels ranging between about 8 - 10.5 m. The port has twelve commercial berths, one repair quay and a graving dock. Six berths are situated on the West Bank and six on the East bank, offering a total quay length of about 2.4 km. A repair quay and the graving dock are situated on the East Bank, the latter with a docking length of about 200 m.



Figure 1. Aerial view of the Buffalo River estuary, showing the positions where sediment was sampled in July 2022.

A variety of cargo is imported and exported through the port, of which vehicles and vehicle components, grain and containerised traffic are the most important. Grain exports (primarily maize) are facilitated through the largest grain silo on the South African coast. The silo is on the West Bank, near the port entrance. A multi-level car terminal with storage for about 2800 vehicles and a throughput of about 50 000 vehicles per year is also situated on the West Bank. Containerised traffic and break-bulk cargo are handled at the Combi Terminal on the East Bank.

The immediate surroundings of the port are heavily urbanised, consisting of a mainly residential and light industrial type on the East Bank and an industrial type on the West Bank. Several small streams and creeks drain surface runoff from the surroundings to the port.

2.2. Fieldwork

Sediment was sampled on 13 July 2022 at 11 positions (hereafter referred to as stations) identified by Transnet National Ports Authority, based largely on anticipated maintenance dredging requirements (Figure 1; see Appendix 1 for station Global Positioning System coordinates). The sediment at each station was analysed for its grain

size and total organic content, and for the concentrations of 15 metals.

The upper 5 - 10 cm of sediment was sampled using a van Veen grab. Three grab samples were collected at each station. On retrieval, water overlying sediment in the grab was bled through a small hole in their sides, taking care to lose as little fine-grained material as possible during the process. The sediment from the grab samples was composited in a glass bowl and then inspected for the presence of anomalous material (e.g. plastic items). If the contents were comprised of a large amount of gravel, plastic items, or other anomalous material the contents were discarded, and the grabs were re-deployed. If the grab contents were acceptable the sediment was homogenised in the glass bowl using a high-density polyethylene scoop. During this process small stones, plastic items and other material not deemed representative of the sediment was removed if encountered. Characteristics of the sediment, such as its colour, texture, and aroma, were noted on field data sheets and the sediment was photographed. Aliquots of the sediment were then distributed between pre-cleaned high-density polyethylene and amber glass jars depending on the required analyses. The samples were held on ice in the field and frozen (-18°C) on return to the laboratory apart

from the sediment destined for toxicity testing, which was refrigerated at 4°C. The grab and sediment processing equipment was scrubbed with a hard brush, rinsed in site water, sprayed with acetone, and again rinsed in site water before the sampling of sediment at a new station, to limit cross contamination.

2.3. Laboratory analyses

2.3.1. Analytical laboratory

The sediment samples were analysed for metals at the Environmental Chemistry laboratory at the CSIR in Stellenbosch. The laboratory is accredited by the South African National Accreditation System (SANAS) for the analysis of marine water, sediment, and biological tissue. The laboratory SANAS accreditation certificate is provided in Appendix 2.

2.3.2. Grain size composition

Sediment grain size composition was determined by wet and dry sieving the sediment into seven grain size classes according to the Wentworth Scale, namely mud (<0.063 mm), very fine-grained sand (0.063 - 0.125 mm), fine-grained sand (0.125 - 0.250 mm), medium-grained sand (0.25 - 0.50 mm), coarse-grained sand (0.5 - 1.0 mm), very coarse-grained sand (1.0 - 2.0 mm) and gravel (>2.0 mm).

2.3.3. Total organic content

An aliquot of the sediment was oven dried and weighed. Particulate organic matter in the sediment was then degraded using hydrogen peroxide, which was continually added until effervescence ceased. The sediment was then rinsed in distilled water, dried, and weighed. The difference in dry weight before and after particulate organic matter degradation was taken as the total organic content.

2.3.4. Metals

The sediment was freeze dried and ball milled to a fine consistency. About 1 g of the sediment was then weighed into a digestion vessel and digested in a mixture of HNO₃-HCl-H₂O₂ according to USEPA method 3050B. This is a 'near-total' digestion method that dissolves most elements that could be 'environmentally available', but it is not designed to dissolve metals that are tightly incorporated in silicate structures (*i.e.* refractive metals). The digestate was filtered (0.45 µm), diluted to volume

with Milli-Q water, and the concentrations of various major, minor and trace metals detected and quantified using Inductively Coupled Plasma Optical Emission (ICP-OES) and Mass Spectroscopy (ICP-MS). Mercury was analysed using a direct mercury analyser (DMA).

Method blanks were analysed to assess laboratory contamination. The precision and extraction efficiency of the analytical procedures was evaluated by analysing marine sediment reference standard PACS-2 (National Research Council of Canada) and laboratory duplicates. Since the reference material is certified for total digestion and a near-total extraction procedure was used in this study, the recovery of several refractory metals (*e.g.* aluminium, chromium) was below 100% (Appendix 3). However, the recoveries are within limits defined by the CSIR for quality assurance and quality control purposes based on the results of repeated analysis of the CRM over an extended period. All metals were at a concentration below the method detection limit in method blanks. The Relative Standard Deviation for laboratory duplicates was within the data quality objective of 10% (Appendix 3).

Although arsenic is technically a metalloid (*i.e.* semi-metal), in the interests of simplicity it is referred to as a metal in this report.

3. Results and Discussion

3.1. Grain size composition

In a geologically homogenous area, grain size is the most important factor that controls the natural concentrations of metals in sediment. This is because aluminosilicates, which are the major natural metal-bearing phase of sediment, predominate in clay. Sand, in contrast, is comprised largely of metal deficient quartz (silica) and acts as a diluent of metal concentrations. Muddy sediment thus naturally has a higher metal content than sandy sediment. Mud also sequesters metals that are anthropogenically introduced in solution to surface waters because of the large surface area provided by the grains for adsorption and because their surface is electrically charged, rendering them chemically reactive. Metals and other contaminants that are particle reactive also attach to and are transported with suspended particulate matter in

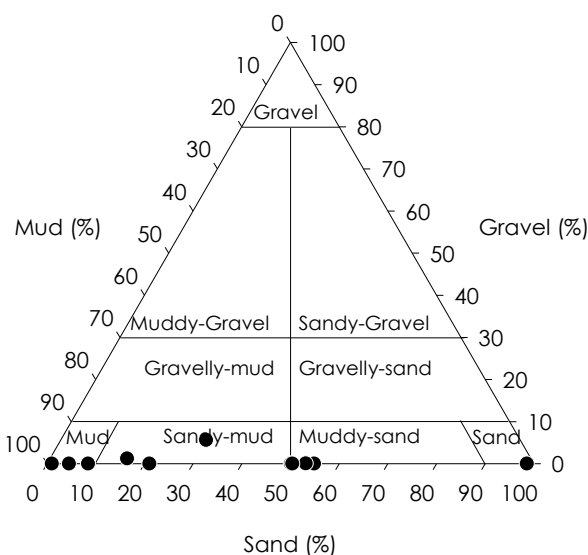


Figure 2. Ternary plot illustrating the proportional contribution of gravel, sand, and mud to the bulk weight of sediment sampled in the Buffalo River estuary in July 2022.

the water column, ultimately settling and accumulating in depositional zones. These are areas where the sediment is dominated by fine-grained material (*e.g.* mud) and form where water currents are so weak that fine-grained suspended material and any associated contaminants settle from the water column. As a general rule, therefore, naturally occurring and anthropogenically introduced metal concentrations are highest in muddy sediment and lowest in sandy sediment. There may be exceptions in ports since coarse-grained sediment may contain high metal concentrations due, for example, to the inclusion of metal flecks and metal-impregnated antifouling coating flakes derived from vessel maintenance operations, and metal concentrate and ore particles spilled during the loading of vessels.

The grain size of sediment thus provides important information for identifying areas in the Buffalo River estuary where particle reactive contaminants have a propensity to accumulate. Anomalous high metal concentrations in sandy sediment provides indirect information on the likelihood the metals were present as a solid (*i.e.* a largely non-bioavailable form), which has important implications for understanding the toxicological risk.

The sediment sampled in the Buffalo River estuary in July 2022 is classified as sand, muddy-sand, sandy-mud, and mud (Figure 2; data in Appendix 3).

The dominant grain size class at all but Station 11 near the end of the southern breakwater was mud. At Station 11, fine-grained sand was the dominant grain size class. The contribution of mud to the bulk weight of sediment generally decreased from Station 1 toward Station 11, although there are areas along the estuary where the sand fraction is fairly high. Coarse-grained material (*i.e.* gravel, very coarse and coarse-grained sand) was poorly represented, typically contributing <2% to bulk sediment weight but up 10.8% at Station 3 off the Dry Dock. The coarse material in sediment at Station 3 may reflect material released from the Dry Dock, or the scouring of fine-grained material from the sediment when the dock is drained.

The findings for the 2022 survey are consistent with those of previous surveys. The high mud fraction of sediment across large parts of the Buffalo River estuary reflects its depositional nature, which is a characteristic feature of estuaries. This indicates there is a high propensity for the retention of particle reactive contaminants introduced in solution to the estuary.

3.2. Total organic content

Particulate organic matter in sediment also provides a site for the adsorption of contaminants, including metals such as cadmium and mercury and organic contaminants such as polycyclic aromatic hydrocarbons. Metals and other contaminants that are particle reactive attach to and are transported with suspended particulate organic matter in the water column, ultimately settling and accumulating in depositional zones. Due to its fine-grained nature, particulate organic matter is deposited on and winnowed from sediment concurrently with mud depending on the prevailing current regime. Mud and particulate organic matter tend, therefore, to accumulate in or be depleted from sediment in the same areas. The total organic content of sediment thus provides important information for identifying major sources of, and depositional zones for particulate organic matter in the Buffalo River estuary, and therefore, for identifying parts of the estuary that are susceptible to the accumulation of contaminants that adsorb onto this matter. The total organic content is also monitored to determine if the sediment is so enriched with particulate organic matter that its

exposure during dredging will likely result in an excessive oxygen demand by microorganisms that degrade this matter. Since dissolved oxygen is a fundamental requirement for the survival of most forms of aquatic life an excessive oxygen demand is of obvious ecological concern.

In aquatic ecosystems where the sediment is not enriched with particulate organic matter from anthropogenic sources there is often a strong positive relationship between the mud fraction and total organic content of the sediment due to the similar deposition and winnowing from sediment of these fine-grained materials by currents. The relationship is beneficial since it can be used to identify sediment that has an anomalous total organic content. Scientists from the Coastal Systems research group of the CSIR have defined a baseline model for the total organic content of sediment in the Port of East London using the results from previous monitoring and research (Figure 4). The baseline model comprises a linear regression and 99% prediction limits (oblique solid and dashed lines respectively in Figure 4). The regression defines the average total organic content at co-occurring mud fractions in sediment at baseline locations in the Port of East London, while the upper and lower prediction limits define the range around the average in which 99% of measurements should fall if the sediment is not enriched with particulate organic matter and the data are normally distributed. A total organic content that plots above the upper prediction limit indicates the sediment has a total organic content in excess of the baseline and is thus deemed to be enriched with particulate organic matter. The magnitude of the enrichment was quantified by calculating an Enrichment Factor. An Enrichment Factor ≤ 1 indicates the total organic content is lower than the concentration predicted at the upper prediction limit of the baseline model and is thus within the baseline range while an Enrichment Factor >1 indicates the total organic content is in excess of the concentration expected for baseline sediment at the corresponding mud fraction in the sediment sample. An Enrichment Factor of two, for example, means the total organic content is twice as high as the total organic content predicted for sediment for baseline sediment with the corresponding mud fraction.

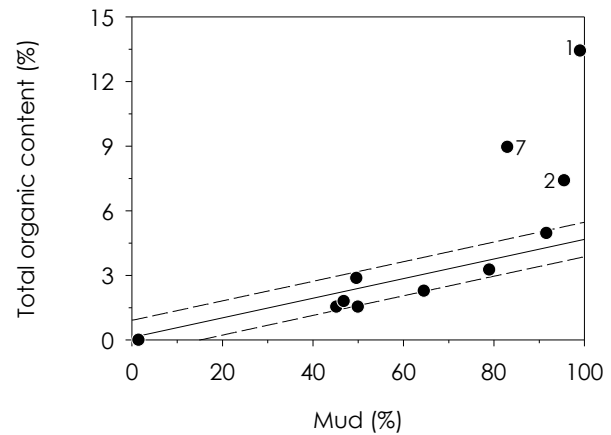


Figure 3. Baseline model for total organic content in sediment in the Buffalo River estuary, with the total organic content in sediment sampled in the estuary in July 2022 superimposed. Some data points are highlighted by station identifiers.

Superimposing the total organic content of sediment sampled in the Buffalo River estuary in July 2022 onto the baseline model identifies the sediment at Stations 1 and 2 upstream of the port proper, and at Station 7 off the Victoria Slipway as enriched with particulate organic matter (Figure 3; data in Appendix 3). The degree of enrichment was high at Stations 1 and 7, and moderate at Station 2. Since Stations 1 and 2 are situated upstream of the port proper the particulate organic matter in the sediment will have little impact on dissolved oxygen concentrations during dredging. There may be a slight depression in the dissolved oxygen concentration when the sediment at Station 7 is dredged.

The findings for the 2022 survey are consistent with those of previous surveys from the perspective that sediment across most of the Buffalo River estuary has usually not been enriched with particulate organic matter apart from upstream of the port proper. Other research by the scientists from the Coastal Systems research group of the CSIR has revealed that the particulate organic material is derived from plant remains, which are undoubtedly introduced to the estuary via the Buffalo River.

3.3. Metals

It is easy to determine if sediment is contaminated by some chemicals since they do not occur naturally in the environment but are manmade. The mere presence of these chemicals in sediment indicates it is contaminated. Determining if sediment is metal contaminated is more

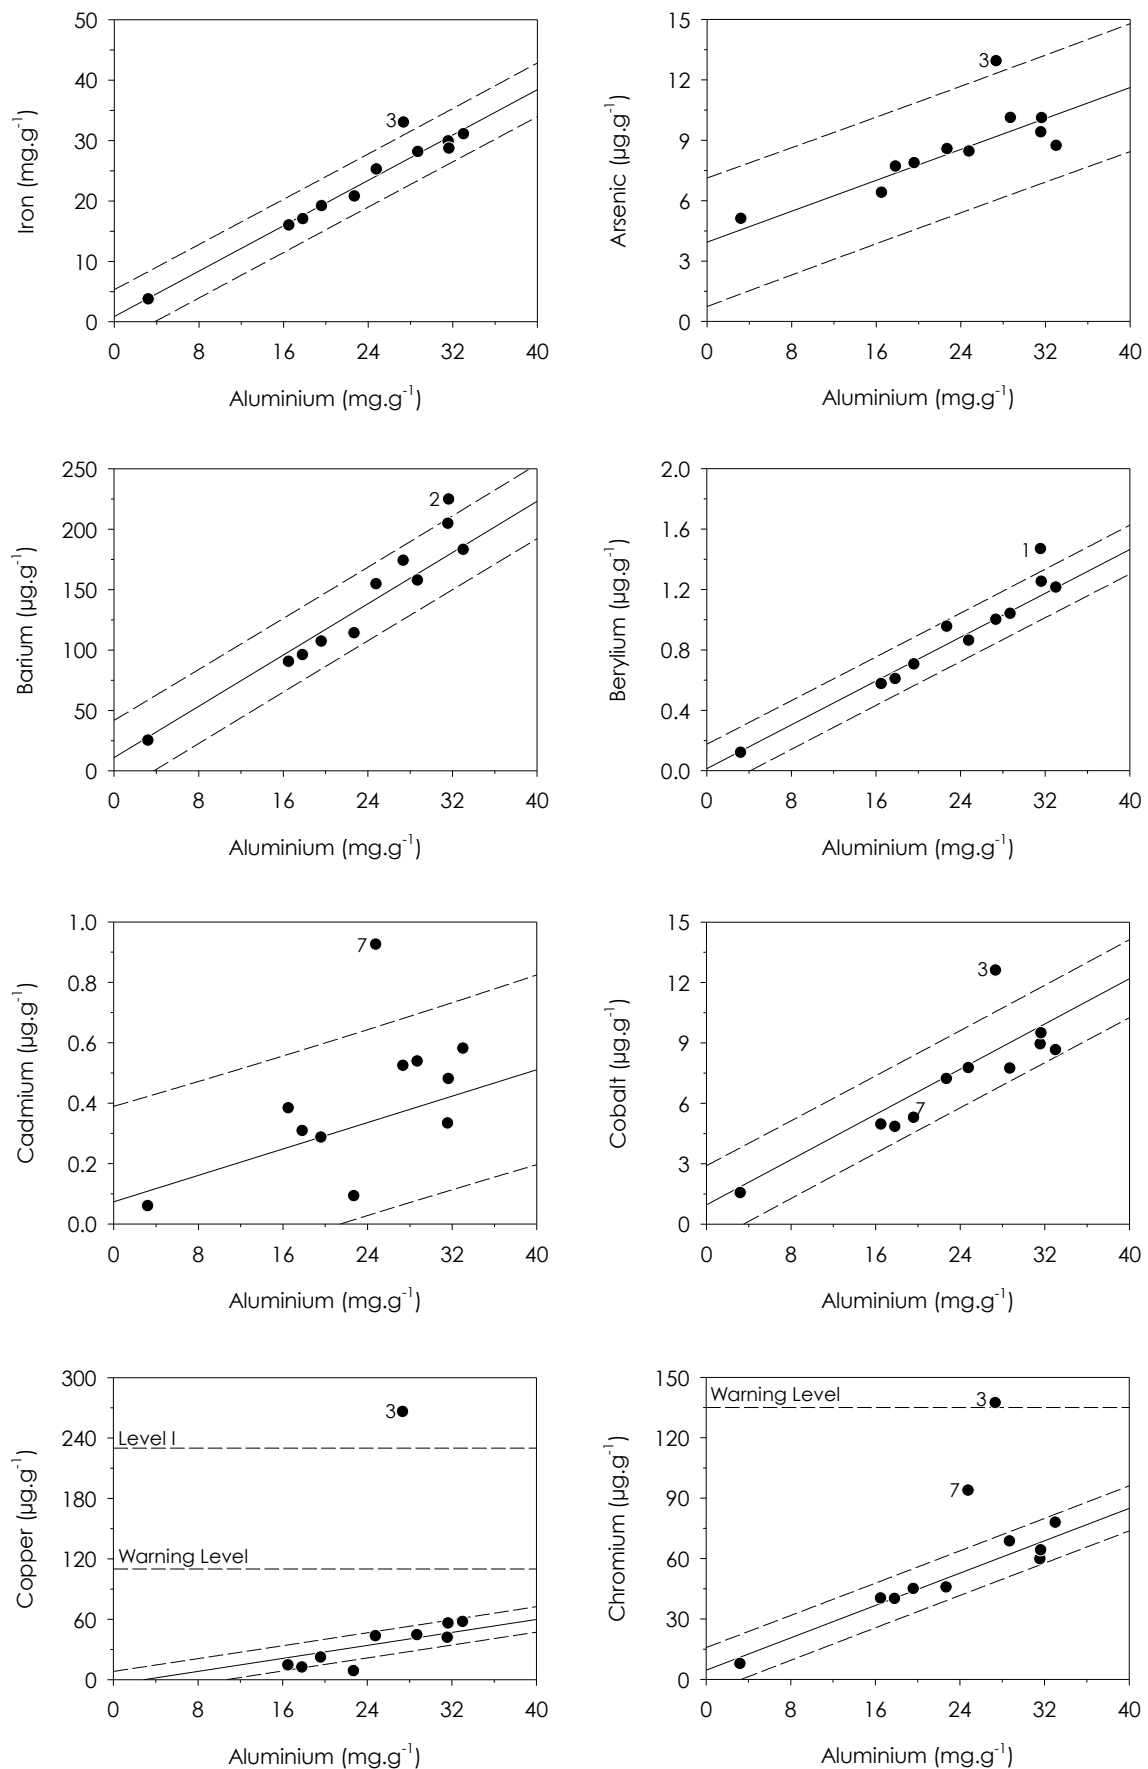


Figure 4. Baseline metal concentration models for sediment in the Buffalo River estuary, with metal concentrations in sediment sampled in the estuary in July 2022 superimposed. Sediment quality guidelines used by the Department of Forestry, Fisheries and the Environment to decide if sediment identified for dredging in South African ports is suitable for open water disposal are included if they fall within the y-axis range. Some metal concentrations are highlighted by station identifiers.

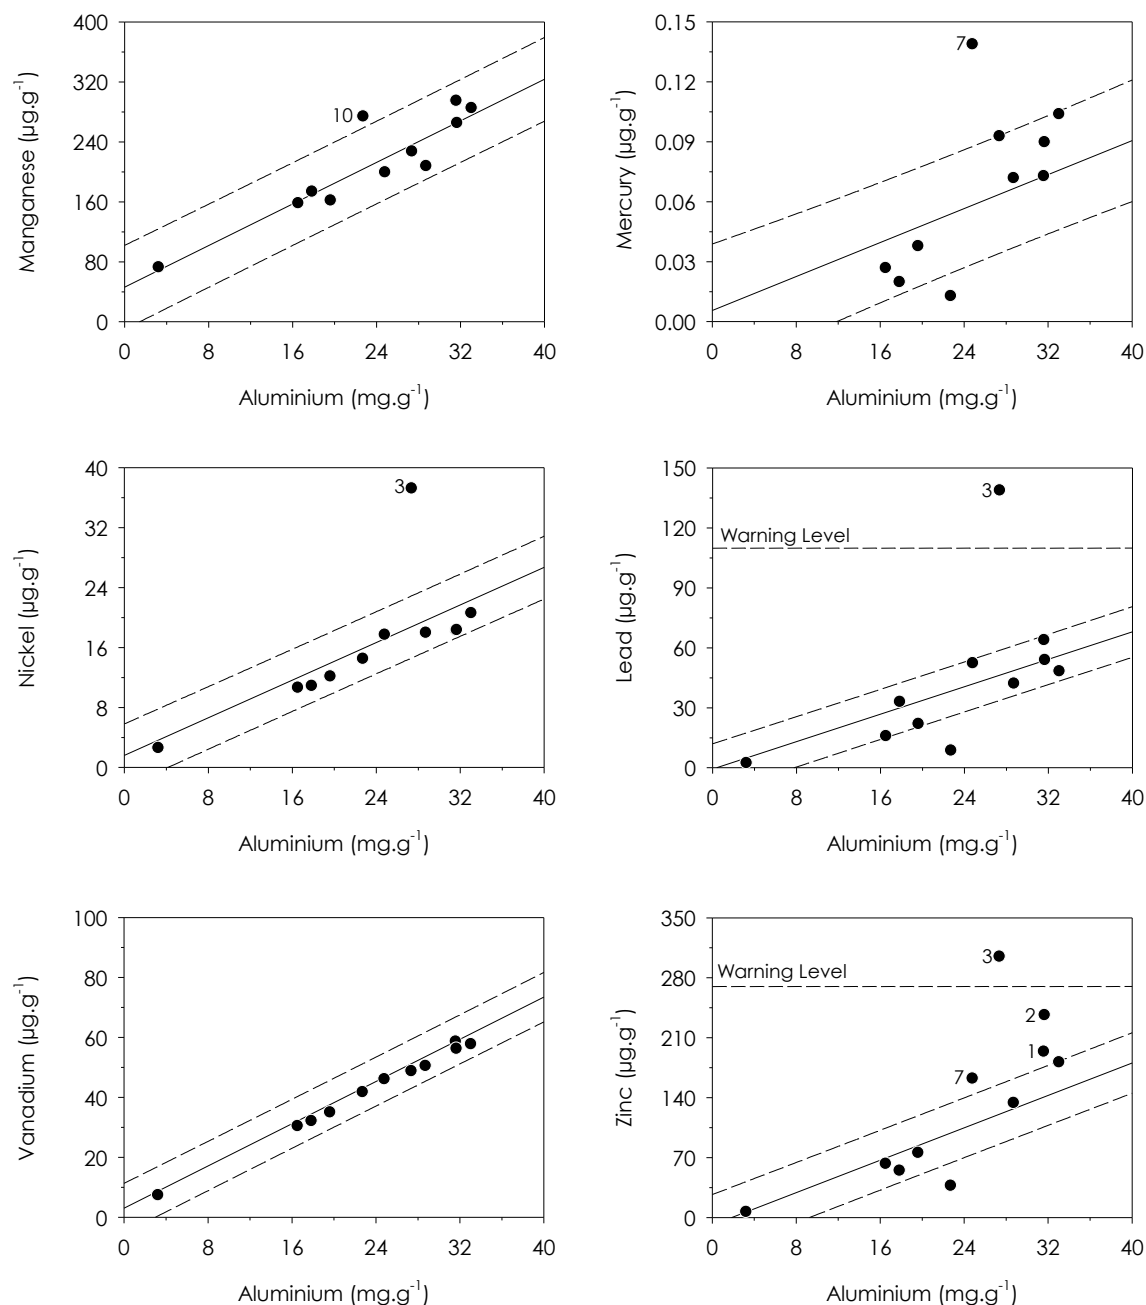


Figure 4 continued. Baseline metal concentration models for sediment in the Buffalo River estuary, with metal concentrations in sediment sampled in the estuary in July 2022 superimposed. Sediment quality guidelines used by the Department of Forestry, Fisheries and the Environment to decide if sediment identified for dredging in South African ports is suitable for open water disposal are included if they fall within the y-axis range. Some metal concentrations are highlighted by station identifiers.

complicated because metals are a ubiquitous, naturally occurring component of sediment. The mere presence of metals in sediment does not automatically imply it is contaminated. Metal concentrations in uncontaminated sediment can vary naturally by several orders of magnitude over a relatively small spatial scale depending on the sediments mineralogy, granulometry and organic content amongst other factors (Loring and Rantala, 1992; Kersten and Smedes, 2002). High metal concentrations in sediment do not imply

contamination but might simply reflect the mineralogy of the parent material and its grain size and organic content. As a further complication, despite input and transport dissimilarities, naturally occurring and anthropogenically introduced metals tend to accumulate in the same areas (Hanson *et al.*, 1993). As a result of these complexities, an identical metal concentration in two sediment samples from the same aquatic system may reflect contamination in one instance but not the other, because of a difference in the grain size and organic

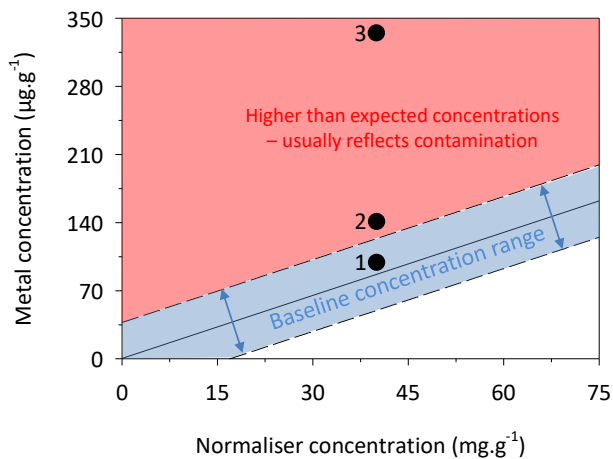


Figure 5. Schematic of a baseline metal concentration model. The oblique solid line and flanking dashed lines are the linear regression and upper and lower 99% prediction limits respectively. The prediction limits define the baseline concentration range for a metal in sediment at any co-occurring aluminium concentration (blue shaded area). If a metal concentration falls within the prediction limits, as is the case for hypothetical concentration 1, then the metal is present at a baseline concentration (not contaminated). If a metal concentration falls above the upper dashed line (i.e. upper prediction limit), as is the case for hypothetical concentrations 2 and 3, then the metal is present at an enriched concentration. Hypothetical metal concentration 2 is only slightly higher than the upper prediction limit and reflects a low degree of contamination. Hypothetical metal concentration 3 far exceeds the upper prediction limit and represents a much higher degree of contamination.

content of the sediment. A low metal concentration might reflect contamination, but a higher concentration might not for the same reason.

To meaningfully interpret metal concentrations in sediment it is necessary to compensate for factors that control their natural variation before background or baseline concentrations can be differentiated from enriched concentrations, which might reflect contamination. This is usually accomplished by the procedure of geochemical normalisation, wherein metal concentrations are mathematically normalised to a co-occurring conservative element in the sediment that provides a tracer of crustal decomposition (Hanson *et al.*, 1993; Kersten and Smedes, 2002). The purpose of geochemical normalization is to compensate for the variables that influence the natural variation of metal concentrations in sediment (principally grain size) such that after normalization concentrations in equally contaminated or uncontaminated

sediment with a different granulometry do not differ significantly (Kersten and Smedes, 2002).

In a geologically homogenous area, metals are usually found at relatively constant proportions in uncontaminated sediment (Wedepohl, 1995; Kersten and Smedes, 2002), with their absolute concentration largely controlled by the sediment grain size (Horowitz, 1991; Loring, 1991). There is usually a strong linear relationship between metal concentrations and the silt and clay (mud) fraction, and between concentrations of different metals in sediment. It is these relationships that provide the basis for geochemical normalization, wherein the relationships between a metal and an element that provides a conservative tracer of the natural metal-bearing phases of sediment is modelled through simple linear regression analysis (Hanson *et al.*, 1993; Kersten and Smedes, 2002). Simple linear regression models and associated prediction limits that describe the relationship between a metal and co-occurring normaliser are referred to as baseline metal concentration models, or simply baseline models.

Scientists from the Coastal Systems research group of the CSIR have defined baseline models for metals in sediment in all South African ports. The models define the range in concentrations that can be expected for any metal in baseline sediment of a differing grain size. The procedure used to define the baseline models is too voluminous to discuss in this report. Briefly, metal concentrations were plotted against corresponding aluminium concentrations and a simple linear regression and 99% prediction limits were fitted to the data. Metal concentrations falling outside the prediction limits were deemed outliers and trimmed, starting with the concentration with the largest residual, reiterating the regression, and proceeding in this way until all concentrations fell within the prediction limits. The models represent baseline rather than background concentrations as some concentrations in the models may reflect low magnitude contamination of sediment considering the sediment was sampled in a port. It is not possible to discriminate perfectly between background and contaminated sediment.

The baseline models are provided in Figure 4, with aluminium normalised metal concentrations in

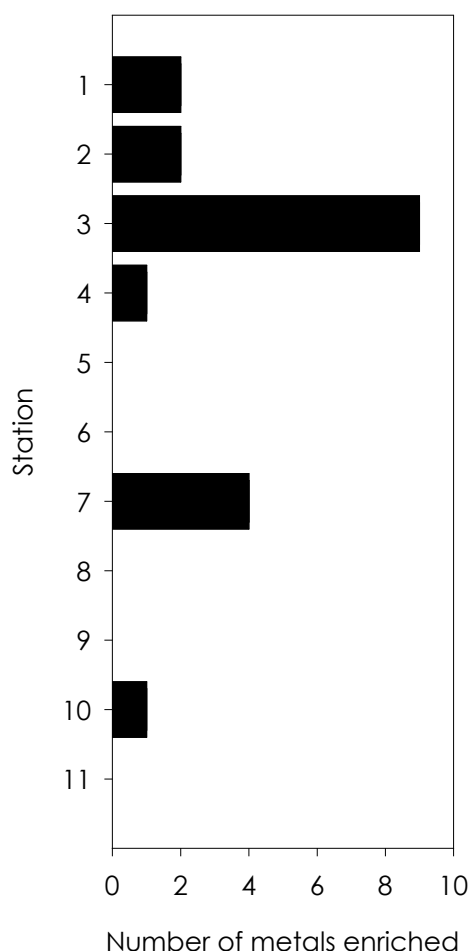


Figure 6. The number of metals enriched in sediment sampled in the Buffalo River estuary in July 2022.

sediment sampled in the Buffalo River estuary in July 2022 superimposed (data in Appendix 4). Aluminium was used as the normaliser of metal concentrations because it is (a) highly refractory, (b) is structurally combined to the major metal-bearing phases of sediment, (c) co-varies in proportion to naturally occurring concentrations of other metals, (d) is insensitive to inputs from anthropogenic sources, and (e) is stable and not subject to environmental influences such as reduction/ oxidation, adsorption/desorption and other diagenic processes that may alter sediment concentrations. Aluminum is used as a proxy for the granulometric variation of sediment, and more specifically the variation in the silt and clay (mud) fraction. To demonstrate this point the aluminium concentration in sediment sampled in the Buffalo River estuary in July 2022 is very strongly positively correlated to the mud fraction ($r = 0.961$, $p < 0.001$). The choice of aluminium as the normaliser of metal concentrations in sediment in the Buffalo River estuary is thus founded on valid

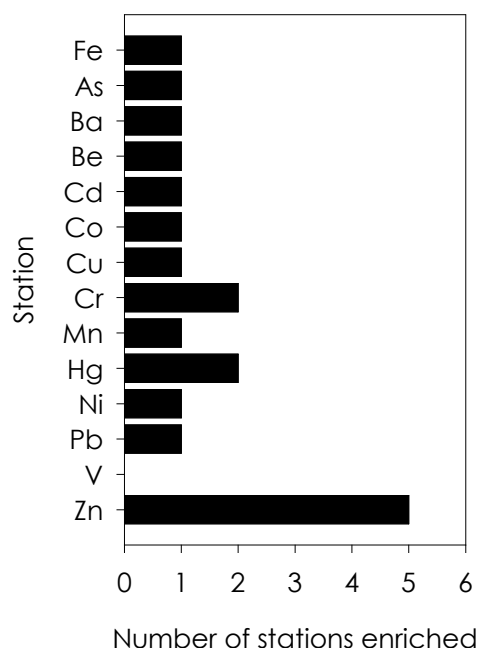


Figure 7. The number of stations in the Buffalo River estuary where sediment sampled in July 2022 was enriched by various metals.

geochemical principles.

As stated above, the baseline models comprise a regression line and upper and lower 99% prediction limits (oblique and solid and dashed lines in Figures 6 and 7). The regression line defines the average concentration for a metal at co-occurring aluminium concentrations in sediment at baseline locations, while the upper and lower prediction limits define the range in which 99% of concentrations should fall if the sediment is not enriched and the concentrations used to define the baseline model are normally distributed. Metal concentrations that exceed the upper prediction limit when superimposed onto a baseline model are in excess of the baseline and indicate the sediment is enriched (see Figure 7). A concentration that exceeds the upper prediction limit does not imply it was enhanced by an anthropogenic contribution but rather that it is atypical of the data used to define the model. Several reasons other than an anthropogenic input can result in a metal concentration exceeding the upper prediction limit. These include analytical variability and errors, poor model assumptions, the probability that metal concentrations in some samples will naturally exceed the upper prediction limit (in a normally distributed population, at the 99% prediction limit one in every 100 concentrations could conceivably naturally exceed the limit), and natural enrichment

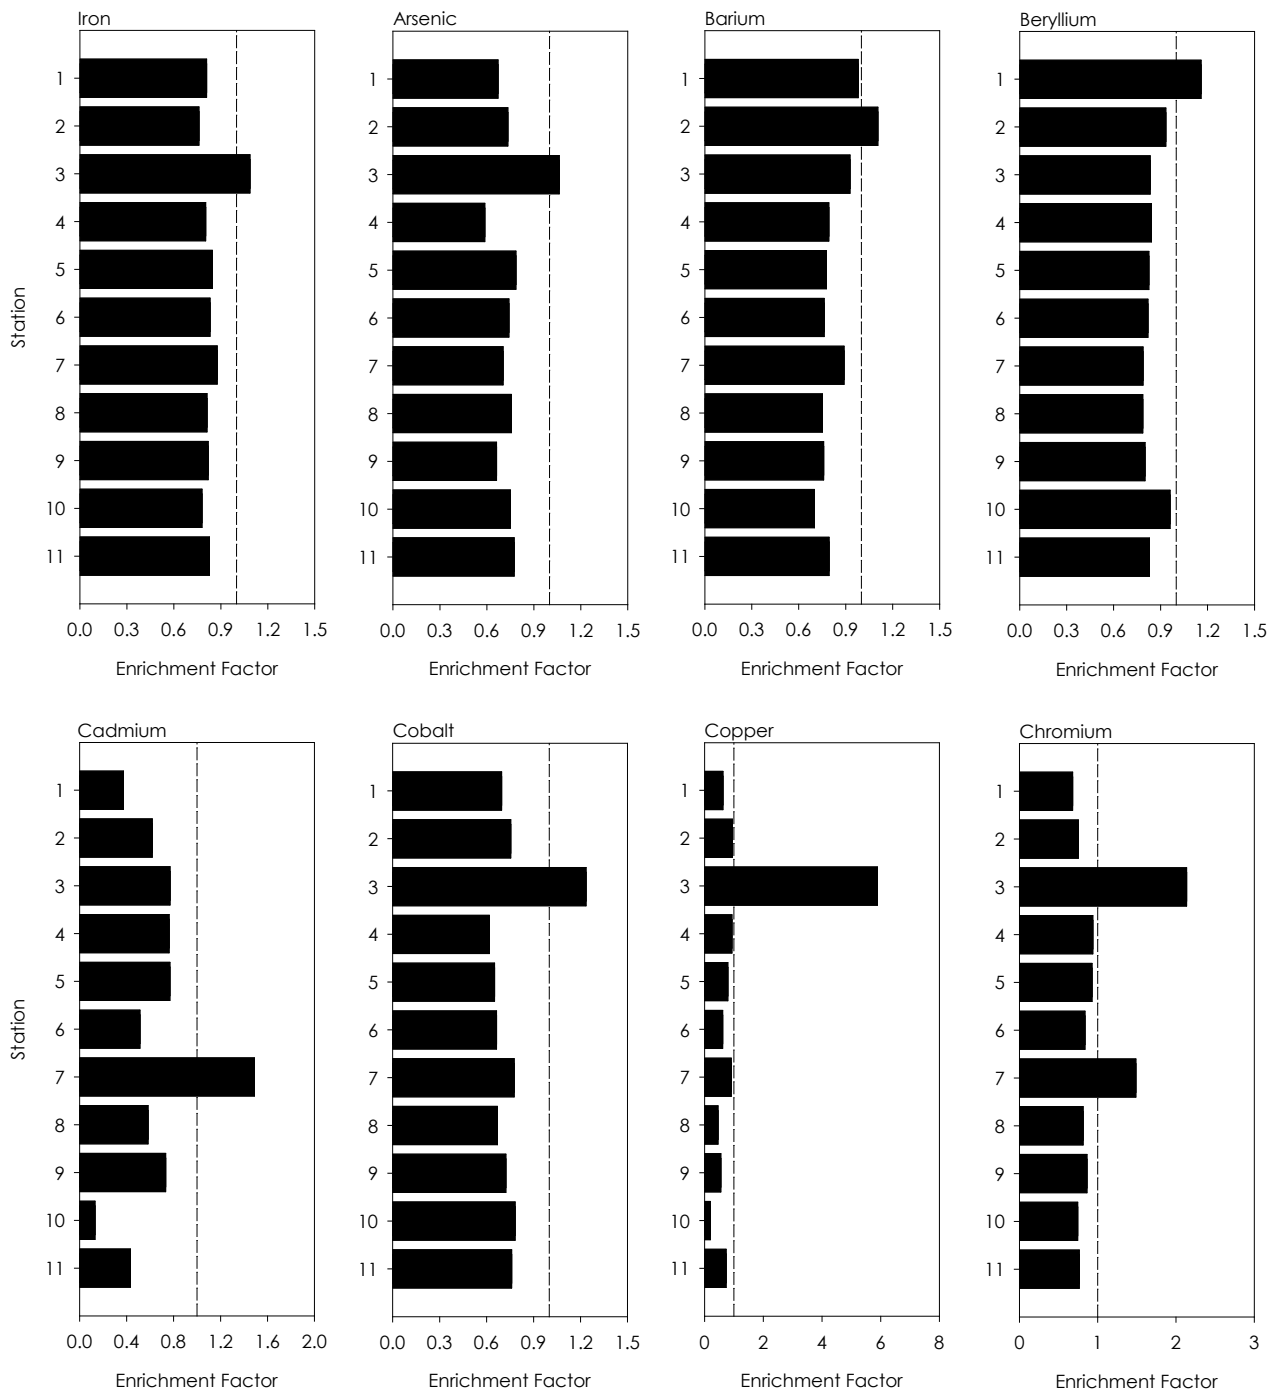


Figure 8. Enrichment Factors for metals in sediment sampled in the Buffalo River estuary in July 2022. The dashed lines represent an Enrichment Factor = 1. An Enrichment Factor >1 indicates the metal was at a concentration exceeding the baseline and may indicate contamination.

not captured by the baseline data set (Schropp *et al.*, 1990; Rae and Allen, 1993).

The interpretation of whether metal enrichment reflects contamination thus requires consideration of ancillary factors that include biogeochemical processes that may naturally lead to the enrichment of some metals, the absolute difference between a metal concentration and upper prediction limit, the location of enriched sediment relative to known or potential anthropogenic

sources of metals, and an assessment of the number of metals in a sediment sample that exceed upper prediction limits. The larger the difference between a metal concentration and upper prediction limit (see Figure 7) and the greater the number of metals enriched in a sediment sample the more likely this reflects contamination. This is because the sediment in ports is most commonly enriched by several metals rather than a single metal, particularly if the anthropogenic sources are diffuse (*e.g.* stormwater runoff). This said,

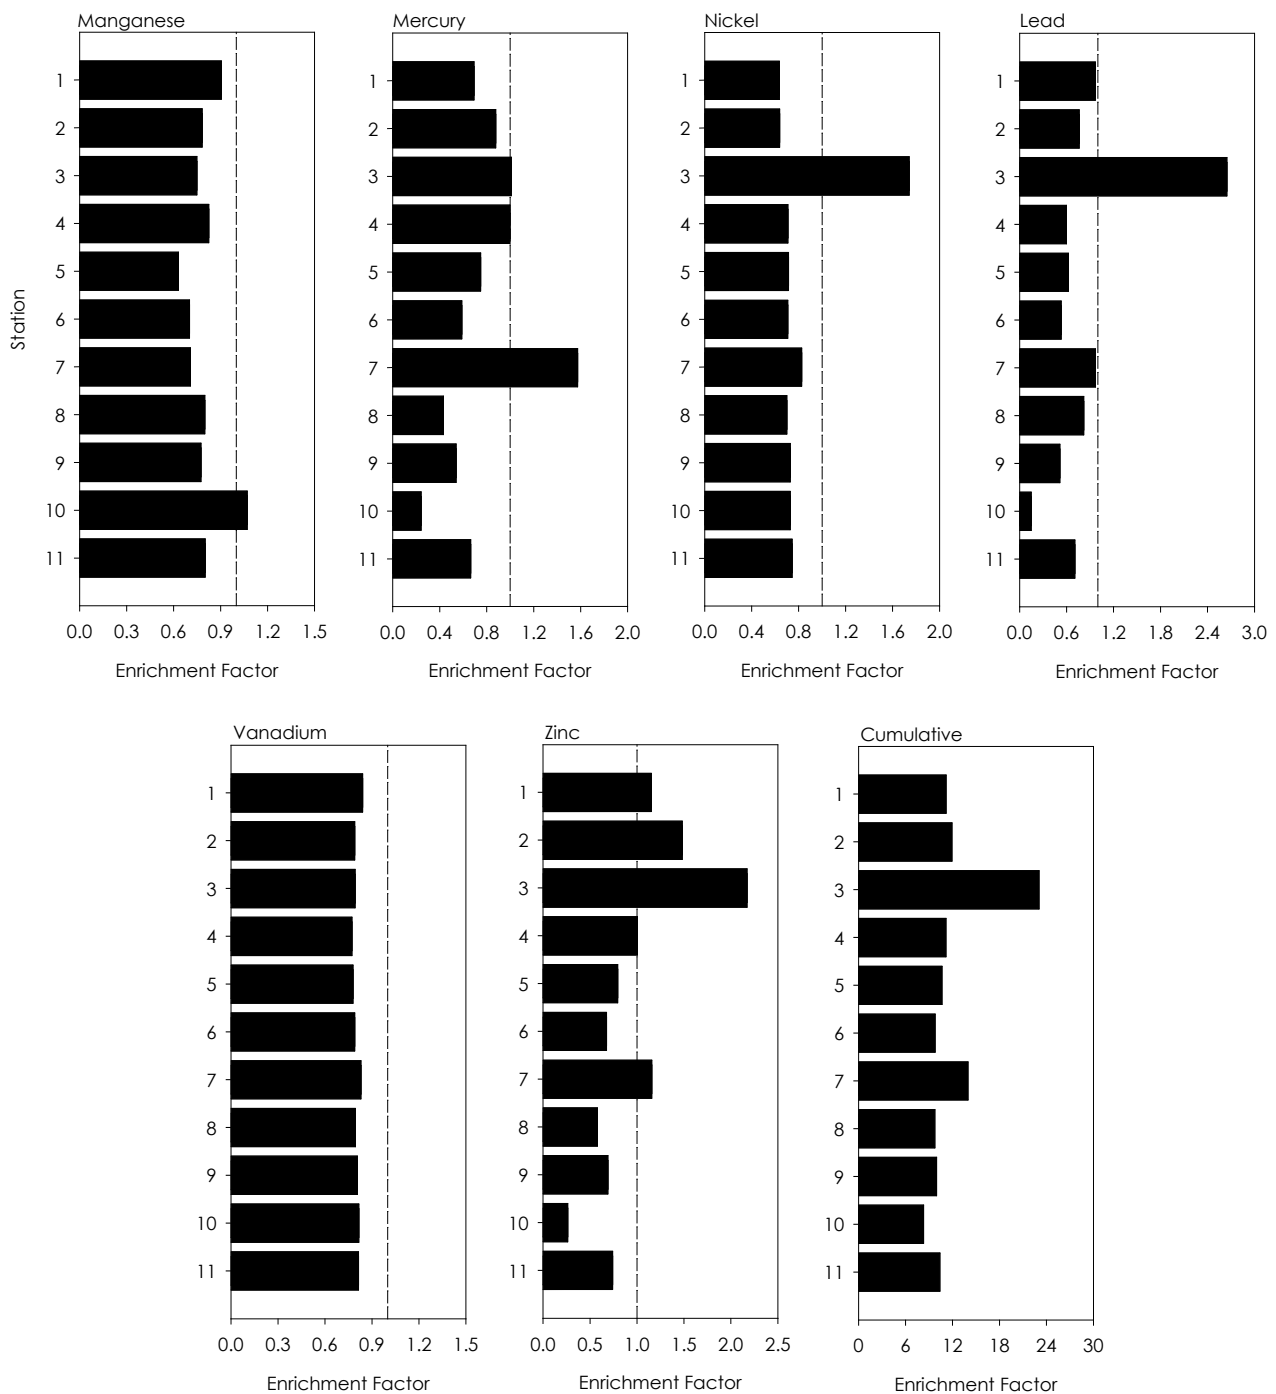


Figure 8 continued. Enrichment Factors for metals in sediment sampled in the Buffalo River estuary in July 2022. The dashed lines represent an Enrichment Factor = 1. An Enrichment Factor >1 indicates the metal was at a concentration exceeding the baseline and may indicate contamination.

enrichment of sediment by one metal may occur in areas where metal ores are exported and there are few other anthropogenic sources of metals in the area. However, even in these cases other metals are commonly enriched in the sediment as they are impurities of ores.

The concentrations of most metals in sediment sampled at most stations in the Buffalo River estuary in July 2022 fall within baseline model prediction limits, that is, they are within the

expected baseline range for sediment in the estuary (Figure 4). The concentrations of one or more metals in the sediment sampled at Stations 1, 2, 3, 4, 7, and 10 did, however, exceed baseline model upper prediction limits. The sediment with the highest number of metals (nine) at an enriched concentration was at Station 3 off the Dry Dock, followed by four metals at Station 7 at the Victoria Slipway (Figures 4 and 6). The sediment sampled at Stations 5, 6, 8, 9, and 11 was not metal enriched. In the case of Stations 3 and 7 the enrichment by

some metals was significant and certainly reflects contamination rather than enrichment resulting from natural biogeochemical processes. The enrichment at Stations 1, 2, 4 and 10 may reflect contamination, but of a far lower magnitude compared to Stations 3 and 7.

Zinc was the most frequently enriched metal, at five of the 11 stations, followed by chromium and mercury at three stations each (Figure 7). Vanadium was never at an enriched concentration (Figure 7).

The Cumulative Enrichment Factor, which is the sum of the Enrichment Factors for all metals in sediment at a station, provides additional understanding on metal enrichment of sediment. From this perspective the most metal contaminated sediment was at (in order) Stations 3 and 7 (Figure 8).

3.4. Comparison of chemical concentrations to sediment quality guidelines

The Department of Forestry, Fisheries and the Environment uses an Action List (sediment quality guidelines) to decide if sediment identified for dredging in South African ports is suitable for open water disposal. However, there are only guidelines for metals. There are three guidelines, known as the Warning Level, Level I and Level II (Table 1). The Warning Level provides a warning of incipient metal contamination but is not used for decision-making. Sediment with metals at a concentration below the Level I is considered suitable for disposal.

Table 1. Action List used by the Department of Forestry, Fisheries and the Environment to decide if sediment identified for dredging in South African ports is of a suitable quality for open water disposal. Concentrations are in $\mu\text{g.g}^{-1}$.

Metal	Warning Level	Level I	Level II
Arsenic	42	57	93
Cadmium	1.2	5.1	9.6
Chromium	135 ^a /250 ^b	260	370
Copper	110	230	390
Mercury	0.43	0.84	1.5
Nickel	62 ^a /88 ^a	140	370
Lead	110	218	530
Zinc	270	410	960

a - for Eastern and Western Cape, b - for KwaZulu-Natal

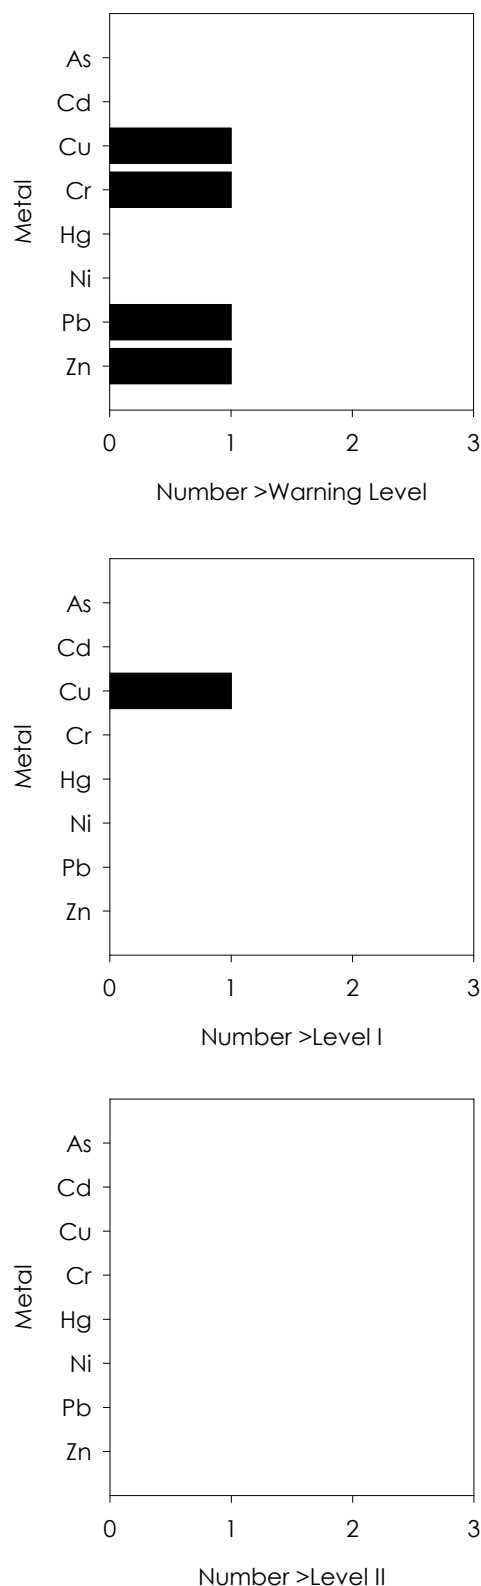


Figure 9. The number of stations at which metals in sediment sampled in the Buffalo River estuary in July 2022 were at a concentration that exceeded the Warning Level, Level I and Level II of the sediment quality guidelines used by the Department of Forestry, Fisheries and the Environment to decide if sediment identified for dredging in South African ports is suitable for open water disposal.

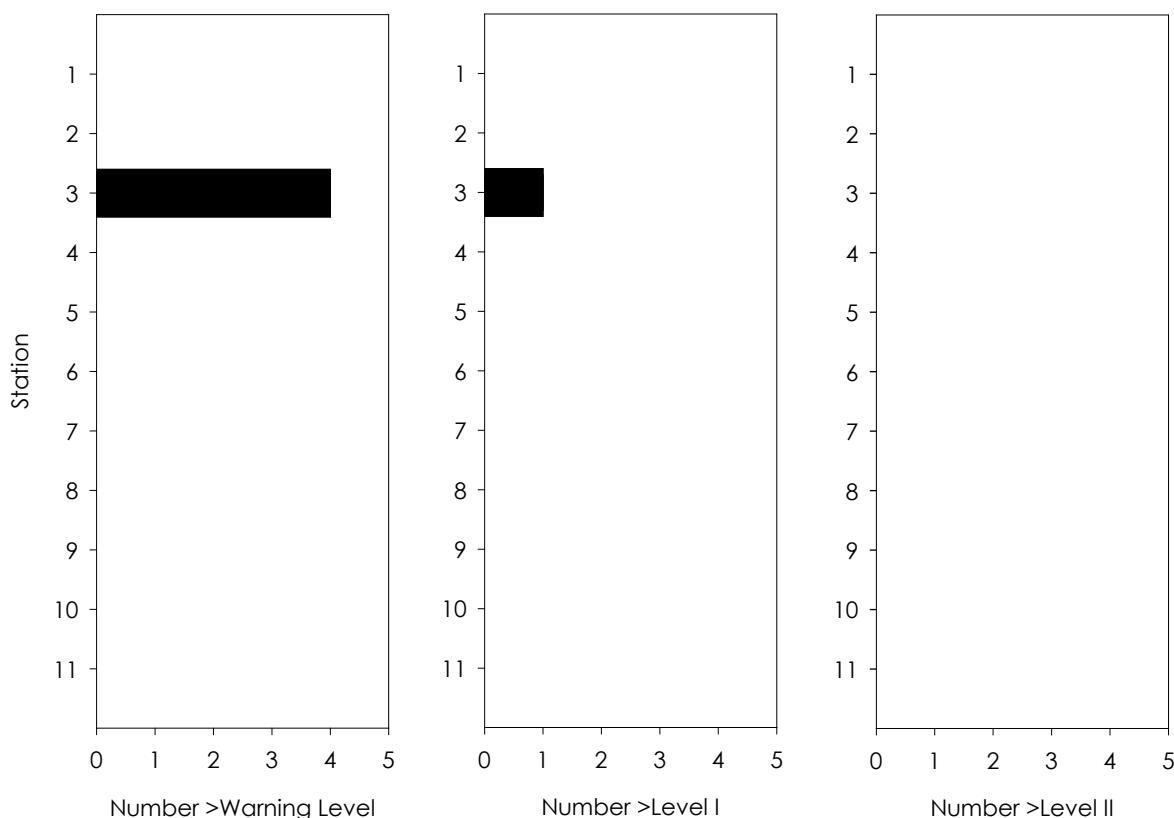


Figure 10. The number of stations at which metals in sediment sampled in the Buffalo River estuary in July 2022 were at a concentration that exceeded the Warning Level, Level I and Level II of the sediment quality guidelines used by the Department of Forestry, Fisheries and the Environment to decide if sediment identified for dredging in South African ports is suitable for open water disposal.

Sediment with metals at a concentration between the Level I and Level II is considered cause for concern, with the degree of concern increasing as the concentrations approach the Level II. Further testing may be requested to determine if metals in the sediment pose a toxic risk to sediment-dwelling organisms, but in practice this has not been implemented. Sediment with metals at a concentration exceeding the Level II is considered unsuitable for open water disposal unless other evidence (e.g. toxicity testing) shows the metals are not toxic to sediment-dwelling organisms due, for example, to the metals being present in metal flecks or metal-impregnated paint flakes and the entire concentration thus not being in a bioavailable form.

The number of metals in sediment sampled in the Buffalo River estuary in July 2022 that were at a concentration exceeding South African sediment quality guidelines is provided in Figures 9 and 10. The concentrations of copper, chromium, lead, and zinc at Station 3 exceed the Warning Level. The copper concentration at Station 3 also exceeds the Level I. No metal concentrations exceed the Level II.

4. Conclusions

The sediment sampled at six stations in the Buffalo River estuary was metal enriched in July 2022. The most significant enrichment, which certainly reflects contamination, was at Station 3 off the Dry Dock and Station 7 at Victoria Slipway. The most significant metal contaminants of sediment were chromium, mercury, and zinc. The metal contamination at Station 3 probably reflects the inclusion of metal flecks and/or metal impregnated antifouling coating flakes in the sediment. This conclusion is based on the fact that significant metal contamination was restricted to this area, an unlikely situation in the event of significant diffuse sources of metals in an aquatic ecosystem. The same conclusion probably applies to the sediment at Victoria Slipway.

The trend in metal enrichment of sediment sampled in the Buffalo River estuary in July 2022 is generally consistent with the trends for previous surveys. Thus, sediment in certain parts of the estuary has been consistently and more significantly enriched (contaminated) than in other

parts, most notably near the Dry Dock and at Victoria Slipway. The overwhelming feature of previous surveys, however, is that the sediment across most of the Buffalo River estuary was not metal contaminated, but when so this was usually of a low magnitude apart from near the Dry Dock and at Victoria Slipway.

The risk posed by metals in sediment was estimated by comparing their concentration to sediment quality guidelines that are used by the Department of Forestry, Fisheries and the Environment to determine if sediment identified for dredging in South African ports is suitable for open water disposal. The copper concentration in sediment sampled off the Dry Dock slightly exceeds the Level I. Based on the findings of this survey, it appears that the disposal of sediment dredged in the Buffalo River estuary is unlikely to pose a significant toxicological risk when it is disposed at the open water dredged material disposal site, even though sediment off the Dry Dock and at Victoria Slipway was contaminated. The sediment is likely to be contaminated in a small area around the latter sites and the contamination is likely to reflect the inclusion of metals in solid particles rather than as diffuse sourced contaminants. The disposal site is also situated in a highly dispersive environment and contaminants that do reach the seabed are likely to be rapidly winnowed and diluted by the prevailing currents. This conclusion is based on the fact that previous surveys have revealed there is virtually no mud in sediment at

the dredged material disposal site and metal concentrations in the sediment are very low.

5. References

- Hanson P, Evans D, Colby D and Zdanowics V (1993) Assessment of elemental contamination in estuarine and coastal environments based on geochemical and statistical modeling of sediments. *Marine Environmental Research* 36: 237-266.
- Kersten M and Smedes F (2002) Normalization procedures for sediment contaminants in spatial and temporal trend monitoring. *Journal of Environmental Monitoring* 4: 109-115.
- Loring DH and Rantala RTT (1992) Manual for the geochemical analyses of marine sediments and suspended particulate matter. *Earth-Science Review* 32: 235-283.
- Rae JE and Allen JRL (1993) The significance of organic matter degradation in the interpretation of historical pollution trends in depth profiles of estuarine sediment. *Estuaries* 16: 678-682.
- Schropp SJ, Lewis FG, Windom HL, Ryan JD, Calder FD and Burney LC (1990) Interpretation of metal concentrations in estuarine sediments of Florida using aluminum as a reference element. *Estuaries* 13: 227-235.
- Wedepohl KH (1995) The composition of the continental crust. *Geochimica et Cosmochimica Acta* 59: 1217-1232.

6. Appendices

Appendix 1

Global Positioning System coordinates of stations sampled in the Buffalo River estuary in July 2022.

Station	Latitude	Longitude
1	33° 01'32.68"S	27°52'54.44"E
2	33° 01'26.25"S	27°53'24.43"E
3	33° 01'20.59"S	27°53'51.88"E
4	33° 01'24.52"S	27°53'55.20"E
5	33° 01'28.96"S	27°54'07.19"E
6	33° 01'28.63"S	27°54'23.31"E
7	33° 01'33.90"S	27°54'22.19"E
8	33° 01'37.63"S	27°54'50.92"E
9	33° 01'46.45"S	27°54'44.09"E
10	33° 01'41.20"S	27°55'07.40"E
11	33° 01'39.13"S	27°55'30.66"E

Appendix 2

Copy of South African National Accreditation System (SANAS) certificate for the environmental chemistry laboratory at the CSIR campus in Stellenbosch.



CERTIFICATE OF ACCREDITATION

In terms of section 22(2) (b) of the Accreditation for Conformity Assessment, Calibration and Good Laboratory Practice Act, 2006 (Act 19 of 2006), read with sections 23(1), (2) and (3) of the said Act, I hereby certify that:-

**COUNCIL FOR SCIENTIFIC AND INDUSTRIAL RESEARCH
ANALYTICAL LABORATORY**

Co. Reg. No.: N/A

STELLENBOSCH

Facility Accreditation Number: **T0093**

is a South African National Accreditation System accredited facility
provided that all conditions and requirements are complied with

This certificate is valid as per the scope as stated in the accompanying schedule of accreditation,
Annexure "A", bearing the above accreditation number for

CHEMICAL ANALYSIS

The facility is accredited in accordance with the recognised International Standard

ISO/IEC 17025:2005

The accreditation demonstrates technical competency for a defined scope and the operation of a
quality management system

While this certificate remains valid, the Accredited Facility named above is authorised to
use the relevant accreditation symbol to issue facility reports and/or certificates



Mr R Josias
Chief Executive Officer

Effective Date: 01 August 2018
Certificate Expires: 31 July 2023

Appendix 3

Quality Assurance and Quality Control Results

Recovery (%) of metals from standard reference material PACS-3 (National Research Council of Canada).

Replicate	Al	Fe	As	Be	Cd	Cu	Cr	Mn	Hg	Ni	Pb	V	Zn
1	44.1	79.0	80.2	40.7	189.5	95.4	71.4	65.4	101.3	78.7	88.1	71.6	91.9
2	44.8	80.3	78.3	38.0	189.9	97.0	72.6	64.9	99.5	80.9	88.9	71.8	93.1
3	45.6	81.8	81.3	38.5	196.4	96.5	73.5	68.1	101.3	80.3	91.3	75.0	95.4
4	45.3	81.4	84.9	38.6	183.3	98.7	74.0	66.5	99.5	79.3	88.7	73.4	96.6
Mean	45.0	80.6	81.2	38.9	189.8	96.9	72.9	66.2	100.4	79.8	89.3	73.0	94.3
Standard deviation	0.7	1.2	2.8	1.2	5.4	1.4	1.1	1.4	1.0	0.9	1.4	1.6	2.2
Minimum	44.1	79.0	78.3	38.0	183.3	95.4	71.4	64.9	99.5	78.7	88.1	71.6	91.9
Maximum	45.6	81.8	84.9	40.7	196.4	98.7	74.0	68.1	101.3	80.9	91.3	75.0	96.6
Variance	0.4	1.5	7.8	1.5	28.7	1.9	1.3	2.0	1.0	0.9	1.9	2.4	4.6

Laboratory duplicate report for metals in sediment sampled in the Port of East London in July 2022.
RSD = Relative Standard Deviation.

Metal	Original Result $\mu\text{g.g}^{-1}$	Duplicate Result $\mu\text{g.g}^{-1}$	RSD %	Acceptable RSD %
Al	52910	54420	2.0	10
Fe	26930	27470	1.4	10
As	8.0	8.2	1.5	10
Ba	252.2	260.1	2.2	10
Be	1497.0	1443.7	2.6	10
Cd	331.7	336.6	1.0	10
Co	8.8	9.1	2.3	10
Cu	46.2	47.1	1.4	10
Cr	58.3	61.5	3.8	10
Mn	202.3	207.4	1.8	10
Ni	17.9	18.8	3.4	10
Pb	34.5	33.8	1.4	10
V	58.2	59.2	1.2	10
Zn	191.4	197.1	2.1	10

Metal	Original Result $\mu\text{g.g}^{-1}$	Duplicate Result $\mu\text{g.g}^{-1}$	RSD %	Acceptable RSD %
Al	32270	32550	0.6	10
Fe	18880	18970	0.3	10
As	7.4	7.4	0.2	10
Ba	141.5	143.9	1.2	10
Be	996.8	915.9	6.0	10
Cd	95.5	89.8	4.3	10
Co	7.2	7.2	0.2	10
Cu	9.8	9.8	0.0	10
Cr	45.2	46.4	1.9	10
Mn	239.6	237.8	0.5	10
Ni	14.7	14.5	0.9	10
Pb	8.7	8.8	0.7	10
V	41.9	41.9	0.0	10
Zn	37.3	37.8	0.9	10

Metal	Original Result $\mu\text{g.g}^{-1}$	Duplicate Result $\mu\text{g.g}^{-1}$	RSD %	Acceptable RSD %
Al	32270	32550	0.6	10
Fe	18880	18970	0.3	10
As	7.4	7.4	0.2	10
Ba	141.5	143.9	1.2	10
Be	996.8	915.9	6.0	10
Cd	95.5	89.8	4.3	10
Co	7.2	7.2	0.2	10
Cu	9.8	9.8	0.0	10
Cr	45.2	46.4	1.9	10
Mn	239.6	237.8	0.5	10
Ni	14.7	14.5	0.9	10
Pb	8.7	8.8	0.7	10
V	41.9	41.9	0.0	10
Zn	37.3	37.8	0.9	10

Appendix 4

Contribution (%) of grain size class fractions and total organic content to the bulk weight and mean grain size (mm) of sediment sampled in the Buffalo River estuary in July 2022. VCS = very coarse-grained sand, CS = coarse-grained sand, MS = medium-grained sand, FS = fine-grained sand, VFS = very fine-grained sand, TOC = total organic content.

Station	Gravel	VCS	CS	MS	FS	VFS	Mud	Mean	TOC
1	0.00	0.00	0.00	0.29	0.29	0.43	99.00	0.04	13.43
2	0.00	0.00	0.00	0.28	0.75	3.48	95.48	0.04	7.41
3	5.62	2.81	2.38	5.95	15.85	2.90	64.49	0.08	2.28
4	0.00	0.00	0.11	0.43	4.09	3.83	91.55	0.05	4.96
5	0.00	0.00	0.09	1.44	13.42	6.10	78.95	0.06	3.27
6	0.00	0.00	0.19	9.88	35.81	4.21	49.91	0.09	1.54
7	1.23	0.05	0.21	2.87	8.21	4.51	82.92	0.06	8.97
8	0.00	0.00	0.16	7.96	40.51	6.23	45.14	0.11	1.54
9	0.08	0.04	0.12	4.01	41.58	7.36	46.79	0.11	1.81
10	0.00	0.00	0.09	1.68	40.93	7.71	49.59	0.09	2.88
11	0.00	0.00	0.20	40.48	56.83	1.06	1.43	0.24	0.01

Appendix 5

Metal concentrations (Al and Fe as mg.g⁻¹, other metals as µg.g⁻¹ dry weight) in sediment sampled in the Buffalo River estuary in July 2022. Al = aluminium, Fe = iron, As = arsenic, Ba = barium, Be = beryllium, Cd = cadmium, Co = cobalt, Cu = copper, Cr = chromium, Mn = manganese, Hg = mercury, Ni = nickel, Pb = lead, V = vanadium, Zn = zinc, < = concentration below the method detection limit as indicated. Bold text in coloured cells indicates the concentration exceeds the Warning Level, Level I and Level II of the sediment quality guidelines used by the Department of Forestry, Fisheries and the Environment to decide if sediment identified for dredging in South African ports is of a suitable quality for open water disposal.

Station	Al	Fe	As	Ba	Be	Cd	Co	Cu	Cr	Mn	Hg	Ni	Pb	V	Zn
1	31.57	29.92	9.4	205	1.47	0.334	9.0	42.0	59.9	296	0.073	18.3	64.1	58.7	194
2	31.63	28.72	10.1	225	1.254	0.481	9.5	56.2	64.3	266	0.090	18.4	54.1	56.3	237
3	27.34	33.06	12.9	174	1.002	0.525	12.6	266.2	137.4	228	0.093	37.3	139.0	48.9	305
4	33.01	31.12	8.7	183	1.215	0.582	8.7	57.7	78.0	286	0.104	20.6	48.5	57.9	182
5	28.69	28.17	10.1	158	1.042	0.539	7.7	44.5	68.7	208	0.072	18.0	42.4	50.6	134
6	19.59	19.22	7.9	107	0.706	0.287	5.3	22.3	45.1	162	0.038	12.2	22.1	35.1	76
7	24.77	25.28	8.5	155	0.864	0.926	7.8	43.5	93.9	200	0.139	17.8	52.6	46.2	163
8	17.82	17.06	7.7	96	0.610	0.309	4.9	12.4	40.1	174	0.020	10.9	33.2	32.2	55
9	16.50	16.02	6.4	91	0.576	0.384	5.0	14.6	40.4	159	0.027	10.7	16.1	30.5	63
10	22.69	20.82	8.6	114	0.956	0.093	7.2	8.8	45.8	275	0.013	14.6	8.8	41.9	38
11	3.20	3.76	5.1	25	0.121	0.060	1.6	<1	7.8	73	<0.01	2.7	2.5	7.5	7
Warning Level	-	-	42	-	-	1.2	-	110	135	-	0.43	62	110	-	270
Level I	-	-	57	-	-	5.1	-	230	260	-	0.84	140	218	-	410
Level II	-	-	93	-	-	9.6	-	390	370	-	1.50	370	530	-	960