DOOR NO : D1 (LHS), D4 (RHS)	TOTAL 2
	
DOOR	SINGLE SWING ALUMINIUM DOOR LEAF FABRICATED FROM CLIP 44 SYSTEM PROFILES IN 6063-T6 ALLOY, COMPRISING CLIP 44 STILES, TOP RAIL, MID-RAIL AND BOTTOM RAIL DOOR LEAF TO BE FITTED WITH EXTERNAL BURGLAR GUARD RAILS FIXED TO THE OUTSIDE FACE IN FRONT OF ALL GLAZED OPENINGS. FABRICATION TO COMPLY WITH SANS 10400 (PARTS A19 AND N) AND BE AAAMSA CERTIFIED.
GLASS	6.38MM CLEAR LAMINATED SAFETY GLASS TO BE SABS APPROVED IN ACCORDANCE WITH SANS 1263-1, SET IN EPDM GASKETS. IN STRICT ACCORDANCE WITH SANS 10400 (PARTS N AND A19).
FINISH	25-MICRON NATURAL ANODISED FINISH TO SANS 999.
FRAME	SINGLE DOOR OUTER FRAME FABRICATED FROM CLIP 44 SYSTEM PROFILES IN 6063-T6 ALLOY WITH 25-MICRON. COMPRISING CLIP 44 FRAME JAMBS AND HEAD. FABRICATION TO COMPLY WITH SANS 10400 (PARTS A19 AND N) AND BE AAAMSA CERTIFIED.
FINISH	25-MICRON NATURAL ANODISED FINISH TO SANS 999.
IRONMONGERY — HANDLES & LOCKSET	SUPPLY A BACK-TO-BACK PAIR OF 22MM DIAMETER (Ø) TUBULAR ROUND BAR D-PULL HANDLES MANUFACTURED FROM GRADE 316 MARINE-GRADE STAINLESS STEEL, FEATURING A 300MM OVERALL LENGTH, 278MM CENTRE-TO-CENTRE (CTC) FIXING POINTS, AND CONCEALED FIXING ROSES (FLANGES). THE HANDLES MUST PROVIDE A MINIMUM HAND GRIP CLEARANCE OF 45MM FROM THE DOOR FACE. PAIR THIS WITH A HEAVY-DUTY EURO PROFILE SASHLOCK FEATURING A GRADE 316 STAINLESS STEEL FOREND AND STRIKE PLATE. THE LOCKING SYSTEM MUST INCLUDE A SECURITY EURO-PROFILE CYLINDER WITH EXTERNAL KEYED ENTRY FOR RESTRICTED ACCESS AND AN INTERNAL LARGE DISABLED THUMBTURN (ACCESSIBLE TURN). A MATCHING GRADE 316 STAINLESS STEEL INDICATOR ROSE WITH A CLEAR RED/GREEN (OCCUPIED/VACANT) DISPLAY AND EXTERNAL SLOTTED EMERGENCY RELEASE IS REQUIRED.
IRONMONGERY — HINGES	STAINLESS STEEL, EN1953 GRADE 13, TWO BALL BEARING BUTT HINGE, FIRE RATED, 120KG CARRYING CAPACITY PER PAIR.
IRONMONGERY — DOORCLOSER	DPSDBRG DPS.D8.R.G. DOOR CLOSER GREY, REG/ARM, B/CHECK, DELAYED ACTION .ADJ CLOSING FORCE, EN1-6, DOORS =<200KG, =<1500MM WIDE. FIRE, RATED, 2 MIL. CYCLES, UL LISTED, ANSI GR 1, GREY. DCFS DOOR CLOSER FIXING SCREW - STUD 6X30MM &SCREW M5X75MM. DPSOFFITG DP SOFFIT..G GREY SOFFIT BRACKET FOR ARM PARALLEL FITTING.
IRONMONGERY — DOORSTOP	50MM (DIAMETER) X 12MM(HEIGHT) TZ 5020 FLOOR DOOR STOP, BRUSHED MARINE-GRADE STAINLESS STEEL BASIC BODY WITH DURABLE BLACK RUBBER RING & STAINLESS STEEL KNOB OR SIMILAR & APPROVED. TO BE INSTALLED AS PER MANUFACTURERS INSTRUCTION.
GENERAL	BY APPROVED MANUFACTURER AND/OR SUPPLIER. ALLOW FOR VINYL FROSTING TO 100 % OF THE GLAZED SECTIONS. PATTERN TO BE DETERMINED. DIMENSIONS ON THIS DRAWING SHALL BE VERIFIED ON SITE. 100MM DOOR UNDERCUT.

DOOR NO : D2 (LHS), D3 (RHS)	TOTAL 2
DOOR	SINGLE SWING ALUMINIUM DOOR LEAF FABRICATED FROM CLIP 44 SYSTEM PROFILES IN 6063-T6 ALLOY, COMPRISING CLIP 44 STILES, TOP RAIL, MID-RAIL AND BOTTOM RAIL DOOR LEAF TO BE FITTED WITH EXTERNAL BURGLAR GUARD RAILS FIXED TO THE OUTSIDE FACE IN FRONT OF ALL GLAZED OPENINGS. FABRICATION TO COMPLY WITH SANS 10400 (PARTS A19 AND N) AND BE AAAMSA CERTIFIED.
GLASS	6.38MM CLEAR LAMINATED SAFETY GLASS TO BE SABS APPROVED IN ACCORDANCE WITH SANS 1263-1, SET IN EPDM GASKETS. IN STRICT ACCORDANCE WITH SANS 10400 (PARTS N AND A19).
FINISH	25-MICRON NATURAL ANODISED FINISH TO SANS 999.
FRAME	SINGLE DOOR OUTER FRAME FABRICATED FROM CLIP 44 SYSTEM PROFILES IN 6063-T6 ALLOY WITH 25-MICRON. COMPRISING CLIP 44 FRAME JAMBS AND HEAD. FABRICATION TO COMPLY WITH SANS 10400 (PARTS A19 AND N) AND BE AAAMSA CERTIFIED.
FINISH	25-MICRON NATURAL ANODISED FINISH TO SANS 999.
IRONMONGERY — HANDLES & LOCKSET	SUPPLY A BACK-TO-BACK PAIR OF 22MM DIAMETER (Ø) TUBULAR ROUND BAR D-PULL HANDLES MANUFACTURED FROM GRADE 316 MARINE-GRADE STAINLESS STEEL, FEATURING A 300MM OVERALL LENGTH, 278MM CENTRE-TO-CENTRE (CTC) FIXING POINTS, AND CONCEALED FIXING ROSES (FLANGES). THE HANDLES MUST PROVIDE A MINIMUM HAND GRIP CLEARANCE OF 45MM FROM THE DOOR FACE. PAIR THIS WITH A HEAVY-DUTY EURO PROFILE SASHLOCK FEATURING A GRADE 316 STAINLESS STEEL FOREND AND STRIKE PLATE. THE LOCKING SYSTEM MUST INCLUDE A SECURITY EURO-PROFILE CYLINDER WITH EXTERNAL KEYED ENTRY FOR RESTRICTED ACCESS AND AN INTERNAL LARGE DISABLED THUMBTURN (ACCESSIBLE TURN). A MATCHING GRADE 316 STAINLESS STEEL INDICATOR ROSE WITH A CLEAR RED/GREEN (OCCUPIED/VACANT) DISPLAY AND EXTERNAL SLOTTED EMERGENCY RELEASE IS REQUIRED.
IRONMONGERY — HINGES	STAINLESS STEEL, EN1953 GRADE 13, TWO BALL BEARING BUTT HINGE, FIRE RATED, 120KG CARRYING CAPACITY PER PAIR.
IRONMONGERY — DOORCLOSER	DPSDBRG DPS.D8.R.G. DOOR CLOSER GREY, REG/ARM, B/CHECK, DELAYED ACTION .ADJ CLOSING FORCE, EN1-6, DOORS =<200KG, =<1500MM WIDE. FIRE, RATED, 2 MIL. CYCLES, UL LISTED, ANSI GR 1, GREY. DCFS DOOR CLOSER FIXING SCREW - STUD 6X30MM &SCREW M5X75MM. DPSOFFITG DP SOFFIT..G GREY SOFFIT BRACKET FOR ARM PARALLEL FITTING.
IRONMONGERY — DOORSTOP	50MM (DIAMETER) X 12MM(HEIGHT) TZ 5020 FLOOR DOOR STOP, BRUSHED MARINE-GRADE STAINLESS STEEL BASIC BODY WITH DURABLE BLACK RUBBER RING & STAINLESS STEEL KNOB OR SIMILAR & APPROVED. TO BE INSTALLED AS PER MANUFACTURERS INSTRUCTION.
GENERAL	BY APPROVED MANUFACTURER AND/OR SUPPLIER. ALLOW FOR VINYL FROSTING TO 100 % OF THE GLAZED SECTIONS. PATTERN TO BE DETERMINED. DIMENSIONS ON THIS DRAWING SHALL BE VERIFIED ON SITE. 100MM DOOR UNDERCUT.

SIGN No. 1	WALL MOUNTED large	TOTAL REQ : 1
		
SIZE	289MM X 103MM WHITE VINYL GRAPHIC	
MATERIAL	SLATS TO BE EXTRUDED ALUMINIUM COATED WITH VINYL COLOUR PANTONE 5493	
CODE	T-INT-19	
GENERAL	DESIGN, SUPPLY & INSTALL BY APPROVED MANUFACTURER, WITH ALL NECESSARY FIXINGS & FIXTURES. TO BE SUITABLE FOR MARINE (CX ZONE) CONDITIONS. SAMPLE TO BE PROVIDED PRIOR TO INSTALLATION.	

SIGN No. 2	WALL MOUNTED large	TOTAL REQ : 2
		
SIZE	289MM X 222MM WHITE VINYL GRAPHIC	
MATERIAL	SLATS TO BE EXTRUDED ALUMINIUM COATED WITH VINYL COLOUR PANTONE 5493	
CODE	T-INT-19	
GENERAL	DESIGN, SUPPLY & INSTALL BY APPROVED MANUFACTURER, WITH ALL NECESSARY FIXINGS & FIXTURES. TO BE SUITABLE FOR MARINE (CX ZONE) CONDITIONS. SAMPLE TO BE PROVIDED PRIOR TO INSTALLATION.	

SIGN No. 3	WALL MOUNTED large	TOTAL REQ : 1
		
SIZE	276MM X 125MM WHITE VINYL GRAPHIC	
MATERIAL	SLATS TO BE EXTRUDED ALUMINIUM COATED WITH VINYL COLOUR PANTONE 5493	
CODE	T-INT-19	
GENERAL	DESIGN, SUPPLY & INSTALL BY APPROVED MANUFACTURER, WITH ALL NECESSARY FIXINGS & FIXTURES. TO BE SUITABLE FOR MARINE (CX ZONE) CONDITIONS. SAMPLE TO BE PROVIDED PRIOR TO INSTALLATION.	

SIGN No. 4	WALL MOUNTED large	TOTAL REQ : 1
TEXT SIZE	60MM TEXT HEIGHT PER 3 METERS OF VIEWING DISTANCE.	
MATERIAL	SLATS TO BE EXTRUDED ALUMINIUM COATED WITH VINYL COLOUR PANTONE 5493	
CODE	T-INT-19	
GENERAL	DESIGN, SUPPLY & INSTALL BY APPROVED MANUFACTURER, WITH ALL NECESSARY FIXINGS & FIXTURES. TO BE SUITABLE FOR MARINE (CX ZONE) CONDITIONS, SAMPLE TO BE PROVIDED PRIOR TO INSTALLATION. FONT: THE FONT SHALL BE PRIMARY ALPHANUMERIC TYPEFACE - APEX (APEX SANS MEDIUM T), WITH LETTER SIZING DETERMINED BY VIEWING DISTANCE,60MM TEXT HEIGHT PER 3 METERS OF VIEWING DISTANCE.	

CONSTRUCTION NOTES

ROOF SHEETING:
ROOF PITCH 5° 0.8MM MILL FINISH ALUMINIUM (GRADE 5754 MARINE-GRADE ALLOY) KLIP-LOK 700 CONCEALED FIX PROFILE WITH A NATURAL UNTREATED MILL FINISH, CAPABLE OF WITHSTANDING A MINIMUM 1.8 KPA UPLIFTMENT LOAD, COMPLIANT WITH SANS 10400-L, AND MANUFACTURED WITH A MINIMUM 15-YEAR STRUCTURAL MATERIAL GUARANTEE AGAINST PERFORATION. ALL SURFACES SHALL BE PREPARED AND DEGREASED STRICTLY IN ACCORDANCE WITH THE SHEET MANUFACTURER'S INSTRUCTIONS AND COATING MANUFACTURER'S TECHNICAL DATA SHEETS TO REMOVE MILL OILS, FOLLOWED BY LIGHT NON-METALLIC MECHANICAL ABRASION TO PROVIDE A UNIFORM KEY. PROFILE SHEETS SHALL BE SITE-PAINTED WITH AN APPROVED PROTECTIVE SYSTEM COATING ACCORDING TO ISO 12944 C5 CORROSIVITY CATEGORY, COMPRISING A TWO-COMPONENT POLYAMINE-CURED HIGH-SOLIDS (80% VOLUME SOLIDS) SURFACE-TOLERANT EPOXY MASTIC PRIMER (100-300 MICRONS DFT) PRE-QUALIFIED TO NORSOK M-501 AND CARRYING A 10-YEAR MANUFACTURER PERFORMANCE GUARANTEE, FOLLOWED BY A TWO-COMPONENT HIGH-SOLIDS (63% VOLUME SOLIDS) ALIPHATIC ACRYLIC POLYURETHANE TOPCOAT ENGINEERED FOR HIGH-CORROSIVITY ATMOSPHERIC EXPOSURES WITH VERY GOOD COLOUR AND GLOSS RETENTION BACKED BY A 10-YEAR MANUFACTURER FINISH GUARANTEE. PRIOR TO FIXING FLASHINGS, ALL TROUGHS AT THE APEX SHALL BE STOP-ENDED TO THE FULL DEPTH OF THE SHEET TO PREVENT WIND-DRIVEN WATER PENETRATION, AND TROUGHS SHALL BE LIPPED AT THE EAVES END TO FORM A DRIP. STANDARD BASE GREY FINAL SPECIFIC SHADE TO BE SELECTED PRIOR TO APPLICATION. ALL PROFILE SHEETS, CONCEALED FIXING CLIPS, FASTENERS, AND FIXINGS SHALL BE SUPPLIED, SPECIFIED, AND INSTALLED ENTIRELY AS PER MANUFACTURER'S SPECIFICATIONS AND INSTRUCTIONS BY AN APPROVED APPLICATOR AND CONTRACTOR TO QUALIFY FOR A PROJECT-SPECIFIC 10-YEAR BACK-TO-BASIX SYSTEM WARRANTY.

ROOF FLASHING:
TO MATCH ROOF SHEETING.

DRIP FLASHING (STONE CLADDING):
TO MATCH ROOF SHEETING. SUPPLY & INSTALL. PROVIDE ALL NECESSARY FIXINGS/FIXTURES & SAMPLE TO BE PROVIDED PRIOR TO INSTALLATION. TO BE BENT ALONG GIRTH & NOTCHED ON SITE TO SUIT WALL CONDITIONS. DIMENSIONS TO BE VERIFIED ON SITE AFTER INSTALLATION OF WALL CLADDING.

PURLIN:
TREATED SOLID TIMBER TO STRUCTURAL ENGINEERS DETAIL.

ROOF TIE:
TO STRUCTURAL ENGINEERS DETAIL.

RAFTER:
TREATED SOLID TIMBER TO STRUCTURAL ENGINEERS DETAIL.

WALL PLATE:
TREATED SOLID TIMBER TO STRUCTURAL ENGINEERS DETAIL.

CEILING:
SUPPLY AND INSTALL 6 MM HIGH DENSITY, MULTI-PURPOSE FIBRE CEMENT BOARD BY AN APPROVED MANUFACTURER OR SUPPLIER, MEASURING 3000 MM X 1200 MM X 6 MM WITH SQUARE EDGES, POSSESSING A MINIMUM DRY DENSITY OF >1230 KG/M³, CLASS A/A1/1 NON-COMBUSTIBLE FIRE PERFORMANCE RATING TO SANS 10177-5/10, 100% RELATIVE HUMIDITY (RH) RESISTANCE, AND MANUFACTURED IN ACCORDANCE WITH SANS 803 / SANS 50803, FIXED STRICTLY IN ACCORDANCE WITH THE MANUFACTURER'S DETAILED INSTALLATION INSTRUCTIONS AND USING APPROVED CORROSION-RESISTANT FIXINGS.

SHADOW TRIM:
SUPPLY AND INSTALL PRE-PAINTED ALUMINIUM WHITE SHADOWLINE WALL TRIM BY APPROVED MANUFACTURER AND/OR SUPPLIER TO PERIMETER OF ROOMS FIXED AT 450MM CENTRES WITH WALL ANCHORS.

COLUMN:
TO STRUCTURAL ENGINEERS DETAIL.

BREEZE BLOCK:
222MMX73MMX166MM BREEZE BLOCKS. IN ACCORDANCE WITH SANS 9001:2015, TYPICAL COMPRESSIVE STRENGTH OF >10 MP, 8 / 24 HR WATER ABSORPTION, 2.2 KG MASS, COLOUR TO BE SELECTED. BY APPROVED MANUFACTURER AND/OR SUPPLIER.

MESH:
DESIGN, SUPPLY & INSTALL INTERNALLY 4 X (690MM X 250MM) HEAVY-DUTY INDUSTRIAL UV-STABILIZED ISOPHTHALIC RESIN FIBREGLASS REINFORCED POLYMER (FRP) MICRO-MESH SECURITY PANELS BY AN APPROVED MANUFACTURER. THE FRP PANEL SHALL BE HOUSED WITHIN AN APPROVED ENCLOSURE SUB-FRAME AND SECURED WITH GRADE 316 STAINLESS STEEL TAMPER-PROOF SECURITY FASTENERS AND COMPATIBLE ISOLATION MOUNTING BRACKETS. ALL FIXINGS, ANCHORS, AND FIXTURES SHALL BE GRADE 316 STAINLESS STEEL OR NON-METALLIC MATERIALS AS RECOMMENDED BY THE MANUFACTURER. ALL DIMENSIONS SHALL BE CONFIRMED ON SITE PRIOR TO FABRICATION. DETAILED SHOP DRAWINGS, TECHNICAL DATA SHEETS, AND PHYSICAL SAMPLES SHOWING PANEL THICKNESS, APERTURE SIZE, MESH OPENING RATIO, AND COLOR FINISH SHALL BE SUBMITTED FOR WRITTEN APPROVAL PRIOR TO INSTALLATION. MESH DIMENSIONS AND APERTURE SIZES SHALL COMPLY WITH REQUIRED IMPACT, VENTILATION, AND SECURITY STANDARDS. ALL WORK TO BE INSTALLED IN STRICT ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS BY AN APPROVED APPLICATOR AND CONTRACTOR.

WALL:
FACEBRICK
FACEBRICK AGATE SATIN FINISH FBX OR SIMILAR & APPROVED, BAG AND BITUMEN PAINT EXTERNAL FACE OF INTERNAL SKIN, PROVIDE GI#8 BRICKFORCE EVERY 3 COURSES AND ABOVE PC LINTOLS.

ON-SITE SAMPLE PANEL:
CONSTRUCT A 1000 MM X 1000 MM FACEBRICK SAMPLE PANEL (MOCK-UP) ON SITE INCORPORATING THE APPROVED FACEBRICK, SPECIFIED MORTAR MIX, JOINTING, AND POINTING PROFILE FOR ARCHITECTURAL INSPECTION AND WRITTEN APPROVAL PRIOR TO THE COMMENCEMENT OF FULL-SCALE BRICKWORK.

PLASTER & PAINT:
PREPARE, PRIME AND PAINT WITH 1 UNDERCOAT AND MIN.3 FINISHING COATS 100% HIGHLY DURABLE ACRYLIC EMULSION PAINT (PROFESSIONAL SUPERIOR LOW SHEEN, PEM 1000), PAINTED TO MANUFACTURERS INSTRUCTIONS. DEEP COLOUR TO BE SELECTED.

STONE CLADDING
CLOUD GREY NATURAL STONE CLADDING 160 X 350MM, INSTALLED AS PER MANUFACTURERS SPECIFICATIONS WITH, BONDING AGENT – BONDING LIQUID + BASECOAT (KIT), ADHESIVE – CLADDING ADHESIVE, CLADDING TILES, GROUT – WATER REPELLENT GROUT & JOINTS POLYURETHANE SEALANT AND BACKING CORD.. PREPARE & LAY TILES ACCORDING TO MANUFACTURERS INSTRUCTIONS, TO A MAXIMUM HEIGHT OF 2100MM. TILE AND GROUT COLOUR TO BE SELECTED. SAMPLES TO BE PROVIDED PRIOR TO CONSTRUCTION.

ON-SITE SAMPLE PANEL:
CONSTRUCT A 1000 MM X 1000 MM NATURAL STONE CLADDING SAMPLE PANEL (MOCK-UP) ON SITE USING THE APPROVED CLOUD GREY 160 MM X 350 MM TILES, COMPLETE WITH THE SPECIFIED BONDING AGENT, ADHESIVE SYSTEM, WATER-REPELLENT GROUT, AND POLYURETHANE JOINTING, FOR APPROVAL PRIOR TO FULL-SCALE INSTALLATION/CONSTRUCTION.

STEEL COLUMN:
TO STRUCTURAL ENGINEERS DETAIL.

SLAT:
REFER TO ARCHITECTS SPECIFICATION(LA-0002-0A).

BRACKET (L SECTION) 01:
TO STRUCTURAL ENGINEERS DETAIL.

BRACKET (U SECTION) 02:
TO STRUCTURAL ENGINEERS DETAIL.

T SECTION:
TO STRUCTURAL ENGINEERS DETAIL.

I SECTION:
TO STRUCTURAL ENGINEERS DETAIL.

TIMBER BEAM:
TO STRUCTURAL ENGINEERS DETAIL.

BASE PLATE:
TO STRUCTURAL ENGINEERS DETAIL.

CONCRETE FOOTING:
TO STRUCTURAL ENGINEERS DETAIL.

FIXINGS & FIXTURES:
TO STRUCTURAL ENGINEERS DETAIL.

TILING WORKS:
ALL ADHESIVES, SEALANTS, AND PRIMERS MUST BE STRICTLY LOW-VOC (VOLATILE ORGANIC COMPOUND) EMISSION PRODUCTS COMPLYING WITH SOUTH AFRICAN GREEN BUILDING COUNCIL (GBCSA) LIMITS (< 50 G/L VOC CONTENT) TO ENSURE INDOOR AIR QUALITY AND ENVIRONMENTAL COMPLIANCE. ALL TILE PREPARATION, SURFACE PRIMING, ADHESIVE APPLICATION, GROUTING, EXPANSION JOINTS, AND CURING/DRYING TIMES SHALL BE EXECUTED ENTIRELY IN STRICT ACCORDANCE WITH THE SELECTED TILE, ADHESIVE, AND GROUT MANUFACTURERS' WRITTEN INSTRUCTIONS AND TECHNICAL DATA SHEETS.

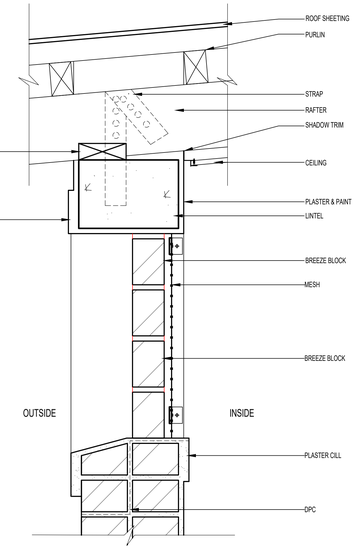

Detail 1 (TO STRUCTURAL ENGINEERS DETAIL)
SCALE 1:5

FINISHES SCHEDULE	FLOORS	CILLS	SKIRTING	WALLS
01 Male Toilet	01		01	01
02 Male Paraplegic Toilet	01		01	01
03 Female Paraplegic Toilet	01		01	01
04 Female Toilet	01		01	01
05 Covered walkway		01		

SANITARY SCHEDULE	WHB	W/C	W/C	URINAL	TAP	TAP	MISCELLANEOUS					
01 Male Toilet	01	01	01	01	01	01				01	01	01
02 Male Paraplegic Toilet	01		01		01		01	01	01	01	01	01
03 Female Paraplegic Toilet	01		01		01		01	01	01	01	01	01
04 Female Toilet	01	01		01		01				01	01	01
05 Covered walkway												

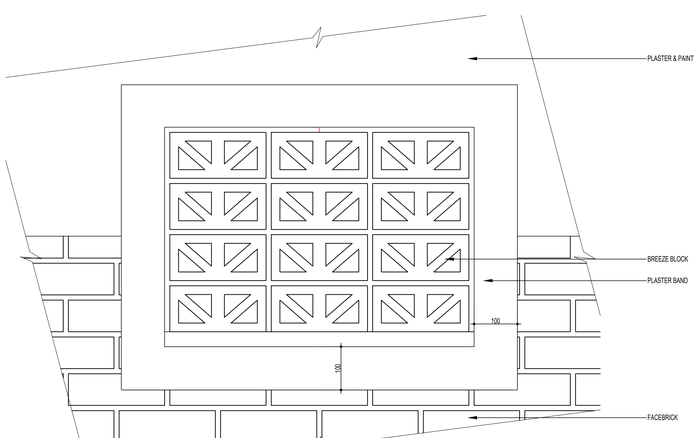

Detail 5
SCALE 1:5

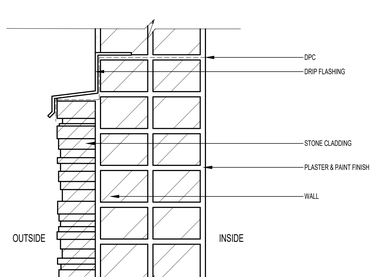

Detail 4
SCALE 1:5



Detail 2 (TO STRUCTURAL ENGINEERS DETAIL)
SCALE 1:5

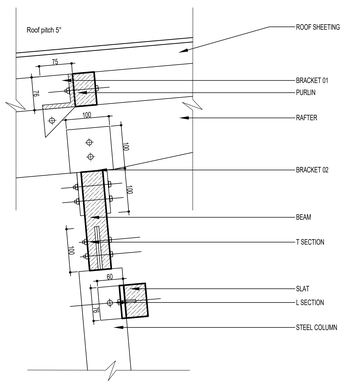



Detail 3 (TO STRUCTURAL ENGINEERS DETAIL)
SCALE 1:5

NOTES

1. **DO NOT SCALE DRAWING - ONLY DIMENSIONS SHOWN TO BE USED.**
2. **THE CONTRACTOR SHALL VERIFY ALL CONDITIONS, DIMENSIONS AND LEVELS ON THE SITE AND NOTIFY THE NEC SUPERVISOR OF ANY VARIATIONS BEFORE CONSTRUCTION.**
3. **ALL LEVELS ARE IN METERS TO MEAN SEA LEVEL.**
4. **ALL ARCHITECTS DRAWINGS TO BE READ IN CONJUNCTION WITH RELEVANT ENGINEERS DRAWINGS.**

TNPA APPROVAL

NAME	DATE
SIGNATURE	
TITLE	

REFERENCE DRAWINGS

DRAWING NO.	REFERENCE

NO.	DESCRIPTION	BY	CHKD	APPD	DATE
0A	ISSUED FOR TENDER				

REVISIONS

This Document including all design and information thereon is Confidential Intellectual Property of Transnet. Copyright and all other rights are reserved by Transnet. This Document may only be used for its intended purpose.

CONTRACTOR / CONSULTANT

TITLE	NAME	SIGN	DATE
DRAWN	.		. . .
CHECKED	.		. . .
DESIGNED	.		. . .
CHECKED			

PR.ENG. / PR.TECH./PR. ARCH

NAME	DATE
SIGNATURE	. . .
REG. NUMBER	
TITLE	

TRANSNET NATIONAL PORTS AUTHORITY

TITLE	NAME	SIGN	DATE
DRAWN	ZZ		
CHECKED	AN		
DESIGNED	ZZ		
CHECKED	RS		

PR.ENG. / PR.TECH./PR. ARCH

NAME	PULENG JALI	DATE
SIGNATURE		
REG. NUMBER	PAT26658986	
SCALE		

TRANSNET

Transnet National Ports Authority

TRANSNET SOC Ltd : REG No. 1990/000090/30
237 MAHATMA GANDHI RD, POINT, 4001
DURBAN TEL: 031 361 1791

XDN.E.0048-1-100-A-LA-0002-01-0A	PLANS, SECTIONS & ELEVATIONS

FOR REVIEW

PROJECT / AREA / ASSET / SUBJECT/DRAWING TITLE

PORT OF DURBAN

UPGRADE OF THE NORTH GROYNE PROMENADE IN THE PORT OF DURBAN, ABLUTION BLOCK SCHEDULES & DETAILS 47432 STREET, POINT, DURBAN SUB 13 OF LOT 10031

PAPER SIZE	TRANSNET DRW. NO.	REV.
A0	XDN.E.0048-100-A-DE-0003-01	0A
	PROJECT DRG. NO.	REV.