




TECHNICAL SPECIFICATIONS FOR 6m TANKSTAND AND FOUNDATION (5000l and 10 000l Tanks)

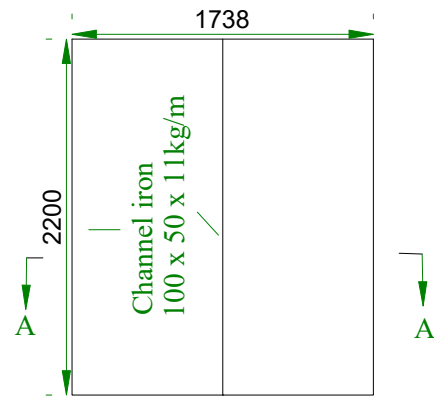

TOP VIEW : Carrier and support beams




SECTION AA : Carrier and support beams


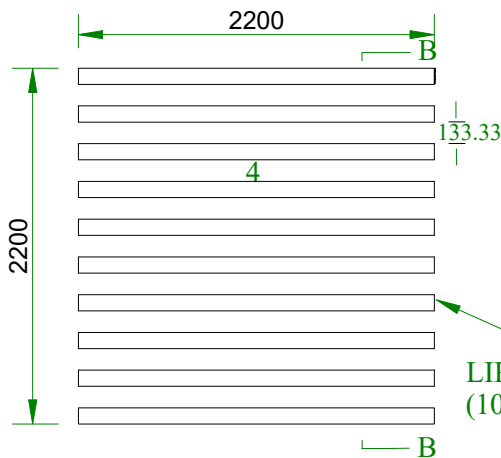


TOP VIEW : Platform

SECTION BB : Platform

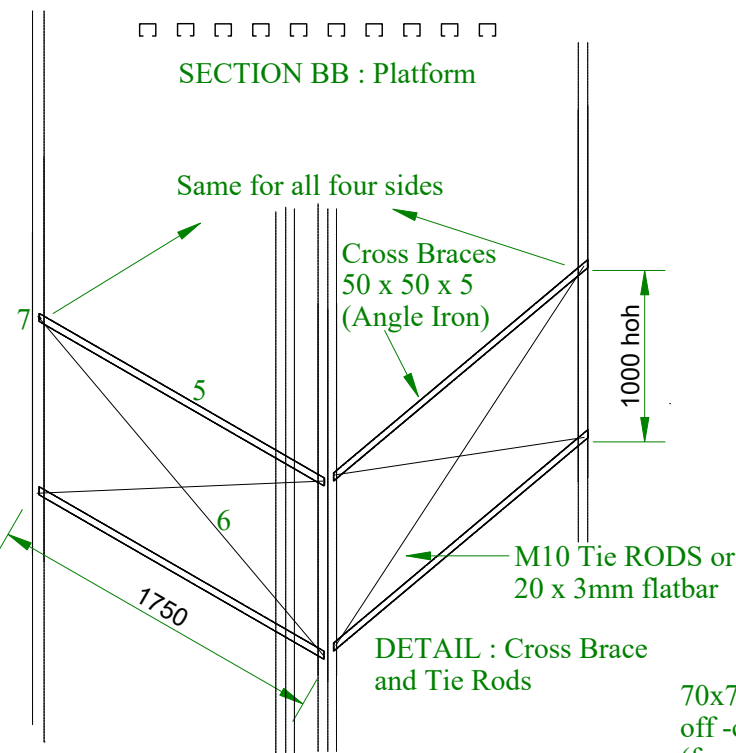

Notes :
Fastening must be welded or by using M10 bolts.
Numbering = refer to quantity schedule
Cross braces start at bottom and end at top.
Follow same specifications for 3m Stand.

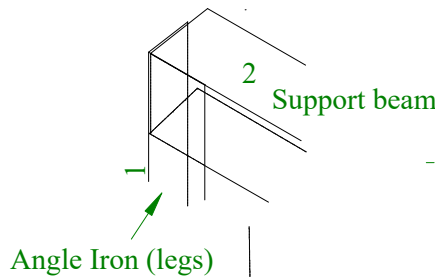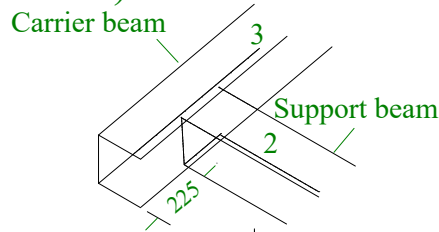

Legs : Angle Iron
70 x 70 x 6

70x70x6 "crosses"
off-cut (200mm) welded to leg
(for all 4 legs)

Leg "foot" 70x70x6
off-cut (300mm)
welded to leg

FOUNDATION:TANKSTAND

AGRICULTURAL ENGINEERING P.BAG X 804 POTCHEFSTROOM 2520

Drawn by: Mr Z Mthamali

Checked :

Signed off:

Tankstand 6m : Suitable for 5000 and
10 000 liter water tank.

Scale : None

Ref. no. :

C:\ENG.\Tankstand\51101 6m.DRG

Tel : (063) 588 5825

Fax :

Date : 2026.06.01

Drawing nr.

D01/03