

Item No	Quantity	Rate	Amount
<u>SECTION 1</u>			
<u>BILL No.1</u>			
<u>PRELIMINARIES</u>			
<p>1. The Principal Building Agreement shall be the JBCC Series Edition 4.1, March 2005 as recommended by the Joint Building Contract Committee and as amended by this Tender Enquiry.</p> <p>2. The Preliminaries shall be JBCC Series 2000, May 2005 for use with the Principal Building Agreement as recommended by the Joint Building Contracts Committee and as amended by this Tender Enquiry shall be deemed to be incorporated herein.</p> <p>3. Tenderers are referred to the abovementioned documents for the full intent and meaning of each clause thereof. These clauses are hereinafter referred to by clause number and heading only.</p> <p>4. Where standard clauses or alternatives are not entirely applicable to this contract, such modifications, corrections or additions as are necessary, are given as far as possible under each relevant clause heading. Additional Preliminary clauses are contained in Section C hereof.</p> <p>5. No claim whatsoever shall be entertained in respect of errors or omissions in pricing due to brevity of descriptions of items which are fully described when read in conjunction with the relevant clauses of the said Principal Building Agreement, Preliminaries and Preambles.</p>			
Carried to Collection			
Section 1 Bill No. 1 Preliminaries		R	

6. The Tenderers shall allow opposite each of the clauses whatever costs and charges he may consider necessary for the carrying out, complying with and due observance of the provisions, conditions and requirements set out herein. Only priced items will be considered in respect of any adjustment of this Section. Any items left unpriced will be understood to be provided free of charge and no claim for any extras arising out of the Tenderer's omission to price any item will be entertained.

7. Where modifications or amendments as described are made, such modifications and/or amendments shall supersede any conflicting provisions in the relevant clauses of the Standard Preliminaries or the Principal Building Agreement and the Tenderer shall make due allowance for whatever costs and charges he may consider necessary for the carrying out and observance of the provisions of the clauses as modified and/or amended.

8. Where any item is not relevant to this specific contract, such item is marked N/A.

9. If Alternative A as set out in clause B10.3 hereinafter is to be used for the adjustment of the preliminaries, each item priced is to be allocated to one or more of the three categories by insertion of "F", "V", "T" as the case may be against the price in the "rate" column immediately preceding the "amount" column, where "F" denotes a fixed amount (amount not to be varied), "V" denotes an amount variable in proportion to value, and "T" denotes an amount proportionate to time.

Carried to Collection

Section 1
Bill No. 1
Preliminaries

R

<u>SECTION A: PRINCIPAL BUILDING AGREEMENT</u>			
<u>DEFINITIONS</u>			
Definitions and interpretation (Clause 1).			
1	F: V: T:	Item	
<u>OBJECTIVE AND PREPARATION</u>			
Offer, acceptance and performance (Clause 2).			
2	F: V: T:	Item	
Documents (Clause 3).			
Clause 3.1 is deleted and substituted with: 'This tender is for a Government Contract. No Payment Guarantee will be provided.'			
Clause 3.3 is deleted and substituted with:			
The principal agent shall complete the schedule and arrange for formal signing of the agreement once the priced bill of quantities/lump sum document, security, insurances and waiver of lien, where acceptable, have been provided and effected'.			
3	F: V: T:	Item	
Design responsibility (Clause 4).			
4	F: V: T:	Item	
Employer's agents (Clause 5).			
5	F: V: T:	Item	
Site representative (Clause 6).			
6	F: V: T:	Item	
Compliance with regulations (Clause 7).			
7	F: V: T:	Item	
Carried to Collection			
Section 1 Bill No. 1 Preliminaries			R

	Contract instructions (Clause 17).		
17	F: V: T:	Item	
	Setting out of the works (Clause 18.3).		
	The contractor shall notify the principal agent if any encroachments of adjoining foundations, buildings, structures, pavements, boundaries, etc., exist in order that the necessary arrangements may be made for the rectification of any such encroachments. Should incorrect information be given to the contractor in terms of 18.1 and 18.2, which causes the incorrect setting out of the works, the contractor shall not be liable for such incorrect setting out.		
18	F: V: T:	Item	
	Assignment (Clause 19).		
19	F: V: T:	Item	
	Nominated subcontractors (Clause 20).		
20	F: V: T:	Item	
	Selected subcontractors (Clause 21).		
21	F: V: T:	Item	
	Employer's Direct contractors (Clause 22).		
22	F: V: T:	Item	
	Contractor's Domestic subcontractors (Clause 23).		
23	F: V: T:	Item	
	<u>COMPLETION</u>		
	Practical completion (Clause 24).		
24	F: V: T:	Item	
	Works completion (Clause 25).		
		Carried to Collection	
	Section 1		
	Bill No. 1		
	Preliminaries		
			R

25	<p>F: V: T:</p> <p>Final completion (Clause 26).</p> <p>Latent defects liability period (Clause 27).</p> <p>Clause 27.0 is amended by the addition of the following clauses:</p> <p>"27.3 Any water leakage into the building, whether in the roof, external wall or other element of the building susceptible to water leakage shall, unless proven to be a design defect, or as a result of obvious storm damage, be classified as a latent defect in terms of clause 1.0 Definitions and Interpretations".</p> <p>"27.4 The Contractor shall attend to defects during the Defects Liability Period on a progressive basis, to the satisfaction of the Principal Agent and will not be permitted to wait until the end of the Defect Liability Period or until the amount of defects accumulates in order to attend to a comprehensive list of defects"</p>	Item	R
26	<p>F: V: T:</p> <p>Sectional completion (Clause 28).</p>	Item	
27	<p>F: V: T:</p> <p>Revision of date for practical completion (Clause 29).</p>	Item	
28	<p>F: V: T:</p> <p>Penalty for non-completion (Clause 30).</p>	Item	
29	<p>F: V: T:</p> <p><u>PAYMENT</u></p> <p>Interim payment to the contractor (Clause 31).</p> <p>The inclusion of materials and goods stored off site in the amount authorised for payment in terms of clause 31.3 shall be at the sole discretion of the principal agent and such inclusion shall only be considered upon the provision, by the contractor, of an approved guarantee issued by a registered commercial bank.</p>	Item	
	Carried to Collection		
	Section 1		
	Bill No. 1		
	Preliminaries		

<p>Where prices are submitted by the contractor or nominated/selected sub contractor during the progress of the works in respect of contract instructions or in regard to a claim under the terms of the contract and notwithstanding the fact that such prices may be used in an interim payment certificate, there is to be no presumption of acceptance. Should the principal agent wish to accept any such prices prior to the issue of the final certificate, it will be in writing.</p> <p>Adjustment to the contract value (Clause 32).</p>				
30	F:	V:	T:	Item
	Recovery of expense and loss (Clause 33).			
31	F:	V:	T:	Item
	Final account and final payment (Clause 34).			
32	F:	V:	T:	Item
	Payment to other parties (Clause 35).			
33	F:	V:	T:	Item
<u>CANCELLATION</u>				
	Cancellation by Employer - Contractor's default (Clause 36).			
34	F:	V:	T:	Item
	Cancellation by Employer - Loss and damage (Clause 37).			
35	F:	V:	T:	Item
	Cancellation by Contractor - Employer's default (Clause 38).			
36	F:	V:	T:	Item
	Cancellation - Cessation of the works (Clause 39).			
37	F:	V:	T:	Item
Carried to Collection				
Section 1				
Bill No. 1				
Preliminaries				
				R

	<u>DISPUTE</u>		
38	Dispute Settlement (Clause 40) F: V: T:	Item	
39	<u>SUBSTITUTE PROVISIONS</u> State Clauses (Clause 41) F: V: T:	Item	
40	<u>CONTRACT VARIABLES</u> The Schedule: Pre-Tender information (Clause 42). F: V: T:	Item	
	<u>CONTRACTING AND OTHER PARTIES (Clause 42.1)</u> Employer: The Mvula Trust Postal Address: 67 Devereux Avenue, Vincent, East London Telephone: 043 726 2255 Facsimile: 043 726 5967 Physical address: 67 Devereux Avenue, Vincent, East London Principal Agent: The Mvula Trust Postal Address: 67 Devereux Avenue, Vincent, East London Telephone: 043 726 2255 Facsimile: 043 726 5967 Physical address: 67 Devereux Avenue, Vincent, East London		
	Carried to Collection		R
	Section 1 Bill No. 1 Preliminaries		

CONTRACT DETAILS (Clause 42.2)

Clause 42.2.1

Works Description: Construction of new ablution facilities.

Clause 42.2.2

Site Description: The site is the existing school.

Clause 42.2.3

Work or Installations by Others: NIL

Clause 42.2.4

This Agreement is for a State Contract :- Yes

Payment will be made for materials and goods:- Yes

Dispute resolution :- Mediation (in terms of clause 40) followed by litigation.

Arbitration rules as recommended by the Association of Arbitrators (SA) :- N/A

Clause 42.2.5

Date on which possession of the site is intended to be given on :-

To be advised.

Clause 42.2.6

Period for the commencement of the works after the contractor takes possession of the site :- 5 Working days.

Completion in Sections are required : NO

Clause 42.2.7

Intended date of practical completion and the penalty per calendar day for the works as a whole :-

Carried to Collection

Section 1
Bill No. 1
Preliminaries

R

To be advised.			
Penalty amount will be R2 000.00 per calendar day.			
Clause 42.2.8			
Intended dates of practical completion and the penalties per calendar day for the works in sections :			
N/A			
Clause 42.2.9			
The law applicable to this agreement shall be that of - Republic of South Africa.			
<u>INSURANCES (Clause 42.3)</u>			
Clause 42.3.1			
Contract works insurance to be effected by Contractor for the sum of: Contract Sum			
With a deductible of : Not exceeding 5% of each and every claim.			
Clause 42.3.2			
Supplementary insurance is required : Yes			
SASRIA insurance required to be effected by the Contractor for the amount of: Contract Sum plus 20% (with a deductible to be determined by the Insurance company issuing the policy).			
Clause 42.3.3			
Public liability insurance to be effected by Contractor			
For the amount of: R 5million			
With a deductible of: Not exceeding 5% of each and every claim.			
	Carried to Collection		
Section 1			
Bill No. 1			
Preliminaries			

R

<p><u>DOCUMENTS (Clause 42.4)</u></p> <p>Clause 42.4.1 Waiver of the contractor's lien is required :- YES</p> <p>Clause 42.4.2 Number of construction document copies to be supplied to the Contractor free of charge :- 1</p> <p>Clause 42.4.3 Bills of Quantities drawn up in accordance with :- Standard System of Measuring Building Work - Seventh Edition including all amendments</p> <p>Clause 42.4.4 Number of days for submission of priced documents : 5 working days from the Letter of Appointment.</p> <p>Clause 42.4.5 JBCC Engineering General Conditions are to be included in the documents :- No</p> <p>Clause 42.4.6 The contract value is to be adjusted using CPAP:- NO</p>	<p>Item</p> <p>Carried to Collection</p> <p>R</p>
<p>41 F: V: T:</p> <p><u>DOCUMENTS (B2)</u></p> <p>Checking of documents (B2.1)</p> <p>Section 1 Bill No. 1 Preliminaries</p>	

56	F: V: T: Articles of value (B3.10)	Item	
57	F: V: T: Inspection of adjoining properties (B3.11)	Item	
58	F: V: T: <u>MANAGEMENT OF CONTRACT (B4)</u>	Item	
	Management of the Works (B4.1)		
59	F: V: T: Programme for the Works (B4.2)	Item	
60	F: V: T: Progress meetings (B4.3)	Item	
61	F: V: T: Technical meetings (B4.4)	Item	
62	F: V: T: <u>SAMPLES AND SHOP DRAWINGS (B5)</u>	Item	
	Samples of materials (B5.1)		
63	F: V: T: Workmanship samples (B5.2)	Item	
64	F: V: T: Shop drawings (B5.3)	Item	
65	F: V: T: <u>TEMPORARY WORKS AND PLANT (B6)</u>	Item	
	Deposits and fees (B6.1)		
Carried to Collection			
Section 1			
Bill No. 1			
Preliminaries			
			R

CLUSTER 93
NOMATHEBE JUNIOR SECONDARY SCHOOL
THE MVULA TRUST SAFE PROGRAMME

66	<p>F: V: T:</p> <p>Enclosure of the works (B6.2)</p> <p>The contractor shall erect, maintain and remove at completion, hoardings, safety screens, barriers, access gates, covered gangways and the like as necessary for the enclosure of the works and elements thereof all for the protection of the public and others.</p>	Item	R
67	<p>F: V: T:</p> <p>Advertising (B6.3)</p>	Item	R
68	<p>F: V: T:</p>	Item	R
	Carried to Collection		
Section 1 Bill No. 1 Preliminaries			

	Ablution facilities (B7.5) The contractor shall provide toilet facilities on site for the works in accordance with: Alternative A (i.e. to be provided for by the Contractor).		
76	F: V: T:	Item	
	<u>PRIME COST AMOUNTS (B8)</u>		
	Responsibility for prime cost amounts (B8.1)		
77	F: V: T:	Item	
	<u>ATTENDANCE ON N/S SUBCONTRACTORS (B9)</u>		
	General Attendance (B9.1)		
78	F: V: T:	Item	
	Special Attendance (B9.2)		
79	F: V: T:	Item	
	Commissioning - fuel, water and power (B9.3)		
80	F: V: T:	Item	
	<u>FINANCIAL ASPECTS (B10)</u>		
	Statutory taxes, duties and levies (B10.1)		
	Provision is made in the Final Summary of these Bills of Quantities for the inclusion of Value Added Tax (VAT).		
81	F: V: T:	Item	
	Payment of Preliminaries (B10.2)		
82	F: V: T:	Item	
	Adjustment of Preliminaries (B10.3)		
83	F: V: T:	Item	
	Carried to Collection		
	Section 1 Bill No. 1 Preliminaries		R

<u>SECTION C: SPECIFIC PRELIMINARIES</u>		
<u>Section C: Specific Preliminaries:</u>		
94	<p>C1. Proprietary branded products</p> <p>The contractor shall take delivery of, handle, store, use, apply and/or fix all proprietary branded products in strict accordance with the manufacturer's instructions after consultation with the manufacturer's authorised representative.</p> <p>F: V: T:</p> <p>C2. Trade Names, etc.</p> <p>All materials, fittings, finishings, etc., specified hereinafter under a trade name, catalogue number or reference, must be exactly as described. The Architect's approval in writing must be obtained for the use of any alternative to the specification before the submission of tenders otherwise the specified materials, fittings, finishings, etc., will be assumed to have been allowed for in the tender.</p> <p>The Contractor must take delivery of, handle, store, use, apply and/or fix all proprietary branded products in strict accordance with the manufacturer's instructions after consultation with the manufacturer's authorised representative.</p> <p>F: V: T:</p> <p>C3. Contractors responsibility</p> <p>The Employer, the Principal Agent and the other professional consultants shall not be responsible for any act or omission on the part of the Contractor which may result in any patent or latent defects, in materials or workmanship, breach or neglect of any local regulations. The Contractor shall at all times be responsible for any such neglect, deviation or wrong act, whether the same is discovered before or after the final certificate, or any other Certificate, has been approved.</p> <p>F: V: T:</p>	Item
95		
96		Item
Carried to Collection		
<p>Section 1 Bill No. 1 Preliminaries</p> <p>R</p>		

97	<p>C4. Overtime</p> <p>Should overtime be required to be worked for any reason whatsoever, the costs of such overtime are to be borne by the contractor unless the principal agent has specifically authorised in writing, prior to the execution thereof, that costs for such overtime are to be borne by the employer.</p> <p>F: V: T:</p> <p>C5. As built drawings</p> <p>The position of construction breaks and the extent of individual concrete pours are to be recorded by the contractor on the structural engineer's drawings and are to be submitted to the principal agent and the structural engineer for their records.</p> <p>Three full sets of as-built drawings shall be submitted to the Principal Agent no later than fourteen days after practical completion.</p>	Item	
98	<p>F: V: T:</p> <p>C6. Construction Instructions</p> <p>Contract instructions issued on site are to be recorded in triplicate in a site instruction book which is to be maintained on site by the Contractor. The Contractor shall supply and have available at the site of the works at all times, the following site books:</p> <p>a) Construction Instruction Book:</p> <p>Receiving and recording instructions in a suitable A4 size triplicate book kept on site. Instructions issued shall be recorded by the Architect or other Employer's Agents to whom the Architect has delegated authority to in the book.</p> <p>Only instructions issued in such book shall be recognised.</p> <p>b) Daily Record Book:</p>	Item	
	Carried to Collection		
	<p>Section 1</p> <p>Bill No. 1</p> <p>Preliminaries</p>	R	

<p>The Contractor shall record in triplicate in a suitable A4 size triplicate book kept at the site, a daily record of work done, all site visits by the Principal Agent and other professional personnel and all events affecting the Works, such as progress, issue of plans, breakdown of machinery, etc. The labour, plant and material on site shall be recorded as well as work performed. Entries must be made by the Contractor and must be signed and forwarded to the Principal Agent for his counter-signature on a daily basis. Copies of these records shall be for the Architect, Quantity Surveyor and Contractor.</p>		
9	F: V: T:	Item
0	<p>C7. Labour record</p> <p>At the end of each week the contractor shall provide the principal agent with a written record, in schedule form, reflecting the number and description of tradesmen and labourers employed by him and all subcontractors on the works each day.</p> <p>F: V: T:</p>	Item
1	<p>C8. Plant record</p> <p>At the end of each week the contractor shall provide the principal agent with a written record, in schedule form, reflecting the number, type and capacity of all plant, excluding hand tools, currently used on the works.</p> <p>F: V: T:</p>	Item
2	<p>C9. Encroachment</p> <p>During the course of the building operations, the Contractor shall be held entirely responsible for any encroachment onto any adjoining properties, buildings, etc., or servitudes and the cost of any remedial measures as required by the Principal Agent shall be borne by the Contractor.</p> <p>F: V: T:</p>	Item
<p>C10. Method Statement</p>		
<p>Carried to Collection</p>		
<p>Section 1 Bill No. 1 Preliminaries</p>		

	The Tenderer shall produce, when required to do so by the Principal Agent, a Method Statement outlining the methods of construction and labour and plant resources that he proposes to use in the execution of the Works. Any approval given or observation made by the Principal Agent shall not relieve the Contractor of his sole responsibility to adopt the methods of construction and to provide the labour and plant resources necessary for the due and proper timeous execution of the Works.		
103	F: V: T:	Item	
	C11. Unauthorised Persons/Workmen on Premises		
	The Contractor shall at all times strictly exclude all unauthorised persons from the Works and the site and shall set up notice boards to that effect.		
	No workmen or labourers (except security guards) are to be allowed under any circumstances to sleep or deposit any kit on the premises. The Contractor must provide any necessary independent shelter or shed required for any labour or watchmen on site, to the approval of the Employer.		
104	F: V: T:	Item	
	C12. Mode of Procedure		
	Notwithstanding anything to the contrary contained herein the Principal Agent at all times reserves the right to direct the order in which the various parts of the Contract are to be executed. The Contractor shall give priority to any individual section or portion of the Works that, in the opinion of the Principal Agent, requires to be expedited.		
	Should it appear, in the Principal Agent's opinion, that work in any area is not being executed in accordance with the requirements of the Contract Programme, the Contractor shall provide additional manpower and resources and shall work additional overtime and do everything else required to bring the work back to programme to the satisfaction of the Principal Agent and to the Contractor's cost.		
105	F: V: T:	Item	
	Carried to Collection		
	Section 1 Bill No. 1 Preliminaries		R

	C13. Location of Temporary Buildings and Temporary Services		
	The Contractor shall provide all necessary temporary works, including temporary roads, tracks, crossings, hardstanding and services, hoardings, dust screens, tunnelling, etc., required for his own and sub-contractors use during the construction and maintenance period.		
	There is no guarantee given or implied that Site conditions will be such that the Contractor will be able to erect such temporary works, roads, hardhats, offices, stores and temporary accommodation within the site boundaries and it shall be the Contractor's responsibility to adopt whatever measures he deems necessary in this regard and to obtain all necessary permission and pay all costs in connection therewith.		
106	F: V: T:	Item	
	<u>C14. Office accommodation</u>		
	The contractor shall provide, maintain and remove on practical completion air conditioned office accommodation with suitable tables and chairs for meetings to be held on the site. Such offices shall be kept clean and fit for use at all times [12.2.18]		
107	F: V: T:	Item	
	<u>C15. Storage Facilities</u>		
108	The Contractor shall provide a Container for storage of materials.	Item	
109	F: V: T:	Item	
	C16. Removal and Making Good of Temporary Works, etc, on Completion		
	The Contractor shall remove (except where specifically stated otherwise) all temporary works, roads, services and the like used for this contract and shall make good to the entire satisfaction of the Principal Agent any damage resulting therefrom.		
110	F: V: T:	Item	
	Carried to Collection		
	Section 1 Bill No. 1 Preliminaries		R

CLUSTER 93
NOMATHEBE JUNIOR SECONDARY SCHOOL
THE MVULA TRUST SAFE PROGRAMME

Section 1			
Bill No. 1			
Preliminaries			
<u>COLLECTION</u>			
Total Brought Forward from Page No.		Page No	Amount
	1		
	2		
	3		
	4		
	5		
	6		
	7		
	8		
	9		
	10		
	11		
	12		
	13		
	14		
	15		
	16		
	17		
	18		
	19		
	20		
		Carried Forward	
Section 1			
Bill No. 1			
Preliminaries			
		R	

<u>COLLECTION</u>		Page No	Amount
	Brought Forward		
Total Brought Forward from Page No.		21	R
		22	
		23	
		24	
Carried Forward to Summary of Section No. 1		R	
Section 1			
Bill No. 1			
Preliminaries			

Item No		Quantity	Rate	Amount
	<u>SECTION 1</u>			
	<u>BILL No. 2</u>			
	<u>HEALTH AND SAFETY</u>			
	<u>MODEL PREAMBLES</u>			
	The tenderer is referred to the "Model Preambles for Trades 2008" for supplementary and comprehensive expansion of descriptions, appropriate provision for which shall be deemed to have been included in all relevant rates.			
	<u>SUPPLEMENTARY PREAMBLES</u>			
	Supplementary preambles and/or specifications are incorporated in these bills of quantities to satisfy the requirements of this project. Such supplementary preambles and/or specifications shall take precedence over the provisions of the General Preambles.			
	The contractor's prices for all items throughout these bills of quantities shall take account of and include where applicable for all of the obligations, requirements and specifications given in the General Preambles and in any supplementary preambles and/or specifications.			
	Prior to pricing the principal contractor must familiarize him/herself with the Occupational Health and Safety Act No. 85 Of 1993, Construction Regulations 2014, other relevant Regulations and Standards as well as project specific Health & Safety specifications.			
	The items in this Bill do not contain quantities hence the Contractor must insert his own quantities based on his individual requirements to comply with the Health and Safety obligations and demands of the Occupational Health and Safety Act No. 85 of 1993, Construction Regulations 2014, other relevant Regulations and Standards as well as project specific Health & Safety Specifications.			
	Carried to Collection			
	Section 1 Bill No. 2 Health and Safety		R	

The costs included herein must incorporate Community Liaison Officer (CLO).			
<u>OCCUPATIONAL HEALTH AND SAFETY</u>			
<u>General:</u>			
1	Preparation of Contractor's site specific Health and Safety Plan.	Item	
2	Submission of the Health and Safety File.	Item	
3	Principal Contractor's initial obligations in respect of the OHS Act and Construction Regulations.	Item	
4	Principal Contractor's time related obligations in respect of the OHS Act and Construction Regulations for the entire construction period.	Item	
5	Provision of full time Health and Safety Officer for the entire construction period.	Item	
6	Induction training of personnel.	No	20
7	Provision of first aid boxes.	No	1
8	SANS approved weld mesh type temporary barrier fencing 1,8m high covered with a net fixed to and including 100mm diameter gum poles set securely min 300mm deep in ground at max 3m spacing including excavation, backfilling, etc	m	250
9	Extra over mesh fence for pedestrian gate size 1.8 x 1,8m high.	No	1
<u>Provision for Personal Protective Equipment and Protective Clothing:</u>			
10	Reflective vests.	No	50
11	Hard hats.	No	50
12	Protective foot wear.	No	50
13	Ear Plugs.	No	100
Carried to Collection			
Section 1 Bill No. 2 Health and Safety			
R			

CLUSTER 93
NOMATHEBE JUNIOR SECONDARY SCHOOL
THE MVULA TRUST SAFE PROGRAMME

14	Dust Masks.	No	100		
<u>Costs of Medical Certificates and Medical Surveillance:</u>					
15	Initial (baseline) medical examinations.	No	50		
16	Exit Examinations.	No	50		
<u>Noise Monitoring:</u>					
17	Establishment of noise zones.	No	2		
18	Audiograms.	No	2		
<u>C16. Covid-19 Compliance Measures</u>					
19	The Contractor is required to price for Covid 19 compliance and the pricing thereof shall be deemed to include all the mandatory requirements.	Item			
Carried to Collection					
Section 1 Bill No. 2 Health and Safety					
R					

CLUSTER 93
NOMATHEBE JUNIOR SECONDARY SCHOOL
THE MVULA TRUST SAFE PROGRAMME

Section 1 Bill No. 2 Health and Safety			
<u>COLLECTION</u>		Page No	Amount
Total Brought Forward from Page No.		27	-----
		28	-----
		29	-----
Carried Forward to Summary of Section No. 1		R	-----
Section 1 Bill No. 2 Health and Safety			-----

CLUSTER 93
NOMATHEBE JUNIOR SECONDARY SCHOOL
THE MVULA TRUST SAFE PROGRAMME

Bill No	Section 1	Page No	Amount
<u>SECTION SUMMARY - PRELIMINARIES</u>			
	Preliminaries	26	
	Health and Safety	30	
Carried to Final Summary			
Section 1		R	

Item No		Quantity	Rate	Amount
	<p><u>SECTION 2</u></p> <p><u>BILL No. 1</u></p> <p><u>DEMOLITIONS</u></p> <p><u>MODEL PREAMBLES</u></p> <p>The tenderer is referred to the "Model Preambles for Trades 2008" for supplementary and comprehensive expansion of descriptions, appropriate provision for which shall be deemed to have been included in all relevant rates</p> <p><u>SUPPLEMENTARY PREAMBLES</u></p> <p><u>View site</u></p> <p>Before submitting his tender the tenderer shall visit the site and satisfy himself as to the nature and extent of the work to be done and the value of the materials contained in the buildings or portions of the buildings to be demolished. No claim for any variations of the contract sum in respect of the nature and extent of the work or of inferior or damaged materials will be entertained</p> <p><u>Explosives</u></p> <p>No explosives whatsoever may be used for demolition purposes unless otherwise stated.</p> <p><u>General</u></p> <p>Water supply pipes and other piping in ground that may be encountered and found necessary to disconnect or cut, shall be effectually stopped off or grubbed up and removed, and any new connections that may be necessary shall be made with proper fittings to the satisfaction of the principal agent.</p> <p>Unless otherwise described all materials are to become the property of the contractor and are to be removed from the site.</p> <p style="text-align: center;">Carried to Collection</p> <p>Section 2 Bill No. 1 Demolitions</p>			R

<p><u>Removal of asbestos material</u></p> <p>All preparatory work, alterations, etc., to existing asbestos cement roof sheeting, gutters, rainwater pipes, etc., is to be carried out strictly by an approved and certified specialist company and in accordance with statutory requirements (Occupational Health and Safety Act, 1993 - Asbestos Regulations 2001) and all necessary precautions must be taken when working with and disposing of asbestos cement products and the disposal of waste water resulting from cleaning operations, etc.</p>	<p><u>The following shall apply in respect of asbestos removal</u></p> <p>The removal of asbestos shall be carried out by a certified entity, registered in accordance with the Occupational Health and Safety Act. 1993 and the Asbestos Regulations 2001</p> <p>Asbestos in all forms/building elements that is to be removed, shall be carried out in strict accordance with aforementioned regulation and a certificate issued by the entity as contemplated in the above, shall be provided per block for the removal thereof, where the term block shall in this context refer to any single, free standing building structure, regardless of size or purpose</p> <p>Corresponding disposal certificates shall be issued by the facility at which the asbestos is disposed off, with said facility to, prior to the disposal of any asbestos material provide satisfactory proof that the facility is duly registered and fully compliant in terms of the act, to receive the asbestos material</p> <p>Under no circumstances is the Contractor nor any of his duly authorised representatives to sell and/or give away asbestos material to any member/s of the school community, the community in general or the public at large. Should this be found to be occurring, the Contractor will be held responsible contractually and may further be prosecuted criminally</p> <p>The cost for complying with the above, and all requirements of regulation as reflected above is to be priced for in terms for removal of asbestos material. No further claims in this regard will therefore be entertained</p>	<p>Carried to Collection</p> <p>Section 2 Bill No. 1 Demolitions</p>	<p>R</p>
--	---	---	----------

DEMOLISHING AND REMOVING			
Demolish pit latrine structure comprising of brick/block work with corrugated roof sheeting, approximate size 8.9 x 5m wide with 3.5m high top structure and 2.0m deep pit. Demolition is to only commence once the latrine has been completely emptied (elsewhere measured).	No	2	
Demolish pit latrine structure comprising of brick/block work with corrugated roof sheeting, approximate size 11 x 5m wide with 3.5m high top structure and 2.0m deep pit. Demolition is to only commence once the latrine has been completely emptied (elsewhere measured).	No	1	
Demolish pit latrine structure comprising of brick/block work with corrugated roof sheeting, approximate size 7.5 x 5m wide with 3.5m high top structure and 2.0m deep pit. Demolition is to only commence once the latrine has been completely emptied (elsewhere measured).	No	1	
Demolish pit latrine structure comprising of brick/block work with corrugated roof sheeting, approximate size 6 x 3m wide with 3.5m high top structure and 2.0m deep pit. Demolition is to only commence once the latrine has been completely emptied (elsewhere measured).	No	1	
Cart away rubble from demolitions and dispose off site.		Item	
Backfill existing hole with G7 fill material in max. 150mm layers and compact to 95% MOD AASHTO density.	m3	377	
Allow for compaction tests by an approved laboratory to determine density of filling material.	No	5	
SUNDRIES			
Desludging			
Clean out pit latrine by desludging including removal of all debris and waste including solid waste as per Health and Safety requirements and make good on completion including disposing of all debris and waste at an authorised municipal waste disposal facility. Contractor to price per seat	No	30	
Issue of Certificate of Waste Disposal.		Item	
Carried to Collection			
Section 2			
Bill No. 1			
Demolitions			

Item No		Quantity	Rate	Amount
<p><u>SECTION 3</u></p> <p><u>BILL No. 1</u></p> <p><u>EARTHWORKS (PROVISIONAL)</u></p> <p><u>Quantity Split:</u></p> <p>Note that the total quantity per each item is split into the various buildings and appears below each description as follows:</p> <p>A0 - DWG 04 - Staff Ablutions A1 - DWG 06 - Grade R Ablutions A6 - DWG 14 - Male Ablutions AD - DWG 35 - Female Ablutions</p> <p><u>MODEL PREAMBLES</u></p> <p>The tenderer is referred to the "Model Preambles for Trades 2008" for supplementary and comprehensive expansion of descriptions, appropriate provision for which shall be deemed to have been included in all relevant rates</p> <p><u>SUPPLEMENTARY PREAMBLES</u></p> <p><u>Proprietary products in descriptions:</u></p> <p>Proprietary products shall be used as specified. Substitute products of similar quality and specification may only be used with prior approval by the Principal Agent.</p> <p><u>Nature of material to be excavated:</u></p> <p>The material to be excavated is assumed to be predominantly of a composition that will allow excavation in "earth" as specified, but including a percentage of excavation in "soft rock" and "hard rock".</p> <p><u>Carting away of excavated material:</u></p> <p>Descriptions of carting away of excavated material shall be deemed to include loading excavated material onto trucks directly from the excavations, or alternatively, from stock piles situated on the building site.</p> <p style="text-align: center;">Carried to Collection</p> <p>Section 3 Bill No. 1 Earthworks (Provisional)</p>				R

Dewatering of excavations:

The Contractor shall allow for removing seepage and other water from subterranean sources from the excavations by pumping, baling or otherwise. Accurate records of all such dewatering shall be kept to determine the total volume of water so removed and a clear distinction shall be made between water from subterranean sources and other water

Density testing on filling:

Rates for filling, etc. shall include for all density and soil type testing to prove that the specified compaction is achieved. When additional testing is done on instruction of the Principal Agent and these tests are successful, they will be paid for additionally.

Imported fill:

"Filling and bedding to trenches etc. to be in compliance with SABS 1200 DB and LB respectively"

Classification of excavated material

"Hard rock" shall mean granite, quartzitic sandstone or other rock of similar hardness, the removal of which requires drilling, wedging and splitting or the use of explosives.

"Soft rock" shall mean hard material, the removal of which warrants the use of pneumatic tools and includes hard shale, ferricite, compact oukliip and material of similar hardness.

"Earth" shall mean all ground other than that classified as "hard rock" or "soft rock" and shall include made-up ground and any loose stones or pieces of concrete not exceeding 0,03m³ in volume.

Carried to Collection

Section 3
Bill No. 1
Earthworks (Provisional)

R

EARTH FILLING, ETC.				
<u>Earth filling obtained from the excavations and / or prescribed stock piles on site (minimum G7 tested material) compacted to 93% Mod. AASHTO density:</u>				
Backfilling to trenches, holes, etc.			m3	3
A0 : 1	A1 : 1	A6 : 0	AD : 1	
<u>Imported G5 filling, selected and supplied by the Contractor, including depositing in layers not exceeding 150mm thick and compacting to 98% modified AASHTO dry density to trenches, holes, etc.</u>				
Under floors, steps, pavings, trenches, etc.			m3	16
A0 : 5	A1 : 4	A6 : 3	AD : 5	
<u>Imported G7 filling, selected and supplied by the Contractor, including depositing in layers not exceeding 150mm thick and compacting to 98% modified AASHTO dry density to holes, trenches etc.</u>				
Under floors, steps, pavings, trenches, etc.			m3	74
A0 : 22	A1 : 17	A6 : 14	AD : 21	
<u>Coarse river sand filling supplied by the contractor:</u>				
Under floors etc.			m3	10
A0 : 3	A1 : 2	A6 : 2	AD : 3	
<u>Compaction of surfaces:</u>				
Compaction of ground surface under floors etc including scarifying for a depth of 150mm, breaking down oversize material, adding suitable material where necessary and compacting to 93% Mod AASHTO density.			m2	179
A0 : 52	A1 : 41	A6 : 32	AD : 54	
Carried to Collection				
Section 3				
Bill No. 1				
Earthworks (Provisional)				
				R

CLUSTER 93
NOMATHEBE JUNIOR SECONDARY SCHOOL
THE MVULA TRUST SAFE PROGRAMME

Prescribed density tests on filling:			
8 Allow for compaction tests by an approved laboratory to determine density of filling material. A0 : 8 A1 : 10 A6 : 8 AD : 11	No	37	
Carried to Collection Section 3 Bill No. 1 Earthworks (Provisional)		R	

<u>SOIL POISONING</u>				
<u>Approved brand of anti-termite soil poison applied by a Registered Pest Control company and guaranteed against termite infestation for ten years:</u>				
9	Under floors, etc., including forming and poisoning shallow furrows against foundation walls, etc., filling in furrows and ramming.	m2	107	
	A0 : 31 A1 : 24 A6 : 22 AD : 30			
10	To bottoms and sides of trenches, holes, etc.	m2	478	
	A0 : 137 A1 : 116 A6 : 97 AD : 127			
		Carried to Collection		
Section 3 Bill No. 1 Earthworks (Provisional)			R	

CLUSTER 93
NOMATHEBE JUNIOR SECONDARY SCHOOL
THE MVULA TRUST SAFE PROGRAMME

Section 3 Bill No. 1 Earthworks (Provisional)	Page No	Amount
<u>COLLECTION</u>		
Total Brought Forward from Page No.	36	
	37	
	38	
	39	
	40	
Carried Forward to Summary of Section No. 3		
Section 3 Bill No. 1 Earthworks (Provisional)	R	

Item No		Quantity	Rate	Amount
	<u>SECTION 3</u>			
	<u>BILL No. 2</u>			
	<u>CONCRETE, FORMWORK AND REINFORCEMENT</u>			
	<u>Quantity Split:</u>			
	Note that the total quantity per each item is split into the various buildings and appears below each description as follows:			
	A0 - DWG 04 - Staff Ablutions A1 - DWG 06 - Grade R Ablutions A6 - DWG 14 - Male Ablutions AD - DWG 35 - Female Ablutions			
	<u>MODEL PREAMBLES</u>			
	The tenderer is referred to the "Model Preambles for Trades 2008" for supplementary and comprehensive expansion of descriptions, appropriate provision for which shall be deemed to have been included in all relevant rates			
	<u>SUPPLEMENTARY PREAMBLES</u>			
	<u>Proprietary products in descriptions:</u>			
	Proprietary products shall be used as specified. Substitute products of similar quality and specification may only be used with prior approval by the Principal Agent.			
	<u>Cost of tests:</u>			
	The costs of making, storing and testing of concrete test cubes as required under clause 7 'Tests' of SABS 1200 G shall include the cost of providing cube moulds necessary for the purpose, for testing costs and for submitting reports on the tests to the Architect. The testing shall be undertaken by an independent firm or institution nominated by the Contractor to the approval of the Architect. (Test cubes are measured separately).			
		Carried to Collection		
	Section 3 Bill No. 2 Concrete, Formwork and Reinforcement			
			R	

Formwork:

Descriptions of formwork shall be deemed to include use and waste only (except where described as left in or permanent), for fitting together in the required forms, wedging, plumbing and fixing to true angles and surfaces as necessary to ensure easy release during stripping and for reconditioning as necessary before re-use.

The vertical strutting shall be carried down to such construction as is sufficiently strong to afford the required support without damage and shall remain in position until the newly constructed work is able to support itself.

Formwork to soffits of solid slabs etc., shall be deemed to be to slabs not exceeding 250mm thick unless otherwise described.

Formwork to sides of bases, pile caps, ground beams, etc., will only be measured where it is prescribed by the Engineer for design reasons. Formwork necessitated by irregularity or collapse of excavated faces will not be measured and the cost thereof shall be deemed to be included in the allowance for taking the risk of collapse of the sides of the excavations, provision for which is made in Earthworks.

Carried to Collection

Section 3
Bill No. 2
Concrete, Formwork and Reinforcement

R

REINFORCED CONCRETE					
<u>30MPa/20mm concrete:</u>					
Surface beds on waterproofing.				m3	18
A0 : 5	A1 : 4	A6 : 4	AD : 5		
Suspended Slabs.				m3	15
A0 : 3	A1 : 4	A6 : 3	AD : 5		
TEST BLOCKS					
<u>Test blocks:</u>					
Making and testing of 150x150x150mm concrete strength test cubes (Provisional).				No	24
A0 : 6	A1 : 6	A6 : 3	AD : 9		
Carried to Collection					
Section 3					
Bill No. 2					
Concrete, Formwork and Reinforcement					

FINISHING TOP SURFACE OF CONCRETE				
<u>Finishing top surfaces of concrete smooth with a wood float:</u>				
4	Surface beds, suspended slabs, ground slabs, etc.		m2	286
	A0 : 83 A1 : 65 A6 : 54 AD : 84			
<u>Finishing top surfaces of concrete smooth with a steel float:</u>				
5	Surface beds, suspended slabs, etc.		m2	70
	A0 : 13 A1 : 17 A6 : 16 AD : 25			
<u>Chamfers at corners</u>				
6	19 x 19mm triangular fillet at corners formed of unreinforced concrete steel trowelled.		m	71
	A0 : 15 A1 : 17 A6 : 17 AD : 23			
<u>ROUGH FORMWORK (DEGREE OF ACCURACY III)</u>				
<u>Rough Formwork to Sides:</u>				
7	Edges, risers, ends and reveals not exceeding 300mm high or wide.		m	69
	A0 : 19 A1 : 17 A6 : 13 AD : 21			
<u>Permanent Formwork:</u>				
8	Soffit of slab over pit.		m2	70
	A0 : 13 A1 : 17 A6 : 16 AD : 25			
<u>Extra on permanent formwork for boxing or blocking in or boxing out to form:</u>				
9	835mm diameter circular opening through 370mm thick slab.		No	8
	A0 : 2 A1 : 2 A6 : 2 AD : 2			
10	450mm Diameter opening through 255mm thick slab.		No	5
	A0 : 4 A1 : 1 A6 : 0 AD : 0			
11	200mm Diameter opening through 255mm thick slab.		No	8
	A0 : 0 A1 : 0 A6 : 2 AD : 6			
12	150mm Diameter opening through 255mm thick slab.		No	3
	A0 : 0 A1 : 3 A6 : 0 AD : 0			
Carried to Collection				
Section 3				
Bill No. 2				
Concrete, Formwork and Reinforcement				
R				

CLUSTER 93
NOMATHEBE JUNIOR SECONDARY SCHOOL
THE MVULA TRUST SAFE PROGRAMME

Section 3 Bill No. 2 Concrete, Formwork and Reinforcement	Carried to Collection	R	

	<u>SMOOTH FORMWORK (DEGREE OF ACCURACY I)</u>			
13	<u>Smooth Formwork to Sides:</u> Edges, risers, ends and reveals not exceeding 300mm high or wide. A0 : 11 A1 : 6 A6 : 4 AD : 8	m	29	
14	<u>MOVEMENT JOINTS ETC</u> <u>Expansion joints with bitumen impregnated softboard between vertical concrete or brick surfaces:</u> 12mm Joints not exceeding 300mm high (Provisional). A0 : 28 A1 : 24 A6 : 23 AD : 22	m	97	
15	<u>Saw cut joints:</u> 6 x 40mm Saw cut joints in top of concrete (Provisional). A0 : 42 A1 : 36 A6 : 35 AD : 33	m	145	
16	<u>REINFORCEMENT (PROVISIONAL)</u> High tensile steel reinforcement bars to structural concrete work. A0 : 0.40 A1 : 0.40 A6 : 0.40 AD : 0.40	t	1.60	
17	<u>Fabric reinforcement:</u> REF. 888 fabric reinforcement in concrete footings, walls, base slabs etc. A0 : 44 A1 : 33 A6 : 26 AD : 45	m ²	148	
	Carried to Collection			
Section 3 Bill No. 2 Concrete, Formwork and Reinforcement				R

CLUSTER 93
NOMATHEBE JUNIOR SECONDARY SCHOOL
THE MVULA TRUST SAFE PROGRAMME

Section 3			
Bill No. 2			
Concrete, Formwork and Reinforcement			
<u>COLLECTION</u>			
Total Brought Forward from Page No.		Page No	Amount
		42	
		43	
		44	
		45	
		46	
		47	
Carried Forward to Summary of Section No. 3		R	
Section 3			
Bill No. 2			
Concrete, Formwork and Reinforcement			

Item No		Quantity	Rate	Amount
<p><u>SECTION 3</u></p> <p><u>BILL No. 3</u></p> <p><u>MASONRY</u></p> <p><u>Quantity Split:</u></p> <p>Note that the total quantity per each item is split into the various buildings and appears below each description as follows:</p> <p>A0 - DWG 04 - Staff Ablutions A1 - DWG 06 - Grade R Ablutions A6 - DWG 14 - Male Ablutions AD - DWG 35 - Female Ablutions</p> <p><u>MODEL PREAMBLES</u></p> <p>The tenderer is referred to the "Model Preambles for Trades 2008" for supplementary and comprehensive expansion of descriptions, appropriate provision for which shall be deemed to have been included in all relevant rates</p> <p>All references to SABS shall be deemed to be the relevant SANS specification</p> <p><u>SUPPLEMENTARY PREAMBLES</u></p> <p><u>BRICKWORK</u></p> <p><u>Sizes in descriptions</u></p> <p>Where sizes in descriptions are given in brick units, "one brick" shall represent the length and "half brick" the width of a brick</p> <p><u>Hollow walls etc</u></p> <p>Descriptions of hollow walls shall be deemed to include leaving every fifth perpend of the bottom course of the external skin open as a weep hole.</p> <p>Walls in two skins described as "bagged and sealed" shall be deemed to include having the outer face of the inner skin bagged with 1:6 cement and sand mixture and sealed with two coats "Brixeal" bitumen emulsion waterproofing coating.</p> <p style="text-align: center;">Carried to Collection</p> <p>Section 3 Bill No. 3 Masonry</p>				R

Face bricks

Bricks shall be ordered timeously to obtain uniformity in size and colour

Pointing

Descriptions of recessed pointing to fair face brickwork and face brickwork shall be deemed to include square recessed, hollow recessed, weathered pointing, etc

Samples

Samples of all masonry building units, except those of walls described as "loadbearing", shall consist of a minimum of 6 units. Samples of building units to be used in walls described as "loadbearing" shall consist of 30 units from every 30 000 units delivered to site

Trade names

Where trade names are specified it will read "or equal approved"

Carried to Collection

Section 3
Bill No. 3
Masonry

R


<u>BRICKWORK IN FOUNDATIONS (PROVISIONAL)</u>						
<u>Brickwork consisting of solid bricks with 10.5 MPa minimum nominal compressive strength in Class I mortar with Coprox masonry waterproofing or equal approved waterproof cement additive. Add 2.5kg Coprox waterproof cement additive for every 50kg of cement used in mortar mix (Cement to be 42.5N all-purpose cement):</u>						
1	One brick walls.	A0 : 2	A1 : 2	A6 : 3	AD : 3	m2 10
<u>BRICKWORK AND BLOCKWORK SUNDRIES</u>						
<u>Galvanized brickwork reinforcement</u>						
2	115mm Wide reinforcement built in horizontally	A0 : 153	A1 : 152	A6 : 89	AD : 214	m 609
3	230mm Wide reinforcement built in horizontally.	A0 : 352	A1 : 249	A6 : 253	AD : 260	m 1 114
4	Ditto, but in foundations (Provisional).	A0 : 154	A1 : 131	A6 : 127	AD : 121	m 533
<u>Cramps, ties, etc:</u>						
5	30 x 2mm Galvanized roof tie 1500mm long with one end fixed to timber and other built into brickwork or concrete.	A0 : 25	A1 : 23	A6 : 20	AD : 26	No 94
<u>Air bricks etc:</u>						
6	229 x 152mm terracotta clay vermin proof air brick	A0 : 4	A1 : 4	A6 : 4	AD : 4	No 16
<u>Bagging and sealing the outer face of the inner skin of walls with 1:3 cement and sand mixture and seal with two coats "Brixeal" bitumen emulsion waterproofing coating:</u>						
7	To walls (Provisional).	A0 : 73	A1 : 63	A6 : 62	AD : 71	m2 268
Carried to Collection						
Section 3 Bill No. 3 Masonry						

Samples	Item	R
8 Prepare and construct for approval L-Shaped one brickwall faced and pointed both sides as per given specification, size: 1000x1000x1000mm high. same position to be paved as per given specifications.		
FACE BRICK		
<u>"Rustgold FBS/Qunu Travertine" clay face brick or equal approved, size 222 x 106 x 73mm, bedded and jointed in Class II mortar and pointed with recessed vertical and recessed horizontal joints, suitable for exposure zones 1-2 (Cement to be 42.5N all-purpose cement):</u>		
9 Extra over brickwork for face brickwork externally. A0 : 5 A1 : 4 A6 : 2 AD : 5	m2	16
10 Extra over for face brick in foundations (Provisional). A0 : 22 A1 : 18 A6 : 18 AD : 17	m2	75
11 Half brick wall in beam filling pointed one side including cutting and fitting around roof timbers and bedding roofing solid on top in cement mortar. A0 : 6 A1 : 5 A6 : 5 AD : 6	m2	23
12 One brickwall pointed on both sides. A0 : 107 A1 : 76 A6 : 78 AD : 79	m2	340
13 Half brickwall pointed on both sides. A0 : 11 A1 : 16 A6 : 5 AD : 27	m2	59
14 Fair raking cutting. A0 : 9 A1 : 9 A6 : 9 AD : 9	m	36
<u>Brick-on-edge header course copings, sills, etc, of "Rustgold FBS/Qunu Travertine" or equal approved face bricks pointed with recessed joints on all exposed faces, 220mm wide sill set sloping and slightly projecting:</u>		
15 220mm Brick on edge sill bedded sloping and jointed in cement mortar and pointed on top, edge and projecting soffit including cutting and fitting between reveals and splay cutting brickwork under. A0 : 7 A1 : 5 A6 : 4 AD : 7	m	23
Carried to Collection		
Section 3 Bill No. 3 Masonry		R

CLUSTER 93
NOMATHEBE JUNIOR SECONDARY SCHOOL
THE MVULA TRUST SAFE PROGRAMME

16 220mm Wide header course to top of one brick wall
bedded and jointed in cement mortar and pointed on
both sides.

A0 : 8 A1 : 6 A6 : 5 AD : 8

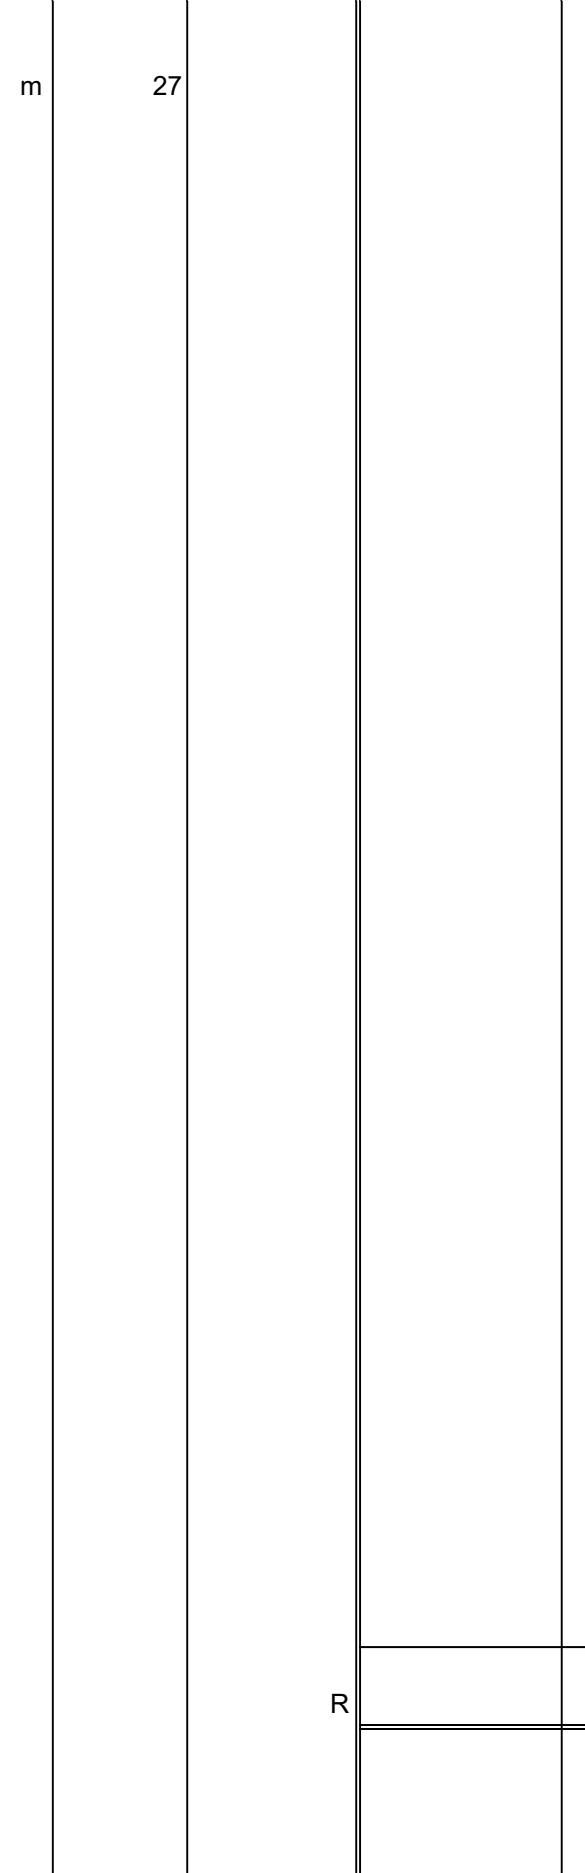

Section 3
Bill No. 3
Masonry

CLUSTER 93
NOMATHEBE JUNIOR SECONDARY SCHOOL
THE MVULA TRUST SAFE PROGRAMME

Section 3 Bill No. 3 Masonry			
<u>COLLECTION</u>		Page No	Amount
Total Brought Forward from Page No.		49	-----
		50	-----
		51	-----
		52	-----
		53	-----
Carried Forward to Summary of Section No. 3		R	-----
Section 3 Bill No. 3 Masonry			-----

Contractor to provide water proofing product that will be 100% resistant to extreme hydrostatic pressure at depth of 2m, from the positive (water from inside) of substrate. Resistant to aggressive chemicals i.e oil, salt water, sewage, weak acids and aggressive sulphate soils. The product must be able to withstand backfilling without protection and must not be subject to deterioration. The product must be able to ensure that the pit structure is fully sealed (100% free from water ingress from outside and it will not penetrate the pit).

The product and its methodology for application must be approved by Principal Agent before it is used.

It is a mandatory requirement for the Contractor to attend training to be provided by Supplier. Proof of attendance will be required prior to application of the approved waterproofing product.

Contractor must prepare a 1m x 1m sample in the presence of the Principal Agent or Engineer. In this case, the Contractor must give at least 48 hours notice prior to the date when the application of the waterproofing product is intended to be done.

Contractor to provide a Letter of Compliance confirming that waterproofing has been applied as per Manufacturer's instructions and data sheet.

Carried to Collection

Section 3
Bill No. 4
Waterproofing

R

<u>DAMPROOFING OF WALLS AND FLOORS</u>						
<u>One layer of 250 micron 'USB GREEN' waterproof sheeting sealed at laps with 'Gunplas Pressure Sensitive Tape':</u>						
1	Under surface beds, bases, etc.	A0 : 52	A1 : 41	A6 : 32	AD : 54	m2 179
<u>One layer of 350 micron embossed dampcourse waterproof sheeting below walls, sills, etc:</u>						
2	Below walls, sills, etc.	A0 : 3	A1 : 2	A6 : 2	AD : 3	m2 11
<u>JOINT SEALANTS ETC</u>						
<u>Clear Neutral silicone sealant:</u>						
3	In joint sealing and pointing all round external window and door frames.	A0 : 55	A1 : 43	A6 : 31	AD : 61	m 188
<u>Two-part grey polysulphide sealing compound including backing cord, bond breaker, primer, etc</u>						
4	10 x 12mm In movement joints in floors or walls including raking out expansion joint filler as necessary (Provisional).	A0 : 70	A1 : 60	A6 : 58	AD : 55	m 242
<u>WATERPROOFING TO PIT WALLS</u>						
<u>Waterproofing product to plastered walls, subject to approval by the Principal Agent prior to application.</u>						
5	On plastered wall surfaces including 100mm overlap at the base slab	A0 : 36	A1 : 30	A6 : 22	AD : 38	m2 126
Carried to Collection						
Section 3 Bill No. 4 Waterproofing						

CLUSTER 93
NOMATHEBE JUNIOR SECONDARY SCHOOL
THE MVULA TRUST SAFE PROGRAMME

Section 3 Bill No. 4 Waterproofing	Page No	Amount
<u>COLLECTION</u>		
Total Brought Forward from Page No.	55	-----
	56	-----
	57	-----
Carried Forward to Summary of Section No. 3		
Section 3 Bill No. 4 Waterproofing		R

Quality Assurance

The manufacturer shall be assessed and certified as complying with ISO 9001: 2008 Quality Management System

Guarantee

Z200 Galvanized Metal or equal approved sheeting shall be laid in strict accordance with manufacturer's specifications by an approved contractor. The employer shall be provided with a ten year written guarantee on materials by the manufacturer.

Safety

The contractor shall exercise special care when handling long length sheeting, particularly in windy conditions. Should work be interrupted for any reason, all loose sheeting and incomplete sections must be adequately secured against possible movement by wind and gravity

Handling and Storage

The contractor shall ensure that all materials used on site for cladding, etc are transported, handled and stored in accordance with the manufacturer's recommendations. Material damaged shall be rejected and replaced with undamaged material at the contractor's expense. Repair of damaged material will not generally be permitted. Rates are to include for preventing damage and protecting sheets through all stages of construction

Carried to Collection

Section 3
Bill No. 5
Roof Coverings Etc.

R

Inspection Prior to Installation or Erection

Before commencing with installation, the contractor shall verify that the following items have been checked and accepted:

- a. The entire structure or the portion thereof to be sheeted has been correctly aligned, levelled and grouted
- b. Purlins and sheeting rails are at the correct spacing and are within the specified tolerances
- c. The corners of the roof are square and the wall framework is perpendicular or as specified
- d. No protrusions such as bolt heads, splice plates, cleats, etc. appear on the face of the framework
- e. All members to which roofing and cladding are to be fixed in aesthetically sensitive areas are true and square
- f. Paint and any other materials that may be incompatible with the sheeting, have been painted over or so dealt with that direct contact with the sheeting is avoided
- g. The contact faces between the purlins or the girts and the cladding are in the same plane. Should the alignment be inadequate, the contractor shall request instructions from the engineer before proceeding with the fixing of the cladding

Protrusion through Sheeted Surfaces

Protrusions such as pipes, ducts and the like, shall be adequately flashed where they pass through the sheeting surface. Where ribs have to be cut away to permit penetration, additional framing is to be installed as required to support the sheeting. Depending on the position of the penetration through the roof, special attention shall be given to back flashing the sheeting to the ridge or point of water entry. In all cases, all cutting and flashings shall be so arranged that adequate provision is made for the drainage of all troughs and corrugation

Cleaning of Roofs, etc

All debris, etc arising from the fixing of the cladding shall be removed from the sheeting as the fixing progresses. In addition, off-cuts of insulation, surplus fasteners and sealants, mandrels from pop rivets, off-cuts of flashings and sheeting, surplus flashing, food packaging, cartons, bottles, cans, etc shall not be left on the roof or in the gutters. Care shall be taken to ensure that no such material enters, blocks or partially impedes the flow of water into the outlets, downpipes, etc

Carried to Collection

Section 3
Bill No. 5
Roof Coverings Etc.

R

CLUSTER 93
NOMATHEBE JUNIOR SECONDARY SCHOOL
THE MVULA TRUST SAFE PROGRAMME

Section 3 Bill No. 5 Roof Coverings Etc.	Carried to Collection		R	

<u>ROOF COVERINGS</u>						
<u>PROFILED METAL SHEETING AND ACCESSORIES</u>						
<u>0.58mm Thick Z200 "IBR Profile" galvanised metal roof sheeting, in single sheet lengths, with "Chromadek" finish to external face and standard backing coat to internal face :</u>						
1	Roof sheeting laid to a mono-pitch. A0 : 42 A1 : 34 A6 : 31 AD : 42		m2		149	
2	<u>0.58mm Flashings pre-painted to match roof sheeting and fixed in strict accordance with manufacturer's instructions:</u> Mono pitched ridge capping with 225mm lapping secured onto the roof. A0 : 10 A1 : 8 A6 : 7 AD : 9	m			34	
<u>ROOF AND WALL INSULATION</u>						
<u>"Sisalation Grade FR430" or equal approved heavy industrial insulation</u>						
3	Insulation laid taut over roof trusses (at approximately 1 100mm centres) and fixed concurrent with SA Pine purlins at 900mm centres, etc including galvanised steel straining wires A0 : 42 A1 : 34 A6 : 31 AD : 42	m2			149	
Carried to Collection						
Section 3 Bill No. 5 Roof Coverings Etc.				R		

CLUSTER 93
NOMATHEBE JUNIOR SECONDARY SCHOOL
THE MVULA TRUST SAFE PROGRAMME

Section 3 Bill No. 5 Roof Coverings Etc.	Page No	Amount
<u>COLLECTION</u>		
Total Brought Forward from Page No.	59	
	60	
	61	
	62	
	63	
Carried Forward to Summary of Section No. 3	R	
Section 3 Bill No. 5 Roof Coverings Etc.		

Item No		Quantity	Rate	Amount
SECTION 3	<u>SECTION 3</u> <u>BILL No. 6</u> <u>CARPENTRY & JOINERY</u> <u>Quantity Split:</u> Note that the total quantity per each item is split into the various buildings and appears below each description as follows: A0 - DWG 04 - Staff Ablutions A1 - DWG 06 - Grade R Ablutions A6 - DWG 14 - Male Ablutions AD - DWG 35 - Female Ablutions <u>MODEL PREAMBLES</u> The tenderer is referred to the "Model Preambles for Trades 2008" for supplementary and comprehensive expansion of descriptions, appropriate provision for which shall be deemed to have been included in all relevant rates <u>SUPPLEMENTARY PREAMBLES</u> <u>FIXING</u> All nailing of timber roof rafters, purlins, etc shall be done with galvanised nails. In coastal areas, copper, aluminium or stainless steel nails shall be used.	Carried to Collection	R	

<u>CARPENTRY</u>							
<u>Sawn softwood:</u>							
1	38 x 152mm Wall plate. A0 : 19 A1 : 15 A6 : 14 AD : 19			m	67		
2	50 x 76mm Purlins. A0 : 76 A1 : 62 A6 : 56 AD : 75			m	269		
3	50 x 76mm Bracing. A0 : 12 A1 : 12 A6 : 12 AD : 12			m	48		
4	38 x 152mm Rafters. A0 : 44 A1 : 44 A6 : 44 AD : 53			m	186		
<u>Sundries:</u>							
5	TRI FIX or equal approved hurricane clip fixed using 10 x 32mm galvanised clout nails (Provisional). A0 : 45 A1 : 45 A6 : 40 AD : 55	No	185				
<u>EAVES, VERGES, ETC</u>							
<u>"Everite Nutec" or equal approved fibre cement</u>							
6	12 x 225mm Fascia board drilled and brass screwed to rafter feet including galvanised steel H-profile jointing strips, etc. A0 : 10 A1 : 8 A6 : 7 AD : 9	m	34				
7	85 x 275 x 6mm Barge board drilled and brass screwed to purlin ends including galvanised steel H-profile jointing strips, screws, holes, etc. A0 : 9 A1 : 9 A6 : 9 AD : 9	m	36				
<u>DOORS ETC</u>							
<u>SANS Approved meranti:</u>							
8	44mm Framed, ledged, and battened single door with flush ply panel internally size 813 x 2032mm high comprising 44 x 110mm top rail and stiles, 44 x 220mm bottom rail, 44 x 150mm lock rail and 22 x 70mm vertical "v" jointed boards (D1). A0 : 2 A1 : 1 A6 : 1 AD : 1	No	5				
Carried to Collection							
Section 3 Bill No. 6 Carpentry and Joinery					R		

9	44mm Framed, ledged, and batten single door with flush ply panel internally size 950 x 2032mm high comprising 44 x 110mm top rail and stiles, 44 x 220mm bottom rail, 44 x 150mm lock rail and 22 x 70mm vertical "v" jointed boards (D2). A0 : 1 A1 : 1 A6 : 0 AD : 0	No	2		
10	44mm Braced and ledged door size 862 x 1000mm (D3). A0 : 0 A1 : 3 A6 : 0 AD : 0	No	3		
11	44mm Framed, ledged, and batten purpose made single door with flush ply panel internally size 813 x 1832mm high comprising 44 x 110mm stiles, 44 x 220mm bottom rail, 44 x 150mm lock rail and 22 x 70mm vertical "v" jointed boards (D4). A0 : 3 A1 : 3 A6 : 2 AD : 6	No	14		
<u>FRAMED FRAMES, ETC</u>					
	<u>Meranti Frames bolted to wall with expanding masonry bolts - four per style including quadrant beads on both sides:</u>				
12	70 x 108mm rebated meranti frame . A0 : 23 A1 : 18 A6 : 14 AD : 32	m	87		
	<u>Meranti Frames fixed against brickwall using galvanised steel lugs bolted with expanding masonry bolts - four per style including quadrant beads on both sides:</u>				
13	70 x 108mm rebated meranti frame . A0 : 5 A1 : 11 A6 : 0 AD : 0	m	16		
Carried to Collection					
Section 3 Bill No. 6 Carpentry and Joinery					

CLUSTER 93
**NOMATHEBE JUNIOR SECONDARY SCHOOL
 THE MVULA TRUST SAFE PROGRAMME**

Section 3 Bill No. 6 Carpentry and Joinery	Page No	Amount
<u>COLLECTION</u>		
Total Brought Forward from Page No.	65	-----
	66	-----
	67	-----
Carried Forward to Summary of Section No. 3		R
Section 3 Bill No. 6 Carpentry and Joinery		

Item No		Quantity	Rate	Amount
<p><u>SECTION 3</u></p> <p><u>BILL No. 7</u></p> <p><u>IRONMONGERY</u></p> <p><u>Quantity Split:</u></p> <p>Note that the total quantity per each item is split into the various buildings and appears below each description as follows:</p> <p>A0 - DWG 04 - Staff Ablutions A1 - DWG 06 - Grade R Ablutions A6 - DWG 14 - Male Ablutions AD - DWG 35 - Female Ablutions</p> <p><u>MODEL PREAMBLES</u></p> <p>The tenderer is referred to the "Model Preambles for Trades 2008" for supplementary and comprehensive expansion of descriptions, appropriate provision for which shall be deemed to have been included in all relevant rates</p> <p><u>SUPPLEMENTARY PREAMBLES</u></p> <p><u>Keys/Locks</u></p> <p>Each lock is to be distinctly numbered with consecutive numbers and each key is to be stamped with the corresponding number to the lock that it controls. All locks are to have two keys</p> <p><u>Trade Names</u></p> <p>Where trade names are specified other ironmongery approved by the Principal Agent may be used</p> <p><u>Fixing</u></p> <p>Fixing of ironmongery is deemed to be fixed to timber unless otherwise described</p> <p style="text-align: center;">Carried to Collection</p> <p>Section 3 Bill No. 7 Ironmongery</p>				R

<u>HINGES:</u>				
75 x 100mm Brass Medium duty ball bearing HMP butt hinges.			Pairs	24.0
A0 : 6.0 A1 : 8.0 A6 : 3.0 AD : 7.0				
<u>LOCKS</u>				
"UNION 2277-78SS" or equal approved three lever sash mortice lockset.		No	7	
A0 : 3 A1 : 2 A6 : 1 AD : 1				
"UNION w/c indicator bolt satin chrome - Code CZ80941SC		No	17	
A0 : 3 A1 : 6 A6 : 2 AD : 6				
<u>HANDLES</u>				
"Dorma DPH301B" or equal approved Stainless Steel Straight Tubular Pull handle flange fixing.		No	21	
A0 : 6 A1 : 5 A6 : 3 AD : 7				
<u>Sundries:</u>				
Stainless Steel Hat and coat hook, code DHC - SS-030-A or equal approved.		No	14	
A0 : 3 A1 : 3 A6 : 2 AD : 6				
38mm Diameter black rubber door stop plugged and screwed to wall.		No	24	
A0 : 6 A1 : 8 A6 : 3 AD : 7				
<u>SIGN PLATES:</u>				
<u>All sign plates are to be with engraved blue perspex all in accordance with the standard sign plates for Schools.</u>				
Sign plate plugged and screwed to walls with chromium plated dome headed screws.		No	7	
A0 : 3 A1 : 2 A6 : 1 AD : 1				
Carried to Collection				
Section 3 Bill No. 7 Ironmongery			R	

<u>SUNDRIES</u>						
<u>Halcast or equal approved"</u>						
8	Thiefproof toilet roll holder plugged. A0 : 8 A1 : 8 A6 : 7 AD : 14	No	37			
<u>Grade 304 stainless steel ware:</u>						
9	32mm outside diameter x 1,6mm thick tubular wall mounted side stainless steel grab rail 1,06m girth with two 45 degree and two 90 degree formed bends and each end fitted with 80mm diameter x 5mm thick flange welded on and four times countersunk holed for and plugged and screwed to wall with stainless steel crews. A0 : 1 A1 : 1 A6 : 0 AD : 0	No	2			
10	32mm outside diameter x 1,6mm thick tubular wall mounted around cistern back stainless steel grab rail 1,23m girth with two 90 degree formed bends and each end fitted with 80mm diameter x 5mm thick flange welded on and four times countersunk holed for and plugged and screwed to wall with stainless steel crews. A0 : 1 A1 : 1 A6 : 0 AD : 0	No	2			
<u>Satin Grey Plastics or equal approved</u>						
11	"Satin plastic N-SBIN-12-SA SHE Bin size 463 x 140 x 480mm, floor standing loose. A0 : 2 A1 : 2 A6 : 2 AD : 2	No	8			
Carried to Collection						
Section 3 Bill No. 7 Ironmongery				R		

CLUSTER 93
NOMATHEBE JUNIOR SECONDARY SCHOOL
THE MVULA TRUST SAFE PROGRAMME

Section 3			
Bill No. 7			
Ironmongery			
<u>COLLECTION</u>			
	Page No		Amount
Total Brought Forward from Page No.	69		
	70		
	71		
Carried Forward to Summary of Section No. 3			
Section 3			
Bill No. 7			
Ironmongery			
		R	

Item No		Quantity	Rate	Amount
Section 3 <u>BILL No. 8</u> <u>METALWORK</u> <u>Quantity Split:</u> Note that the total quantity per each item is split into the various buildings and appears below each description as follows: A0 - DWG 04 - Staff Ablutions A1 - DWG 06 - Grade R Ablutions A6 - DWG 14 - Male Ablutions AD - DWG 35 - Female Ablutions <u>MODEL PREAMBLES</u> The tenderer is referred to the "Model Preambles for Trades 2008" for supplementary and comprehensive expansion of descriptions, appropriate provision for which shall be deemed to have been included in all relevant rates <u>SUPPLEMENTARY PREAMBLES</u> The Contractor is to check and verify on site that the item specified in the BoQ matches existing prior to placing orders. Additional costs will not be borne by the client for items that do not match existing and are not approved by the Principal Agent	Carried to Collection	R		

<p><u>ALUMINIUM WINDOWS</u></p> <p>All aluminium windows are to be manufactured by manufacturers who are members of AAAMSA. All aluminium systems to be approved by AAAMSA.</p> <p>All aluminium work is to be protected by covering with plastic sheeting fixed with low tack adhesive prior to leaving the factory. Plastic sheeting is to remain in place during construction.</p> <p>All glazing shall be in accordance with SABS 0400 - 1990, SABS 1263 - 1. All safety glazing materials (individual panes) shall be permanently marked. Such marking shall be visible after glazing process. If it is not marked, it is not safety glass.</p> <p><u>Natural anodised aluminium windows glazed with 6.38mm safety laminated glass and plugged to brickwork:</u></p>	No	38	R			
1 Window Size 600 x 600mm high complete, including ironmongery etc, all as per Window Type W01.						
A0 : 11 A1 : 8 A6 : 7 AD : 12						
<u>HOT DIP GALVANIZED STEEL GATES</u>						
<u>Note: The contractor is to check on site measurements before placing of order.</u>						
<u>Security Gate consisting of 25 x 25 x 2mm galvanised mild steel frame with 12mm galvanised mild steel square bars infill placed at 109mm centres, hung with one pair of galvanised mild steel hinges including locks, handles, ironmongery complete and fixed to brickwork:</u>						
2 Security gate size 900 x 2050mm high (G1).	No	4				
A0 : 1 A1 : 1 A6 : 1 AD : 1						
3 Security double gate size 1800 x 2050mm high.	No	1				
A0 : 1 A1 : 0 A6 : 0 AD : 0						
<u>LOCKABLE MANHOLE COVERS</u>						
4 600mm diameter lockable circular type M4A product or similar approved manhole SANS 1882 medium duty Dough Moulding compound 4A hinged lid and frame cast into concrete upstand.	No	8				
A0 : 2 A1 : 2 A6 : 2 AD : 2						
Carried to Collection						
Section 3 Bill No. 8 Metalwork				R		

Item No		Quantity	Rate	Amount
	<u>SECTION 3</u>			
	<u>BILL No. 9</u>			
	<u>PLASTERING</u>			
	<u>Quantity Split:</u>			
	Note that the total quantity per each item is split into the various buildings and appears below each description as follows:			
	A0 - DWG 04 - Staff Ablutions A1 - DWG 06 - Grade R Ablutions A6 - DWG 14 - Male Ablutions AD - DWG 35 - Female Ablutions			
	<u>MODEL PREAMBLES</u>			
	The tenderer is referred to the "Model Preambles for Trades 2008" for supplementary and comprehensive expansion of descriptions, appropriate provision for which shall be deemed to have been included in all relevant rates			
	<u>SCREEDS</u>			
	<u>Untinted granolithic, on concrete:</u>			
1	30mm Thick on floors and landings. A0 : 60 A1 : 55 A6 : 50 AD : 67	m2	232	
	<u>Skirtings</u>			
2	75mm High coved granolithic skirting. A0 : 89 A1 : 80 A6 : 74 AD : 86	m	329	
	<u>INTERNAL PLASTER (PIT WALLS)</u>			
	<u>15mm thick of 1:4 sand cement plaster with Coprox masonry waterproofing or equal approved waterproof cement additive. Add 2.5kg Coprox waterproof cement additive for every 50kg of cement used in plaster mix</u>			
3	On walls. A0 : 34 A1 : 29 A6 : 21 AD : 37	m2	120	
	<u>Carried Forward to Summary of Section No. 3</u>			
	Section 3 Bill No. 9 Plastering	R		

Item No		Quantity	Rate	Amount
	<u>SECTION 3</u>			
	<u>BILL No. 10</u>			
	<u>PLUMBING AND DRAINAGE</u> <u>(PROVISIONAL)</u>			
	<u>Quantity Split:</u>			
	Note that the total quantity per each item is split into the various buildings and appears below each description as follows:			
	A0 - DWG 04 - Staff Ablutions A1 - DWG 06 - Grade R Ablutions A6 - DWG 14 - Male Ablutions AD - DWG 35 - Female Ablutions			
	<u>MODEL PREAMBLES</u>			
	The tenderer is referred to the "Model Preambles for Trades 2008" for supplementary and comprehensive expansion of descriptions, appropriate provision for which shall be deemed to have been included in all relevant rates			
	<u>RAINWATER DISPOSAL:</u>			
	<u>Watertite or equal approved Aluminium Gutters and Downpipes:</u>			
1	125 x 85 x 0.6mm Ogee domestic gutters including gutter brackets at 600mm centres. A0 : 10 A1 : 8 A6 : 7 AD : 9	m	34	
2	Extra over eaves gutter for stopped end. A0 : 2 A1 : 2 A6 : 2 AD : 2	No	8	
3	Extra over eaves gutter for outlet for 100 x 75mm aluminium downpipe. A0 : 2 A1 : 2 A6 : 2 AD : 2	No	8	
4	100 x 75 x 0.6mm rectangular fluted downpipes fixed to wall with and including proprietary holderbats to 5000L rainwater tanks (elsewhere measured). A0 : 8 A1 : 8 A6 : 8 AD : 8	m	32	
	Carried to Collection			
	Section 3 Bill No. 10 Plumbing and Drainage (Provisional)			

5	Extra over rainwater downpipe for bends. A0 : 4 A1 : 4 A6 : 4 AD : 4	No	16		
<u>TAPS, VALVES, ETC</u>					
<u>Solid Cast brass taps, valves, etc:</u>					
6	"Cobra KM2-200" or other approved 15mm chrome plated metered bib tap with non-hold open feature and flow controller. A0 : 8 A1 : 6 A6 : 4 AD : 8	No	26		
7	15mm Ball-o-stop valve. A0 : 4 A1 : 4 A6 : 2 AD : 4	No	14		
8	22mm Non Return valve. A0 : 2 A1 : 4 A6 : 4 AD : 6	No	16		
<u>WASTE UNIONS ETC</u>					
<u>Outlets, traps, etc:</u>					
9	40mm 342/50 CP bottle trap. A0 : 0 A1 : 1 A6 : 0 AD : 0	No	1		
10	40mm Code 316 chrome plated unslotted waste outlet. A0 : 4 A1 : 3 A6 : 2 AD : 4	No	13		
11	40mm Rubber "P" or "S" trap A0 : 4 A1 : 3 A6 : 2 AD : 4	No	13		
<u>SANITARY FITTINGS</u>					
<u>Rust and corrosion resistant, UV-resistant polyethylene pedestals, urinals, basins, etc. Product and colour to Principal Agent's approval:</u>					
12	VIP 450 Pit pedestal complete with integral flap four times plugged to floor with and including 6 x 75mm masonry anchors. A0 : 4 A1 : 1 A6 : 0 AD : 0	No	5		
13	VIP 200 Pit pedestal complete with integral flap four times plugged to floor with and including 6 x 75mm masonry anchors. A0 : 0 A1 : 0 A6 : 2 AD : 6	No	8		
14	Bambi Longdrop VIP Pit pedestal for children complete with C/W flap. size: 282 x 360 x 300mm. A0 : 0 A1 : 3 A6 : 0 AD : 0	No	3		
Carried to Collection					
Section 3 Bill No. 10 Plumbing and Drainage (Provisional)					

	<u>Vaal or equal approved:</u>				
15	Lavatera White Vitreous china wall mounted bowl urinal with top inlet [code: 704001] 610x385mm, supplied with 38mm chromium plated domical grating [code: 8787], chromium plated spreader [code: 8543], and two hanger brackets [code: 8127] A0 : 0 A1 : 1 A6 : 0 AD : 0	No	1		
16	Hibiscus White Vitreous china 510 x 405mm rounded basin [code: 7050] with one tap hole on left hand side, including integrated overflow, bolted to wall with two 8mm bolts [code 8448Z0], to manufacturer's specification. A0 : 4 A1 : 3 A6 : 2 AD : 4	No	13		
	<u>Franke Model TU101 or equal approved flush valve/cistern flat back wall mounted urinal:</u>				
17	SS-TU101-1830R Flat back stainless steel school trough urinal wall and floor mounted. manufactured from Grade 304 (18/10) Stainless Steel, 0,9 mm gauge. Urinal to be supplied with a concealed sparge pipe and a 22 mm inlet with chrome plated conex fitting for connecting to water inlet (Connection fitting not supplied). Urinal to include a tiling key to sides and rear walls. The back to be fully sound deadened with vermin proof bitumastic material. Outlet to be situated on the left or right of the urinal with a recess for 40 mm chrome plated waste outlet. A0 : 0 A1 : 0 A6 : 2 AD : 0	No	2		
	<u>SANITARY PLUMBING</u>				
	<u>PVC waste or vent pipes and fittings:</u>				
18	50mm Waste pipe. A0 : 25 A1 : 35 A6 : 25 AD : 40	m	125		
19	110mm Pipe and laying in ground or filling not exceeding 2m deep including excavation, filling in and ramming. A0 : 8 A1 : 12 A6 : 10 AD : 15	m	45		
20	110mm Vent pipe fixed to wall with proprietary brackets at not exceeding 500mm centres. A0 : 24 A1 : 16 A6 : 8 AD : 24	m	72		
	Carried to Collection				
	Section 3 Bill No. 10 Plumbing and Drainage (Provisional)			R	

	<u>uPVC gulleys</u>			
21	200mm Precast concrete gully dish and uPVC lowback assembly complete with 110mm P trap gully (code UGB 40) including 190mm diameter head (code UGA 40) and grate (code UGG 40), not exceeding 750mm deep, jointed to 110mm drain pipe, including excavations for and encasing in concrete (15MPa crushing strength after 28 days) worked up to form kerb, finished smooth on top in 1:3 cement mortar. A0 : 1 A1 : 1 A6 : 1 AD : 1	No	4	
	<u>Extra for:</u>			
22	50mm Bend. A0 : 8 A1 : 9 A6 : 8 AD : 12	No	37	
23	50mm Access bend. A0 : 3 A1 : 3 A6 : 3 AD : 7	No	16	
24	Envirosan or equal approved fly screens to top of 110 diameter vent pipe. A0 : 6 A1 : 4 A6 : 2 AD : 6	No	18	
	<u>WATER SUPPLIES</u>			
	<u>Polycop pipes:</u>			
	Pipes shall be class 10.			
	<u>Fixing of pipes</u>			
	Unless specifically otherwise stated, descriptions of pipes shall be deemed to include for fixing to walls etc. casting in, building in or suspending not exceeding 1m below suspension level			
	<u>Polycop pipes chased in walls:</u>			
	Where pipes have been chased in walls, the price for making good of plaster and paint etc shall be deemed to be included in the description of pipe chased in walls.			
		Carried to Collection		
	Section 3 Bill No. 10 Plumbing and Drainage (Provisional)			R

<u>Reducing fittings:</u>				
Where fittings have reducing ends or branches they are described as 'reducing'. In the case of pipes with diameters not exceeding 60mm only the largest end or branch size is given. Should the Contractor wish to use other fittings and bushes or reducers he may do so on the understanding that no claim in this regard will be entertained. In the case of pipes with diameters exceeding 60mm all sizes are given and no claim for extra bushes, reducers, etc will be entertained.				
<u>Class 10 Polycop pipes:</u>				
25	15mm Pipe chased into brick walls. A0 : 22 A1 : 35 A6 : 32 AD : 28	m	117	
26	22mm Pipe chased into brick walls. A0 : 11 A1 : 13 A6 : 15 AD : 11	m	50	
<u>Extra over polycop pipes for compression fittings:</u>				
27	15mm Fittings. A0 : 17 A1 : 24 A6 : 26 AD : 19	No	86	
28	22mm Fittings. A0 : 10 A1 : 15 A6 : 18 AD : 10	No	53	
Carried to Collection				
Section 3 Bill No. 10 Plumbing and Drainage (Provisional)				

CLUSTER 93
NOMATHEBE JUNIOR SECONDARY SCHOOL
THE MVULA TRUST SAFE PROGRAMME

Section 3			
Bill No. 10			
Plumbing and Drainage (Provisional)			
<u>COLLECTION</u>			
	Page No		Amount
Total Brought Forward from Page No.	77		
	78		
	79		
	80		
	81		
Carried Forward to Summary of Section No. 3			
Section 3			
Bill No. 10			
Plumbing and Drainage (Provisional)			
		R	

Item No		Quantity	Rate	Amount
	<u>SECTION 3</u>			
	<u>BILL No. 11</u>			
	<u>PAINTWORK</u>			
	<u>Quantity Split:</u>			
	Note that the total quantity per each item is split into the various buildings and appears below each description as follows:			
	A0 - DWG 04 - Staff Ablutions A1 - DWG 06 - Grade R Ablutions A6 - DWG 14 - Male Ablutions AD - DWG 35 - Female Ablutions			
	<u>MODEL PREAMBLES</u>			
	The tenderer is referred to the "Model Preambles for Trades 2008" for supplementary and comprehensive expansion of descriptions, appropriate provision for which shall be deemed to have been included in all relevant rates			
	<u>SUPPLEMENTARY PREAMBLES</u>			
	<u>Trade Names</u>			
	Where trade names are specified it will read "or equal approved"			
	<u>Epoxy paint</u>			
	The product and its methodology for application must be approved by Principal Agent before it is used.			
	Contractor must prepare a 1m x 1m sample in the presence of the Principal Agent. In this case, the Contractor must give at least 48 hours notice prior to the date when the application of the epoxy paint is intended to be done.			
	Contractor to provide a Letter of Compliance confirming that epoxy paint has been applied as per Manufacturer's instructions and data sheet. Proof of payment for the epoxy paint must be provided to the Principal Agent once approval has been granted.			
	Carried to Collection			
	Section 3 Bill No. 11 Paintwork			
				R

<u>PAINTWORK ETC TO NEW WORK</u>						
<u>ON WOOD</u>						
<u>Stop, sand down and prepare wood surfaces and apply one coat wood primer, one undercoat and two coats eggshell enamel paint as per Plascon or equal approved:</u>						
1	On doors				m2	76
	A0 : 21	A1 : 23	A6 : 10	AD : 23		
2	On door frames				m2	24
	A0 : 6	A1 : 7	A6 : 3	AD : 7		
<u>Prepare and apply two coats carbolenium on:</u>						
3	On exposed timbers.				m2	26
	A0 : 7	A1 : 6	A6 : 6	AD : 7		
<u>ON FIBRE-CEMENT</u>						
<u>Prepare and apply two coats pure acrylic roof paint on:</u>						
4	On fascias and barge boards.				m2	18
	A0 : 5	A1 : 4	A6 : 4	AD : 5		
<u>ON PVC VENT PIPE</u>						
<u>Prepare and apply two coats black PVA paint:</u>						
5	Vent Pipes				m2	68
	A0 : 23	A1 : 15	A6 : 8	AD : 23		
Carried to Collection						
Section 3						
Bill No. 11						
Paintwork						
R						

CLUSTER 93
NOMATHEBE JUNIOR SECONDARY SCHOOL
THE MVULA TRUST SAFE PROGRAMME

Section 3 Bill No. 11 Paintwork	Page No	Amount
<u>COLLECTION</u>		
Total Brought Forward from Page No.	83	-----
	84	-----
Carried Forward to Summary of Section No. 3		
Section 3 Bill No. 11 Paintwork		R

Bill No	Section 3	Page No	Amount
<u>SECTION SUMMARY - BUILDING WORKS</u>			
	Earthworks (Provisional)	41	
	Concrete, Formwork and Reinforcement	48	
	Masonry	54	
	Waterproofing	58	
	Roof Coverings Etc.	64	
	Carpentry and Joinery	68	
	Ironmongery	72	
	Metalwork	75	
	Plastering	76	
	Plumbing and Drainage (Provisional)	82	
	Paintwork	85	
Carried to Final Summary			
Section 3			R

Item No		Quantity	Rate	Amount
	<u>SECTION No. 4</u>			
	<u>BILL No. 1</u>			
	<u>EXTERNAL WORKS (PROVISIONAL)</u>			
	<u>MODEL PREAMBLES</u>			
	The tenderer is referred to the "Model Preambles for Trades 2008" for supplementary and comprehensive expansion of descriptions, appropriate provision for which shall be deemed to have been included in all relevant rates			
	<u>THE FOLLOWING IN PLATFORMS, ETC.</u>			
	<u>Site Clearance, ETC</u>			
1	Allow for clearing the area of the site to be built upon of all grass, weeds, shrubs, trees with trunks not exceeding 200mm girth, debris, etc., including grubbing up all roots, scoffling up as required and cart away all vegetation and debris.	m2	1 391	
2	Stripping average 200mm thick layer of topsoil and stockpiling on site.	m2	1 391	
	<u>Open face excavation not exceeding 2m deep:</u>			
3	Excavate to cut in open face, not exceeding 2m deep to reduce levels and grade to fill and compact to 93% mod AASHTO density at optimum moisture content.	m3	798	
	<u>Extra over all excavations for carting away:</u>			
4	Surplus material from excavations and/or stock piles on site to a dumping site to be located by the contractor.	m3	319	
	<u>Carried to Collection</u>			
	Section 4 Bill No. 1 External Works		R	

<u>Earth filling from excavated material</u>			
5	Dig, load and remove filling selected from spoil heaps on site and deposit as filling in platforms including spreading and compacting to cambers and falls in layers not exceeding 150 mm thick to a minimum of 95% Modified AASHTO dry density.	m3	479
<u>Surface Preparation:</u>			
6	Trim and level off surface of ground (excavated or filled under this Contract) including excavating or filling, ripping and scarifying as necessary and compacting the whole area for a depth of 300mm to a density of at least 90% Mod. AASHTO maximum density, part to falls.	m2	798
<u>Prescribed density tests on filling:</u>			
7	Modified AASHTO Density test.	No	45
<u>THE FOLLOWING IN WALKWAYS</u>			
<u>Excavation not exceeding 2m deep</u>			
8	Reducing levels and depositing excavated material in prescribed stock piles on site.	m3	150
<u>Extra over all excavations for loading, carting and dumping surplus excavated material (no allowance made for increase in bulk):</u>			
9	Off site to a dumping site to be found by the Contractor.	m3	150
<u>Filling supplied by the contractor under walkways</u>			
10	G7 Base course material compacted to 98% Mod AASHTO density	m3	96
11	Over site of Selected Subgrade G5 material in accordance with SABS 1 200 DM in layers not exceeding 150mm thick and compacted to 95% Mod AASHTO density.	m3	75
<u>Rip and Re - compact insitu material on site compacted to 93% Mod. AASHTO density:</u>			
12	Under floors,etc.	m2	320
Carried to Collection			
Section 4			
Bill No. 1			
External Works			
R			

	<u>Prescribed density tests on filling:</u>			
13	In-situ dry density test.	No	10	
	<u>Approved brand of anti-termite soil poison applied by a Registered Pest Control Company and guaranteed against termite infestation for ten years:</u>			
14	Treat filling under paving with 'Chlordane Heptachlor Aldrin' or equal approved.	m2	320	
	<u>Concrete Paving Blocks</u>			
	<u>Paving of 50mm thick 200x100mm 25MPa Bevel Bond paver blocks grey in colour in herringbone pattern on and including 20mm thick sand bed with dry filler sand swept and vibrated into joints all laid on subgrade (elsewhere measured) conforming to SABS 1200D degree of accuracy 1:</u>			
15	Paving to walkway areas, etc laid to falls.	m2	285	
16	Extra over ordinary paving for 200mm wide block-on-flat header course edging on 100mm thick mortar bed including unreinforced concrete haunching along outside edge.	m	250	
17	Ditto but circular on plan.	m	15	
	<u>Kerb</u>			
	<u>Precast or in situ mass concrete (25 MPa - 19 mm stone) kerbs cast in convenient lengths with exposed faces finished smooth from the mould and all salient angles rounded, jointed and pointed in 1:3 cement mortar, including excavations, formwork, etc.</u>			
18	Figure 8B (300 x 275 x 175mm) semi mountable kerb laid in lengths not exceeding 1000mm on a well rammed earth bottom or base course.	m	250	
19	Ditto but circular on plan.	m	30	
20	Fig. 12 kerb size 75 x 150mm high overall, laid in lengths not exceeding 1000mm on a well rammed earth bottom or base course.	m	24	
21	Ditto but circular on plan.	m	10	
	Carried to Collection			
	Section 4 Bill No. 1 External Works			R

CLUSTER 93
NOMATHEBE JUNIOR SECONDARY SCHOOL
THE MVULA TRUST SAFE PROGRAMME

Section 4 Bill No. 1 External Works	Carried to Collection	R
---	-----------------------	---

<u>THE FOLLOWING IN ONE BRICK WALL (GARDEN WALL)</u>			
<u>Excavation in earth not exceeding 2m deep:</u>			
22	Trenches.	m3	30
<u>Extra over all excavations for carting away:</u>			
23	Surplus material from excavations and/or stock piles on site to be located by the Contractor.	m3	30
<u>Risk of collapse of excavations:</u>			
24	Sides of trench and hole excavations not exceeding 1,5m deep.	m2	140
<u>Earth filling obtained from the excavations and/or prescribed stock piles on site compacted to 93% MOD AASHTO density:</u>			
25	Backfilling to trenches, holes, etc.	m3	95
<u>Earth filling (G7 material) supplied by the contractor in layers not exceeding 150mm thick and compacted to 98% Mod AASHTO density:</u>			
26	Under footings.	m3	15
<u>Compaction of surfaces</u>			
27	Compaction of ground surface under floors, etc including scarifying for a depth of 150mm, breaking down oversize material, adding suitable material where necessary and compacting to 90% Mod AASHTO density.	m2	140
<u>25 Mpa/19mm Concrete</u>			
28	Strip footings.	m3	5
<u>Test blocks:</u>			
29	Making and testing of 150x150x150mm concrete strength test cubes (Provisional).	No	5
Carried to Collection			
Section 4 Bill No. 1 External Works			

	<u>Reinforcement (Provisional)</u>			
30	High tensile steel reinforcement bars to structural concrete work.	t	1.00	
	<u>BRICKWORK IN FOUNDATIONS.</u>			
	<u>Brickwork of NFX bricks (14 MPa nominal compressive strength) in Class I mortar (Cement to be 42.5N all-purpose cement):</u>			
31	One brick walls.	m ²	60	
	<u>BRICKWORK IN SUPERSTRUCTURE</u>			
	<u>Brickwork of NFP bricks (14 MPa nominal compressive strength) in Class II mortar (Cement to be 42.5N all-purpose cement):</u>			
32	One brick walls.	m ²	45	
	<u>Brickwork reinforcement:</u>			
33	230mm Wide reinforcement built in horizontally.	m	1 080	
34	Ditto but in foundations.	m	432	
	<u>FACE BRICK</u>			
	<u>"Rustgold FBS/Qunu Travertine" clay face brick or equal approved, size 222 x 106 x 73mm, bedded and jointed in Class II mortar and pointed with recessed vertical and recessed horizontal joints, suitable for exposure zones 1-2 (Cement to be 42.5N all-purpose cement):</u>			
35	One brickwall faced on both sides.	m ²	55	
	<u>Brick-on-edge header course copings, sills, etc, of "Rustgold FBS/Qunu Travertine" or equal approved face bricks pointed with recessed joints on all exposed faces, 220mm wide sill set sloping and slightly projecting:</u>			
36	230mm wide header course to top of one brick wall bedded and jointed in cement mortar and pointed on top and both sides as described.	m	60	
	Carried to Collection			
	Section 4 Bill No. 1 External Works			R

STORMWATER CHANNELS			
<u>Excavation not exceeding 2m deep</u>			
37	Reducing levels and depositing excavated material in prescribed stock piles on site.	m3	60
<u>Extra over all excavations for loading, carting and dumping surplus excavated material (no allowance made for increase in bulk):</u>			
38	Off site to a dumping site to be found by the Contractor.	m3	60
<u>Filling supplied by the contractor under channels</u>			
39	G7 Base course material compacted to 98% Mod AASHTO density	m3	24
40	Over site of Selected Subgrade G5 material in accordance with SABS 1 200 DM in layers not exceeding 150mm thick and compacted to 95% Mod AASHTO density.	m3	12
<u>Cast in-situ Ref 395 mesh reinforced concrete (25MPa) open stormwater channels having V-shaped waterway formed in top, finished smooth on all exposed surfaces in 3:1 cement plaster trowelled smooth and with angles rounded, cast in suitable lengths not exceeding 2m, including all formwork, moulds, shallow excavation, filling and ramming, laying to falls, bedding and pointing in 3:1 cement mortar. Concrete apron to be tinted, colour to be specified by the Engineer.</u>			
41	700 x 80mm thick V' channel 150mm deep in centre laid in position in ground in 2000mm sections including all formwork, reinforcement, expansion joints, smooth finishing to top of concrete surface etc.	m	160
42	Extra for 700mm angle	No	20
43	Extra for forming 200mm thick 700mm wide spreader with 200mm high edges fanning out to 1 960mm width at furthest end with hard burnt bricks pitching cast in ass diffusers including working off concrete to a smooth finish and draining onto natural ground with 150 - 200mm diameter loose stones.	No	20
Carried to Collection			
Section 4			
Bill No. 1			
External Works			

	<u>Sundries:</u>			
44	Create earth berm for stormwater control with in situ material 1,5m wide at base x 500mm high	m	120	
45	Construct shaped earth V-drain 2m wide with grass runners	m	150	
<u>THE FOLLOWING IN DISABLED ACCESS</u>				
<u>SCREEN WALL</u>				
<u>Excavation in earth not exceeding 2m deep:</u>				
46	Trenches.	m3	6	
<u>Extra over all excavations for carting away:</u>				
47	Surplus material from excavations and/or stock piles on site to a dumping site to be located by the Contractor.	m3	4	
<u>Risk of collapse of excavations:</u>				
48	Sides of trench and hole excavations not exceeding 1,5m deep.	m2	22	
<u>Earth filling obtained from the excavations and/or prescribed stock piles on site compacted to 93% MOD AASHTO density:</u>				
49	Backfilling to trenches, holes, etc.	m3	3	
<u>Earth filling (G7 material) supplied by the contractor in layers not exceeding 150mm thick and compacted to 98% Mod AASHTO density:</u>				
50	Under footings.	m3	2	
<u>Compaction of surfaces</u>				
51	Compaction of ground surface under floors, etc including scarifying for a depth of 150mm, breaking down oversize material, adding suitable material where necessary and compacting to 90% Mod AASHTO density.	m2	11	
Carried to Collection				
Section 4 Bill No. 1 External Works				

	<u>25 Mpa/19mm Concrete</u>			
2	Strip footings.	m3	3	
	<u>Test blocks:</u>			
3	Making and testing of 150x150x150mm concrete strength test cubes (Provisional).	No	4	
	<u>Reinforcement (Provisional)</u>			
4	High tensile steel reinforcement bars to structural concrete work.	t	0.32	
	<u>BRICKWORK IN FOUNDATIONS.</u>			
	<u>Brickwork of NFX bricks (14 MPa nominal compressive strength) in Class I mortar (Cement to be 42.5N all-purpose cement):</u>			
5	One brick walls.	m2	5	
	<u>BRICKWORK IN SUPERSTRUCTURE</u>			
	<u>Brickwork of NFP bricks (14 MPa nominal compressive strength) in Class II mortar (Cement to be 42.5N all-purpose cement):</u>			
6	One brick walls.	m2	16	
	<u>Brickwork reinforcement:</u>			
7	230mm Wide reinforcement built in horizontally.	m	64	
8	Ditto but in foundations.	m	191	
	<u>FACE BRICK</u>			
	<u>"Rustgold FBS/Qunu Travertine" clay face brick or equal approved, size 222 x 106 x 73mm, bedded and jointed in Class II mortar and pointed with recessed vertical and recessed horizontal joints, suitable for exposure zones 1-2 (Cement to be 42.5N all-purpose cement):</u>			
9	One brickwall faced on both sides.	m2	11	
	Carried to Collection			R
	Section 4			
	Bill No. 1			
	External Works			

	<u>Brick-on-edge header course copings, sills, etc, of "Rustgold FBS/Qunu Travertine" or equal approved face bricks pointed with recessed joints on all exposed faces, 220mm wide sill set sloping and slightly projecting:</u>			
60	230mm wide header course to top of one brick wall bedded and jointed in cement mortar and pointed on top and both sides as described.	m	18	
<u>ACCESS RAMPS</u>				
	<u>Excavation not exceeding 2m deep</u>			
61	Reducing levels and depositing excavated material in prescribed stock piles on site.	m3	18	
	<u>Extra over all excavations for loading, carting and dumping surplus excavated material (no allowance made for increase in bulk):</u>			
62	Off site to a dumping site to be found by the Contractor.	m3	18	
	<u>Filling supplied by the contractor under floors, aprons, etc</u>			
63	G7 Base course material compacted to 98% Mod AASHTO density	m3	5	
64	Over site of Selected Subgrade G5 material in accordance with SABS 1 200 DM in layers not exceeding 150mm thick and compacted to 95% Mod AASHTO density.	m3	5	
	<u>Coarse river sand filling supplied by the contractor:</u>			
65	Under floors etc.	m3	1	
	<u>Compaction of surfaces:</u>			
66	Compaction of ground surface under floors etc including scarifying for a depth of 150mm, breaking down oversize material, adding suitable material where necessary and compacting to 90% Mod AASHTO density.	m2	18	
	<u>Prescribed density tests on filling:</u>			
67	In-situ dry density test.	No	5	
<u>Carried to Collection</u>				
Section 4 Bill No. 1 External Works				

	<u>Reinforced 25Mpa/19mm Concrete:</u>			
68	Ramps, Landings, etc.	m3	4	
	<u>Finishing top surfaces of concrete smooth with a wood float:</u>			
69	Surface beds, slabs, etc to falls and currents.	m2	18	
	<u>Test blocks:</u>			
70	Making and testing of 150x150x150mm concrete strength test cubes (Provisional).	No	10	
	<u>Expansion joints with bitumen impregnated softboard between vertical concrete or brick surfaces:</u>			
71	12mm Joints not exceeding 300mm high.	m	10	
	<u>Two-part grey polysulphide sealing compound including backing cord, bond breaker, primer, etc</u>			
72	10 x 12mm In movement joints in floors or walls including raking out expansion joint filler as necessary.	m	10	
	<u>Fabric reinforcement:</u>			
73	REF. 395 fabric reinforcement in concrete surface beds, slabs, etc.	m2	18	
	<u>Waterproofing under Surface beds</u>			
74	350 Micron USB orange polyethylene dampproof membrane in accordance with SABS 952 Type C laid on sand bed (elsewhere measured).	m2	18	
	Carried to Collection			
Section 4 Bill No. 1 External Works				R

<u>THE FOLLOWING IN ACCESS DRIVEWAY, ETC.</u>			
<u>Excavation not exceeding 2m deep</u>			
Reducing levels and depositing excavated material in prescribed stock piles on site.	m3	279	
<u>Extra over all excavations for loading, carting and dumping surplus excavated material (no allowance made for increase in bulk):</u>			
Off site to a dumping site to be found by the Contractor.	m3	167	
<u>Filling supplied by the contractor under driveways</u>			
G7 Base course material compacted to 98% Mod AASHTO density	m3	93	
Over site of Selected Subgrade G5 material in accordance with SABS 1 200 DM in layers not exceeding 150mm thick and compacted to 95% Mod AASHTO density.	m3	93	
<u>Rip and Re - compact insitu material on site compacted to 93% Mod. AASHTO density:</u>			
Under floors,etc.	m2	5	
<u>Prescribed density tests on filling:</u>			
In-situ dry density test.	No	5	
<u>Approved brand of anti-termite soil poison applied by a Registered Pest Control Company and guaranteed against termite infestation for ten years:</u>			
Treat filling under paving with 'Chlordane Heptachlor Aldrin' or equal approved.	m2	620	
<u>150-175mm diameter bollards</u>			
2100mm long tanalith treated gum pole planted 800mm deep including excavations, cartaways, concrete base etc.	No	20	
Carried to Collection			R
Section 4			
Bill No. 1			
External Works			

<u>THE FOLLOWING IN RETAINING WALLS, ETC.</u>			
	<u>Excavation in earth not exceeding 2m deep</u>		
83	Trenches.	m3	19
	<u>Risk of collapse of excavations:</u>		
84	Sides of trench and hole excavations not exceeding 1,5m deep.	m2	65
	<u>Keeping excavations free of water:</u>		
85	Keeping excavations free of all water other than subterranean water.		Item
	<u>Extra over all excavations for loading, carting and dumping surplus excavated material (no allowance made for increase in bulk):</u>		
86	Off site to a dumping site to be found by the Contractor.	m3	7
	<u>Filling with approved clean, hard, dry decomposed dolerite filling supplied and carted onto site by the Contractor, compacted to a density of at least 95% Mod. AASHTO maximum density:</u>		
87	Behind walls with selected backfilling supplied by the Contractor compacted to 98% Mod ASSHTO density	m3	18
	<u>Compaction of surfaces</u>		
88	Compaction of ground surface under floors, etc including scarifying for a depth of 150mm, breaking down oversize material, adding suitable material where necessary and compacting to 90% Mod AASHTO density.	m2	28
	<u>15Mpa/19mm Concrete</u>		
89	Surface blinding under footings and bases.	m3	1
	<u>30Mpa/19mm Concrete</u>		
90	Strip footings.	m3	7
91	Cavity walls.	m3	3
	Carried to Collection		
Section 4 Bill No. 1 External Works			R

92	<u>Test blocks:</u> Making and testing of 150x150x150mm concrete strength test cubes (Provisional).	No	4	
93	<u>Fabric reinforcement:</u> REF. 395 fabric reinforcement in concrete infill, strip footings.	m2	33	
94	<u>Brickwork of NFX bricks (14 MPa nominal compressive strength) in Class I mortar (Cement to be 42.5N all-purpose cement):</u> 330mm thick cavity brick Walls made of two leafs of 110mm wall with 110mm mesh reinforced concrete fill (concrete and reinforcement elsewhere measured).	m2	55	
95	<u>Brickwork reinforcement:</u> 230mm Wide reinforcement built in horizontally.	m	652	
96	<u>"Rustgold FBS/Qunu Travertine" clay face brick or equal approved, size 222 x 106 x 73mm, bedded and jointed in Class II mortar and pointed with recessed vertical and recessed horizontal joints, suitable for exposure zones 1-2 (Cement to be 42.5N all-purpose cement):</u> Extra over brickwork for face brickwork externally.	m2	37	
97	<u>Brick-on-edge header course copings, sills, etc, of "Rustgold FBS/Qunu Travertine" or equal Architect approved clay face brick size 222 x 106 x 73mm, pointed with recessed joints on all exposed faces:</u> 220mm Wide header course to top of one brick wall bedded and jointed in cement mortar and pointed on top and both sides as described.	m	46	
98	<u>Openings in Walls etc.</u> Leave or form 32mm weephole through one brick wall	No	10	
99	<u>Membranes</u> "Geofabric filter blanket wrapped around stone with 150mm side and 300mm end laps, including stitching.	m2	10	
	Carried to Collection			
	Section 4 Bill No. 1 External Works			R

	<u>Earth filling 300 x 300mm section of 19mm thick stone material surrounding 110mm uPVC pipe, supplied by the contractor compacted to 98% Mod AASHTO density:</u>			
100	19mm Stone.	m3	2	
<u>THE FOLLOWING IN STORMWATER DRAINAGE, APRONS ETC.</u>				
<u>STORMWATER APRONS</u>				
	<u>Excavation not exceeding 2m deep</u>			
101	Reducing levels and depositing excavated material in prescribed stock piles on site.	m3	15	
	<u>Extra over all excavations for loading, carting and dumping surplus excavated material (no allowance made for increase in bulk):</u>			
102	Off site to a dumping site to be found by the Contractor.	m3	20	
	<u>Filling supplied by the contractor under floors, aprons, etc</u>			
103	G7 Base course material compacted to 98% Mod AASHTO density	m3	6	
104	Over site of Selected Subgrade G5 material in accordance with SABS 1 200 DM in layers not exceeding 150mm thick and compacted to 95% Mod AASHTO density.	m3	6	
	<u>Coarse river sand filling supplied by the contractor:</u>			
105	Under floors etc.	m3	3	
	<u>Compaction of surfaces:</u>			
106	Compaction of ground surface under floors etc including scarifying for a depth of 150mm, breaking down oversize material, adding suitable material where necessary and compacting to 90% Mod AASHTO density.	m2	60	
Carried to Collection				
Section 4 Bill No. 1 External Works				R

STORMWATER CHANNELS			
<u>Excavation not exceeding 2m deep</u>			
116	Reducing levels and depositing excavated material in prescribed stock piles on site.	m3	15
	<u>Extra over all excavations for loading, carting and dumping surplus excavated material (no allowance made for increase in bulk):</u>		
117	Off site to a dumping site to be found by the Contractor.	m3	10
	<u>Filling supplied by the contractor under channels</u>		
118	G7 Base course material compacted to 98% Mod AASHTO density	m3	5
119	Over site of Selected Subgrade G5 material in accordance with SABS 1 200 DM in layers not exceeding 150mm thick and compacted to 95% Mod AASHTO density.	m3	5
	<u>Cast in-situ Ref 395 mesh reinforced concrete (25MPa) open stormwater channels having V-shaped waterway formed in top, finished smooth on all exposed surfaces in 3:1 cement plaster trowelled smooth and with angles rounded, cast in suitable lengths not exceeding 2m, including all formwork, moulds, shallow excavation, filling and ramming, laying to falls, bedding and pointing in 3:1 cement mortar. Concrete apron to be tinted, colour to be specified by the Engineer.</u>		
120	700 x 80mm thick V' channel 150mm deep in centre laid in position in ground not exceeding 2000mm sections including all formwork, reinforcement, expansion joints, smooth finishing to top of concrete surface etc.	m	50
121	Extra for 700mm angle	No	5
122	Extra for forming 200mm thick 700mm wide spreader with 200mm high edges fanning out to 1 960mm width at furthest end with hard burnt bricks pitching cast in ass diffusers including working off concrete to a smooth finish and draining onto natural ground with 150 - 200mm diameter loose stones.	No	2
Carried to Collection			
Section 4			
Bill No. 1			
External Works			
		R	

	<u>Sundries:</u>			
123	Create earth berm for stormwater control with in situ material 1,5m wide at base x 500mm high	m	25	
124	Construct shaped earth V-drain 2m wide with grass runners	m	34	
<u>THE FOLLOWING IN SUB-SOIL DRAINAGE, ETC.</u>				
<u>Site Clearance, ETC</u>				
125	Digging up and removing rubbish, debris, vegetation, hedges, shrubs and trees not exceeding 200mm girth, bush, etc	m2	38	
<u>Excavation in earth not exceeding 2m deep:</u>				
126	Trenches.	m3	12	
<u>Extra over all excavations for carting away:</u>				
127	Surplus material from excavations and/or stock piles on site to a dumping site to be located by the Contractor.	m3	12	
<u>Risk of collapse of excavations:</u>				
128	Sides of trench and hole excavations not exceeding 1,5m deep.	m2	20	
129	Ditto, but from ground level to exceeding 1,5m.	m2	20	
<u>Earth filling obtained from the excavations and/or prescribed stock piles on site compacted to 93% MOD AASHTO density:</u>				
130	Backfilling to trenches, holes, etc.	m3	20	
<u>Earth filling 300 x 300mm section of 19mm thick stone material surrounding 110mm uPVC pipe, supplied by the contractor compacted to 98% Mod AASHTO density:</u>				
131	19mm Stone.	m3	10	
Carried to Collection				
Section 4 Bill No. 1 External Works				

	<u>Membrane</u>			
132	'''Geofabric filter blanket wrapped around stone with 150mm side and 300mm end laps, including stitching.	m2	90	
133	<u>Keeping excavations free of water:</u> Keeping excavations free from mud and all water including subterranean sources.	Item		
134	<u>Compaction of surfaces</u> Compaction of ground surface under floors, etc including scarifying for a depth of 150mm, breaking down oversize material, adding suitable material where necessary and compacting to 90% Mod AASHTO density.	m2	60	
	Carried to Collection			
Section 4 Bill No. 1 External Works			R	

<u>SOIL DRAINAGE</u>		
110mm Diameter perforated uPVC pipe surrounded with 300 x 300mm section of 20mm stone wrapped in A3 geotextile material.		
110mm uPVC pipe.	m	40
<u>Extra for:</u>		
110mm Tee.	No	5
110mm Y junction.	No	4
<u>THE FOLLOWING IN SOAKAWAY</u>		
<u>Site Clearance, Etc</u>		
Digging up and removing rubbish, debris, vegetation, hedges, shrubs and trees not exceeding 200mm girth, bush, etc	m2	5
<u>Excavation in earth not exceeding 2m deep:</u>		
Holes	m3	5
<u>Extra over all excavations for carting away</u>		
Surplus material from excavations and/or stock piles on site to a dumping site to be located by the contractor within 5km from the building site	m3	5
<u>Risk of collapse of excavations</u>		
Sides of trench and hole excavations exceeding 1,5m deep but not exceeding 3,0m deep	m2	21
<u>Earth filling obtained from the excavations and/or prescribed stock piles on site compacted to 90% Mod AASHTO density</u>		
Backfilling to holes	m3	5
Carried to Collection		R
Section 4		
Bill No. 1		
External Works		

150	Keeping excavations free from water		Item	
151	Carting away surplus excavated material	m3	7	
152	150mm layer of G7 material compacted to 95% MOD AASHTO under concrete slab.	m3	4	
153	150mm layer of G5 material compacted to 95% MOD AASHTO under concrete slab.	m3	4	
154	25Mpa/19mm Reinforced concrete in bottom slabs and footings.	m3	4	
155	Formwork to edges, risers, ends and reveals not exceeding 300mm wide or high.	m	45	
156	Weld Mesh Ref 193 in Concrete bottom slab.	m2	15	
157	One brick wall of 14 MPa NFX bricks.	m2	15	
158	230mm Wide reinforcement built in horizontally.	m	45	
159	Plaster on brick walls.	m2	45	
160	Gabion mattress comprising of 20 to 30mm stones wrapped in A3 geotextile with voids filled with 1:3 cement/sand mortar.	m2	15	
<u>THE FOLLOWING IN RAINWATER TANKS AND STANDS</u>				
	<u>Excavation in earth not exceeding 2m deep:</u>			
161	Trenches.	m3	16	
	<u>Extra over all excavations for carting away:</u>			
162	Surplus material from excavations and/or stock piles on site to a dumping site to be located by the Contractor.	m3	16	
	<u>Risk of collapse of excavations:</u>			
163	Sides of trench and hole excavations not exceeding 1,5m deep.	m2	60	
Carried to Collection				
Section 4				
Bill No. 1				
External Works				
R				

	<u>Earth filling obtained from the excavations and/or prescribed stock piles on site compacted to 93% MOD AASHTO density:</u>			
164	Backfilling to trenches, holes, etc.	m3	44	
	<u>Earth filling (G7 material) supplied by the contractor in layers not exceeding 150mm thick and compacted to 98% Mod AASHTO density:</u>			
165	Under footings.	m3	8	
	<u>Compaction of surfaces</u>			
166	Compaction of ground surface under floors, etc including scarifying for a depth of 150mm, breaking down oversize material, adding suitable material where necessary and compacting to 90% Mod AASHTO density.	m2	25	
	<u>25 Mpa/19mm Concrete</u>			
167	Strip footings.	m3	7	
	<u>25 MPa/19mm Concrete:</u>			
168	Tank concrete slab.	m3	7	
	<u>Test blocks:</u>			
169	Making and testing of 150x150x150mm concrete strength test cubes (Provisional).	No	5	
	<u>Finishing top surfaces of concrete smooth with a steel trowel including adding additional cement while concrete is still green to attain a smooth, hard surface:</u>			
170	Surface beds, slabs, etc.	m2	30	
	<u>Rough Formwork to Sides:</u>			
171	Edges, risers, ends and reveals not exceeding 300mm high.	m	45	
	<u>Allens Meshco Square Mesh Fabric reinforcement:</u>			
172	Type 617 fabric reinforcement in concrete slabs.	m2	25	
	Carried to Collection			
Section 4				
Bill No. 1				
External Works				

	<u>BRICKWORK IN FOUNDATIONS.</u>			
173	<u>Brickwork of NFX bricks (14 MPa nominal compressive strength) in Class I mortar (Cement to be 42.5N all-purpose cement):</u> One brick walls.	m2	60	
174	<u>BRICKWORK IN SUPERSTRUCTURE</u> <u>Brickwork of NFP bricks (14 MPa nominal compressive strength) in Class II mortar (Cement to be 42.5N all-purpose cement):</u> One brick walls.	m2	60	
175	<u>Brickwork reinforcement:</u> 230mm Wide reinforcement built in horizontally.	m	180	
176	Ditto but in foundations.	m	135	
177	<u>FACE BRICK</u> <u>"Rustgold FBS/Qunu Travertine" clay face brick or equal approved, size 222 x 106 x 73mm, bedded and jointed in Class II mortar and pointed with recessed vertical and recessed horizontal joints, suitable for exposure zones 1-2(Cement to be 42.5N all-purpose cement):</u> Extra over brickwork for face brickwork externally.	m2	60	
178	<u>Brick-on-edge header course copings, sills, etc, of "Rustgold FBS/Qunu Travertine" or equal approved face bricks pointed with recessed joints on all exposed faces, 220mm wide sill set sloping and slightly projecting:</u> 230mm wide header course to top of one brick wall bedded and jointed in cement mortar and pointed on top and both sides as described.	m	45	
Carried to Collection				
Section 4 Bill No. 1 External Works				R

CLUSTER 93
NOMATHEBE JUNIOR SECONDARY SCHOOL
THE MVULA TRUST SAFE PROGRAMME

	<u>Plastic water tanks etc:</u>			
179	5000 Litre roto molded or equal approved plastic tank complete with lid, 15mm brass bibtap with handle suitable for locking and 4 No. galvanised stay wires 2.5m each long connected to tank, with and including 4 No. eye bolts cast into concrete.	No	4	
180	Hole top of tank for 100mm pipe.	No	4	
		Carried to Collection		
	Section 4 Bill No. 1 External Works			R

<u>THE FOLLOWING IN SECURITY FENCING, ETC</u>			
<u>Site clearance</u>			
181	Allow for clearing site for the width of 1 000 mm where fencing is to be erected including removing trees, shrubs etc. not exceeding 200 mm girth, grubbing up roots and roughly levelling.	m2	120
<u>Straining wires, fencing and razor wire:</u>			
182	Four strands of 4mm Class'A' galvanised straining wires secured to fencing posts with doubled 2 mm galvanised wire inserted through hole in post and turned a minimum of four turns around straining wire and attached to straining frame at one end with not less than four turns at the other end to straining bolts (elsewhere measured).	m	100
183	3 Strands of galvanised barbed wire tied to standards, posts and eye bolts	m	100
184	Fencing formed of 50 x 50 x 2.0mm diameter galvanised fencing 1 800mm high and fixed to each straining wire with 8 guage binding wire at 500mm centres including Y12 pegs at 900mm c/c between posts (straining wires elsewhere measured).	m	100
<u>Posts for 1 800mm high security fence:</u>			
185	60mm Diameter galvanised steel intermediate fencing post 1800mm long fitted with a pressed steel mushroom cap one end and 150 x 150 x 5 mm baseplate at bottom and embedded in and including 350 x 350 x 600 mm mass concrete (15 MPa) base.	No	75
186	100mm Ditto as corner post, fitted with two 50mm diameter galvanised steel stay set raking and with top end flattened and bolted through post, with post and stay both embedded in mass concrete (15 MPa) bases as last.	No	6
187	150mm Ditto as gate post 1 800mm long, fitted with two 50mm diameter galvanised steel stay set raking and with top end flattened and bolted through post, with post and stay both embedded in mass concrete (15 MPa) bases as last.	No	6
Carried to Collection			
Section 4 Bill No. 1 External Works			

188	12mm Diameter galvanised mild steel straining eye bolt with hook, threaded portion and two nuts and washers.	No	50		
189	Form 12mm diameter hole through fence post.	No	50		
<u>Gates:</u>					
190	Security fence single gate, size 1 000 mm wide x 1 800 mm high, formed of 50 mm diameter nominal bore x 3,25 mm wall thickness hot dip galvanised mild steel pipe framing all round with mitred and welded angles and cross braces mullion and transome, scribed and welded into angles and at cross intersections, with two 50 mm diameter nominal bore x 3,25 mm wall thickness security posts each 600 mm long with one end welded to top rail of gate and closure plate to other end, the gate covered with 100 x 50 x 2,5 mm weld mesh with four straining wires as before described and with four 2,37 mm four point core diameter single "kampeon" wires with crimped droppers to security posts as before described; including three strands flat wrap razor barbed tape wire fixed as before described, leaf fitted with three 24 mm diameter x 300 mm long eyebolt hinges and stops including all holes, etc., welded or bolted to adjoining galvanised gatepost with and including 500 mm long approved chain spot welded to gate	No	1		
191	Two leafed vehicular swing gate. Size 5500mm x 1800mm high.	No	2		
<u>PADLOCKS</u>					
192	Supply 50 mm "Viro" Padlocks and Keys (or equal approved)	No	2		
Carried to Collection					
Section 4 Bill No. 1 External Works					

CLUSTER 93
NOMATHEBE JUNIOR SECONDARY SCHOOL
THE MVULA TRUST SAFE PROGRAMME

Section 4			
Bill No. 1			
External Works			
<u>COLLECTION</u>			
	Page No		Amount
Total Brought Forward from Page No.	87		
	88		
	89		
	90		
	91		
	92		
	93		
	94		
	95		
	96		
	97		
	98		
	99		
	100		
	101		
	102		
	103		
	104		
	105		
	106		
	Carried Forward		
Section 4			
Bill No. 1			
External Works			
		R	

CLUSTER 93
NOMATHEBE JUNIOR SECONDARY SCHOOL
THE MVULA TRUST SAFE PROGRAMME

Section 4			
Bill No. 1			
External Works			
<u>COLLECTION</u>			
	Brought Forward	Page No	Amount
Total Brought Forward from Page No.		107	R
		108	
		109	
		110	
		111	
		112	
		113	
	Carried to Final Summary		
Section 4			
Bill No. 1			
External Works			

FINAL SUMMARY		Page No	Amount
Section No			
1	PRELIMINARIES	31	
2	DEMOLITIONS (PROVISIONAL)	35	
3	BUILDING WORKS	86	
4	EXTERNAL WORKS (PROVISIONAL)	115	
5	PROVISIONAL SUMS	116	
	SUB-TOTAL		R
	CONTINGENCY		
	Allow an amount of Five (5%) percent for contingencies to be used at the discretion of the Representative/Agent and deducted in whole or in part if not required		%
	Add Value Added Tax at the rate of 15%		R
	Carried to Form of Offer and Acceptance		R