


LINE NO.	CODE NAME	DESCRIPTION	UNIT MEASURE	QUANTITY
1	Fence Type 1	2.1m high coated heavy duty, welded mesh fence of Clear View type or equivalent	Meter	139
2	Fence Type 2/3	Carefully remove Fence Type 3 and move to Fence Type 2 position.	Meter	60
3	Fence Type 2/3	Allow for additional new fence to replace irreparable portions of Fence 3	Meter	20
4	Fence Type 4	Repair 2.4m high precast fencing by replacing precast slabs ONLY	No.	65
5	Fence Type 4	Repair 2.4m high precast fencing by replacing precast posts ONLY	No.	100
6	Gate 1	12m x 2100mm high coated heavy duty, welded mesh double Sliding Gate of Clear View type. The gate shall be designed and installed to the specialist manufacturer's specifications	No.	1
7	Gate 2	12m x 2100mm high coated heavy duty, welded mesh double Sliding Gate of Clear View type. The gate shall be designed and installed to the specialist manufacturer's specifications	No.	1
8	Gate 3	1200mm x 2100mm high coated heavy duty, welded mesh Pedestrian Gate of Clear View type. The gate shall be designed and installed to the specialist manufacturer's specifications.	No.	3

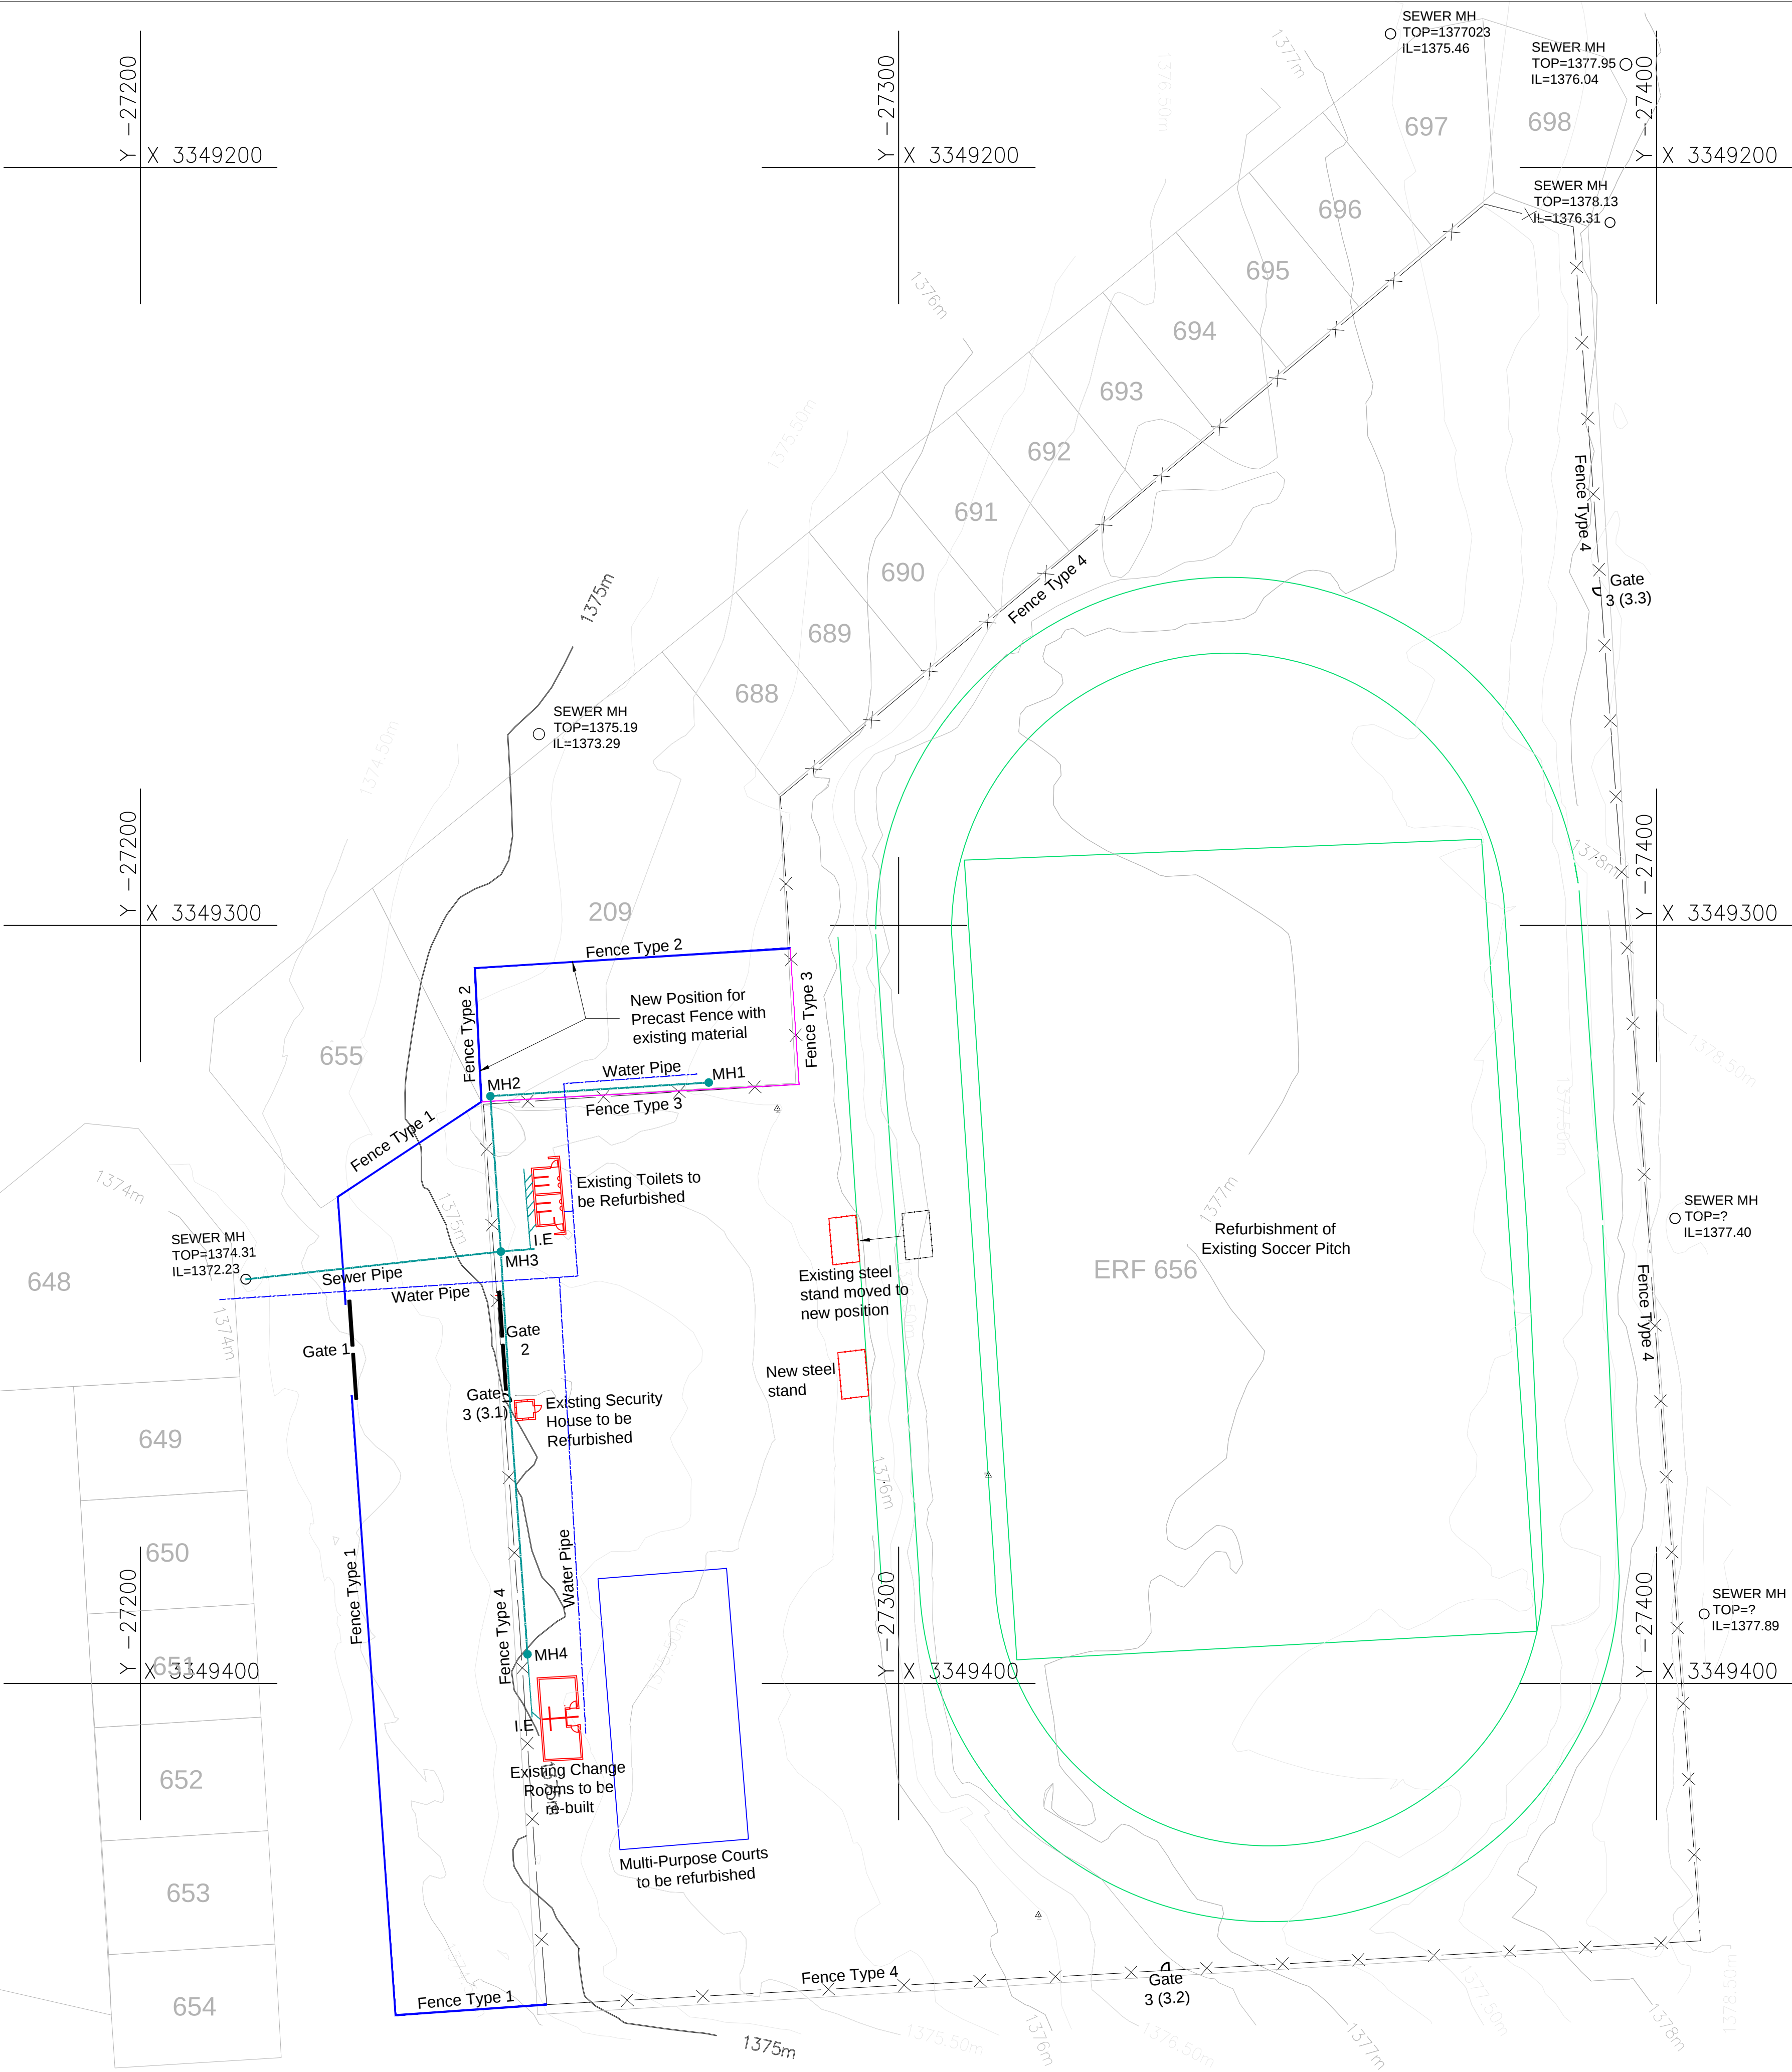

- IMPORTANT NOTES:
- The contractor's Rate as quoted in the Bill of Quantities for every item or activity forming part of the scope of work under this contract shall include all the necessary costs (e.g. transport, administration, consumables, equipment, health & safety related items, overheads, labour, testing, profits and any charges and taxes, etc.)
- The installation of new precast fencing or any repair or replacement of parts shall included non-shrinkage cementitious grouting in between the members.
 - The installation of any fence posts for any type of fence shall include the excavation and casting in of concrete not less than 200mm x 200mm x 500mm depth.
 - All concrete for foundations shall be 20MPA unless stated otherwise.

0	31-10-2023	ISSUED FOR TENDER	T.L
REV.	DATE	REVISION	BY

CLIENT : KOPANONG LOCAL MUNICIPALITY



PRIVATE BAG X23
TROMPSBURG
9913
TEL: (+27) 51 010 5156

CONSULTANT: CIVIL & STRUCTURAL ENGINEERS



10 TILLARD STR
NO 6 PROGRESS COMPLEX
GOLFVIEW MAHKENG, 2745
Tel: +27 18 000 9513
Mobile: +27 79 515 0611
Email: losaba.tk@soleng.co.za

PROJECT

UPGRADING OF PHILIPPOLIS SPORTS FACILITY

TITLE:		
SITE LAYOUT		
DRAWN:	DESIGNED:	CHECKED:
M. GAREKOE	T. LOSABA	T. LOSABA
APPROVED BY:	SIGNATURE:	
DATE:	PAPER SIZE	SCALE:
30-10-2023	A1	1:500
DRAWING NO:	KLM/PHIL/USF2023-0300/01 - Services Layout	REV. No.
		0