



Construction of Fencing and Related Works

[illegible]

[illegible]



correctional services

Department:
Correctional Services
REPUBLIC OF SOUTH AFRICA

Proj. No.: LMN 04/2021

Construction of Fencing and Related Works

0

Item. No.	Payment Clause	Description	Unit	Quantity	Rate	Amount	
						R	c
3	PPS 12 PPS 13	NEW FENCING Supply and erect 2,5mm galvanized welded mesh wire fence size 50mm x 50mm x1,8m <u>Full galvanizing required to all steel components.</u>	km	3			
		c) Mesh Fence					
3.25.		Excavate 300 x 200 x 500mm deep holes for anchor posts	No.	121			
3.26.		Supply and place well compacted concrete mix 1:4:4 (19mm stone, 15 Mpa)	m ³	4			
3.27.		Supply Y standards, 2300mm long	No.	600			
3.28.		Install Y standards, 2300mm long, driven 600mm into the ground	No.	600			
3.29.		Extra-over for the supply and installation of staples	Sum	1			
3.30.		Extra-over for drilling holes through poles for ties.	No.	165			
3.31.		Supply 2.5mm double strand fully galvanized barbed wire.	km	6			
3.32.		Install 2.5mm double strand fully galvanized barbed wire.	km	6			
3.33.		Extra-over for the supply and fixing of tie wire	Sum	1			
3.34.		Supply 1.8m high, fully galvanized bonnox mesh as per specification.	km	3			
3.35.		Install 1.8m high, fully galvanized bonnox mesh as per specification.	km	3			
3.36.		Supply all materials for corner boxes	No.	15			
3.37.		Supply all additional materials for straining posts and gate boxes		30			
3.38.		Install all materials for corner boxes		15			
3.39.		Install all materials for straining and gate boxes		30			
3.40.		Supply 500mm diameter flatwrap razor wire	km	3,5			
3.41.		Install 500mm diameter razor wire, 300mm to be buried under the trench under the outer face of the mesh, securely tied to the mesh with 2,00mm fully galvanized tie wire.	km	3,5			
3.42.		Supply and install 2mm Campeon double barbed wire 2 strands	km	12			
Total carried forward							

[illegible]




0


Proj. No.: LMN 04/2021

Construction of Fencing and Related Works


[illegible]

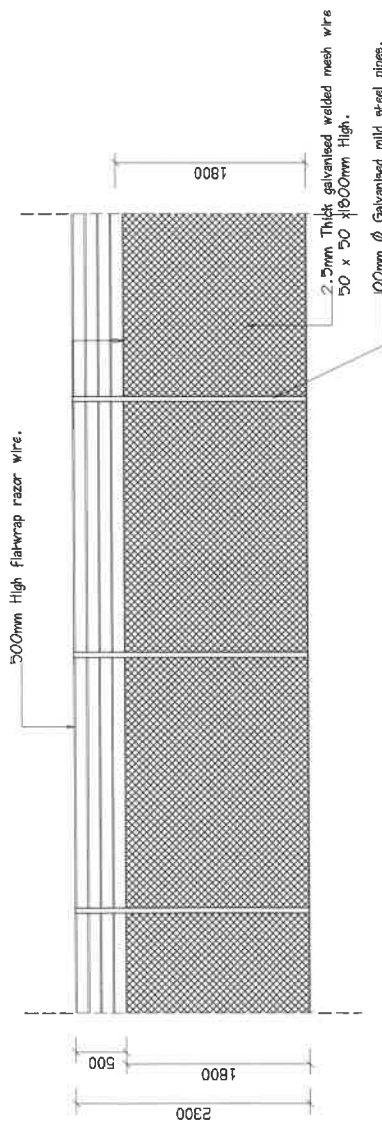

PERIMETER FENCING -- ELEVATION OUTSIDE
SCALE-1:50

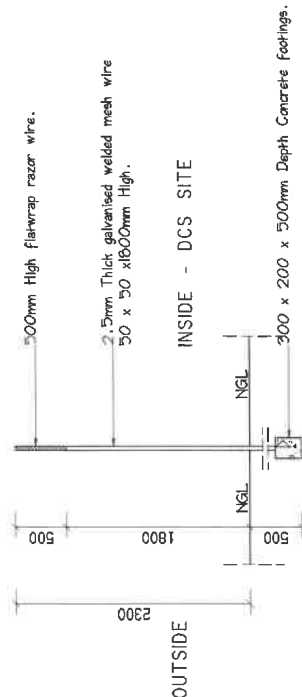

SECTION A-A
SCALE-1:50

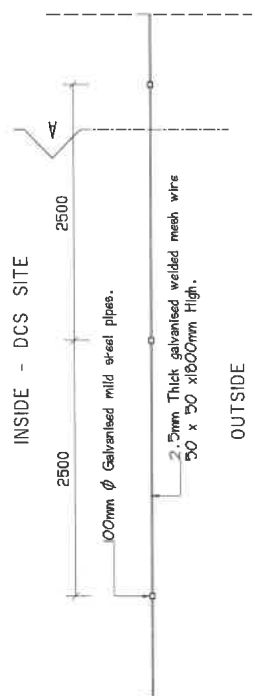

PERIMETER FENCING--PLAN
SCALE-1:50

