



ANNEXURE C3.2: SCOPE OF WORK (ZK Roads Soccer field entrance and Cricket Field entrance)

CIDB CE 3 grading required

Entrance Roads at Rand Water Zwartkopjes combined = 600meter

Site visit will serve as an advantage.

- 1) Remove all grass, plants, and roots from the areas approximately 3000m² (Square Meters)
- 2) Level out surface and slope adequately to allow proper drainage. Compensate for low areas where water can collect. 3000m²
- 3) Apply pre-emergency herbicide granules to treat the area where the paving will be laid or installed 20x 10 kg bags
- 4) Compact surface area properly and prepare to receive lay G5 3000m²
- 5) Install Mountable Kerbstones 300mm x 150mm x 1m (See attached Picture) 1200meters
- 6) Lay kerbstones on cement foundation to prevent movement. 1200meters
- 7) Lay 150mm thick G5 between newly installed Kerbstones 1600 cubic meters
 - > Use a heavy roller to level and compact G5 after the installation.
 - > Water lightly and recheck surface level and correct if necessary.
- 8) ZK Safety File Costs

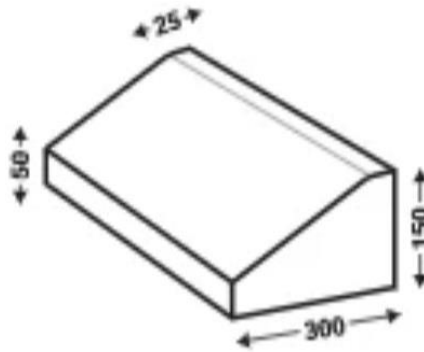

**Mountable Kerb Figure 8A (1000 x
300 x 150mm)**



