

**SOUTH AFRICAN POLICE SERVICE
SUPPLY CHAIN MANAGEMENT (SCM)**



**PLEASE NOTE: IF YOU ARE NOT CIDB
REGISTERED YOUR QUOTATION WILL
BE DISQUALIFIED DURING EVALUATION**

Quotation Number: AE DUDU 01/2026

**APPOINTMENT OF A CONTRACTOR FOR REPAIR AND
RENOVATIONS OF THE CELL BLOCK AT DUDUZA
POLICE STATION: GAUTENG PROVINCE**

Name of Company: _____

PART A

REQUEST FOR QUOTATION

1. YOU ARE HEREBY INVITED TO QUOTE FOR REQUIREMENTS OF THE SOUTH AFRICAN POLICE SERVICE					
QUOTE NUMBER:	AE DUDU 01/2026	CLOSING DATE:	2026-10-05	CLOSING TIME:	11:00
DESCRIPTION:	APPOINTMENT OF A CONTRACTOR FOR REPAIR AND RENOVATIONS OF THE CELL BLOCK AT DUDUZA POLICE STATION: GAUTENG PROVINCE				
2. QUOTATION RESPONSE DOCUMENTS MAY ONLY BE SUBMITTED ONLINE AT NATIONAL TREASURY E-TENDER WEBSITE:			3. QUOTATION RESPONSE DOCUMENTS MAY BE E-MAILED TO:		
Quotation documents are not to be altered and electronically typed, but printed, filled in and submitted online via National Treasury E-Tender Portal Website. Only Quotations responses received by the South African Police Service online via National Treasury E-Tender Portal Website will be considered. No manual / hand delivery responses will be accepted or considered by the South African Police Service. Bidders / contractors who submitted manual / hand delivery responses will be disqualified.			N/A		
4. QUOTATION PROCEDURE ENQUIRIES MAY BE DIRECTED TO:			5. TECHNICAL ENQUIRIES MAY BE DIRECTED TO:		
CONTACT PERSON	Captain Mohlala		CONTACT PERSON	Captain AP ENSLIN	
TELEPHONE NUMBER	012 841 7358		TELEPHONE NUMBER	082 827 7459	
E-MAIL ADDRESS	MohlalaKK@saps.gov.za		E-MAIL ADDRESS	EnslinAP@saps.gov.za	
6. SUPPLIER INFORMATION					
NAME OF BIDDER					
POSTAL ADDRESS					
STREET ADDRESS					
TELEPHONE NUMBER	CODE		NUMBER		
CELLPHONE NUMBER					
FACSIMILE NUMBER	CODE		NUMBER		
E-MAIL ADDRESS					
VAT REGISTRATION NUMBER					
SUPPLIER COMPLIANCE STATUS	TAX COMPLIANCE SYSTEM PIN:		OR	CENTRAL SUPPLIER DATABASE NUMBER:	MAAA
CENTRAL SUPPLIER DATABASE REGISTRATION REPORT	[TICK APPLICABLE BOX] ☐ Yes ☐ No				

PART B TERMS AND CONDITIONS FOR QUOTATION

1. QUOTATION SUBMISSION:

- 1.1. QUOTATIONS MUST BE SUBMITTED ONLINE VIA NATIONAL TREASURY E-TENDER PORTAL WEBSITE BY THE STIPULATED TIME. LATE QUOTATIONS WILL NOT BE ACCEPTED FOR CONSIDERATION.
- 1.2. ALL QUOTATIONS MUST BE SUBMITTED ON THE OFFICIAL FORMS PROVIDED – (NOT TO BE RE-TYPED) OR IN THE MANNER PRESCRIBED IN THE QUOTATION DOCUMENT.
- 1.3. BIDDERS AND SUBCONTRACTORS MUST REGISTER ON THE CENTRAL SUPPLIER DATABASE (CSD) TO UPLOAD MANDATORY INFORMATION NAMELY: (BUSINESS REGISTRATION/ DIRECTORSHIP/ MEMBERSHIP/IDENTITY NUMBERS; TAX COMPLIANCE STATUS; AND BANKING INFORMATION FOR VERIFICATION PURPOSES).
- 1.4. WHERE A BIDDER OR SUB CONTRACTOR IS NOT REGISTERED ON THE CSD, MANDATORY INFORMATION NAMELY: (BUSINESS REGISTRATION/ DIRECTORSHIP/ MEMBERSHIP/IDENTITY NUMBERS; TAX COMPLIANCE STATUS MAY NOT BE SUBMITTED WITH THE BID DOCUMENTATION.
- 1.5. THIS QUOTATION IS SUBJECT TO THE PREFERENTIAL PROCUREMENT POLICY FRAMEWORK ACT, 2000 AND THE PREFERENTIAL PROCUREMENT REGULATIONS, 2022, THE GENERAL CONDITIONS OF CONTRACT (GCC) AND, IF APPLICABLE, ANY OTHER SPECIAL CONDITIONS OF CONTRACT.

2. TAX COMPLIANCE REQUIREMENTS

- 2.1 BIDDERS AND SUB CONTRACTORS MUST ENSURE COMPLIANCE WITH THEIR TAX OBLIGATIONS.
- 2.2 BIDDERS AND SUB CONTRACTORS ARE REQUIRED TO SUBMIT THEIR UNIQUE PERSONAL IDENTIFICATION NUMBER (PIN) ISSUED BY SARS TO ENABLE THE ORGAN OF STATE TO VERIFY THE TAXPAYER'S PROFILE AND TAX STATUS.
- 2.3 APPLICATION FOR TAX COMPLIANCE STATUS (TCS) PIN MAY BE MADE VIA E-FILING THROUGH THE SARS WEBSITE WWW.SARS.GOV.ZA.
- 2.4 BIDDERS AND SUB CONTRACTORS MAY ALSO SUBMIT A PRINTED TCS CERTIFICATE TOGETHER WITH THE BID.
- 2.5 IN BIDS WHERE CONSORTIA / JOINT VENTURES / SUB-CONTRACTORS ARE INVOLVED, EACH PARTY MUST SUBMIT A SEPARATE TCS CERTIFICATE / PIN / CSD NUMBER.
- 2.6 WHERE NO TCS IS AVAILABLE BUT THE BIDDERER IS REGISTERED ON THE CENTRAL SUPPLIER DATABASE (CSD), A CSD NUMBER MUST BE PROVIDED.

3. GENERAL

- 3.1 NO QUOTATION WILL BE CONSIDERED FROM PERSONS IN THE SERVICE OF THE STATE, COMPANIES WITH DIRECTORS WHO ARE PERSONS IN THE SERVICE OF THE STATE, OR CLOSE CORPORATIONS WITH PERSONS IN THE SERVICE OF THE STATE."

NB: FAILURE TO PROVIDE / OR COMPLY WITH ANY OF THE ABOVE PARTICULARS MAY RENDER THE QUOTATION INVALID.

SIGNATURE OF BIDDER: _____

CAPACITY UNDER WHICH THIS BID IS SIGNED: _____
(Proof of authority must be submitted e.g. company resolution)

DATE: _____

CONTENTS OF QUOTATION DOCUMENT

Please ensure that you received all pages of this document which consists of the following sections:

PART T: TENDER	Document number
Part T1: Tendering procedures.	
Notice and Invitation to Tender	T 1.1
Tender Data	T1.2
Part T2: Returnable documents <u>including part C1, C2 and C3</u>	
List of Returnable Documents	T2.1
Resolution of Board of Directors	T2.1.1
Compulsory Clarification Meeting Certificate	T2.1.2
Schedule of Sub-Contractors	T2.1.3
Declaration of Interest (SBD 4)	T2.1.4
Preference Points Claim Form in terms of the Preferential Procurement Regulations, 2022 (SBD 6.1)	T2.1.6
Form of Offer and Acceptance	C1.1
Bill of Quantities	C2
PART C: CONTRACT	
Part C1 – Agreements and contract data	
Form of Offer and Acceptance	C1.1
Contract data and Form of Guarantee	C1.2
Part C2 – Pricing data	
Bills of Quantities	C2
Part C3 – Scope of Work	
Scope of Work	C3

T1.1: NOTICE AND INVITATION TO TENDER

THE SOUTH AFRICAN POLICE SERVICE INVITES QUOTATIONS FOR:

Project title:	APPOINTMENT OF A CONTRACTOR FOR REPAIR AND RENOVATIONS OF THE CELL BLOCK AT DUDUZA POLICE STATION: GAUTENG PROVINCE		
Quotation no:	AE DUDU 01/2026		
Advertising date:	2026-09-02	Closing date:	2026-10-05
Closing time:	11:00	Validity period:	90 days

It is estimated that tenderers must have a CIDB contractor grading designation of **Grade 2 (R 500 001 to R 1 million) (GB) General Building**, or higher.

Only Tenderers who are responsive to the following responsiveness criteria are eligible to submit tenders:

☒	Only those tenderers who are registered with the cidb, or are capable of being so prior to the evaluation of submissions, in a contractor grading designation equal to or higher than a contractor grading designation determined in accordance with the sum tendered, or a value determined in accordance with Regulation 25 (1B) or 25 (7A) of the Construction Industry Development Regulations, for a Grade 2 (R 500 001 to R1 million)(GB) General Building , or higher class of construction work, are eligible to have their tenders evaluated.
☒	Tenderers must be active on the cidb Register of Contractors prior to the evaluation of submissions.
☒	Tender offer must be properly received on the tender closing date and time specified on the invitation, <u>fully completed and signed in ink (All as per Standard Conditions of Tender)</u> .
☒	Submission of Resolution of Board of Directors document (T2.1.1) or (T2.1.8), authorising a dedicated <u>person to sign documents on behalf of the Bidding Enterprise</u> .
☒	Submission of the Compulsory Clarification Meeting Certificate (T2.1.2), as proof of attendance of the compulsory clarification meeting that must be signed by the SAPS representative at the meeting. Failure to attend the physical site inspection will result in the Compulsory Clarification Meeting Certificate not being signed by the SAPS's representative at the closing of the compulsory clarification meeting. Compulsory Clarification Meeting Certificates must be signed by the SAPS representative at the closing of the compulsory clarification meeting or it will be regarded as being non-compliant and WILL lead to the Tender being disqualified.
☒	Submission of the Declaration of Interest SBD4 (T2.1.4).
☒	Submission of the Form of Offer and Acceptance (C1.1).
☒	Submission of the priced Bill of Quantities (C2).
☒	Tenderers and Subcontractors must be registered on CIDB and the Government's Central Supplier Database (CSD) and must include in their bid, their Master Registration Numbers (Supplier Numbers), as well as their Tax Compliance Status PINs to enable the SAPS Department to verify the Suppliers' Tax Status on (CSD), alternatively, within 7 calendar days after the closing date of this bid. Failure to submit will result in the tender offer being rejected.
☒	Tenderers and Sub-contractors must be Tax compliant, failure to comply will result in the bid being disqualified.
☒	<u>A compulsory clarification meeting will take place at Duduza Police Station, on 2026-09-15 starting strictly at 11:00. Latecomers will not be allowed. Please send competent Representatives to obtain important information.</u>
☒	The SAPS reserves the right to conduct supplier due diligence prior to final award or at any time during the contract period. This may include site visits.

This tender will be evaluated according to the PPPFA Preferential Procurement Regulations, 2022.

The Preference points scoring system will be the 80/20 points scoring system.

PRICE:	POINTS 80
NUMBER OF PREFERENCE POINTS ALLOCATED FOR SPECIFIC GOALS	20
Total points for Price and Preference for specific goals:	100

SPECIFIC PREFERENTIAL GOALS	Number of points (80/20 system)
Persons historically disadvantaged on the basis of race with at least 51% ownership	5
Persons historically disadvantaged on the basis of gender with at least 51% ownership	5
Persons with at least 51% ownership who are youth	5
Persons historically disadvantaged by unfair discrimination on the basis of disability with at least 51% ownership	5
Total number of preference points allocated for specific goals	20
Non-compliant contributor	0

NOTE: Bidders claiming preference points **must sign and submit** the Preference Points Claim Form in terms of the Preferential Procurement Regulations, 2022. (T2.1.6 (SBD 6.1)).

COMPILED BY:

Rank, initials and surname	Signature	Date

VERIFIED AND APPROVED BY:

Rank, initials and surname	Signature	Date

T1.2: TENDER DATA

Project title:	APPOINTMENT OF A CONTRACTOR FOR REPAIR AND RENOVATIONS OF THE CELL BLOCK AT DUDUZA POLICE STATION: GAUTENG PROVINCE		
-----------------------	--	--	--

Quotation no:	<i>AE DUDU 01/2026</i>	Closing date:	<i>2026-10-05</i>
Closing time:	<i>11:00</i>	Validity period:	<i>90 days</i>

Clause number:	The conditions of tender are the Standard Conditions of Tender as contained in Annex C of the CIDB Standard for Uniformity in Construction Procurement as per Government Notice No. 423 published in Government Gazette No. 42622 of 8 August 2019 and as amended from time to time. (see www.cidb.org.za) The Standard Conditions of Tender make several references to the Tender Data for details that apply specifically to this tender. The Tender Data shall have precedence in the interpretation of any ambiguity or inconsistency between it and the Standard Conditions of Tender. Each item of data given below is cross-referenced to the clause marked "C" in the above mentioned Standard Conditions of Tender.
C.1.1.1	The employer is the Government of the Republic of South Africa in its Department of the South African Police Service.
C.1.6.3	For this contract the single volume approach is adopted. This procurement document has been formatted and compiled under the headings for a single volume approach as contained in the CIDB's "Standard for Uniformity in Construction Procurement." The list of Returnable Documents identifies which of the documents a tenderer must complete when submitting a tender offer. The tenderer must submit his tender offer by completing the Returnable Documents including the fully priced Activity Schedule / Bills of Quantities, signing the "Offer" section in the "Form of Offer and Acceptance" and delivering the single volume procurement document back to the Department bound up as it was when it was received. The single volume procurement document issued by the employer comprises the following: TENDER Part T1: Tendering procedures T1.1 - Tender Notice and Invitation to Tender T1.2 - Tender Data Part T2: Returnable documents T2.1- List of Returnable Documents CONTRACT Part C1: Agreements and contract data C1.1 - Form of Offer and Acceptance Part C2: Pricing data C2 - Pricing instructions and Bill of Quantities Part C3: Scope of work C3 - Scope of work

Quotation no: AE DUDU 01/2026

C.1.4	The Employer's agent is:
	Name:
	Capacity:
	Address:
	Tel:
	Fax:
	E-mail:
C.2.1	Only those tenderers who are registered with the cidb, or are capable of being so prior to the evaluation of submissions, in a contractor grading designation equal to or higher than a contractor grading designation determined in accordance with the sum tendered, or a value determined in accordance with Regulation 25 (1B) or 25 (7A) of the Construction Industry Development Regulations, for a Grade 2 (R 500 001 to R1 million)(GB) General Building class of construction work, are eligible to have their tenders evaluated.
C.2.7	For particulars regarding a compulsory clarification meeting, see Notice and Invitation to Tender T1.1
C.2.12	If a tenderer wishes to submit an own alternative tender offer, the only criteria permitted for such alternative tender offer is that it demonstrably satisfies the Employer's standards and requirements. A tenderer may submit alternative tender offers only if a main tender offer, strictly in accordance with all the requirements of the tender documents, is also submitted. Provided that the tenderer's main tender offer is according to specification and would under normal circumstances be recommended for acceptance, his alternative tender offer may also be considered for the purpose of the award of the contract. Calculations, drawings and all other pertinent technical information and characteristics as well as modified or proposed Pricing Data must be submitted with the alternative tender offer to enable the Employer to evaluate the efficacy of the alternative and its principal elements, to take a view on the degree to which the alternative complies with the Employer's standards and requirements and to evaluate the acceptability of the pricing proposals. Calculations must be set out in a clear and logical sequence and must clearly reflect all design assumptions. Pricing Data must reflect all assumptions in the development of the pricing proposal. Acceptance of an alternative tender offer will mean acceptance in principle of the offer. It will be an obligation of the contract for the tenderer, in the event that the alternative is accepted, to accept full responsibility and liability that the alternative offer complies in all respects with the Employer's standards and requirements. The modified Pricing Data must include an amount equal to 5% of the amount tendered for the alternative offer to cover the Employer's costs of confirming the acceptability of the detailed design before it is constructed. Alternative tender offer permitted: Yes ☐ No ☒
C.2.13.5	The Employer's address for delivery of tender offers and identification details to be shown on each tender offer package are as per Notice and Invitation to Tender.
C.2.13.6	A two-envelope procedure will not be followed.
C.3.5	
C.2.15	The closing time for submission of tender offers is as per Notice and Invitation to Tender T1.1
C.2.16	The tender offer validity period is as per Notice and Invitation to Tender T1.1
C.2.19	Access shall be provided for inspections, tests and analysis as may be required by the Employer.
C.2.22	Not a requirement.

Quotation no: AE DUDU 01/2026

C.3.11	Scoring Financial Offer: Tender offers will be scored using the following formula: $N_{FO} = P_m / P \times W_1$ where N_{FO} = Number of tender evaluation points awarded for the financial offer. W_1 = The percentage score given for financial offer as stated in the Notice and Invitation to Tender T1.1 P_m = The comparative offer of the most favourable tender offer. P = The comparative offer of tender offer under consideration.
	Scoring the Financial / Quality combined Offer: $S = N_{FO} + W_Q \text{ (calculated separately for each tender offer)}$ The score for quality and financial offer is to be combined, before the addition of the score for preference, as follows: $W_C = W_3 \left(1 + \frac{(S - S_m)}{S_m} \right)$ where W_3 = The number of tender evaluation points for quality and financial offer and equals: 1) 90 where the financial value inclusive of VAT of all responsive tenders received have a value in excess of R 50 000 000; or 2) 80 where the financial value inclusive of VAT of one or more responsive tender offers equals or is less than R 50 000 000. S = The sum of score for quality and financial offer of the submission under consideration. S_m = Sum of the score for quality and financial offer of the submission scoring the highest number of points. Scoring for Preferences: Up to 100 minus W_3 tender evaluation points will be awarded to tenderer who completes the preferencing schedule and who is found to be eligible for the preference claimed. Points for Preference will be calculated according to the Preferential Procurement Regulations, 2022 as a proportion of the percentages stated in the Notice and Invitation to Tender T1.1 Calculate Total tender Evaluation Points: The point calculated for price will be added to the point scored for preference for each individual tender offer according to the formula: $\text{Total tender evaluation points} = W_C + N_p$
C.3.13	Tender offers will only be accepted if: (a) the tenderer or any of its directors is not listed on the Register of Tender Defaulters in terms of the Prevention and Combating of Corrupt Activities Act, 2004 (Act No. 12 of 2004) as a person prohibited from doing business with the public sector; and (b) the tenderer has not: i) abused the Employer's Supply Chain Management System; or ii) Failed to perform on any previous contract and has been given a written notice to this effect. The SAPS reserves the right to accept and award any bid wholly, partially/ split or not accept and award any bid. A contract will only be entered into with a tenderer who has in his employ management and supervisory staff satisfying the requirements of the scope of work for labour intensive competencies for supervisory and management staff. - Applicable
C.3.17	Provide to the successful tenderer one copy of the signed contract document.

T2.1 LIST OF RETURNABLE DOCUMENTS

The tenderer must complete the following returnable documents:

Returnable schedules and documents required to be regarded as responsive:

- Resolution of Board of Directors (T2.1.1)
- Compulsory Clarification Meeting Certificate (T2.1.2) **(Only if compulsory clarification meeting is applicable.)**
The compulsory clarification meeting certificate must be signed by the SAPS representative at the meeting. **Failure to attend the physical site inspection will result in the Compulsory Clarification Meeting Certificate not being signed by the SAPS's representative at the closing of the compulsory clarification meeting. Compulsory Clarification Meeting Certificates must be signed by the SAPS representative at the closing of the compulsory clarification meeting or it will be regarded as being non-compliant and WILL lead to the Quotation being disqualified.**
- Declaration of Interest - SBD4 (T2.1.4)
- Form of Offer and Acceptance (C1.1)
- Priced Bill of Quantities (C2)

Other documents required for tender evaluation purposes:

- Schedule of Sub- Contractors (T2.1.3)
- Preference Points Claim Form in terms of the Preferential Procurement Regulations, 2022 - SBD6.1 (T2.1.6)
- **Tenderers and their Subcontractors must be registered on the Government's Central Supplier Database (CSD) and must include in their tender, their Master Registration Numbers (Supplier Numbers) as well as their Tax Compliance Status PIN's to enable the SAPS to verify the Suppliers' Tax Status on (CSD) and at SARS, alternatively, within 7 calendar days after the closing date of this tender. Failure to comply will result in the Quotation offer being rejected.**

Documents that will be incorporated into the contract:

- Form of Offer and Acceptance (C1.1)
- Contract Data (C1.2)
- Bill of Quantities (C2)
- Scope of Work (C3)

All the above-mentioned documents and schedules are compulsory. Failure to submit these documents may result in the Quotation being rejected.

T2.1.1: RESOLUTION OF BOARD OF DIRECTORS

RESOLUTION of a meeting of the Board of * Directors / Members / Partners of:

(Legally correct full name and registration number of the Enterprise)

Held at _____ (place)

on _____ (date)

RESOLVED that:

1. The Enterprise submits a Bid / Tender to the South African Police Service in respect of the following project:

(Project description as per Bid Document)

Bid Number: _____ (Bid Number as per Bid Document)

2. *Mr/Mrs/Ms: _____
(Full names and Surname)

Identity number: _____

in *his/her Capacity as: _____ (Position in the Enterprise)

and who will sign as follows: _____ (Signature)

be, and is hereby, authorized to sign the Bid / Tender, and any and all other documents and/or correspondence in connection with and relating to the Bid / Tender, as well as to sign any Contract, and any and all documentation, resulting from the award of the Tender to the Enterprise mentioned above.

	Name	Capacity	Signature
1			
2			
3			
4			
5			
6			
7			

Note:

1. * **Delete which is not applicable.**
2. **NB: This Resolution must be signed by ALL the Directors/ Members/ Partners of the Bidding Enterprise. Other Resolutions will not be accepted and it WILL result in the tender being disqualified.**
3. **In the event that paragraph 2 cannot be complied with, this Resolution must be signed by Directors/ Members/ Partners holding a majority of the shares/ ownership of the Bidding Enterprise. (Proof of shareholding/ ownership MUST be attached hereto. Failure WILL result in the tender being disqualified)**
4. **Directors/ Members/ Partners of the Bidding Enterprise may alternatively appoint a person to sign this document on behalf of the bidding Enterprise, which person must be so authorised by way of a duly completed Power of Attorney, signed by the Directors/ Members/ Partners holding a majority of the shares/ ownership of the Bidding Enterprise. (Proof of Power of Attorney and shareholding/ ownership MUST be attached hereto. Failure WILL result in the tender being disqualified)**
5. **Should the number of Directors / Members/ Partners exceed the space available above, additional names and signatures must be supplied on a separate page.**

T2.1.2: COMPULSORY CLARIFICATION MEETING CERTIFICATE

Project title:	APPOINTMENT OF A CONTRACTOR FOR REPAIR AND RENOVATIONS OF THE CELL BLOCK AT DUDUZA POLICE STATION: GAUTENG PROVINCE		
Quotation no:	AE DUDU 01/2026		
Closing date:	2026-10-05		

This is to certify that I, _____

representing the company of _____

attended the compulsory clarification meeting on: **2026-09-15 @ 11:00**

I have made myself familiar with all local conditions likely to influence the work and the cost thereof. I further certify that I am satisfied with the description of the work and explanations given at the clarification meeting and that I understand perfectly the work to be done, as specified and implied, in the execution of this contract.

Submission of the Compulsory Clarification Meeting Certificate (T2.1.2), as proof of attendance of the compulsory clarification meeting **must be signed by the SAPS representative at the meeting.**

Failure to attend the physical site inspection will result in the Compulsory Clarification Meeting Certificate not being signed by the SAPS's representative at the closing of the compulsory clarification meeting.

Compulsory Clarification Meeting Certificates must be signed by the SAPS representative at the closing of the compulsory clarification meeting or it will be regarded as being non-compliant and WILL lead to the Quotation being disqualified.

		2026-09-15
Name and Surname of Representative	Signature	Date

Captain Mohlala		2026-09-15
SAPS Representative	Signature	Date

T2.1.3: SCHEDULE OF SUB-CONTRACTORS

Project title:	APPOINTMENT OF A CONTRACTOR FOR REPAIR AND RENOVATIONS OF THE CELL BLOCK AT DUDUZA POLICE STATION: GAUTENG PROVINCE
Quotation no:	AE DUDU 01/2026

We notify you that it is our intention to employ the following Sub-Contractors for work in this contract.

We confirm that all Sub-Contractors who are contracted are CIDB and CSD registered and that they are Tax compliant. **Subcontractors must be registered with the cidb, in a contractor grading designation for which they are sub contracted for and must be registered on the Government's Central Supplier Database (CSD) and must also include in their bid, their Master Registration Numbers (Supplier Numbers), as well as their Tax Compliance Status PINs.** It is the responsibility of the Tenderer to ensure that all sub-contractors are cidb and CSD registered and that they are TAX compliant. **Failure to comply WILL lead to the Quotation being disqualified.**

If no Sub-Contractor is included on this form, the successful Bidder (Contractor) will have to obtain SAPS approval prior to the appointment of any Sub-Contractors for work on this contract.

	Name and address of Sub-Contractor	Nature and extent of work	Sub-Contractor's CIDB Designation and Grading (for example: 1GB, 1EB, etc.)
1		Description: Value: R	
2		Description: Value: R	
3		Description: Value: R	
4		Description: Value: R	

Name of representative	Signature	Date	

BIDDER'S DISCLOSURE

1. PURPOSE OF THE FORM

- 1.1 Any person (natural or juristic) may make an offer or offers in terms of this invitation to bid. In line with the principles of transparency, accountability, impartiality, and ethics as enshrined in the Constitution of the Republic of South Africa, 1996 (Constitution), and further expressed in the various applicable legislation, it is required for the bidder to make this declaration in respect of the details required hereunder.
- 1.2 If a person is listed in the Register for Tender Defaulters and/or the List of Restricted Suppliers, that person will automatically be disqualified from the bid process.

2. DECLARATION ON EMPLOYMENT BY ORGAN OF STATE

- 2.1 Is the bidder, or any of the directors / trustees / shareholders / members / partners of the bidder employed by an organ of state, as defined in section 239 of the Constitution? **YES/NO**
- 2.2 If YES, furnish particulars of the names, individual identity numbers, in the table below:

Full Name	Identity Number	Name of organ of state

1. the power, by one person or a group of persons holding the majority of the equity of an enterprise, alternatively, the person/s having the deciding vote or power to influence or to direct the course and decisions of the enterprise.

2.3 Do you, or any person connected with the bidder, have a relationship with any person who is employed by the procuring institution? **YES/NO**

2.3.1 If so, furnish particulars:

.....

.....

.....

2.4 Does the bidder or any of its directors/trustees/shareholders members/partners or any person having a controlling interest in the enterprise have any interest in any other related enterprise, whether or not they are bidding for this contract? **YES/NO**

2.4.1 If so, indicate all companies registered in the CSD in the table below:

Supplier registration number (MAAA)	Status (active/inactive/deleted)

Failure to disclose all CSD-registered active companies linked to all Directors will lead to disqualification.

3 GENERAL DECLARATION

I,, the undersigned, in submitting the accompanying bid, do hereby make the following statements that I certify to be true and complete in every respect:

3.1 I have read and I understand the contents of this disclosure.

3.2 I understand that the accompanying bid will be disqualified if this disclosure is found to be false.

3.3 The bidder has arrived at the accompanying bid independently from, and without consultation, communication, agreement or arrangement with any competitor.

3.4 In addition, there have been no consultations, communications, agreements or arrangements with any competitor regarding the quality, quantity, specifications, prices, including methods, factors or formulas used to calculate prices, market allocation, the intention or decision to submit or not to submit the bid, bidding with the intention not to win the bid and conditions or delivery particulars of the products or services to which this bid invitation relates.

- 3.5 The terms of the accompanying bid have not been, and will not be, disclosed by the bidder, directly or indirectly, to any competitor, prior to the date and time of the official bid opening or of the awarding of the contract.
- 3.6 There have been no consultations, communications, agreements or arrangements made by the bidder with any official of the procuring institution in relation to this procurement process prior to and during the bidding process except to provide clarification on the bid submitted where so required by the institution; and the bidder was not involved in the drafting of the specifications or terms of reference for this bid.
- 3.7 I am aware that, in addition and without prejudice to any other remedy provided to combat any restrictive practices related to bids and contracts, bids that are suspicious will be reported to the Competition Commission for investigation and possible imposition of administrative penalties in terms of section 59 of the Competition Act, 1998 (Act No. 89 of 1998) and or may be referred to law enforcement agencies for criminal investigation and or may be restricted from conducting business with the state for a period not exceeding 10 years in terms of the Prevention and Combating of Corrupt Activities Act, 2004 (Act No. 12 of 2004) or any other applicable legislation.

I CERTIFY THAT THE ABOVE IS CORRECT.

I ACCEPT THAT THE PROCURING INSTITUTION MAY REJECT THE BID OR TAKE APPROPRIATE ACTION AGAINST ME IF THIS DECLARATION IS FALSE.

.....
Signature

.....
Date

.....
Designation

.....
Name of bidder

PREFERENCE POINTS CLAIM FORM IN TERMS OF THE PREFERENTIAL PROCUREMENT REGULATIONS 2022

This preference form must form part of all tenders invited. It contains general information and serves as a claim form for preference points for specific goals.

NB: BEFORE COMPLETING THIS FORM, TENDERERS MUST STUDY THE GENERAL CONDITIONS, DEFINITIONS AND DIRECTIVES APPLICABLE IN RESPECT OF THE TENDER AND PREFERENTIAL PROCUREMENT REGULATIONS, 2022

1. GENERAL CONDITIONS

1.1 The following preference point systems are applicable to invitations to tender:

- the 80/20 system for requirements with a Rand value of up to R50 000 000 (all applicable taxes included).
-

1.2 **To be completed by the organ of state**

- a) The applicable preference point system for this tender is the **80/20** preference point system.

1.3 Points for this tender (even in the case of a tender for income-generating contracts) shall be awarded for:

- (a) Price; and
- (b) Specific Goals.

1.4 **To be completed by the organ of state:**

The maximum points for this tender are allocated as follows:

	POINTS
PRICE	80
SPECIFIC GOALS	20
Total points for Price and SPECIFIC GOALS	100

1.5 Failure on the part of a tenderer to submit proof or documentation required in terms of this tender to claim points for specific goals with the tender, will be interpreted to mean that preference points for specific goals are not claimed.

1.6 The organ of state reserves the right to require of a tenderer, either before a tender is adjudicated or at any time subsequently, to substantiate any claim in regard to preferences, in any manner required by the organ of state.

2. DEFINITIONS

- (a) **“tender”** means a written offer in the form determined by an organ of state in response to an invitation to provide goods or services through price quotations, competitive tendering process or any other method envisaged in legislation;
- (b) **“price”** means an amount of money tendered for goods or services, and includes all applicable taxes less all unconditional discounts;

- (c) **“rand value”** means the total estimated value of a contract in Rand, calculated at the time of bid invitation, and includes all applicable taxes;
- (d) **“tender for income-generating contracts”** means a written offer in the form determined by an organ of state in response to an invitation for the origination of income-generating contracts through any method envisaged in legislation that will result in a legal agreement between the organ of state and a third party that produces revenue for the organ of state, and includes, but is not limited to, leasing and disposal of assets and concession contracts, excluding direct sales and disposal of assets through public auctions; and
- (e) **“the Act”** means the Preferential Procurement Policy Framework Act, 2000 (Act No. 5 of 2000).

3.1. FORMULAE FOR PROCUREMENT OF GOODS AND SERVICES

3.2. POINTS AWARDED FOR PRICE

3.1.1 THE 80/20 PREFERENCE POINT SYSTEMS

A maximum of 80 points is allocated for price on the following basis:

$$Ps = 80 \left(1 - \frac{Pt - P_{min}}{P_{min}} \right)$$

Where

Ps = Points scored for price of tender under consideration

Pt = Price of tender under consideration

Pmin = Price of lowest acceptable tender

4. POINTS AWARDED FOR SPECIFIC GOALS

- 4.1. In terms of Regulation 4(2); 5(2); 6(2) and 7(2) of the Preferential Procurement Regulations, preference points must be awarded for specific goals stated in the tender. For the purposes of this tender the tenderer will be allocated points based on the goals stated in table 1 below as may be supported by proof/ documentation stated in the conditions of this tender:

- 4.2. **Table 1: Specific goals for the tender and points claimed are indicated per the table below. *Note to tenderers: The tenderer must indicate how they claim points for the preference point system.***

The specific goals allocated points in terms of this tender	Number of points Allocated (80/20 system) (To be completed by the organ of state)	Number of points claimed (80/20 system) (To be completed by the tenderer)
Persons historically disadvantaged on the basis of race with at least 51% ownership	5	
Persons historically disadvantaged on the basis of gender with at least 51% ownership by women	5	
Persons with at least 51% ownership who are youth	5	
Persons historically disadvantaged by unfair discrimination on the basis of disability with at least 51% ownership	5	
TOTAL	20	

- 4.3. Name of company/firm.....
- 4.4. Company registration number:
- 4.5. TYPE OF COMPANY/ FIRM

Partnership/Joint Venture / Consortium
 One-person business/sole propriety
 Close corporation
 Public Company
 Personal Liability Company
 (Pty) Limited
 Non-Profit Company
 State Owned Company

[TICK APPLICABLE BOX]

- 4.6. I, the undersigned, who is duly authorised to do so on behalf of the company/firm, certify that the points claimed, based on the specific goals as advised in the tender, qualifies the company/ firm for the preference(s) shown and I acknowledge that:
- i) The information furnished is true and correct;
 - ii) The preference points claimed are in accordance with the General Conditions as indicated in paragraph 1 of this form;
 - iii) In the event of a contract being awarded as a result of points claimed as shown in paragraphs 1.4 and 4.2, the contractor may be required to furnish documentary proof to the satisfaction of the organ of state that the claims are correct;
 - iv) If the specific goals have been claimed or obtained on a fraudulent basis or any of the conditions of contract have not been fulfilled, the organ of state may, in addition to any other remedy it may have –
 - (a) disqualify the person from the tendering process;
 - (b) recover costs, losses or damages it has incurred or suffered as a result of that person's conduct;
 - (c) cancel the contract and claim any damages which it has suffered as a result of having to make less favourable arrangements due to such cancellation;
 - (d) recommend that the tenderer or contractor, its shareholders and directors, or only the shareholders and directors who acted on a fraudulent basis, be restricted from obtaining business from any organ of state for a period not exceeding 10 years, after the *audi alteram partem* (hear the other side) rule has been applied; and
 - (e) forward the matter for criminal prosecution, if deemed necessary.

.....
SIGNATURE(S) OF TENDERER(S)

SURNAME AND NAME:

DATE:

ADDRESS:

.....

C 1.1: FORM OF OFFER AND ACCEPTANCE

Quotation no: **AE DUDU 01/2026**

OFFER

The Employer, identified in the acceptance signature block, has solicited offers to enter into a contract for the procurement of: **APPOINTMENT OF A CONTRACTOR FOR REPAIR AND RENOVATIONS OF THE CELL BLOCK AT DUDUZA POLICE STATION: GAUTENG PROVINCE**

The Tenderer, identified in the offer signature block, has examined the documents listed in the tender data and addenda thereto as listed in the returnable schedules, and by submitting this offer has accepted the conditions of tender.

By the representative of the Tenderer, deemed to be duly authorized, signing this part of this form of offer and acceptance, the Tenderer offers to perform all of the obligations and liabilities of the Contractor under the contract including compliance with all its terms and conditions according to their true intent and meaning for an amount to be determined in accordance with the conditions of contract identified in the contract data.

THE OFFERED TOTAL OF THE PRICES INCLUSIVE OF VALUE ADDED TAX IS:

Rand (in words):	
Rand (in figures):	R

This offer may be accepted by the Employer by signing the acceptance part of this form of offer and acceptance and returning one copy of this document to the Tenderer before the end of the period of validity stated in the tender data, whereupon the Tenderer becomes the party named as the Contractor in the conditions of contract identified in the contract data.

SIGNED FOR THE TENDERER:

Signature	Capacity	Name and surname of representative	Date
Name and address of Tenderer:			

WITNESSED BY:

Signature	Name and surname of witness	Date

Quotation no: **AE DUDU 01/2026****ACCEPTANCE**

By signing this part of this form of offer and acceptance, the Employer identified below accepts the Tenderer's offer. In consideration thereof, the Employer shall pay the Contractor the amount due in accordance with the conditions of contract identified in the contract data. Acceptance of the Tenderer's offer shall form an agreement between the Employer and the Tenderer upon the terms and conditions contained in this agreement and in the contract that is the subject of this agreement.

The terms of the contract, are contained in:

- Part 1 Agreements and contract data, (which includes this agreement)
 Part 2 Pricing data
 Part 3 Scope of work.
 Part 4 Occupational Health and Safety, site information, drawings and documents or parts thereof, which may be incorporated by reference into the above listed Parts.

Deviations from and amendments to the documents listed in the tender data and any addenda thereto as listed in the returnable schedules as well as any changes to the terms of the offer agreed by the Tenderer and the Employer during this process of offer and acceptance, are contained in the schedule of deviations attached to and forming part of this form of offer and acceptance. No amendments to or deviations from said documents are valid unless contained in this schedule.

The Tenderer shall within two weeks after receiving a completed copy of this agreement, including the schedule of deviations (if any), contact the Employer's agent (whose details are given in the contract data) to arrange the delivery of any securities, bonds, guarantees, proof of insurance and any other documentation to be provided in terms of the conditions of contract identified in the contract data. Failure to fulfil any of these obligations in accordance with those terms shall constitute a repudiation of this agreement.

Notwithstanding anything contained herein, this agreement comes into effect, on the date when the Tenderer receives one fully completed original copy of this document, including the schedule of deviations (if any). Unless the Tenderer (now Contractor) within five (5) working days of the date of such receipt notifies the Employer in writing of any reason why he/she cannot accept the contents of this agreement, this agreement shall constitute a binding contract between the parties.

SIGNED FOR THE EMPLOYER:

Signature	Capacity	Name and surname of representative	Date

Name of Organisation:	South African Police Service
Address of Organisation:	Supply Chain Management Private Bag X254 Pretoria 117 Cresswell Road Silverton

WITNESSED BY:

Signature	Name and surname of witness	Date

Quotation no: *AE DUDU 01/2026***Schedule of Deviations**

1.1.1. Subject:
Detail: <i>NONE</i>
1.1.2. Subject:
Detail:
1.1.3. Subject:
Detail:
1.1.4. Subject:
Detail:
1.1.5. Subject:
Detail:
1.1.6. Subject:
Detail:

By the duly authorised representatives signing this agreement, the Employer and the Tenderer agree to and accept the foregoing schedule of deviations as the only deviations from and amendments to the documents listed in the tender data and addenda thereto as listed in the tender schedules, as well as any confirmation, clarification or changes to the terms of the offer agreed by the Tenderer and the Employer during this process of offer and acceptance.

It is expressly agreed that no other matter whether in writing, oral communication or implied during the period between the issue of the tender documents and the receipt by the Tenderer of a completed signed copy of this Agreement shall have any meaning or effect in the contract between the parties arising from this agreement.

C1.2: CONTRACT DATA- (GCC (2004) 1st EDITION: 2004)

CONTRACT DATA FOR APPOINTMENT OF A CONTRACTOR FOR REPAIR AND RENOVATIONS OF THE CELL BLOCK AT DUDUZA POLICE STATION: GAUTENG PROVINCE

Quotation no: AE DUDU 01/2026

	PART 1: DATA PROVIDED BY THE EMPLOYER
	CONDITIONS OF CONTRACT
	The General Conditions of Contract for Construction Works (2004) [hereinafter referred to as GCC 2004], published by the South African Institution of Civil Engineering, is applicable to this Contract.
	CONTRACT SPECIFIC DATA
	The following contract specific data; amendments; additions; or omissions are applicable to this Contract.

CLAUSES	Compulsory Data
1.1.14	"Employer" means the Government of the Republic of South Africa in its South African Police Service.
1.2.2	The addresses of the Employer, where the Employer shall receive notices, are as follows: Physical Address: SAPS INFRASTRUCTURE MAINTENANCE SERVICES 117 Cresswell Rd Silverton 0127 Postal Address: Private Bag X 254 Pretoria 0001 Facsimile: 012-8 Telephone: 012 841 7575
1.1.15	The name of the Engineer is:
1.2.2	The address of the Engineer, where the Engineer shall receive notices, are as follows: Physical Address: SAPS INFRASTRUCTURE MAINTENANCE SERVICES 117 Cresswell Rd Silverton 0127 Postal Address: Private Bag X 254 Pretoria 0001
1.1.21	Not applicable to this Contract

Quotation no: **AE DUDU 01/2026**

1.1.24	Omit reference to “telex, telegram, cable, electronic communication” and “or any like communication”
1.1.25	Add the following Clause 1.1.25 “Value of Works” means the value of Works certified by the Engineer as having been satisfactorily executed and shall include the value of the work done, the value of the materials and/or goods and Contract Price Adjustments.
1.1.26	“Contract Sum” means the total of Prices provided for in the Agreement made in terms of the Form of Offer and Acceptance.
1.6 and 3.8	The special non-working days are public holidays, Saturdays, and Sundays
1.6	The year end break commences on 16 December until the first working Monday of January of the succeeding year.
2.3	1. In Clauses 6.2; 11.2; 36.1; 36.2; 39.2;42.2; 43.2; 50.1; 53.3.2 and 54.4.3 all reference to the word “Engineer” must be replaced with the word “Employer”, as the Employer has in terms of such Clauses retained its authority and has not given a mandate to the Engineer and the Employer shall therefore sign all documents in relation thereto. 2. Clauses 36.2; 37.1; 40.3; 41.1; 48.5; 49.10; 51.4; and 52.1 shall be amended as follows to indicate the limitation on the Engineer’s authority in respect thereof: Clause 36.2 – amend to read as follows: “... (herein referred to as a “Variation Order”) by the Employer...any confirmation in writing of such oral order given by the Employer...The Contractor shall, as soon as possible... confirms it in writing to the Employer...and such order in writing is not contradicted in writing by the Employer....” Clause 37.1 – amend to read as follows: “The value of the variations ordered the Employer...Provided that, failing agreement with the Contractor, the Engineer shall determine the rate or price in accordance with the foregoing principles, obtain approval from the Employer, notify the Contractor in writing...” Clause 40.3 – amend to read as follows: “...unless such instruction is in writing, duly approved by the Employer, states explicitly...” Clause 41.1 – amend to read as follows: “... said performance has actually taken place and may be extended by the Employer at his discretion.” Clause 48.5 – amend to read as follows: “ Unless otherwise provided in the Contract, the Employer shall...as read with Clause 48.2, and deliver to the Contractor its written ruling on the claim...thereof allowed by the Employer...so agreed between the Contractor and the Employer...If, before the Employer's ruling on the whole claim...” Clause 49.10 – amend to read as follows: “...The Employer shall within 14 days issue to the Contractor a Final Payment Certificate...”

Quotation no: AE DUDU 01/2026

	Clause 51.4 – amend to read as follows: “...the Employer shall issue to the Contractor a Certificate of Completion; Provided that the Employer, shall be...” Clause 52.1 – (a) amend to read as follows: “... shall have been delivered by the Employer to the Contractor stating the date...” (b) Delete the entire third paragraph under Clause 52.1 3. Add the following paragraph under Clause 2.3: Provided that, notwithstanding any provisions to the contrary in the Contract, the Employer shall have the right to reverse and, should it deem it necessary, to amend any certificate, instruction, decision or valuation of the Engineer and to issue a new one, and such certificate, instruction, decision or valuation shall for the purposes of the Contract be deemed to be issued by the Engineer, provided that the Contractor shall be remunerated in the normal manner for work executed in good faith in terms of an instruction issued by the Engineer and which has subsequently been rescinded.
6.6	Omit
7.	Replace the word “ GUARANTEE ” with the word “ SECURITY ”
7.1	Replace in its entirety with the following: The Contractor shall deliver to the Employer within 21 days of the Commencement Date the form of security selected in the Contract Data and any expenditure incurred in doing so shall be borne by the Contractor.
7.2	Should the Contractor fail to select the security to be provided or should the Contractor fail to provide the Employer with the selected security within 21 days from the Commencement Date, it will be deemed that the Contractor has selected a security in the form of a retention of 10% of the Value of Works (excluding of VAT)
9.1	Replace in its entirety with the following: The Employer will become the owner of the information, documents, advice, recommendation and reports collected, furnished and/or compiled by the Contractor during the course of, and for the purposes of executing this Contract, all of which will be handed over to the Employer on request, but in any event on the termination and/or cancellation of this Contract for whatever reason. The Contractor relinquishes its retention or any other rights to which it may be entitled.
9.2	Add the following as 9.2: The copyright of all documents, recommendations and reports compiled by the Contractor during the course of and for the purposes of finalising the Works will vest in the Employer, and may not be reproduced or distributed or made available to any person outside the Employer's service, or to any institution in any way, without the prior written consent of the Employer. The Employer shall have the right to use such material for any other purpose without the approval of, information or payment to the Contractor.
9.3	Add the following as 9.3 The copyright of all electronic aids, software programmes etc. prepared or developed in terms of the Contract shall vest in the Employer, who shall have the right to use such material for any other purpose without the approval of, information or payment to the Contractor.

Quotation no: AE DUDU 01/2026

9.4	Add the following as 9.4 In case of the Contractor providing documents, electronic aids, software programmes or like material to the Employer, the development of which has not been at the expense of the Employer, copyright shall not vest in the Employer. The Contractor shall be required to indicate to which documents, electronic aids, software programmes or like material this provision applies.
9.5	Add the following as 9.5 The Contractor hereby indemnifies the Employer against any action, claim, damages or legal cost that may be instituted against the Employer on the grounds of an alleged infringement of any copyright or any other intellectual property right in connection with the Works outlined in this Contract.
9.6	Add the following as 9.6 All information, documents, recommendations, programmes and reports collected or compiled must be regarded as confidential and may not be communicated or made available to any person outside the Employer's service and may not be published either during the currency of this Contract or after termination thereof without the prior written consent of the Employer.
10.1	Replace with the following: The Contractor shall, save as may be otherwise provided in the Contract or be legally or physically impossible, commence executing the Works within 14 days calculated from the date the Contractor is given access to and possession of the Site in terms of Clause 11.
11.1.1	Replace the words "On the Commencement Date" with the words "Within 14 days of the Contractor submitting to the Engineer an acceptable health and safety plan required in terms of the Occupational Health and Safety Act, 1993 (Act 85 of 1993)"
12.2	The Contractor shall deliver his programme of work within 14 days from date of Site hand-over.
12.3.3	Amend as follows: "Rates of progress for the various parts of the Works taking account, inter alia, of design, acquisition, construction, testing, time risk, float, and any other necessary and relevant facts; and"
13.1	Amend as follows: "On the date possession is given to the Contractor, the Engineer shall deliver to the Contractor three (3) copies, at no cost to the Contractor, of the drawings and any instructions required for the commencement of the Works. The cost of any additional copies of such drawings and/or instructions, as may be required by the Contractor, will be for the account of Contractor.
25.2	Insert the words "in writing" to read as follows: "... unless he considers it unnecessary and advises the Contractor accordingly in writing..."
26.2	Replace the words "within a reasonable time" with the words "within the time period stipulated by the Engineer in such order..."
28.1	Add the following at the end thereof Such losses or damages may be recovered from the Contractor or by deducting the same from any amounts still due under this Contract or under any other contract presently or hereafter existing between the Employer and the Contractor and for this purpose all these contracts shall be considered one indivisible whole.

Quotation no: AE DUDU 01/2026

35	Replace in its entirety with the following:
	Unless otherwise stated adequate insurance is the responsibility of the Contractor. The Contractor shall submit the insurance policy to the Employer for approval, if so requested.
	Damage to the Works
35.1	(a) Without in any way limiting the Contractor's obligations in terms of the Contract, the Contractor shall bear the full risk of damage to and/or destruction of the Works by whatever cause during construction of the Works and hereby indemnifies and holds harmless the Employer against any such damage. The Contractor shall take such precautions and security measures and other steps for the protection and security of the Works as he may deem necessary. (b) The Contractor shall at all times proceed immediately to remove or dispose of any debris arising from damage to or destruction of the Works and to rebuild, restore, replace and/or repair the Works. (c) The Employer shall carry the risk of damage to or destruction of the Works and material paid for by the Employer that is the result, whether direct or indirect or proximate or remote, of the excepted risks as set out in Clause 35.2. (d) Where the Employer bears the risk in terms of this Contract, the Contractor shall, if requested to do so, reinstate any damage or destroyed portions of the Works and the costs of such reinstatement shall be measured and valued in terms of Clause 44 hereof.
	Injury to Persons or loss of or damage to Properties
35.2	(a) The Contractor shall be liable for and hereby indemnifies the Employer against any liability, loss, claim or proceeding whether arising in common law or by Statute, consequent upon personal injuries to or the death of any person whomsoever arising out of or in the course of or caused by the execution of the Works unless due to any act or neglect of any person for whose actions the Employer is legally liable. (b) The Contractor shall be liable for and hereby indemnifies the Employer against any liability, loss, claim or proceeding consequent upon loss of or damage to any moveable, or immovable or personal property or property contiguous to the Site, whether belonging to or under the control of the Employer or any other body or person, arising out of or in the course of or by reason of the execution of the Works unless due to any act or neglect of any person for whose actions the Employer is legally liable. The Contractor shall upon receiving an Order in Writing from the Engineer cause the same to be made good in a perfect and workmanlike manner at his own cost and in default thereof the Employer shall be entitled to cause it to be made good and to recover the cost thereof from the Contractor or to deduct the same from amounts due to the Contractor as stated in Sub-Clause 53 (4) hereof. (c) The Contractor shall be responsible for the protection and safety of such portions of the premises placed under his control by the Employer for the purpose of executing the Works until the issue of the Certificate of Completion. (d) Where the execution of the Works involves the risk of removal of or interference with support to adjoining properties including land or structures or any structures to be altered or added to, the Contractor, shall and will remain adequately insured or insured against the death of or injury to persons or damage to such property consequent on such removal or interference with support until such portion of the Works has been completed. (e) The Contractor shall at all times proceed immediately at his own cost to remove or dispose of any debris and to rebuild, restore, replace and/or repair such property and to execute the Works.

Quotation no: AE DUDU 01/2026

35 (A)	HIGH RISK INSURANCE In the event of the project being executed in a geological area classified as a "High Risk Area", that is an area which is subject to highly unstable subsurface conditions that might result in catastrophic ground movement evident by sinkhole or do line formation the following will apply: (1) Damage to the Works The Contractor shall, from the Commencement Date of the Works until the date of the Certificate of Completion, bear the full risk of and hereby indemnifies and holds harmless the Employer against any damage to and/or destruction of the Works consequent upon a catastrophic ground movement as mentioned above. The Contractor shall take such precautions and security measures and other steps for the protection of the Works as he may deem necessary. When instructed to do so by the Engineer, the Contractor shall proceed immediately to remove and/or dispose of any debris arising from damage to or destruction of the Works and to rebuild, restore, replace and/or repair the Works, at the Contractor's own costs. (2) Injury to Persons or Loss of or damage to Properties The Contractor shall be liable for and hereby indemnifies and holds harmless the Employer against any liability, loss, claim or proceeding arising at any time during the Contract Period whether arising in common law or by Statute, consequent upon personal injuries to or the death of any person whomsoever resulting from, arising out of or caused by a catastrophic ground movement as mentioned above. The Contractor shall be liable for and hereby indemnifies the Employer against any and all liability, loss, claim or proceeding consequent upon loss of or damage to any moveable, or immovable or personal property or property contiguous to the Site, whether belonging to or under the control of the Employer or any other body or person whomsoever arising out of or caused by a catastrophic ground movement, as mentioned above, which occurred during the Contract Period. (3) It is the responsibility of the Contractor to ensure that he has adequate insurance to cover his risk and liability as mentioned in Clauses 35 (A) (1) and 35 (A) (2) above. Without limiting the Contractor's obligations in terms of the Contract, the Contractor shall, within 21 days of the Commencement Date but before commencement of the Works, submit to the Employer proof of such insurance policy, if requested to do so. (4) The Employer shall be entitled to recover any and all losses and/or damages of whatever nature suffered or incurred consequent upon the Contractor's default of his obligations as set out in Clauses 35 (A) (1), 35 (A) (2) and (3). Such losses or damages may be recovered from the Contractor or by deducting the same from any amounts still due under this Contract or under any other contract presently or hereafter existing between the Employer and the Contractor and for this purpose all these contracts shall be considered one indivisible whole.
36.4	Delete
37.2.2.3	The percentage allowance to cover the overhead charges is 33%, except on material cost where the percentage allowance is 10%
40.2	Add the following to the end of the second paragraph: "which costs may be deducted from any payments due to the Contractor in terms of the Contract or any other Contract, now or in the future, existing between the Employer and the Contractor and for this purpose all these contracts shall be considered one indivisible whole."

Quotation no: AE DUDU 01/2026

42.1	The Works shall be completed within: 04 MONTHS
43.1	The penalty for failing to complete the Works is 0, 1% of the contract amount per calendar day.
46.2	Contract Price Adjustment (CPA) will be applicable Yes ☐ No ☒ If CPA is applicable, the value of the payment certificates is to be adjusted in accordance with the Contract Price Adjustment Schedule, where: The value of "x" is 0.15 The values of the coefficients are: a= 0.25 (labour) b= 0.3 (contractor's equipment) c= 0.3 (material) d= 0.15 (fuel) The values of the coefficients for "Repair and Maintenance Project" (RAMP) contracts are: a= 0.35 (labour) b= 0.20 (contractor's equipment) c= 0.35 (material) d= 0.10 (fuel) The urban area nearest the Site is DURBAN The base month is AUG 2026
47.5	Add the following Clause 47.5 If during the time for completion of the Works or any extension thereof abnormal rainfall or wet conditions occurs, then the formula below shall be used to calculate separately the delay for each calendar month or part thereof. It shall be calculated each month during the period referred to in Clause 42.1 as the time for the completion of the Works and any extension time in accordance with Clause 42 that may have been granted by the Employer, or until the issue date of the certificate of practical completion, whichever is the shorter period. The delay calculated for a given month shall be used to determine the interim extension of time granted for the month. At the end of the applicable period referred to above, the aggregate of the monthly delays will be taken into account for the final determination of the total extension of time for the Contract: $V = (Nw - Nn) + \frac{(Rw - Rn)}{X}$ If any value of V is negative and its absolute value exceeds Nn, then V shall be taken as equal to minus Nn. The delay for a part of a month shall be calculated by substituting pro-rata values for the variables in the equation.

Quotation no: **AE DUDU 01/2026**

	The symbols shall have the following meanings: V = Delays due to rain in calendar days in respect of the calendar month under consideration. Nw = Actual number of days during the calendar month on which a rainfall of Y mm or more per day has been recorded Rw = Actual rainfall in mm for the calendar month under consideration. Nn = Average number of days in the relevant calendar month (as derived from existing rainfall records provided in the project specifications) on which a rainfall of Y mm or more per day has been recorded. Rn = Average rainfall in mm for the calendar month, as derived from the rainfall records supplied in the project specifications. X = 20, unless otherwise provided in the project specifications. Y = 10, unless otherwise provided in the project specifications. The total delay that will be taken into account for the determination of the total extension of time for the Contract shall be the algebraic sum of the monthly totals for the period under consideration. But if the grand total is negative, the time for completion shall not be reduced on account of abnormal rainfall. The total extension of time for any calendar month shall not exceed $(Nc - Nn)$ calendar days, where Nc = number of days calendar days in the month under consideration The factor $(Nw - Nn)$ shall be considered to represent a fair allowance for variations from the average number of days during which rainfall equals or exceeds Y mm per day. The factor $(Rw - Rn) \div X$ shall be considered to represent a fair allowance for variations from the average for the number of days during which rainfall does not equal or exceed Y mm per day, but when wet conditions prevent or disrupt work. This formula does not take into account any flood damage, which could cause further or concurrent delays and which should be treated separately in so far as extension of time is concerned. Accurate rain gauging shall be taken at a suitable point on the site daily at 08:00 unless otherwise agreed to by the engineer, and the Contractor shall, at his own expense, take all necessary precautions to ensure that the rain gauges cannot be interfered with by unauthorized persons. Information regarding existing rainfall records, if available from a suitable rainfall station near the site, will be supplied in the project specifications, together with calculations of rain delays for previous years in accordance with the above formula. The average of these delays will be regarded as normal rain delays which the Contractor shall accommodate in his programme, and for which no extension of time will be considered.
48.3.4	Replace the word "conclusive" with the words "prima facie"
8.3.6	Delete
48.6	Add the following Clause 48.6 "If the Employer fails to give his ruling within the period referred to in Clause 48.5, he shall be deemed to have given a ruling dismissing the claim."

Quotation no: AE DUDU 01/2026

49.1.2	Replace the word "Schedule" with the word "Bill"
49.1.5	The percentage advance on materials not yet built into the Permanent Works is %
49.3	Replace with the following: Payment of the amounts referred to in Clause 49.1.1, 49.1.2, 49.1.3 and 49.1.4 shall, save to the extent otherwise provided in Clause 49.6, be subject to a retention, if applicable in terms of clause 7.1, by the Employer of an amount (herein after called the "retention money"), being the percentage, stated in Part 2 of the Contract Data of the said amounts due to the Contractor.
49.5	Replace Clause 49.5 with the following In respect of contracts up to R1 million and in respect of contracts above R1 million where the Contractor elects a security by means of a 10% retention of the Value of the Works (excl. VAT), 50% of the retention shall be released to the Contractor when the Engineer issues the last Certificate of Completion in terms of clause 51.4. The remaining 50% of the retention shall be released in accordance with the provisions of the conditions of contract and will become due and payable within 14 days of the issue of the last Final Approval Certificate. Or In respect of contracts above R1 million, where the Contractor elects a security by means of a cash deposit or fixed guarantee of 5% of the Contract Sum (excl. VAT) and a 5% retention of the Value of the Works (excl. VAT), the cash deposit or fixed guarantee, whichever is applicable, shall be refunded to the Contractor or released to the guarantor, respectively, when the Engineer issues the last Certificate of Completion in terms of Clause 51.4. The 5% retention of the Value of the Works (excl. VAT) shall become due and payable within 14 days of the issue of the last Final Approval Certificate. Or In respect of contracts above R1 million, where the Contractor elects a security by means of a cash deposit or a variable guarantee of 10% of the Contract Sum (excl. VAT), the cash deposit or the variable guarantee, whichever is applicable, will be reduced to 5% of the Value of the Works (excl. VAT) when the Engineer issues the last Certificate of Completion in terms of Clause 51.4. The balance of the cash deposit shall become due and payable within 14 days of the issue of the last Final Approval Certificate, or the variable guarantee shall expire upon the issue of the last Final Approval Certificate.
49.6	A Retention Money Guarantee is not permitted.
49.7.2	Replace the words "prime overdraft rate certified by the Contractor's banker" with the words "interest rate as determined by the Minister of Finance, from time to time, in terms of section 80(1)(b) of the Public Finance Management Act, 1999 (Act No. 1 of 1999), will apply"
49.11	Add Clause 49.11 as follows: In respect of any amount owed by the Contractor to the Employer, the Contractor shall pay the Employer interest at the rate as determined by the Minister of Finance, from time to time, in terms of section 80(1)(b) of the Public Finance Management Act, 1999 (Act No. 1 of 1999), will apply
50.	Amend the percentage from 15 per cent to 20 per cent in the title, the Clause and in the sideline comment.
52.2	Amend as follows: "...of the Contract or any part thereof, nor of the accuracy of any claim made by the Contractor, nor shall any other certificate exclude ...powers of the Engineer and/or the Employer"
53.1	The Defects Liability Period is 12 months

Quotation no: AE DUDU 01/2026

55.1.6	Amend as follows "Has, to the detriment of good workmanship or without the written approval of the Employer or in defiance of the Engineer's instructions to the contrary, sublet any part of the Contract, or"
56.2.2	Delete the following words "without prejudice to his lien on the Employer's property"
56.3	Add the following at the end After cancellation of the Contract by the Contractor, the Contractor, when requested by the Employer to do so, shall not be entitled to refuse to withdraw from the Works on the grounds of any lien or a right of retention or on the grounds of any right whatsoever.
57.1	Amend as follows: "... Clauses 48 or 58.7 or in respect of any matter in terms of which the Employer has issued a certificate or instruction or has made a ruling, determination, decision or valuation, or in respect of any matter in terms of which the Employer has given effect to the provision in Clause 2.3, the Contractor shall have the right by written notice with supporting particulars to the Engineer and Employer to require..."
58.1.1	Delete the words "Clause 48 or"
58.1.2	Delete the words "48.5 or" and replace the word "Clauses" with the word "Clause"
58.1.3	Amend as follows: "... and the Engineer or Employer, as applicable, or by the Mediator's opinion to the extent that it has become binding in terms of Clause 58.2.6
58.2	Dispute resolution is to be by means of mediation.
58.4	Disputes are to be referred for final settlement to litigation.
59	Add the following Clause 59 "No amendments of this Contract or of any provisions or terms hereof and no waiver or relaxation or suspension of any of the provisions or terms of this Contract shall be of any force or effect unless reduced to writing and signed by both the parties hereto."

Quotation no: AE DUDU 01/2026

PART 2: DATA PROVIDED BY THE CONTRACTOR	
1.8	The name of the Contractor is (insert the legal name of the Contractor, as well as the Contractor's registration number, if applicable)
1.2.2	The addresses of the Contractor, where the Contractor shall receive notices, are as follows: Physical Address: _____ _____ _____ Postal Address: _____ _____ _____ Facsimile: _____ Telephone: _____
7.1	The security to be provided by the Contractor: (a) in respect of contracts up to R1 million, the security to be submitted by the Contractor to the Employer will be a retention of 5% of the Value of Works (excluding VAT) (b) in respect of contracts above R1 million, the Contractor will provide, as security, one of the following: (1) cash deposit of 10 % of the Contract Sum (excluding VAT) Yes ☐ No ☐ (2) variable construction guarantee of 10 % of the Contract Sum (excluding VAT) Yes ☐ No ☐ (3) retention of 10% of the Value of Works (excluding VAT) Yes ☐ No ☐ (4) cash deposit of 5% of the Contract Sum (excluding. VAT) and a retention of 5% of the Value of Works (excluding. VAT) Yes ☐ No ☐ (5) fixed construction guarantee of 5% of the Contract Sum (excluding VAT) and a retention of 5% of the Value of Works (excluding VAT) Yes ☐ No ☐ NB. Guarantees submitted must be issued by either an insurance company duly registered in terms of the Short-Term Insurance Act, 1998 (Act 35 of 1998) or by a bank duly registered in terms of the Banks Act, 1990 (Act 94 of 1990) on the pro-forma referred to above. No alterations or amendments of the wording of the pro-forma will be accepted.

Requisition No: **AE DUDU 01/2026**Quotation for: **APPOINTMENT OF CONTRACTOR: REPAIR AND RENOVATION OF CELL BLOCK DUDUZA SAPS.**

SCOPE OF WORK	
1A	MASONRY SERVICES
1A1	Remove damaged, incorrect, cracked, damaged, chasing (into ceilings, walls floors, etc.) needs to cell masonry roofs, ceilings, external walls, internal walls, floors, etc. Masonry repair to damaged chased areas, filled areas, plastering and cracked repairs, reconstructed walls, plastering to (roofs, ceilings walls, floors, etc,) make good as per set Bill of Quantities, Scope of works, Specifications, General and Special condition of contract.
1B	PLUMBING SERVICES
1B1	Remove and/or repair old dilapidated, damaged, incorrect cell plumbing services (plumbing reticulation, cell shower, cell toilet, cell drinking fountain, geyser with circulation pump and water mixer, water storage tank and booster pump) with all fixing and finishing accessories to be removed, repaired and/or replaced with new as per set Bill of Quantities, Scope of works, Specifications, General and Special condition of contract.
1C	ELECTRICAL SERVICES
1C1	Remove and/or repair old dilapidated, damaged, incorrect cell electrical services (cell electrical reticulation, DB's, plugs, lights, switches, isolators, flood lights, etc.) with all fixing and finishing accessories to be removed, repaired and/or replaced with new as per set Bill of Quantities, Scope of works, Specifications, General and Special condition of contract.

Date:

Signature of compliance with the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026**Quotation for: **APPOINTMENT OF CONTRACTOR: REPAIR AND RENOVATION OF CELL BLOCK DUDUZA SAPS.**

SCOPE OF WORK	
1D	STEEL SERVICES
1D1	Remove and/or repair old dilapidated, damaged, incorrect cell door(s), gate(s) and frame(s) hinges, lock box (cell lock) fixing bracket(s), handle(s) and cell door sheeting's , prepare area and its surroundings to supply and install new cell door(s), gate(s) and frame(s) hinges, lock box (cell lock) fixing bracket(s), handle(s) and cell door sheeting(s) . Repair old dilapidated, damaged, incorrect overhead cell grills accordingly and fix new cell mesh with Flatex and/or woven mesh on top of existing overhead repaired cell grill structure and make good with all installation, fixing and finishing accessories as per set Bill of Quantities, Scope of works, Specifications, General and Special condition of contract.
1E	PAINTING SERVICES
1E1	Remove old, dilapidated and damaged internal and external paint work on walls, concrete/masonry ceiling slab, steel and carpentry surfaces. Prepare and/or repair to receive paint as per Bill of Quantity, Scope of Work, Specification, General and Special Condition of Contract. According to set National Building Regulation with SANS (SABS) material and accessories.
1F	OHS MATERIALS, EXECUTION AND SERVICES
1F1	Occupational Health and safety daily compliance. Materials, executions and services are to be supplied, executed, documented and performed accordingly.

Date:

Signature of compliance with the above.

Postal Address / Firm stamp

SCOPE OF WORK

Annexure "A"

Page: 3 / 3

Requisition No **AE DUDU 01/2026**Quotation for: **APPOINTMENT OF CONTRACTOR: REPAIR AND RENOVATION OF CELL BLOCK DUDUZA SAPS.**

SCOPE OF WORK	
2	Materials and services must be delivered and rendered at: Supply, delivery and installation of Cellblock masonry, plumbing, electrical, carpentry, welding, and paint materials and services are required at DUDUZA POLICE STATION 8084 Nala Street Nigel 1496 Gauteng Province
3	Specifications and minimum requirements must be complied too accordingly.
3.1	All materials must be SABS (SANS) approved.
3.2	Quantity quarries must be confirmed on site during the project compulsory site meeting and it must be priced for as per quantity as set out in priced Bill of quantities.
3.3	Please note: No additional materials and services must be performed (rendered) that were not specified and priced for accordingly; if additional services are rendered it must be for the cost of the appointed contractor.
3.4	Please note: Materials and services rendered as priced accordingly; only services rendered within the priced bill must be paid accordingly.
3.5	Warrantees and Guarantees must be issued and complied to during the set required timeframes that must commence from the date of practical completion.
3.6	Please find attached SAPS project 5 STAR Standards attached, written specifications take preference over drawings attached.
3.7	All the quantities indicated in the document are provisional and must be re-measured and confirmed on-site.

Date:

Signature of compliance with the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 A**

Quotation for: **Masonry work: Remove, repair concrete ceilings**

No:	SPECIFICATION
1	Remove loose, damaged and incorrect ceiling materials, repair and prepare internal and external concrete ceilings according to specifications and set minimum requirements
1.1	Specifications and set minimum requirements:
1.1.1	Materials and services must be provided to remove loose, damaged and incorrect masonry work; repair and prepare masonry ceilings to receive new paint. Masonry ceilings repairs and finishing's must be rendered according to set National Building Regulations with SANS (SABS) materials and accessories.
1.1.2	Cell masonry ceilings must be cleaned with an Industrial high water pressure cleaner and a degreaser to remove loose, damaged and incorrect paintwork from cell internal ceilings.
1.1.3	Take Note: All electrical lights, light switches, exposed wiring must be made safe and sealed before industrial cleaning work are to be attended to accordingly.
1.1.4	After the industrial degreaser applications an industrial high water pressure cleaner must be used again to remove loose, damaged and incorrect paintwork from cell internal and external concrete ceilings.
1.1.5	After internal and external masonry ceilings were cleaned with an Industrial degreaser and industrial high water pressure cleaner, masonry repair works must be performed to match existing internal and/or external cell block ceilings finishing's.
1.1.6	All internal and external (masonry) plastering ceiling finishing's that are loose or hollow areas needs to be removed and repaired to match existing cell block ceilings with its applicable finishing's.
1.1.7	Preparing Masonry ceiling, to be slashed and made ready for re-plastering with key coat and cement mixture to match existing plaster finishing. If not possible the complete area must be plastered accordingly.
1.1.8	All internal and external ceiling (masonry) holes and uneven surfaces needs to be repaired to match existing cell block ceilings with its applicable finishing.
MASONRY SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 1	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 A**

Quotation for: **Masonry work: Remove, repair concrete ceilings**

No:	SPECIFICATION
1.1.9	Take Note: All repair finishing's must match existing ceiling finishing's if not it must be removed and redone accordingly to the satisfaction of the client.
1.1.10	Drain and/or storm water exits must be closed with a perforated bag or other obstacle material to prevent items not bigger than 14 mm entering the drains and/or storm water inlets.
1.1.11	Rubble must be removed daily to a dedicated dumping area and disposed of weekly to a registered dumping site.
1.1.12	Ceilings must be totally dry before any masonry ceiling repairs, sealant and/or paintwork are applied.
1.1.13	All materials, plant, tools, trades and contract workers services must all be priced as per bill of quantity.
1.1.14	Workmanship: Paintwork applications must be performed as specified, must be neat and clean. If not: It must be repaired and/or redone to the satisfaction of the client at the cost of the appointed contractor.
MASONRY SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 2	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 A**Quotation for: **Masonry work: Remove plastering (fountain, toilet) new plastering**

No:	SPECIFICATION
2	Remove loose, damaged and incorrect face brick and/or plasterwork, repair, prepare internal and external masonry face brick and/or plastered walls to receive paintwork according to specifications and set minimum requirements.
	Specifications and set minimum requirements:
2.1	Materials and services must be provided by the supplier, to remove inferior, loose and damaged paintwork; repair and prepare walls to receive new paint work as required for internal and external walls. The walls repair and finishing's must be rendered according to set National Building Regulations with SANS (SABS) materials and accessories.
2.2	Cell walls must be cleaned with an Industrial high water pressure cleaner and a degreaser to remove loose, damaged paintwork from cell internal and external walls.
2.3	After the industrial degreaser applications an industrial high water pressure cleaner must be used again to remove loose, damaged and incorrect masonry work from cell internal walls.
2.4	After internal walls are cleaned with an Industrial degreaser and industrial high water pressure cleaner, masonry repair works must be performed to match existing internal walls finishing's.
2.5	All internal (masonry) plastered wall finishing's that are loose or hollow needs to be removed and repaired to match existing walls with its applicable finishing's.
2.6	Take Note: All plaster repair finishing's must match existing plastered finishing's if not it must be removed and redone accordingly to the satisfaction of the client.
2.7	All internal and external (masonry) plastering ceiling finishing's that are loose or hollow needs to be removed and repaired to match existing finishings with its applicable finishing's.
MASONRY SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 3	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 A**Quotation for: **Masonry work: Remove plastering (fountain, toilet) new plastering**

No:	SPECIFICATION
2.8	Take Note: All repair finishing's must match existing wall finishing's if not it must be removed and redone accordingly to the satisfaction of the client.
2.9	Drain and/or storm water exits must be closed with a perforated bag or other obstacle material to prevent items not bigger than 14 mm entering the drains and/or storm water inlets.
2.10	Rubble must be removed daily to a dedicated dumping area and disposed of weekly to a registered dumping site.
2.11	All materials, plant, tools, trades and contract workers services must all be priced as per bill of quantity.
2.12	Workmanship: Plaster work applications must be performed as specified, must be neat and clean. If not: It must be repaired and/or redone to the satisfaction of the client at the cost of the appointed contractor.
2.11	All materials, plant, tools, trades and contract workers services must all be priced as per bill of quantity.
2.12	Workmanship: Plaster work applications must be performed as specified, must be neat and clean. If not: It must be repaired and/or redone to the satisfaction of the client at the cost of the appointed contractor.
3	Chasing and filling of sleeving for electrical, plumbing, steel work etc. (remove loose, damaged and incorrect masonry sleeving) into ceilings, walls, floors, slabs repair, prepare internal and external masonry to match existing finishing's as per set specifications and minimum requirements and cart away rubble.
3.1	Materials and services must be provided by Service provider to remove, chase loose, damaged masonry work to receive sleeving, piping, etc. and masonry filling of internal and external walls, ceilings, floors, etc. as required. External and internal walls repairs and finishing's must be rendered according to set National Building Regulations with SANS (SABS) materials and accessories.
3.2	Chased internal and external concrete ceilings, walls, floors, etc. must be removed in a manner not to damage existing masonry services (masonry grinder, drills, etc.).
3.3	Chased internal and external concrete ceilings, walls, floors, etc. must be as follows:
MASONRY SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 4	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 A**

Quotation for: **Masonry work: Remove plastering (fountain, toilet) new plastering**

No:	SPECIFICATION
3.3.1	Chasing for 50 mm waist pipes in and/or through walls and floors: Depth 70 mm width: 70 mm.
3.3.2	Chasing for 15 mm to 25 mm tubing or piping into and/or through walls and floors: Depth 40 mm width: 40 mm.
3.3.3	Chasing must be chipped on all the sides and slashed with key coat and cement mixture before opening are filled and plastered accordingly.
3.4	All opening and chipped areas must be slashed with a slash (key coat, water and building cement) mixture.
3.5	Internal and external chased walls, ceilings floors, etc. must be filled with sleeving, piping at the required depth; plumbing, electrical, etc. that must be level and/or plumb and closed with a 3:1 mortar mix include key coat to mix.
3.6	All internal and external (masonry ceilings, walls, floors) chasings must be closed and left with a rough surface that must receive plasterwork accordingly.
3.7	After internal and external walls, concrete ceilings, floors, were repaired accordingly it must be inspected and approved.
3.8	Take Note: All repair finishing's of internal and external ceilings, walls, floors must be removed and redone accordingly to be fixed and not cracked.
3.9	Drain and/or storm water exits must be closed with a perforated bag or other obstacle material to prevent items not bigger than 4 mm entering the drains and/or storm water exits.
3.10	Rubble must be removed daily to a dedicated dumping area and disposed of weekly to a registered dumping site.
3.11	All materials, plant, tools, trades and contract workers services must all be priced for per square meter and must be inclusive into its unit price.
3.12	Workmanship: Masonry work must be performed as specified, must be neat and clean. If not: It must be repaired and/or redone to the satisfaction of the client at the cost of the appointed contractor.
MASONRY SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 5	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 A**
 Quotation for: **Masonry work: Remove plastering (fountain, toilet) new plastering**

No:	SPECIFICATION
4	Remove loose, damaged and incorrect plasterwork, repair, prepare external masonry plastered walls to receive paintwork on internal and external walls according to specifications and set minimum requirements.
	Specifications and set minimum requirements:
4.1	Materials and services must be provided to remove loose, damaged and incorrect masonry work; repair and prepare walls to receive new paint and paint walls as required to cell external walls. Walls repairs and finishing's must be rendered according to set National Building Regulations with SANS (SABS) materials and accessories.
4.2	Cell walls must be cleaned with an Industrial high water pressure cleaner and a degreaser to remove loose, damaged and incorrect masonry work from cell external walls.
4.3	2 hours after the industrial degreaser applications an industrial high water pressure cleaner must be used again to remove loose, damaged and incorrect masonry work from external walls.
4.4	After internal walls were cleaned with an Industrial degreaser and industrial high water pressure cleaner, masonry repair works must be performed to match existing external walls finishing's.
4.5	All internal (masonry) plastering wall finishing's that are loose or hollow needs to be removed and repaired to match existing walls with its applicable finishing's.
4.6	All internal (masonry) holes and uneven surfaces needs to be repaired to match existing walls with its applicable finishing.
4.7	Take Note: All repair finishing's must match existing ceiling finishing's if not it must be removed and redone accordingly to the satisfaction of the client.
4.8	All external and external (masonry) plastering ceiling finishing's that are loose or hollow needs to be removed and repaired to match existing cell block ceilings with its applicable finishing's.
4.9	After removal of masonry wall plastering areas must be made rough and slashed with a Key-coat and cement mixture it must be plastered and make good to match existing external plaster finishing. If not possible the complete area must be re-plastered accordingly.
MASONRY SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 6	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 A**Quotation for: **Masonry work: Remove plastering (fountain, toilet) new plastering**

No:	SPECIFICATION
4.10	Take Note: All repair finishing's must match existing wall finishing's if not it must be removed and redone accordingly to the satisfaction of the client.
4.11	Drain and/or storm water exits must be closed with a perforated bag or other obstacle material to prevent items not bigger than 14 mm entering the drains and/or storm water inlets.
4.12	Rubble must be removed daily to a dedicated dumping area and disposed of weekly to a registered dumping site.
4.13	Walls preparation must be totally dry before any masonry wall repairs, sealant and plasterwork are applied.
4.14	All materials, plant, tools, trades and contract workers services must all be priced for per square meter.
4.15	Workmanship: Plaster work applications must be performed as specified, neat and clean. If not: It must be repaired and/or redone to the satisfaction of the client at the cost of the appointed contractor.
4.16	Materials and services must be provided to remove loose, damaged and incorrect masonry face brick work to receive new internal and external face brick walls as required. External and internal walls repairs and finishing's must be rendered according to set National Building Regulations with SANS (SABS) materials and accessories.
4.17	After internal and external walls were cleaned with an Industrial degreaser and industrial high water pressure cleaner, masonry internal and external face brick repair works must be performed to match existing internal and external walls finishing's if applicable.
4.18	All internal and external (masonry) face brick wall finishing's that are loose or cracked needs to be removed and repaired to match existing internal and external face brick wall finishing's.
4.19	All internal and external (masonry) face brick wall(s) uneven surfaces must be repaired to match existing internal and external face brick walls with its applicable finishing.
MASONRY SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 7	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 A**

Quotation for: **Masonry work: Remove plastering (fountain, toilet) new plastering**

No:	SPECIFICATION
4.20	Take Note: All repair finishing's must match existing internal and external wall finishing's if not it must be removed and redone accordingly to the satisfaction of the client.
4.21	After internal and external repair work to walls were performed it must be inspected, cleaned and make good.
4.22	Wall opening must be demolished if applicable, remove current cracked bricks and brick-up to match existing.
4.23	Damaged internal and external walls/ bricks must be removed in such a way not to damage existing face bricks (with masonry grinder, drills, etc.) in a toothed form. All opening areas must be slashed (with a slash mixture key coat, water and building cement) mixture.
4.24	Approved internal and external face and/or clay baked bricks must be built in accordingly in a toothed form (as requested when it was to be removed) with a strong dagga mix that must match the existing.
4.25	Drain and/or storm water exits must be closed with a perforated bag or other obstacle material to prevent items not bigger than 14 mm entering the drains and/or storm water exits.
4.26	Rubble must be removed daily to a dedicated dumping area and disposed of weekly to a registered dumping site.
4.27	All materials, plant, tools, trades and contract workers services must all be priced for per square meter.
4.28	Workmanship: Masonry work must be performed as specified, must be neat and clean. If not: It must be repaired and/or redone to the satisfaction of the client at the cost of the appointed contractor.
MASONRY SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 8	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 A**

Quotation for: **Masonry work: Remove plastering (fountain, toilet) new plastering**

No	Bills of Quantities	Unit	Quantity	Rate	Amount (excl VAT)
1	Remove loose, damaged and incorrect plasterwork (cell drinking fountain) brick up opening and perform plasterwork internally and externally according to specifications and set minimum requirements.	m ²	05	R	R
2	Remove loose, damaged and incorrect plasterwork (cell toilet; flush master and/or cistern, push buttons to install new or repaired units as required) and perform new plasterwork internally and externally according to specifications and set minimum requirements.	m ²	10	R	R
3	Chasing, remove, loose, damaged, cracked and incorrect internal and external masonry, plumbing and/or electrical work to receive new sleeving, electrical, plumbing and masonry filling of areas according to specifications and set minimum requirements	m ²	15	R	R
4	Remove loose, damaged and incorrect internal and external walls plasterwork, repairs, prepare plastered walls to receive paintwork according to specifications and set minimum requirements	m ²	05	R	R
MASONRY SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 9				TOTAL	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 A**

Quotation for: **Masonry work: Remove construct internal bench(s) and privacy wall(s)**

No:	SPECIFICATION				
5.2	CONCRETE FLOOR SCREED				
5.2.1	Cell, courtyard, cell toilet and shower floors- Remove existing cracked screeded floors. Cast/lay new 40mm thick screed to floor areas sloping towards doors (to compensate for water flow out of building) and towards shower waste include key coat into 1:3 proportion screed mix and steel trowel finishes (doors to open and close freely).				
5.4	PLASTERING OF CLAY BAKED BRICKS				
5.4.1	Plaster work to walls- Prepare wall areas where needed, patch plaster affected areas, include key coat to 1:3 proportion mix and finish off to match existing plastered areas.				
5.4.2	A Key coat and cement mixture must be slashed on privacy wall area(s) that must receive plastering accordingly.				
No:	Bills of Quantities	Unit	Quantity	Rate	Amount (excl VAT)
	FLOOR SCREED				
6	Floor screed-remove existing cracked screed and prepare area for new 40mm screeding	m ²	15	R	R
MASONRY SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 10				TOTAL	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 A**

Quotation for: **Masonry work: Remove construct privacy wall wall(s)**

No:	Bills of Quantities	Unit	Quantity	Rate	Amount (excl VAT)
7	New floor screed -Cast new 40mm thick screed to all floors, include key coat to mix and slope away from walls and towards doors to prevent stagnant water	m ²	15	R	R
8	Plaster work -Patch plaster affected areas where needed include key coat to plaster mix	m	17	R	R
9	Remove broken or cracked Terracotta 330mm x 330mm floor tiles	m ²	02	R	R
10	Prepare area and replace with new floor tiles to match existing	m ²	02	R	R
11	Rubble -Cart away rubble to an accredited dumping site	m ³	06	R	R
MASONRY SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 11				TOTAL	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Bill of Quantities**Annexure "B"**Page: 12 /12Requisition No **AE DUDU 01/2026 A**Quotation for: **Masonry work: Cell roofs, ceilings, internal and external walls, floors, etc. for masonry repairs, chasing, closings and replacements**

TOTALS BROUGHT OVER MUST BE AS FOLLOWS	
MASONRY MATERIALS & SERVICES TOTAL PRICE PAGE 9	R
MASONRY MATERIALS & SERVICES TOTAL PRICE PAGE 10	R
MASONRY MATERIALS & SERVICES TOTAL PRICE PAGE 11	R
SUB-TOTAL (EXCL VAT)	R
TOTAL CARRIED OVER TO SUMMARY PAGE 12	R

Date:

Signature of compliance of all the above.**Postal Address / Firm stamp**

Requisition No **AE DUDU 01/2026 B**

Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's**

SPECIFICATION	
1	Remove old, inferior poor water reticulation, items to be repaired and make good or receive new accordingly.
1.1	Plumbing water reticulation, accessories and points
1.1.1	Remove all existing, loose, dilapidated, damaged and incorrect plumbing water reticulation and connection points. Opened areas must be repaired to receive new installations accordingly.
1.1.2	Items must be documented. Awaiting way forward with regards to the written disposal procedures: A: Documented items to be stored for possible repairs and or reuse accordingly. B: Documented items to be disposed.
1.1.3	Rubble must be removed and placed at a dedicated temporary disposed area daily on site and then at least once a week dumped at a registered dumping site. Always working area clean.
1.1.4	Working area(s) must be always cleaned and no rubble must be left for the next day.
1.2	Supply and installation of water reticulation including all connections and stop end points with water pressure or leak testing's.
1.2.1	All plumbing water reticulation and connections points must be installed and fixed in position with holderbats, drive nails, small parts of plastering, etc.
PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 1	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 B**

Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's**

SPECIFICATION	
1.2.2	Water pressure test must be performed for at least three days under pressure.
1.2.3	Sewer water and/or air pressure test must be performed for at least two days under pressure.
1.3	If masonry workmanship has commenced before plumbing water and/or sewer reticulation and points pressure leak tests works as specified above. Masonry services must be demolished and re-executed accordingly.
1.4	Fixing and finishing's to be performed.
1.4.1	Closure of all masonry work must be performed and make good to match existing masonry finishing's. If not performed accordingly it must be removed and redone accordingly to the satisfaction of the client.
1.4.2	Note: Embedded pipework and masonry opening must be closed accordingly: A: Openings must be backslashes with a key coat, cement and water mixture to create a bonding surface before masonry closure are performed. B: Openings must be closed with masonry work and make good to match existing masonry finishing's.
1.4.3	All plumbing reticulation water pipework must be embedded/inserted into masonry work enclosed not less than 20mm/ 50 mm deep below the floor finishing and sloping accordingly.
PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 2	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 B**

Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's**

No:	Bills of Quantities	Unit	Quantity	Rate	Amount (excl VAT)
1.5	15 mm to 32 mm external water pipelines must run between 600mm to 1000mm away from the roof structure.				
1.5.1	Supply and install plumbing copper pipe 15 mm SANS (SABS) approved reticulation, connection (accessories) and stopping (blocking) points to be installed and fixed onto or into existing masonry position areas with drive nails, reinforcing bars, etc. and pressurised (water or air) tests to be performed as specified with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications.	m	55	R	R
1.5.2	Supply and install plumbing copper pipe 22 mm SANS (SABS) approved reticulation, connection (accessories) and stopping (blocking) points to be installed and fixed onto or into existing masonry position areas with drive nails, reinforcing bars, etc. and pressurised (water or air) tests to be performed as specified with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications.	m	60.5	R	R
PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 3				TOTAL	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 B**

Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's**

No:	Bills of Quantities	Unit	Quantity	Rate	Amount (excl VAT)
1.5.3	Supply and install plumbing copper pipe 28 mm SANS (SABS) approved reticulation, connection (accessories) and stopping (blocking) points to be installed and fixed onto or into existing masonry position areas with drive nails, reinforcing bars, etc. and pressurised (water or air) tests to be performed as specified with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications.	m	22	R	R
PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 4				TOTAL	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 B**

Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's**

SPECIFICATIONS	
2	Remove old, inferior poor sewer reticulation, items to be repaired and make good or receive new accordingly.
2.1	Remove all existing, loose, dilapidated, damaged and incorrect plumbing items must be removed and stored to be disposed of as instructed.
2.2	Remove all existing, loose, dilapidated, damaged and incorrect plumbing water reticulation and connection points. Opened areas must be repaired to receive new installations accordingly
2.3	Supply, installation, sewer reticulation including all connection and stop end points with water pressure or leak testing's.
2.4	Sewer reticulation and points
2.4.1	All plumbing sewer reticulation and item connections points must be installed and fixed in position with holderbats, drive nails, small parts of plastering, etc.
2.4.2	Sewer pressure test must be performed for at least three days under pressure.
2.4.3	Sewer pipes 50 mm, 110 mm and 160 mm reticulation and points
2.4.4	Closure of all masonry work must be performed and made good to match existing masonry finishing's. If not performed accordingly it must be removed and redone accordingly to the satisfaction of the client.
2.4.5	Sewerage maintenance service: Unblock existing 110mm uPvc sewer pipeline including manholes, manually or mechanically to remove solid debris or any obstructions

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 B**

Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's**

No:	Bills of Quantities	Unit	Quantity	Rate	Amount (excl VAT)
2.5	Remove old and install new plumbing specialised sewer 50 mm SANS (SABS) approved reticulation, connection and stopping (blocking) points to be installed and fixed onto or into existing masonry position areas with drive nails, reinforcing bars, etc. and pressurised (water and air) tests to be performed as specified with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications.	m	30	R	R
2.6	Remove old plumbing and install new specialised sewer 110 mm SANS (SABS) approved reticulation, connection and stopping (blocking) points to be installed and fixed onto or into existing masonry position areas with drive nails, reinforcing bars, etc. and pressurised (water and air) tests to be performed as specified with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications.	m	24	R	R
PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 6				TOTAL	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 B**

Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's**

No:	Bills of Quantities	Unit	Quantity	Rate	Amount (excl VAT)
2.7	Remove old plumbing and install new specialised sewer 110 mm above surface bed SANS (SABS) approved reticulation, connection and stopping (blocking) points to be installed and fixed onto or into existing masonry position areas with drive nails, reinforcing bars, etc. and pressurised (water and air) tests to be performed as specified with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications.	m	12	R	R
2.8	Supply and install water reticulation including (02) two non-return valves, connections, fittings and accessories (HDPE) from existing main water supply to water tank and to cell block.	m	10	R	R
PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 7				TOTAL	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 B**Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's**

No.	SPECIFICATION
3	Stainless-Steel Toilet Pan with New Stainless-Steel Pan with Flush Button accessories must comply with minimum requirements Specifications and minimum requirements: • Grade 304 (18/10) Stainless Steel 1.2 mm / 16 mm gauge • Hygienic and vandal resistant • Pressed components to ensure consistent quality and performance • 6 liters flushing • Heavy duty outer casing conceals the plumbing • Pressed concealed flushing rim • Provision for secured fixing through wall and into floor • Optional outlet and flush inlet pipes are available, which can be shortened /lengthened to suit plumbing. • This product must be supplied and installed. • Toilet to be chipped inside concrete flooring and wall by 40mm. • Toilet to be fixed by roll bolt 10mm on concrete flooring and wall. • At the back of toilet pan to add/ fill with concrete to reinforce the installation. Sub-assembly of pan is pickled and passivized to prevent corrosion of the welding inside the inlet pipes SKETCH / PICTURE OR PHOTO / SIMILAR APPROVED
PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 8	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 B**

Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's**

No.	Bills of Quantities	Unit	Quantity	Rate	Amount (excl VAT)
3.1	Remove old or damaged existing stainless steel toilet pans and prepare the area for installation of new as per set specifications and minimum requirements with finishing's as specified with SANS (SABS) materials, equipment, specialist tradesman, labour, make good, clean according to set specifications.	no	05	R	R
3.2	Supply and install new stainless steel OVE cell toilet pans per set specifications and minimum requirement with finishings as specified with SANS (SABS) materials, equipment, specialist tradesman, labour, make good, clean according to set specifications.	no	05	R	R
3.3	Service and unblock all storm water Channels, Pipes and manhole, specialist tradesman, labor, make good and clean according to set minimum standard.	Item	01	R	R
PLUMBING ITEMS AND ACCESSORIES: TOTAL PAGE 9					R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 B**

Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's**


SPECIFICATION	
5	Supply, installation industrial cell toilet flush master with all installation, fixing and finishing accessories as specified
5.1	Flush master, low-level, heavy-duty tamper proof, complete with all accessories, flushing pipe, push button unit and fixing accessories with all items complete SANS (SABS) approved, must comply with minimum requirements as indicated hereunder and must be supplied, delivered serviced and repaired and commissioned Specifications and set minimum requirements: • Flush master unit(s) materials must be as per manufacturers specifications used externally and mounted against external wall(s) and push mechanisms through walls. • Flush master unit(s) must be operational with pressures ranging between 30 kPa and 600 kPa. • Flush master unit(s) valve must have a 25 mm BSP male inlet connection. • The following items must be supplied with the cistern as a unit: - A: Flushing pipe with accessories to be supplied. - B: Flush master units push button mechanism (accommodate wall thickness between 336 mm up to 400 mm) complete to be supplied and operational with flushing inside cistern mechanism. - C: Flush master unit(s) mechanism to be supplied and operational with push button mechanism. - D: Flush master unit(s) complete with accessories must be SANS (SABS) approved.
PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 10	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 B**Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's**

SPECIFICATION					
5.2	Heavy-Duty Flush Masters, Stop Valve with accessories comply with minimum requirements Specifications and minimum requirements, 106 CC: • Toilet Flushing Valve –Inlet Ø 25mm Female. • Pressure:30 Kpa -600kpa • 25mm BSP, Concealed, DZR Brass Toilet Flushing Valve With S.S WC Pan Adaptor VR Button • Concealed Flush Pipe For S.S Pan with Compression Solder Adaptor for Stainless Steel Prison Complete • Flow Control Adjustment Screw on NRV Valve Inlet. • Maximum Water Supply Pipe: Ø28mm Copper • Suitable For Prisons, Police Stations and High-Risk Vandalism Application • Each Unit Must Be Marked Sans (Sabs) Approved. • Prison Dimensions Steel Pan Model VR Button, 25mm BSP, Concealed, DZR Brass Toilet Flushing Valve With S.S WC Pan Adaptor, VR Button and Concealed Flush Pipe For S.S Pan with Compression Solder Adaptor for Stainless Steel Prison Complete, To Be Ideal for Prisons, Police Stations and High-Risk Vandalism Application, SANS (SABS) Approved • This product must be supplied and installed SKETCH / PICTURE OR PHOTO / SIMILAR APPROVED				
	 				
No.	Bills of Quantities	Unit	Quantity	Rate	Amount (excl VAT)
5.2.1	Remove old or damaged, existing flushing system and prepare area for new	no	05	R	R
5.2.2	Installation of new flush master complete with accessories as per set specifications and minimum requirement with finishing's as specified with SANS (SABS) materials, equipment, specialist tradesman, labour, make good, clean according to set specifications.	no	05	R	R
PLUMBING ITEMS AND ACCESSORIES: TOTAL PAGE 11					R

Date:

Signature of compliance with the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 B**Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's****SPECIFICATION**


- 6 **Fountains With New Ove Model Stainless Steel Drinking Fountain accessories must comply with minimum requirements**

Specifications and minimum requirements:

Recessed hand wash basin & drinking fountain (Franke Model SAPSDF 356158) size 350 x 465 x 125 mm manufactured from Grade 304 (18/10) Stainless Steel with a gauge 1,2 mm thick. Basin & fountain combination to be manufactured as a welded construction with a 40 mm waste outlet and is to be recessed 125 mm into a single brick cavity. Basin is factory fitted with a self – closing metering bib tap at the top of the unit and is fitted with fixing lugs to secure the basin into the wall. Widely used in prison cells and police stations.

- Grade 304 (18/10) Stainless Steel
- Vandal proof
- Unit suitable for plastered and face brick walls
- Basin recessed into the wall
- Application: installed in cells of Prisons & Police Stations
- No crevices, fully welded construction
- All plumbing built into the wall and therefore unexposed
- Fitted with a self-closing metering tap
- Ideal for high-risk areas – vandal resistant
- This product must be supplied and installed **1.2 meter from floor**

SKETCH / PICTURE OR PHOTO / SIMILAR APPROVED



PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 12

Date:

Signature of compliance with the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 B**Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's**

No.	Bill of Quantities	Unit	Quantity	Rate	Amount (excl VAT)
6.1	Remove existing drinking fountains and install new with OVE model stainless steel drinking fountain and ball stop, position it on a newly constructed walls with accessories to make it operational. Brick up the walls and plaster where old drinking fountains was removed as per set specifications and minimum requirement with finishing's as specified with SANS (SABS) materials, equipment, specialist tradesman, labour, make good, clean according to set specifications.	no	05	R	R
6.2	Supply and install new stainless steel drinking fountain to be positioned into the newly build brick wall as per set specifications and minimum requirement with finishings as specified with SANS (SABS)	no	05	R	R
PLUMBING ITEMS AND ACCESSORIES: TOTAL PAGE 13					R

Date:

Signature of compliance with the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 B**Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's**

SPECIFICATION					
7	Vandal Proof Shower Push Buttons and Ball Stop with accessories comply with minimum requirements Specifications and minimum requirements: • Valve Shower Push Button Resistant, female BSP 15mm with vandal resistant sleeve for building into wall. • Manufactured from DZR brass • Ideal for prisons, Police stations and any high-risk vandalism application. • Built – in, sleeve, DZR brass shower metering valve with internal flow control, strainer, no-hold feature and water saving shut off. • Valve Shower Push Button Resistant, female BSP 15mm must be marked SANS (SABS) Approved. • Each unit must be marked SANS (SABS). • This product must be supplied and installed • Shower push button to be installed at the height of 1.3-meter form floor. • SKETCH / PICTURE OR PHOTO / SIMILAR APPROVED 				
No.	Bill of Quantities	Unit	Quantity	Rate	Amount (excl VAT)
7.1	Remove existing shower push Button and prepare area for new vandal proof shower with all accessories as per set specifications and minimum requirements	no	05	R	R
7.2	Supply and install new vandal proof Shower push buttons and ball stop with all accessories as per set specifications and minimum requirements	no	05	R	R
PLUMBING ITEMS AND ACCESSORIES: TOTAL PAGE 14					R

Date:

Signature of compliance with the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 B**Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's**

SPECIFICATION					
8	Shower Head, Vandal Resistant Female< Bsp 15mm Shower Head ½ Female Inlet Comply with minimum requirements Specifications and minimum requirements: - Shower head Ø 15mm BSP female inlet. - Single, large outlet with rotating jet type water spray - Showerhead must be vandal proof wall mounted - The internal strainer prevents nozzle blockages - Flow rate range:6 to 8 liters /min Pressure dependent - High risk vandal resistant applications - Ideal for Prisons cells and Police Station - Shower head must SANS (SABS)Approved - Shower head to be of 2.4 Meter from floor. - Valve shower head, vandal resistant female BSP 15mm, ½ female inlet and outlet, SABS(SANS) Approved, 150 NHS or 155S with sleeves SANS (SABS) approved, must comply with minimum requirement as indicated hereunder and must be supplied and installed. SKETCH / PICTURE OR PHOTO / SIMILAR APPROVED 				
No.	Bill of Quantities	Unit	Quantity	Rate	Amount (excl VAT)
8.1	Remove existing shower head and prepare area for new vandal proof shower head as per set specifications and minimum requirements	no	05	R	R
8.2	Supply and install new vandal proof shower head and make it to work accordingly as per set specifications and minimum requirements	no	05	R	R
PLUMBING ITEMS AND ACCESSORIES: TOTAL PAGE 15					R

Date:

Signature of compliance with the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 B**Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's**

SPECIFICATION					
9	SKETCH / PICTURE OR PHOTO / SIMILAR APPROVED 				
9.1	Shower p trap: Disconnect and remove all damaged shower traps complete with all pipe work, connections and fixing accessories.				
9.1.1	Remove existing shower P-traps and prepare area for new shower P-traps as per set specifications and minimum requirements	no	05	R	R
9.1.2	Supply and install new brass shower P-trap 1^{1/2}BSP female iron outlet connection with shallow seal and stainless steel grating with screws. The shower P-trap to be commissioned into the floor and slopping within all 50mm waste reticulate on fittings(connections)mounting and fixing accessories as per project 5-star specifications	no	05	R	R
PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 16					

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 B**

Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's**

SPECIFICATIONS	
10	Supply, delivery and installation geyser, water mixer and all accessories as specified accordingly.
10.1	Geyser electrical 200 Lit and items complete, SANS (SABS) approved, must comply with minimum requirements as indicated hereunder and must be supplied, delivered, installed and commissioned Specifications and minimum requirements: • Capacity 200 litre. Approved pressure tests 600 KPA. • Can be installed as a Horizontal or Vertical installation. • Geyser with all accessories must be SANS (SABS) approved. • The following items must be included and supplied with the 200-litre geyser: A: One safety valve. B: One drain cock. C: Two vacuum breakers. D: One approved isolator switch wired and mounted on the geyser cover plate. E. N.B Pressure control valve approved pressure tests 600 KPA • All requirements and items must function as a unit. • Geyser and all items complete must be SANS (SABS) approved. • Each geyser and all items complete must be marked SANS (SABS).
10.2	Lagging with all fixing and finishing accessories SANS (SABS) approved, must comply with standards and set minimum requirements and must be supplied, delivered, installed and commissioned. Specifications and minimum requirements: • Lagging with all fixing must accommodate ¾" 22 mm piping and offsets • Lagging with all fixing must be SANS (SABS) approved. • Lagging must be neat if not must be neat removed and redone at the cost of the contractor.
PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 17	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 B**Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's**

SPECIFICATION					
11	Valve, Thermoscopic Mixing Rada 222dk-Lf ¾ Bsp Male Comply with minimum requirements Specifications and minimum requirements: • Inlet & Outlet: ¾ BSP Male (20mm) • Manufactured from DZR brass Chrome plated. • The valve features a pre –set maximum temperature safety stop concealed in a locked temperature shroud to prevent unwanted tampering. • Ideal for anti-scald bath fill, hand basin and shower application. • Thermostatic mixing valve incorporating Radatherm cartridge complete with integral check valves and strainers. • Each Valve, Thermoscopic Mixing Rada 222DK-LF ¾ BSP Male must be marked SANS (SABS) Approved. • This product must be supplied and installed SKETCH / PICTURE OR PHOTO / SIMILAR APPROVED 				
11.1	Supply and install heavy duty water mixer control mixing cold and hot water, valve, thermoscopic mixing Rada 222dk-lfas per set specifications, SANS (SABS) approved as required with finishing as specified with materials, equipment, specialist tradesman, labour, make good, clean according to set specifications.	no	01	R	R
PLUMBING ITEMS AND ACCESSORIES: TOTAL PAGE 18					R

Date:

Signature of compliance of the above.

Postal Address / Firm stamp

Requisition No AE DUDU 01/2026 B

Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's**

SPECIFICATION	
12	Geyser connection with three bollo stops (including bypass) reticulations Water intake X Vent valves 300 mm above geyser Cold water feed Warm water feed X Returned water X GEYSER Pressure drain Masterbats secure items Unions replace/repair Reticulation fittings Vent valves Bollo stop 22 mm Brass 20 mm nonreturn valve Pressure warm water Pressure drain
13	Geysers must be installed as follows: A: Geyser reticulation must only be performed as per set manufacturers specifications. B: Geyser temperature setting must be set 25-to-30-degree Celsius. C: Geyser must be installed onto masonry walls in ducting areas or geyser rooms or on cell yards above cell screens.
PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 19	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No AE DUDU 01/2026 B


Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's**

SPECIFICATIONS

- 14 **Temperature water mixer with all installation and fixing accessories complete, SANS (SABS) approved, must comply with specification set minimum requirements must be supplied, delivered and installed and commissioned**

Specifications and minimum requirements:

- Temperature water mixer must mix cold and geyser hot water to the required temperature to the cell showers and back into the pressure vessel (geyser) to heat up the water back to the required temperature.
- Temperature water mixer to be installed as a Horizontally.
- Temperature water mixer with all accessories must be SANS (SABS) approved.
- All requirements and items must function as a unit when circulation pump is connected after the mixer, showers, mixed water reticulation, etc.
- Water temperature mixer must be a metal unit with a $\frac{3}{4}$ " intake; $\frac{3}{4}$ " outlet connection to circulate the mixed water back into the geyser.

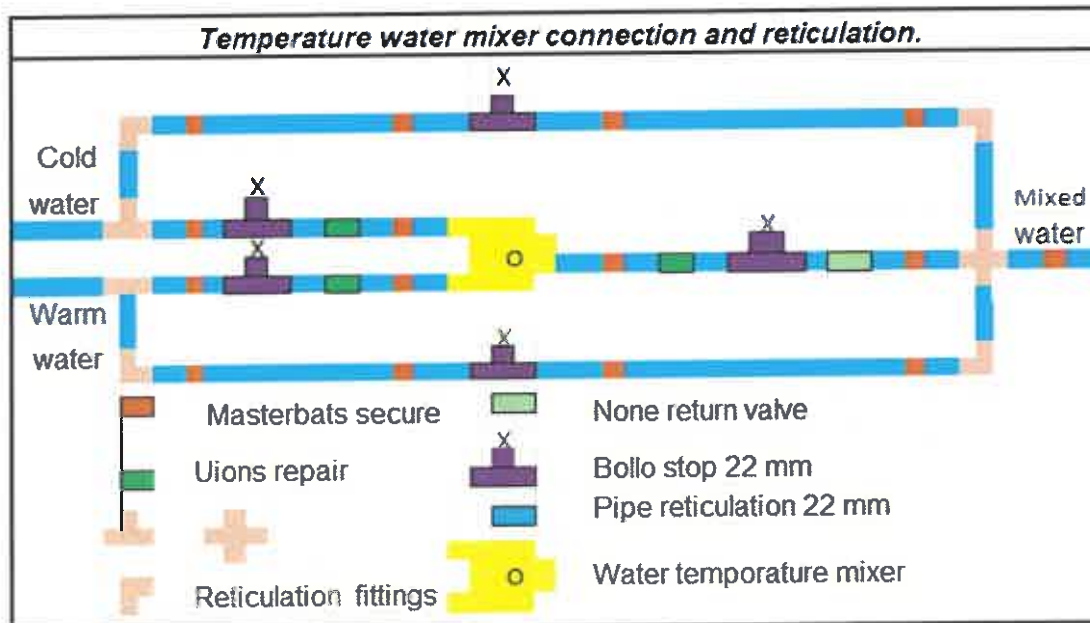

PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 20

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 B**

Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's**

No:	Bills of Quantities	Unit	Quantity	Rate	Amount Excl. (VAT)
14.1	Remove existing damaged geyser and prepare area for installation of new 200 L geysers with all fittings and accessories as per specifications	no	02	R	R
14.2	Supply and install new 200 Litres Geyser, ballo stops, non-return valve, unions, etc.to be commissioned as per set specifications, SANS (SABS) approved to be supplied with finishing's as specified with materials, equipment, specialist tradesman, labour, make good, clean according to set specifications	no	02	R	R
14.3	Remove existing damaged geyser and prepare area for installation of new 150 L geysers with all fittings and accessories as per specifications	no	01	R	R
14.4	Supply and install new 150 Litres Geyser, ballo stops, non-return valve, unions, etc.to be commissioned as per set specifications, SANS (SABS) approved to be supplied with finishing's as specified with materials, equipment, specialist tradesman, labour, make good, clean according to set specifications	no	01	R	R
PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 21				TOTAL	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 B**

Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's**

No:	Bills of Quantities	Unit	Quantity	Rate	Amount Excl. (VAT)
14.5	Sink Mixer Tap: Remove existing damaged wall mixer tap and replace it with new wall mounted sink mixer tap Finish chrome plated, with aerator swivel outlet, Set must consist of one Hot and one Cold tap, Brass head part with Rubber seal, ½ BSP Male inlet connection with all water reticulation and connections	no	01	R	R
14.6	Gully Head Grate: Supply and install new 110mm PVC round gulley grate on existing gully head	no	03	R	R
14.7	Weep Hole- core drill existing hole in passage wall to a 50mm hole diameter to accommodate for damming water in the cell passage	no	01	R	R
14.8	Manhole cover: Supply and Install 600mm x 600mm square cast iron grate and frame manhole. Final measurement of manhole covers to be taken on site	no	02	R	R
PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 22				TOTAL	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 B**

Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's**

No:	Bills of Quantities	Unit	Quantity	Rate	Amount Excl. (VAT)
14.9	Tap Prep Bowl-Visiting Area: Remove damaged prep bowl tap and replace it with new pre bowl pillar tap with swivel outlet, 15mm BSP Female connection with new water supply and wastewater reticulation complete and fixing(connection) and mounting accessories in accordance to set SABS standards	no	02	R	R
14.10	Membrane waterproofing: Prepare area to receive waterproofing, laying membrane and apply 3 coats paintable water proofing solvent	m	15	R	R
PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 23				TOTAL	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 B**

Quotation for: **Plumbing services: Remove, prepare, supply, install / service and repair plumbing materials, accessories and finishing's**

TOTALS BROUGHT OVER MUST BE AS FOLLOWS	
TOTAL PRICE PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES PAGE 3	R
TOTAL PRICE PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES PAGE 4	R
TOTAL PRICE PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES PAGE 6	R
TOTAL PRICE PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES PAGE 7	R
TOTAL PRICE PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES PAGE 9	R
TOTAL PRICE PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES PAGE 11	R
TOTAL PRICE PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES PAGE 13	R
TOTAL PRICE PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES PAGE 14	R
TOTAL PRICE PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES PAGE 15	R
TOTAL PRICE PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES PAGE 16	R
TOTAL PRICE PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES PAGE 18	R
TOTAL PRICE PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES PAGE 21	R
TOTAL PRICE PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES PAGE 22	R
TOTAL CARRIED OVER TO SUMMARY PAGE	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**

Quotation for: **Electrical services: Remove, prepare, supply, install electrical Sleaving reticulation electrical materials, accessories and finishing's**

No:	SPECIFICATIONS
1	Remove old, inferior poor electrical reticulation sleeving, items to be repaired and/or replace and make good or receive new accordingly.
1.1	Electric power reticulation sleeving
1.1.1	Remove all operational, loose, dilapidated, damaged and incorrect electrical reticulation items to be stored and disposed of as instructed.
1.1.2	Items will be named, counted and documented. Awaiting way forward with regards to the written disposal procedures: A: Documented items to be stored for possible repairs and or reuse accordingly.
1.2	Electrical reticulation sleeving and points
1.2.1	All loose, dilapidated, damaged and incorrect electrical reticulation and connection points will be removed, and areas will be opened and/or areas will be repaired to receive newly installations and/or repairs to be made accordingly.
1.2.2	Rubble will be removed and placed at a dedicated temporary disposed area daily on site and then at least once a week dumped at a registered dumping site. Working area should always be clean.
1.3	Supply, installation, electrical reticulation sleeving including all connections and stop end points will be inspected and documented regularly.
1.3.1	Electrical reticulation sleeving and points
1.3.2	All Electrical reticulation sleeving and item connection points will be installed and fixed in position with holderbats, drive nails, small parts of plastering, etc.
	ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 01

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**Quotation for: **Electrical services: Remove, prepare, supply, install electrical Sleeving reticulation electrical materials, accessories and finishing's**

No:	SPECIFICATIONS
1.3.3	Electrical power conduit pipe will be installed with wiring running full lengths to and from all points.
1.4	Electrical 22 mm and 25 mm reticulation and points.
1.4.1	All electrical reticulating and item connections points will be installed and fixed in position with holder bats, drive nails, plastering, etc.
1.4.2	Electrical load test will be performed for at least two days while current is supplied.
1.5	Fixing and finishing's to be performed.
1.5.1	Closure of all masonry work will be performed and make good to match existing masonry finishing's. If not performed accordingly it will be removed and redone accordingly to the satisfaction of the client.
1.5.2	Note: Embedded pipework and masonry opening will be closed accordingly: A: Openings will be backsplashes with a key coat, cement and water mixture to create a bonding surface before masonry closure are performed. B: Openings will be closed with masonry work and made good to match existing masonry finishing's.
1.5.3	All masonry imbedded masonry reticulation electrical pipework will be imbedded into masonry work enclosed not less than 40 mm deep below the floor finishing and sloping accordingly.
1.5.4	All masonry imbedded masonry reticulation water pipework will be imbedded into masonry work enclosed not less than 40 mm deep.
1.5.5	All reticulation electrical pipework exposed or enclosed will be level, plum always and it will be documented into the final as build drawings or documented as sketches that will be submitted accordingly.
	ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 02

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**

Quotation for: **Electrical services: Remove, prepare, supply, install electrical Sleaving reticulation electrical materials, accessories and finishing's**

SPECIFICATIONS	
1.5.6	Underground 20 mm or 25 mm PVC electrical sleaving line(s) (with electrical underground tape 150 mm above the sleaving) will run not less than 600 mm, not more than 1000 mm deep and 1000 mm away in line with the structures.
1.6	Materials that will be used during the repair, reticulation and connection services
1.6.1	Electrical galvanized piping items, fixing and finishing accessories, will comply and be used accordingly as per specification and set minimum requirements to be supplied, delivered, offloaded, installed and commissioned. Specifications and set minimum requirements for materials and services: • Electrical conduit 20 mm Ø reticulation assembling, connection point, fixing and finishing accessories will be galvanized and SANS (SABS) approved. • Electrical conduit 20 mm Ø galvanised reticulation will be paid per meter and all galvanized connection points, fixing and finishing accessories for repairs and/or replacements will be included into the reticulation pricing per meter accordingly. • Electrical reticulation removed and replaced with new will be kept on site and available at any time for inspections and measurement. • Electrical conduit 20 mm Ø galvanised reticulation will be paid per meter and all brass connections, points fixing and finishing accessories for repairs and/or replacements will be included in the reticulation pricing per meter accordingly.
1.7	Supply, replace or repair pipe conduit 20 mm Ø galvanised with new galvanised reticulation conduit pipe will be used accordingly.
ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 03	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**Quotation for: **Electrical services: Remove, prepare, supply, install electrical Sleaving reticulation electrical materials, accessories and finishing's**

No:	SPECIFICATIONS
1.7.1	Supply, replace, add new Bend solid 90 degree galvanised 20 mm Ø will be installed accordingly. Unit pricing will be included within the reticulation pricing as required.
1.7.2	Supply, replace, add new Bend solid 90 degree galvanised 20 mm Ø will be installed accordingly. Unit pricing will be included within the reticulation pricing as required.
1.7.3	Supply, replace, add new Straight socket (coupler) galvanised 20 mm Ø will be installed accordingly. Unit pricing will be included within the reticulation pricing as required.
1.7.4	Supply, replace, add new One way round box, 1 x20 mm Ø galvanised angle access will be installed accordingly. Unit pricing will be included within the reticulation pricing as required.
1.7.5	Supply, replace, add new Two way round box, 2 x 20 mm galvanised angle access will be installed accordingly. Unit pricing will be included within the reticulation pricing as required.
1.7.6	Supply, replace, add new Three way round box, 3 x 20 mm galvanised angle access will be installed accordingly. Unit pricing will be included within the reticulation pricing as required.
1.7.7	Supply, replace, add new Angle round box, 2 x 20 mm galvanised angle access will be installed accordingly. Unit pricing will be included within the reticulation pricing as required.
1.7.8	Supply, replace, add new Cover for galvanised round box will be installed accordingly. Unit pricing will be included within the reticulation pricing as required.
ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 04	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**Quotation for: **Electrical services: Remove, prepare, supply, install electrical Sleeving reticulation electrical materials, accessories and finishing's**

SPECIFICATIONS	
1.7.9	Supply, replace, add new M5 galvanised bolts will be installed accordingly. Unit pricing will be included within the reticulation pricing as required.
1.7.10	Supply, replace, add new 20mm Ø Lock nut hex galvanized will be installed accordingly. Unit pricing will be included within the reticulation pricing as required.
1.7.11	Supply, replace, add new Adaptor Male galvanized 20mm Ø will be installed accordingly. Unit pricing will be included within the reticulation pricing as required.
1.7.12	Supply, replace, add new 20mm Ø Brass bushes(s) female will be installed accordingly. Unit pricing will be included within the reticulation pricing as required
1.7.13	Supply, replace, add new 20mm Ø Lock nut hex galvanized will be installed accordingly. Unit pricing will be included within the reticulation pricing as required.
1.7.14	Supply, replace, add new adaptor Female Galvanized 20mm Ø will be installed accordingly. Unit pricing will be included within the reticulation pricing as required.
1.7.15	Supply, replace, add new 20mm Ø Brass bushes(s)male will be installed accordingly. Unit pricing will be included within the reticulation pricing as required.
1.7.16	Supply, replace, add new saddles for 20 mm Ø galvanised conduit with new galvanised hospital saddles 20 mm Ø galvanised will be installed accordingly. Saddles spacing width will not be less than 500 mm and not wider than 600 mm. Unit pricing will be included within the reticulation pricing as required.
1.7.17	Supply and install saddles with (plug fisher 6 x 55 mm) drive nails. Unit pricing will be included within the reticulation pricing as required.
ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 05	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**Quotation for: **Electrical services: Remove, prepare, supply, install electrical Sleeving reticulation electrical materials, accessories and finishing's**

SPECIFICATIONS	
2	Remove old, inferior poor electrical wire reticulation and points to be repaired and make good or receive new in accordance with specifications and set minimum requirements
2.1	Electrical reticulation wiring and points
2.1.1	Remove all loose, dilapidated, damaged and incorrect electrical wire reticulations and connection points should be removed and/or areas should be repaired to receive newly installations and/or repairs to be made accordingly.
2.2.2	Note: Electrical wiring and supply points will be always closed accordingly: A: New and current open wire points with wires will be closed with covers after the Cables are sealed. or B: New and current open wire points with wires will be connected with item and secured accordingly.
2.2.3	Ceilings and wall areas where electrical items are fitted will first be made good before electrical items is fitted at least with one coat of final paint.
2.2.4	All electrical wiring will be performed in accordance with SANS (SABS) standards.
2.2.5	NOTE: ALL WIRES THAT ARE EXPOSED WILL BE CONSIDERED AS LIVE WIRE, EVEN IF IT IS NOT CONNECTED.
2.2.6	At every respective point all slags (at each respective point) will not be less than 100 mm and not longer than 150 mm to connect each respective item(s) product accordingly.
2.2.7	Every respective point will be tested, commissioned and marked accordingly.
ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 06	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**

Quotation for: **Electrical services: Remove, prepare, supply, install electrical Sleaving reticulation electrical materials, accessories and finishing's**

SPECIFICATIONS	
2.3	Materials that will be used during the repair, reticulation and connection services
2.3.1	Electrical conduct or should comply and be used accordingly as per specification and set minimum requirements to be supplied, delivered, offloaded, installed commissioned and applied. <i>Specifications and set minimum requirements for materials and services:</i> • Electrical conductor 4 mm², 2.5 mm², 1.5 mm² will be multistrand copper wire and it will be SANS (SABS) approved. • Electrical conductors must be insulated in required colors ranging from Black, Blue, Green, Red, White, (Yellow and Green). • Electrical conductor will be priced per meter for installation. Note a slag of not less than 100 mm not longer than 150 mm will be used per point per conductor per connection. • Electrical conductor will be paid per meter for repairs and/or reticulation replacements accordingly. • Electrical conductor removed and replaced with new will be kept on site and available at any time for inspections and measurement.
2.3.2	Supply, replace and repair wiring with conductor 1.5 mm ² insulated wiring Yellow and Green in existing and/or new sleeving and item points will be used accordingly.
2.3.3	Supply, replace and repair wiring with conductor 2.5 mm ² insulated wiring Black in existing and/or new sleeving and item points will be used accordingly.
2.3.4	Supply, replace and repair wiring with conductor 2.5 mm ² insulated wiring Red and green in existing and/or new sleeving and item points will be used accordingly.
ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 07	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**

Quotation for: **Electrical services: Remove, prepare, supply, install electrical Sleaving reticulation electrical materials, accessories and finishing's**

SPECIFICATIONS	
2.3.5	Supply, replace and repair wiring with conductor 2.5 mm ² insulated wiring Blue in existing and/or new sleeving and item points will be used accordingly.
2.3.6	Supply, replace and repair wiring with conductor 2.5 mm ² insulated wiring White in existing and/or new sleeving and item points will be used accordingly.
2.3.7	Supply, replace and repair wiring with conductor 2.5 mm ² insulated wiring Yellow and Green in existing and/or new sleeving and item points will be used accordingly.
2.3.8	Supply, replace and repair wiring with conductor 4 mm ² insulated wiring Black in existing and/or new sleeving and item points will be used accordingly.
2.3.9	Supply, replace and repair wiring with conductor 4 mm ² insulated wiring Red and green in existing and/or new sleeving and item points will be used accordingly.
2.3.10	Insulation tape must comply and be used accordingly as per specification and set minimum requirements to be supplied, delivered, offloaded and (installed) applied. Specifications and set minimum requirements: • Insulation tape: 0 25 mm thickness and 19mm width. • Product to be made of Nylon PVC material. • Insulation tape must be of different colors ranging from black, blue, green, red, white and yellow.
ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 08	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**

Quotation for: **Electrical services: Remove, prepare, supply, install electrical Slewing reticulation electrical materials, accessories and finishing's**

No:	SPECIFICATIONS
2.4	Surfix electrical cable 2.5 mm², 3 core and used accordingly as per specification and set minimum requirements to be supplied, delivered, offloaded, installed and commissioned. Specifications and set minimum requirements: • Surfix electrical cable 2.5 mm², 3 core must be round or flat and SANS (SABS) approved. • Surfix electrical cable 2.5 mm², 3 core must be solid wires. • Surfix electrical cable, 3 core, outer color must be white PVC in aluminum casing.
2.4.1	Supply, replace and/or install new surfix electrical cable 2.5 mm², 3 core, round or flat SABS approved insulated wiring surface, in existing or new sleeving and connection points must be used accordingly.
2.4.2	Supply, replace and repair wiring with Low voltage Copper Cable 4 mm² 3-core PVC/SWA/PVC 600/1000V Grade and shall comply to SABS 150.7 Installation from DB-Main to Isolator terminal Point for Booster Pump including excavation, backfilling and/or new sleeving and item points will be used accordingly.
2.4.3	Excavation and backfilling for Low voltage copper cable Specifications and set minimum requirements: • Excavation for hard or soft rock will be priced as stipulated in the bill of quantity • Trench width for low voltage cables should be 600mm and 800mm from ground surface depth. Trenching should be done by hand not mechanical method within 3 meter to avoid damaging existing services
ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 09	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**

Quotation for: **Electrical services: Remove, prepare, supply, install electrical Sleaving reticulation electrical materials, accessories and finishing's**

No:	Bills of Quantities	Unit	Quantity	Rate	Amount Excl.(VAT)
2.5	Remove old electrical reticulation, supply and install new electrical Copper multistranded conductor 2.5 mm ² PVC insulated with Red colourSANS10142-1 (SABS) approved reticulation until respective connection points with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications and set minimum requirement.	m	200	R	R
2.6	Remove old electrical reticulation, supply and install new electrical Copper multistranded conductor 2.5 mm ² PVC insulated with black colourSANS10142-1 (SABS) approved reticulation until respective connection points with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications and set minimum requirement.	m	200	R	R
ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 10				TOTAL	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**

Quotation for: **Electrical services: Remove, prepare, supply, install electrical Sleaving reticulation electrical materials, accessories and finishing's**

No:	Bills of Quantities	Unit	Quantity	Rate	Amount Excl.(VAT)
2.7	Remove old electrical reticulation, supply and install new electrical Copper multistranded conductor 2.5 mm ² PVC insulated with Green and yellow (earth wire) colourSANS10142-1 (SABS) approved reticulation until respective connection points with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications and set minimum requirement.	m	200	R	R
2.8	Remove old electrical reticulation, supply and install new electrical Copper multistranded conductor 2.5 mm ² PVC insulated with blue colourSANS10142-1 (SABS) approved reticulation until respective connection points with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications and set minimum requirement	m	200	R	R
ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 11				TOTAL	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**

Quotation for: **Electrical services: Remove, prepare, supply, install electrical Sleaving reticulation electrical materials, accessories and finishing's**

No:	Bills of Quantities	Unit	Quantity	Rate	Amount Excl.(VAT)
2.9	Remove old electrical reticulation, supply and install new electrical Copper multistranded conductor 2.5 mm ² PVC insulated with white colourSANS10142-1 (SABS) approved reticulation until respective connection points with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications and set minimum requirement.	m	200	R	R
2.10	Remove old electrical reticulation, supply and install new electrical Copper multistranded conductor 4 mm ² PVC insulated with Red colourSANS10142-1 (SABS) approved reticulation until respective connection points with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications and set minimum requirement.	m	100	R	R
ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 12				TOTAL	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**

Quotation for: **Electrical services: Remove, prepare, supply, install electrical Sleaving reticulation electrical materials, accessories and finishing's**

No:	Bills of Quantities	Unit	Quantity	Rate	Amount Excl.(VAT)
2.11	Remove old electrical reticulation, supply and install new electrical Copper multistranded conductor 4 mm ² PVC insulated with Black colour SANS10142-1 (SABS) approved reticulation until respective connection points with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications and set minimum requirement.	m	100	R	R
2.12	Remove old electrical reticulation, supply and install new electrical Copper multistranded conductor 4 mm ² PVC insulated with Green and yellow (earth wire) colour SANS10142-1 (SABS) approved reticulation until respective connection points with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications and set minimum requirement.	m	100	R	R
ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 13				TOTAL	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**

Quotation for: **Electrical services: Remove, prepare, supply, install electrical Sleaving reticulation electrical materials, accessories and finishing's**

No:	Bills of Quantities	Unit	Quantity	Rate	Amount Excl.(VAT)
2.13	Remove old electrical cable, supply and install new electrical suffix electrical cable 2.5 mm ² , 3 core wires or repairs; SANS10142-1 (SABS) approved reticulation until respective connection points with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications and set minimum requirement.	m	100	R	R
ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 14				TOTAL	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**

Quotation for: **Electrical services: Remove, prepare, supply, install electrical Sleeving reticulation electrical materials, accessories and finishing's**

SPECIFICATIONS	
3	Miniature Circuit Breaker Isolator samite will comply with minimum requirements as indicated hereunder Specifications and minimum requirements: • Alternating Current Circuit breaker make. • Hydraulic – Magnetic Technology • 100% rating capability, independent of ambient temperature • One, two, three, four pole, 1 + N and 3 + N • VC 8036 compliant (SANS 556-1) • VDE approved, CE certified. • Precision tripping characteristics • Ultra-compact - 13 mm wide module • Trip indication with mid-trip position • Mini Rail Mount product in black shells • Suitable to use for electrical isolation • Shell designed for easier installation onto the busbar • Current short rating for Miniature Circuit Breaker to be between 3ka and 6ka • Samite Mount product black shells as requested in the paragraphs below:
ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 15	

Date:

Signature of compliance with the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**Quotation for: **Electrical services: Remove, prepare, supply, install electrical Slewing reticulation electrical materials, accessories and finishing's**

No.	SPECIFICATIONS
3.1	Materials and services to be rendered accordingly
3.1.1	Supply, replace, and new Miniature Breaker Circuit isolator samite 25Amp3ka rating double pole will be installed accordingly. Unit pricing will be priced for installation, wiring, and commissioning.
3.1.2	Supply, replace, and new Circuit Breaker Triple Pole 63amp, 6ka will be installed accordingly. Unit pricing will be priced for installation, wiring, and commissioning.
3.1.3	Supply, replace, ad new 15Amp single pole circuit breaker 3ka will be installed Accordingly. Unit pricing will be priced for installation, wiring and commissioning
3.1.4	Supply, replace, ad new 20Amp single pole circuit breaker 3ka will be installed accordingly. Unit pricing will be priced for installation, wiring and commissioning
3.1.5	Supply, replace, ad new Triple pole surge Arrester 6ka Samite will be installed accordingly. Unit pricing will be priced for installation, wiring and commissioning
ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 16	

Date:

Signature of compliance with the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**

Quotation for: **Electrical services: Remove, prepare, supply, install electrical Sleaving reticulation electrical materials, accessories and finishing's**

No.	Bill of Quantities	Unit	Quantity	Rate	Amount Excl. (VAT)
3.1.6	Miniature Breaker Circuit isolator samite 25Amp3ka rating double pole as per minimum requirements to be supplied, and installed	no	03	R	R
3.1.11	Triple pole surge Arrester 5ka samite per minimum requirements to be supplied, and installed	no	01	R	R
ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 17					R


Date:

Signature of compliance with the above.

Postal Address / Firm stamp

Requisition No: AE DUDU 01/2026 C

Quotation for: **Electrical services: Remove, prepare, supply, install electrical Sleaving reticulation electrical materials, accessories and finishing's**

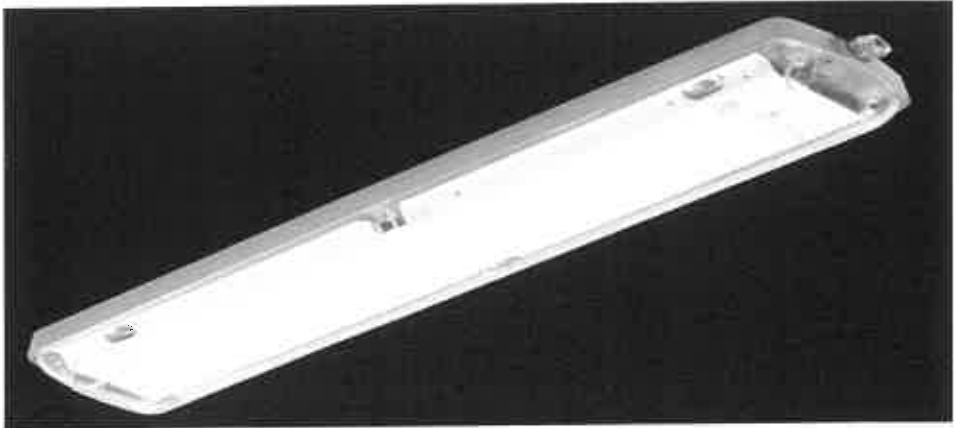SPECIFICATIONS					
4	Remove old light fitting; light vandal proof electrical 53watt LED with all fixing and finishing accessories will comply with minimum requirements as indicated hereunder. Minimum requirements: • Light fitting should be of vandal proof resistance with 53watt LED and high-pressure die-cast marine grade aluminium body with a robust clear polycarbonate diffuser with 10IK Pressure resistance. • Light vandal proof electrical and accessories will be SANS (SABS) approved. • Light vandal proof dimension should be length 739mm(w) x 138mm(h) x 85mm unit will be fixed with at least four raw bolts M8 x 85 mm and no more nails. Light will be installed on existing point, length direction in line with toilet. • Note: Light fitting to be installed or mounted on ceiling or slab of cell inside SKETCH / PICTURE OR PHOTO / SIMILAR APPROVED 				
No.	Bill of Quantities	Unit	Quantity	Rate	Amount Excl. (VAT)
4.1	Remove old light fitting and replace with 53W LED Vandal proof, luminaire as per minimum requirements to be supplied, and installed with all reticulation, connections, fixing, and finishing's with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications.	no	15	R	R
ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 18				TOTAL	R

Date:

Signature of compliance with the above.

Postal Address / Firm stamp

Requisition No: AE DUDU 01/2026 C

Quotation for: **Electrical services: Remove, prepare, supply, install electrical Sleeving reticulation electrical materials, accessories and finishing's**

No.	SPECIFICATIONS
8	Light switches and cover plate will comply with set specifications and minimum requirements to be supplied, delivered and offloaded Specifications and minimum requirements: • Switch must be of rocker operated micro gap type rated at 16A, 220/250V. • Switches must have protected terminal for safe wiring. • All light Switches must fit on to 100 mm x 50 mm wall box. • It must be possible to individually change any switch of multi-lever switches. • The yoke strap must be slotted to allow for easy alignment. • Light switch cover must be of metal make white powder coated • All light switches must comply with the SABS 1663 Specification. • Light switch cover plate must be finished in white baked enamel. • Light switch cover plate must overlap the outlet box and must have beveled edges for proper seating. • Note: Light switches and cover plate to be installed or mounted on cell Kitchen pantry store, visitors' area and ID Parade area
8.1	Remove old switch and replace it with 16A single lever one-way light switch sabs Approved as per minimum requirements to be supplied, and installed with all reticulation, connections fixing, and finishing with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications
8.2	Remove old switch and replace it with 16A Five lever one-way light switch sabs Approved as per minimum requirements to be supplied, and installed with all reticulation, connections fixing, and finishing with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications
ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 19	

Date:

Signature of compliance with the above.

Postal Address / Firm stamp

Requisition No: AE DUDU 01/2026 C

Quotation for: **Electrical services: Remove, prepare, supply, install electrical Slewing reticulation electrical materials, accessories and finishing's**

No.	SPECIFICATIONS
9	Removing old switch fitting makes good; watertight outdoor light rotary switch(s) electrical 16A with all fixing and finishing accessories will comply with minimum requirements as indicated hereunder. Minimum requirements: • Watertight outdoor rotary light switch(s) electrical and accessories will be a industrial PVC unit(s). • Watertight outdoor rotary light switch(s) electrical will be 16A 220 / 250V with all accessories will be SANS (SABS) approved. • Watertight outdoor rotary light switch(s) electrical will not be less than width 80 mm depth 70 mm, height 70 mm complete unit(s) • Watertight outdoor rotary switch will be fixed with no more nails and at least four (plug fisher 6 x 55 mm) drive nails and all reticulation (Flexible Conduit 20mm), connections, fixing and finishing's. • Watertight outdoor rotary light switch(s) will be installed at each point of cell entrance or any outdoor to control installed vandal proof light fitting minimum will be three per cell unit • Watertight outdoor rotary light switch(s) electrical will be a 1-way unit(s) complete with cover and all accessories to be supplied as requested in paragraphs below Note: the light switch needs to be installed for vandal proof light fitting in the cell passage area. • PICTURE OR PHOTO / SIMILAR APPROVED
9.1	Remove old switch and replace it with 16A single lever watertight rotatable industrial one-way SABS Approved as per minimum requirements to be supplied, and installed with all reticulation, connections, fixing, and finishing with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications.
	ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 20

Date:

Signature of compliance with the above.

Postal Address / Firm stamp

Requisition No: AE DUDU 01/2026 C


Quotation for: **Electrical services: Remove, prepare, supply, install electrical Slewing reticulation electrical materials, accessories and finishing's****SPECIFICATIONS**

10 Removing old light fitting makes good; flood Light Fitting Waterproof 50Watt and 200watt Led will comply with minimum requirements as indicated hereunder

Specifications and minimum requirements:

- Light fitting should be of waterproof resistance with 50watt and 200watt LED marine grade high-pressure die-cast aluminium body and an high-impact clear glass diffuser with 07 IK Pressure resistance and led should have wide range optics lance.
- Product dimension should be of 198-264-50Hz Nominal Voltage compactable and ability for 10kv surge protection.
- Product to be of Dimensions (LxWxH)897 x 386 x 170
- Flood light will be fixed with at least three (Bolt Rawl M8X 65mm) fixing bolts and all reticulation (Flexible Conduit 20mm), connections, fixing and finishing's.
- **Note: Flood LED light fitting should be mounted on outside concrete wall of cell courtyard, offloading area and other exterior wall area of cell block be controlled with Photocell.**
- Light fitting to be of IP66 Rate as requested in paragraphs below:

SKETCH / PICTURE OR PHOTO / SIMILAR APPROVED

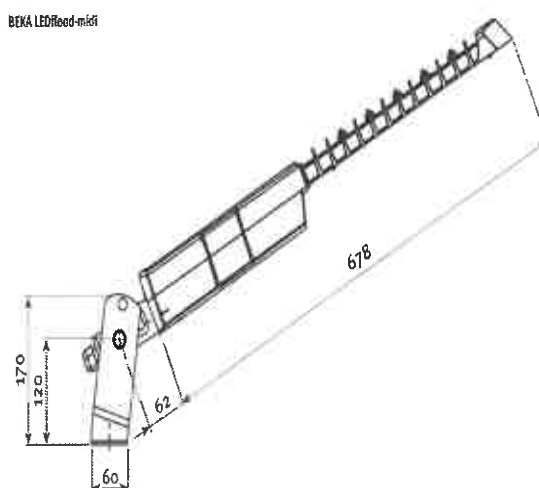

ELECTRICAL ITEMS AND ACCESSORIES: TOTAL PAGE 21


Date:

Signature of compliance with the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**

Quotation for: **Electrical services: Remove, prepare, supply, install electrical Slewing reticulation electrical materials, accessories and finishing's**

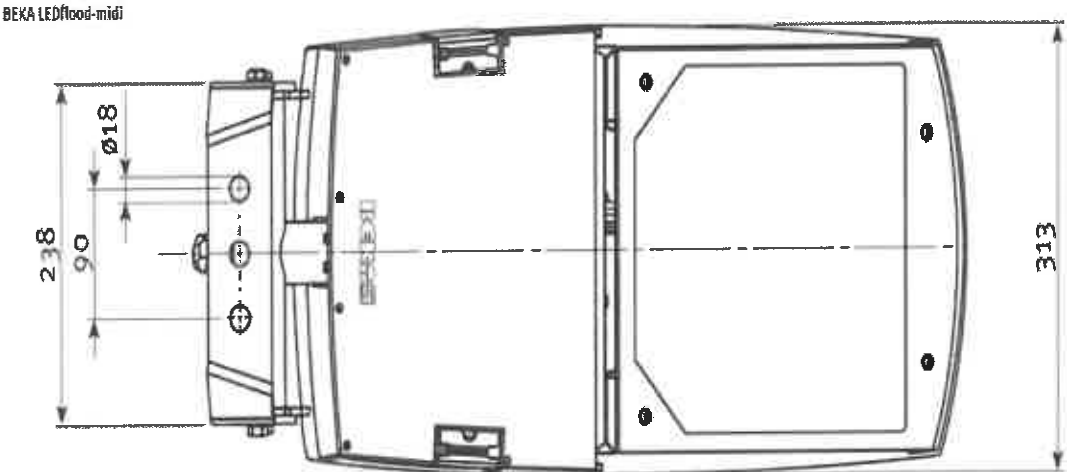No.	SPECIFICATIONS				
10.1	SKETCH / PICTURE OR PHOTO / SIMILAR APPROVED 				
No.	Bill of Quantities	Unit	Quantity	Rate	Amount Excl. (VAT)
10.1.1	Fitting Light flood 50Watt LED as per minimum requirements to be supplied, and installed with all reticulation, connections, fixing, and finishing's with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications.	no	08	R	R
10.1.2	Fitting Light flood 200Watt LED as per minimum requirements to be supplied, and installed with all reticulation, connections, fixing, and finishing's with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications.	no	02	R	R
ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 22					R



Date:

Signature of compliance with the above.

Postal Address / Firm stamp

Requisition No: AE DUDU 01/2026 C

Quotation for: **Electrical services: Remove, prepare, supply, install electrical Slewing reticulation electrical materials, accessories and finishing's**

SPECIFICATIONS					
11	Removing old light fitting makes good; bulkhead Light fitting 15watt LED with all fixing and finishing accessories will comply with minimum requirements as indicated hereunder. Minimum requirements: • Light fitting should be of waterproof resistance with 15watt LED high-pressure die-cast marine grade aluminium body with trim ring, and an opal high-impact acrylic diffuser. • Waterproof light fitting will be SANS 60598-1 and (SABS) approved. • An opal non-discoloring high-impact acrylic injection molded diffuser shall be used throughout the range. It offers excellent vandal resistance, be highly translucent and should not be discolored even when subjected to the harshest UV environments. A silicon sponge gasket shall be fitted into a special groove in the diffuser to prevent damage to the gasket during installation and to achieve the certified ingress protection rating of IP 65. • None: surface Bulkhead Light fitting will be mounted inside store, cell visitor's toilet and along identification parade passage of the cell block. SKETCH / PICTURE OR PHOTO / SIMILAR APPROVED   				
	Bill of Quantities	Unit	Quantity	Rate	Amount Excl. (VAT)
11.1	Remove old light fitting and replace with 19W LED Vandal proof, luminaire as per minimum requirements to be supplied, and installed with all reticulation, connections, fixing, and finishing's with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications.	no	05	R	R
ELECTRICAL ITEMS AND ACCESSORIES: TOTAL PAGE 23					R

Date:

Signature of compliance with the above.

Postal Address / Firm stamp

Requisition No: AE DUDU 01/2026 C

Quotation for: **Electrical services: Remove, prepare, supply, install electrical Sleeving reticulation electrical materials, accessories and finishing's**

No.	SPECIFICATIONS				
12	Light fitting surface mounted waterproof diffuser complete with T8 2*24 Watt Light Emitting diode (LED) tubes will comply with set specifications and minimum requirements to be supplied, delivered and offloaded Specifications and minimum requirements: • BODY: DMC, glass fiber reinforced polyester compression molded • LAMP HOLDERS: Area made of polycarbonate and is bi-pin Rota lock action type for use with both 26 mm and 38 mm diameter lamps. Voltage options are 230V AC and DC • COLD ROOM: The luminaries can be fitted with starters to enable it to be used in a cold room to 20 degrees C and freezer room to -40 degrees C with polycarbonate lens • ENTRIES: Two 20 mm diameter cable entries are provided through wiring. Plugs are supplied for blanking off. Glands are not provided. • Either maintained or none—maintained modes are available as options. • DIFFUSER: Injection molded PVC clear waterproof resistance: IP RATING: 65 one-piece captive double action snap lock polyamide stainless steel diffuser clips • Lamp type: to be of T8(1500mm) 2*24-Watt Light Emitting Diode (LED 220 to 240 Volt) Cool white tubes • Light fitting dimension to be of 1500mm(5ft) • None: surface mounted waterproof Light fitting will be mounted in kitchen, Cell Reception area, identification Parade room, offloading area and cell visitor's toilet of the cell block. • Light fitting to be of IP66 Rate as requested in paragraphs below: SKETCH / PICTURE OR PHOTO / SIMILAR APPROVED 				
	Unit	Quantity	Rate	Amount Excl. (VAT)	
Bill of Quantities					
12.1	Light fitting surface mounted waterproof diffuser complete with T8 2*24-Watt Light Emitting diode (LED) tubes as per minimum requirements to be supplied, and installed with all reticulation, connections, fixing and finishing's	no	24	R	
ELECTRICAL ITEMS AND ACCESSORIES: TOTAL PAGE 24				R	

Date:

Signature of compliance with the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**Quotation for: **Electrical services: Remove, prepare, supply, install electrical Slewing reticulation electrical materials, accessories and finishing's**

SPECIFICATIONS					
13	Removing old day night switch makes good; Day Night control light switch(s) 20A with all fixing and finishing accessories will comply with minimum requirements as indicated hereunder Specification and set minimum requirements: The day night control switches turn the lights on at dusk and turn off the lights at dawn. It is not only convenient but also practical as it can turn a bank of lights on and off automatically, especially when manual control becomes physically tedious due to large distances involved. Day night control switch Sensor is ideal for light industrial, commercial, housing applications, office or park lights, streetlights, garden lights and outdoor lighting. The day night control switches to be installed for outside cell block light fittings Features:5 – 50 LUX (adjustable) Switches lights ON at dusk and OFF at dawn Compatible with LED, incandescent, fluorescent, quartz and halogen light Domestic and business applications Entrances, gates, offices and warehouses 220-240V AC20 Amp PICTURE OR PHOTO / SIMILAR APPROVED 				
No.	Bill of Quantities	Unit	Quantity	Rate	AmountExcl. (VAT)
13.1	Remove old day night fitting and replace with Switch 20A waterproof day night light control switch as per minimum requirements to be supplied, and installed with all reticulation, connections, fixing, and finishing with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications	no	02	R	R
ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 25					R

Date:

Signature of compliance with the above.

Postal Address / Firm stamp

Requisition No: AE DUDU 01/2026 C

Quotation for: **Electrical services: Remove, prepare, supply, install electrical Slewing reticulation electrical materials, accessories and finishing's****SPECIFICATIONS**

14

Isolator control switch (s) electrical with all fixing and finishing accessories will comply with minimum requirements**Specifications and minimum requirements:**

- Isolator control switch with a steel galvanised frame base and steel powder coated white cover with chrome plated screws,
- Isolator control switch (s) will be 20Amp, 30Amp and 60Amp with all accessories will be SANS (SABS) approved.
- Light switch(s) electrical will be a 100 mm x 50 mm and/or 100 mm x 100 mm complete.
- Isolator will be connected, fastened and commissioned with all reticulation (tubing and wiring) connections, fixing and finishing's.
- The Isolator must be installed for booster pump, stove and geyser
- Isolator control switch to be of two pole or three poles with a steel frame base point where earth point will be terminated accordingly.
- **Note: Isolator control switch to be of two poles will be used for booster pump or Geyser for electrical isolation inside York Box.**

(ISOLATOR 100 MM X 50 MM) SKETCH / PICTURE OR PHOTO / SIMILAR APPROVED



ELECTRICAL ITEMS AND ACCESSORIES: TOTAL PAGE 26

Date:

Signature of compliance with the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**

Quotation for: **Electrical services: Remove, prepare, supply, install electrical Sleaving reticulation electrical materials, accessories and finishing's**

No.	Bill of Quantities	Unit	Quantity	Rate	Amount Excl. (VAT)
14.1	Remove old switch fitting and replace it with Isolator Control light Switch 30A double pole 100 x 50 with cover switch as per minimum requirements to be supplied, and installed with all reticulation, connections, fixing and finishing's with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications	no	03	R	R
ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 27					R

Date:

Signature of compliance with the above.

Postal Address / Firm stamp

Bill of Quantities**Annexure "B"**Requisition No: **AE DUDU 01/2026 C**Quotation for: **Electrical services: Remove, prepare, supply, install electrical Slewing reticulation electrical materials, accessories and finishing's**

No.	SPECIFICATIONS
15	Surface Waterproof mounted front opening lit cover York box and finishing accessories will comply with minimum requirements Specifications and minimum requirements: • Weatherproof box accommodating flush mount wall plug with switch /Isolator to connect/disconnect a circuit for appliances with a maximum load of 60A. • Switch Box Waterproof description to house socket outlet. light switch and isolator 100 mm x 100 mm. • Waterproof box Product Gross weighs 0.360 kg, width 110 mm, Length 162 mm and height 84 mm. • Waterproof box will be fixed with no more nails and at least three (plug fisher 6 x 55 mm) drive nails and all reticulation (Flexible Conduit 20mm), connections, fixing and finishing. Note: Waterproof box will be used to house isolator that will be supplying electrical power to booster pump or Geysers • Box body material should be Polycarbonate with front opening sliding up and down lit for easy access of switch/isolator /socket outlet as requested in paragraphs below: SKETCH / PICTURE OR PHOTO / SIMILAR APPROVED 
15.1	Surface Waterproof mounted front lit cover York box Polycarbonate make 100 x 100with sliding cover as per minimum requirements to be supplied, and installed with all Reticulation, connections, fixing and finishing's.
	ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 28

Date:

Signature of compliance with the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**

Quotation for: **Electrical services: Remove, prepare, supply, install electrical Sleaving reticulation electrical materials, accessories and finishing's**

No.	Bill of Quantities	Unit	Quantity	Rate	Amount Excl. (VAT)
16	Electrical specialised galvanised 20 mm conduit SANS (SABS) approved reticulation, connection and stopping (blocking) points to be installed and fixed onto or into existing masonry position areas with drive nails, reinforcing bars, etc. to be performed as specified with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications.	m	80	R	R
17	Service existing industrial extractor Fan in the Cell Kitchen to be in good working condition with new filters and accessories, etc. to be performed as specified with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications.	no	01	R	R
18	Replace missing cover of steel electrical power skirting powder coated beige color in the cell reception area bellow Distribution board.	m	04	R	R
19	Supply and install missing 100x50 Power skirting Normal power socket outlet complete with cover(beige) and mounting brackets supplied with all reticulation, connections, fixing and finishing's with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications	no	01	R	R
ELECTRICAL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 29					R

Date:

Signature of compliance with the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**

Quotation for: **Electrical services: Remove, prepare, supply, install electrical Sleaving reticulation electrical materials, accessories and finishing's**

No.	SPECIFICATIONS				
20	Surface / recessed mounting galvanized powder coated waterproof distribution board or in-house to be rewiring as per SANS 10142-1 wiring code will comply with set specification and minimum requirements				
	Specifications and minimum requirements				
	• All components inside the distribution board should be SABS approved. • Circuit breakers should be correctly rating. socket outlet 20amp, light 15amp etc. • All the components inside the distribution board should be correctly labeled. • Distribution board should have legend inside for all the components are supplied. • Distribution board to be as requested in paragraphs below:				
		Unit	Quantity	Rate	Amount Excl. (VAT)
	Bill of Quantities				
20.1	Distribution Board to be rewired as per SANS 10142-1 Wiring code to be supplied with all reticulation, connections, fixing and finishing's with materials, equipment, plant, specialist tradesman, labour, make good, clean according to set specifications	no	01	R	R
20.2	Issuing the Certificate of Compliance for the electrical installation performed in the cell block	no	01	R	R
ELECTRICAL ITEMS AND ACCESSORIES: TOTAL PAGE 30					R

Date:

Signature of compliance with the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**

Quotation for: **Electrical services: Remove, prepare, supply, install electrical Sleaving reticulation electrical materials, accessories and finishing's**

TOTALS BROUGHT OVER WILL BE AS FOLLOWS	
ELECTRICAL MATERIALS & SERVICES TOTAL PRICE PAGE 10	R
ELECTRICAL MATERIALS & SERVICES TOTAL PRICE PAGE 11	R
ELECTRICAL MATERIALS & SERVICES TOTAL PRICE PAGE 12	R
ELECTRICAL MATERIALS & SERVICES TOTAL PRICE PAGE 13	R
ELECTRICAL MATERIALS & SERVICES TOTAL PRICE PAGE 14	R
ELECTRICAL MATERIALS & SERVICES TOTAL PRICE PAGE 17	R
ELECTRICAL MATERIALS & SERVICES TOTAL PRICE PAGE 18	R
ELECTRICAL MATERIALS & SERVICES TOTAL PRICE PAGE 19	R
ELECTRICAL MATERIALS & SERVICES TOTAL PRICE PAGE 20	R
ELECTRICAL MATERIALS & SERVICES TOTAL PRICE PAGE 22	R
ELECTRICAL MATERIALS & SERVICES TOTAL PRICE PAGE 23	R
ELECTRICAL MATERIALS & SERVICES TOTAL PRICE PAGE 24	R
SUB TOTAL	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 C**Quotation for: **Electrical services: Remove, prepare, supply, install electrical Sleaving
reticulation electrical materials, accessories and finishing's**

SUMMARY BROUGHT FORWARD WILL BE AS FOLLOWS	
TOTAL BROUGHT FORWARD FROM PAGE 31	R
ELECTRICAL MATERIALS & SERVICES TOTAL PRICE PAGE 25	R
ELECTRICAL MATERIALS & SERVICES TOTAL PRICE PAGE 27	R
ELECTRICAL MATERIALS & SERVICES TOTAL PRICE PAGE 28	R
ELECTRICAL MATERIALS & SERVICES TOTAL PRICE PAGE 29	R
ELECTRICAL MATERIALS & SERVICES TOTAL PRICE PAGE 30	R
TOTAL (EXCL VAT)	R
GRAND TOTAL	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 D**

Quotation for: **WELDING WORK: Cell door top, middle, bottom hinges repair(s)**

SPECIFICATIONS	
1.1	Materials and services must be provided to remove existing dilapidated, damaged and incorrect cell door hinges, fixing areas and prepared to receive new cell door top, middle, bottom hinge(s) accordingly.
1.2	All removed dilapidated, damaged, and incorrect cell door top, middle, bottom hinge(s) and unforeseen materials must be removed to be disposed of to a registered dumping site.
1.3	Provision must also be made within the costing to attend to all repairs to existing cell door plate small openings (small openings to be cut into plate to create an opening to weld the cell door hinges to the cell door structure and not plate) to weld cell door top, middle, bottom hinge(s) accordingly.
1.4	Provision must also be made within the costing to attend to all repairs to existing cell doorframe plate small openings (small openings to be cut into cell frame plate to create an opening to weld the cell door and gate(s) hinges to the cell door frame angle iron support structure and not frame plate) to weld cell door top, middle, bottom hinge(s) accordingly.
1.5	Materials and services must be rendered to repair cell door and frame small plate openings before cell door top, middle, bottom hinge(s) with all accessories and finishing's according to set projects 5 Star standards (drawing Pol 2012 / D1, D2, D3, D4, D5), Bill of quantities, Special and General conditions of contract with SANS (SABS) materials, fixing and finishing accessories.
1.6	New manufactured cell hinges must be welded to gate(s), door(s) and/or frame(s) with all fixing accessories (stainless steel setting bolt and nut with grease nipple) and finishing's. New hinges must only be welded to cell door, gate and frames main structural supports and cell door and gate frame units angle iron supports.
1.7	Dilapidated, damaged and/or incorrect cell door top, middle, bottom hinge(s) areas to be repaired and new cell door top, middle, bottom hinge(s) installed and made good with equipment (plant, tools), services (tradesman, labour) with all fixing and finishing materials must be supplied and installed by the successful appointed contractor accordingly to specifications and set minimum requirements.
1.8	Manufacture, Supply and install new combination cell door, gate and frame cell top, middle and bottom hinges; made good as per specifications and set minimum requirements and as per 5star specifications and drawings POL 2012/D1, POL 2012/D2, POL2012 D3 AND POL 2012/D5. All doors and gates must be hot dipped galvanised.
STEEL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 1	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 D**

Quotation for: **WELDING WORK: Cell door top, middle, bottom hinges repair(s)**

SPECIFICATIONS					
2	DETAIL OF CELL DOOR HINGES NOTE: Fit Top & Bottom Hinges to Cell Door or Grille Gate to allow for sufficient play for at least 4 mm play either up or down. Adjust setting bolts to the specified top gap between lead and frame. There after weld middle hinge (up side down as shown) into place allowing a space of 4 mm between the two parts for further future adjustment.				
2.1	Remove old broken, dilapidated offloading area gate hinges and replace with new to match existing				
2.2	Manufacture and install goose neck bracket to support gate at offloading area, weld bar to existing gate post with 50x2mm flat bar and fasten with M12 rawl bolt to top of column.				
No:	Bills of Quantities	Unit	Quantity	Rate	Amount (Excl.Vat)
2.4	Remove and re-align cell door and trellis gate hinges that doesn't close properly that has a recoil, to a proper closing of the doors and gates. Primer coat and make good as per 5 Star Specifications and drawings POL 2012/D1, POL 2012/D2, POL 2012/D3 AND POL 2012/D5.	no	60	R	R
2.5	Manufacture and install (goose neck) bracket to accommodate lean over offloading area gate	no	02	R	R
STEEL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 2				TOTAL	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 D**Quotation for: **WELDING WORK: Cell steelwork repairs and/or replacements**

TOTALS BROUGHT OVER MUST BE AS FOLLOWS	
STEEL SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 1	R
SUB-TOTAL exl VAT	R
TOTAL PAGE 1	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 E**

Quotation for: **Paintwork: Prepare and paint gutters, downpipes, fascia boards, pipework and drainage grids**

No:	SPECIFICATION
1	Prepare and paint gutters, downpipes, fascia boards pipework and drainage grids/ Rainwater goods.
1.1	Sand down, apply rust repellent NS4 where needed and apply two coats Roof Guard Atlantic Blue Enamel SANS approved to a smooth covered area.
1.2	Take Note: All electrical lights, light switches, exposed wiring must be made safe and sealed before industrial cleaning work are to be attended to accordingly.
1.3	After the industrial degreaser applications an industrial high water pressure cleaner must be used again to remove loose, damaged and incorrect from the roofs/rainwater goods.
2	Prepare internal and external masonry (concrete) ceilings to receive paintwork on concrete ceilings according to specifications and set minimum requirements
2.1	Prepare internal and external masonry (concrete) ceilings and receive new paint on internal and external masonry ceilings must be rendered according to set National Building Regulations with SANS (SABS) materials and accessories.
2.2	Plaster primer colour White on new surfaces: One coat (mineral type) plaster primer must be applied by paint brush and/or roller on new plastering and/or repaired plastered areas to have effective plaster primer penetration into masonry finishing.
2.3	First coat Universal undercoat colour White : One coat universal undercoat must be applied by paint brush and/or roller onto plaster primer and/or existing paint applications to paint second coat onto masonry ceilings.
2.4	Second coat washable acrylic wall paint colour White : One coat acrylic paint must be applied by paint brush and/or roller onto universal undercoat application.
2.5	Third coat washable acrylic wall paint colour White : Third coat washable acrylic wall paint must be applied by paint brush and/or roller onto second coat acrylic white applications.
PREPARATIONS & PAINT SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 1	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 E**Quotation for: **Paintwork: Prepare and paint internal masonry walls**

No:	SPECIFICATION
3	Prepare internal walls to receive paintwork (Acrylic paint) according to specifications and set minimum requirements.
3.1	Materials and services must be provided to remove loose, damaged and incorrect paintwork; repair and prepare walls to receive new paint and paint walls as required to cell internal walls. Walls repairs and finishing's must be rendered according to set National Building Regulations with SANS (SABS) materials and accessories.
3.2	Cell walls must be cleaned with an Industrial high water pressure cleaner and a degreaser to remove loose, damaged and incorrect paintwork from cell internal walls.
3.3	Take Note: All electrical lights, light switches, exposed wiring must be made safe and sealed before industrial cleaning work are to be attended to accordingly.
3.4	After the industrial degreaser applications an industrial high water pressure cleaner must be used again to remove loose, damaged and incorrect paintwork from cell internal and external walls.
3.5	After internal walls were cleaned with an Industrial degreaser and industrial high water pressure cleaner, masonry repair works must be performed to match existing internal cell block walls finishing's.
3.6	All internal cell block (masonry) holes and uneven surfaces need to be repaired to match existing cell block walls with its applicable finishing.
3.7	Take Note: All repair finishing's must match existing wall finishing's if not it must be removed and redone accordingly to the satisfaction of the client.
3.8	After internal cell walls were cleaned, repaired and prepared it must be inspected and there after paintwork execution can commence as specified.
3.9	Take Note: The following paintwork phase cannot be applied after the previous application is applied, inspected and approval was granted for the contractor to attend to the following application.
PREPARATIONS & PAINT SERVICES WITH ALL MATERIALS & ACCESSORIES: PAGE 2	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 E**

Quotation for: **Paintwork: Prepare and paint internal masonry walls**

No:	SPECIFICATION
4.10	First coat plaster primer and/or universal undercoat: One coat (mineral type) plaster primer and/or universal undercoat must be applied by paint brush and/or roller to have effective plaster primer penetration into masonry walls finishing.
4.11	Second coat acrylic wall paint Colour: Aluminium snow smooth : One first coat acrylic wall paint to be applied must be applied by paint brush and/or roller onto universal and/or plaster primer walls. It must first be inspected and approved before third and final coat can be applied.
4.12	Final coat acrylic washable paint. Colour: Aluminium snow smooth : Final coat acrylic washable paint must be applied by paint brush and/or roller onto first coat acrylic washable paint. Colour: Aluminium snow applications.
4.13	Drain and/or storm water exits must be closed with a perforated bag or other obstacle material to prevent items not bigger than 14 mm entering the drains and/or storm water exits.
4.14	Walls must be totally dry before any sealant and/or paintwork are applied.
5	Prepare paintwork and paint external walls according to specifications and set minimum requirements
5.1	Materials and services must be provided to remove loose, damaged and incorrect paintwork; prepare external walls to receive new paint and paint walls as required to cell external walls. External walls repairs and finishing's must be rendered according to set National Building Regulations with SANS (SABS) materials and accessories.
5.2	Cell external walls must be cleaned with an Industrial high water pressure cleaner and a degreaser to remove loose, damaged and incorrect paintwork from cell external walls.
5.3	Take Note: All electrical lights, light switches, exposed wiring must be made safe and sealed before industrial cleaning work are to be attended to accordingly.
5.4	2 hours after the industrial degreaser applications an industrial high water pressure cleaner must be used again to remove loose, damaged and incorrect paintwork from cell external walls.
5.5	After external walls were cleaned with an Industrial degreaser and industrial high water pressure cleaner, masonry repair works must be performed to match existing internal and/or external cell block external walls finishing's.
PREPARATIONS & PAINT SERVICES WITH ALL MATERIALS & ACCESSORIES: PAGE 3	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: AE DUDU 01/2026 E

Quotation for: **Paintwork: Remove finishing's, repair steel cell windows internal and External screens.**

No:	SPECIFICATION
6	Remove and re-install loose, damaged and incorrect parts and finishing's of (steel, etc.) window, internal screen, external screen units prepare to receive paintwork and paint window, frame, putty units according to specifications and set minimum requirements. As per existing colour.
6.1	Materials and services must be provided to remove loose, damaged and incorrect paintwork; repair and prepare windows to receive new paint and paint cell widow, internal and external screen units as required to windows. Window repairs and finishing's must be rendered according to set National Building Regulations with SANS (SABS) materials and accessories.
6.2	Cell widow, internal and external screens units must be cleaned with an Industrial high water pressure cleaner and a degreaser to remove loose, damaged and incorrect paintwork from windows.
6.3	Take Note: All electrical lights, light switches, exposed wiring must be made safe and sealed before industrial cleaning work are to be attended to accordingly.
6.4	After the industrial degreaser applications an industrial high water pressure cleaner must be used again to remove loose, damaged and incorrect paintwork from cell widow internal and external screen units.
6.5	After cell window, internal and external screen units were cleaned with an Industrial degreaser and industrial high water pressure cleaner, repair works must be performed to match existing cell widow, internal and external screen units and finishing's.
6.6	Take Note: All repair finishing's must match existing cell widows, internal and external screen units and finishing's if not it must be removed and redone accordingly to the satisfaction of the client.
6.7	Cell window putty must be replaced and or repaired accordingly before paintwork commenced.
6.8	After cell window, internal and external screen units were prepared it must be inspected and thereafter paintwork execution can commence as specified.
PREPARATIONS & PAINT SERVICES WITH ALL MATERIALS & ACCESSORIES: PAGE 4	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 E**

Quotation for: **Paintwork: Remove finishing's, repair steel cell windows internal and External screens.**

No:	SPECIFICATION
6.9	Cell window, internal and external screen units must receive metal edge primer: One coat (mineral type) metal edge primer must be applied by hand (paint brush and roller) onto cell widow, internal and external screen units.
6.10	Second coat Enamel colour: Roofguard Atlantic Blue . One coat (mineral type) Enamel Aluminium Snow / Aluminium Silver Shine paint must be applied by hand (paint brush, roller and spray machine) onto metal edge primer application on window, internal and external screen units. Roofguard Atlantic Blue .
6.11	Third coat Enamel colour: Roofguard Atlantic Blue . Third coat (mineral type) Enamel Aluminium Snow / Silver Shine paint must be applied by hand (paint brush and roller) onto second coat Enamel Roofguard Atlantic Blue . applications on window, internal and external screen units.
6.12	Drain and/or storm water exits must be closed with a perforated bag or other obstacle material to prevent items not bigger than 14 mm entering the drains and/or storm water exits.
6.13	Preparations and paintwork to be applied as per specifications and set minimum requirement on steel cell windows, internal and/or external screen units Cell steel window frames: Colour Roofguard Atlantic Blue. Cell steel internal screens: Colour Roofguard Atlantic Blue. Cell steel external screens: Colour Roofguard Atlantic Blue.
PREPARATIONS & PAINT SERVICES WITH ALL MATERIALS & ACCESSORIES: PAGE 5	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 E**Quotation for: **Paintwork: Prepare and paint cell overhead grill units accordingly.**

SPECIFICATIONS	
7	CELL OVERHEAD GRILLS: Prepare to receive paintwork and paint overhead cell grid units according to specifications and set minimum requirements
7.1	Materials and services must be provided to remove loose, damaged and incorrect paintwork; repair and prepare overhead cell grids to receive new paint and paint overhead cell grid units with finishing's must be rendered according to set National Building Regulations with SANS (SABS) materials and accessories.
7.2	Cell door, gate and frame units must be cleaned with an Industrial high water pressure cleaner and a degreaser to remove loose, damaged and incorrect paintwork from windows.
7.3	Take Note: All electrical lights, light switches, exposed wiring must be made safe and sealed before industrial cleaning and paint work are to be attended to accordingly.
7.4	After the industrial degreaser applications an industrial high water pressure cleaner must be used again to remove loose, damaged and incorrect paintwork from cell door, gate and frame units.
7.5	After overhead cell grid units were cleaned with an Industrial degreaser and industrial high water pressure cleaner, repair works must be performed to match existing overhead cell grid units and finishing's.
7.6	Take Note: All repair finishing's must match existing cell widows, internal and external screen units and finishing's if not it must be removed and redone accordingly to the satisfaction of the client.
7.7	After overhead cell grid units were repaired and prepared it must be inspected and thereafter paintwork execution can commence as specified.
PREPARATIONS & PAINT SERVICES WITH ALL MATERIALS & ACCESSORIES: PAGE 6	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 E**

Quotation for: **Paintwork: Prepare and paint cell overhead grids, Offloading area gates**

SPECIFICATIONS	
7.8	First coat cell overhead grid units must receive metal edge primer colour Black : One coat (mineral type) metal edge primer and/or universal undercoat must be applied by paint brush and roller and/or sprayed) onto the rusted, repaired overhead cell grid units.
7.9	First coat steel paint colour: Roofguard Atlantic Blue . One coat (mineral type) paint must be applied by paint brush, roller and/or sprayed) onto metal edge primer application on overhead cell grids units and offloading gates. After first application it must first be inspected and after approval the second coat can be applied. To match existing
7.10	Second coat steel paint colour: Roofguard Atlantic Blue (mineral type) paint must be applied by paint brush, roller and/or sprayed applications on overhead cell grid and offloading gate units. To match existing
7.11	Please note grease nipples must be closed not to be exposed to paint. If grease nipples were painted, they must be removed and replaced with new at the cost for the appointed contractor.
8	Prepare to receive paintwork and paint onto door, gate and door frame units according to specifications and set minimum requirements
8.1	Materials and services must be provided to remove loose, damaged and incorrect paintwork; repair and prepare cell door, gate and frame unit(s) to receive new paint and paint onto door, gate and doorframe frame units as required onto door, gate and doorframe unit's repairs and finishing's must be rendered according to set National Building Regulations with SANS (SABS) materials and accessories.
8.2	Door, gate and/or doorframe units must be cleaned and repaired with all finishings to receive paintwork.
8.3	All door, gate and/or doorframe unit(s) holes and uneven surfaces needs to be repaired to match existing door, gate and/or doorframe units with its applicable finishing.
PREPARATIONS & PAINT SERVICES WITH ALL MATERIALS & ACCESSORIES: PAGE 7	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 E**

Quotation for: **Paintwork: Prepare and paint door, gate and/or doorframe units**

No:	SPECIFICATION
8.4	Take Note: All repair finishing's must match existing door, gate and/or doorframe units, internal and external finishing's if not it must be removed and redone accordingly to the satisfaction of the client.
8.5	After door, gate and doorframe units were prepared it must be inspected and thereafter paintwork execution can commence as specified.
8.6	Door, gate and/or doorframe units must receive metal edge primer on steel door and/or doorframe units: One coat (mineral type) metal edge primer must be applied by hand (paint brush and roller) onto door, gate and/or doorframe units
8.7	Pink wooden primer on wooden door and/or doorframe units: One coat (mineral type) wooden primer must be applied by hand (paint brush and roller) onto door, gate and/or doorframe units.
8.8	Second coat Enamel steel paint colour: Roofguard Atlantic Blue : One coat (mineral type) Enamel must be applied by hand (paint brush, roller and spray machine) onto metal edge primer or wooden pink primer application onto door units.
8.9	Third coat Enamel steel paint colour: Roofguard Atlantic Blue : Third coat (mineral type) Enamel must be applied by hand (paint brush and roller) onto second coat Enamel applications onto door units.
8.10	If paintwork is not good it must be sanded prepared and repainted again to the satisfaction of the client.
8.11	Preparations and paintwork to be applied as per specifications and set minimum requirement on steel cell doors, gates and/or frame units Cell steel frames: Colour Roofguard Atlantic Blue To match existing Cell steel Cage: Colour Roofguard Atlantic Blue To match existing Cell steel gates: Colour Roofguard Atlantic Blue To match existing Cell steel overhead grids: Colour Roofguard Atlantic Blue To match existing
PREPARATIONS & PAINT SERVICES WITH ALL MATERIALS & ACCESSORIES: PAGE 8	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 E**

Quotation for: **Paintwork: Prepare roofs, ceilings, walls, cell door, gate and frame, window internal and external screens, overhead grid units and paint it accordingly**

No:	SPECIFICATION
9	Painting Concrete sitting benches
9.1	Wash all concrete benches with sugar soap solvent, sand down with sandpaper
9.2	Apply one coat universal undercoat and two coats Bovine Enamel or similar SANS approved
9.3	Visible cracks to concrete ceiling to be opened up and sealed with epoxy type silicone or stretchable foam crack filler and make good to match existing.
10	Daily compliance to services rendered
10.1	Rubble must be removed daily to a dedicated dumping area and disposed of weekly to a registered dumping site.
10.2	All materials, plant, tools, trades and contract workers services must all be inclusive within the price units
10.3	Workmanship: Paintwork applications must be performed as specified, must be neat and clean. If not: It must be repaired and/or redone to the satisfaction of the client at the cost of the appointed contractor.
PREPARATIONS & PAINT SERVICES WITH ALL MATERIALS & ACCESSORIES: PAGE 9	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 E**

Quotation for: **Paintwork: Prepare roofs, ceilings, walls, cell door, gate and frame, window internal and external screens, overhead grid units and paint it accordingly.**

No.	Bill of Quantities	Unit	Quantity	Rate	Amount (Excl Vat)
1	Offloading area gates-2x double gates, apply rust repellent primer to rusted areas and make good. Sand down all previously painted area sand repaint with 2 coats Roofguard Atlantic Blue or similar SANS approved to a smooth covered area. To match existing.	m ²	28	R	R
2	Overhead grids-Offloading area, Cell Courtyards and Service duct areas. Sand down all grids, apply anti-rust primer NS4 and apply 2 coats Roofguard Atlantic Blue SANS approved to a smooth covered area. To match existing.	m ²	140	R	R
3	Cell Combination doors Trellis doors-and doorframes- Sand down apply anti rust primer where needed and paint 2 coats Roofguard Atlantic Blue SANS approved to a smooth covered area. To match existing.	m ²	84	R	R
4	Wooden doors and door frames (Admittance area etc.)- Sand down all doors and doorframes and apply 2 coats Bovine Enamel SANS approved to a smooth covered area	m ²	60	R	R
PREPARATIONS & PAINT SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 10					R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 E**

Quotation for: **Paintwork: Prepare roofs, ceilings, walls, cell door, gate and frame, window internal and external screens, overhead grid units and paint it accordingly.**

No.	Bill of Quantities	Unit	Quantity	Rate	Amount (Excl Vat)
5	Cell Walls- (All cell walls, pantry, kitchen holding cell, storeroom, linen room, admittance area, cell guard area, visitors room, line up and viewing area, waiting rooms and all shelving). Wash all walls and areas with Sugar soap grease remover/solvent, High pressure clean all walls with pressure cleaner, to remove greasiness and flaky paint, scrape loose paint of and apply Polyfilla to affected areas apply 1 coat bonding Liquid to affected areas, 1 coat universal undercoat to all walls and apply 2 coats Acrylic PVA Aluminium Snow to a smooth covered area	m ²	780	R	R
6	Cell shower walls- High pressure clean all walls with pressure cleaner, to remove greasiness and flaky paint, apply Polyfilla to affected areas apply 1 coat bonding Liquid to affected areas, 1 coat universal undercoat to all walls and apply 2 coats Enamel Aluminium Snow SANS approved to a smooth covered area	m ²	45	R	R
PREPARATIONS & PAINT SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 11					R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 E**

Quotation for: **Paintwork: Prepare roofs, ceilings, walls, cell door, gate and frame, window internal and external screens, overhead grid units and paint it accordingly.**

No.	Bill of Quantities	Unit	Quantity	Rate	Amount (Excl Vat)
7	Ceiling paint Cell area-Cells, pantry, kitchen, prison property store, High pressure clean all ceilings with pressure cleaner, to remove greasiness and flaky paint, scrape loose paint of and apply Polyfilla to affected areas apply 1 coat bonding Liquid to affected areas, 1 coat universal undercoat to all walls and apply 2 coats Aluminium Snow Enamel SANS approved to a smooth covered area	m ²	220	R	R
8	Ceiling paint Admittance area, cell guard, linen room, visitors room, line up area, viewing area, waiting room 1&2, High pressure clean all ceilings with pressure cleaner, to remove greasiness and flaky paint, scrape loose paint of and apply Polyfilla/Epoxy type/stretchable foam to affected areas apply 1 coat bonding Liquid to affected areas, apply 1 coat universal undercoat to all walls and 2 coats Acrylic PVA White SANS approved to a smooth covered area	m ²	200	R	R
PREPARATIONS & PAINT SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 12					R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 E**

Quotation for: **Paintwork: Prepare roofs, ceilings, walls, cell door, gate and frame, window internal and external screens, overhead grid units and paint it accordingly.**

No.	Bill of Quantities	Unit	Quantity	Rate	Amount (Excl Vat)
9	Burglar bars and chair posts Pain-Admittance area, Visitors area, waiting room etc. -wash all bars and posts with sugar soap solvent, sand down with sandpaper, prepare, apply 1 coat Universal Undercoat and 2 coats Bovine Enamel SANS approved to a smooth covered area	m ²	10	R	R
10	Shelving-Linen store, pantry etc. -wash all shelving with sugar soap solvent, sand down with sandpaper, prepare, apply 1 coat Universal Undercoat and 2 coats Bovine Enamel SANS approved to a smooth covered area	m ²	20	R	R
12	Painting Ceiling cell passage- Prepare ceiling, primer coat all new screw heads, apply Polyfilla to area needed and apply 2 coats Acrylic PVA to it to a smooth covered area	m ²	23	R	R
13	Window Inner and Outer Screens- Sand down, apply rust repellent primer NS4 to rusted areas, and apply 2 coats Roofguard Atlantic Blue SANS approved to a smooth covered area. To match existing.	m ²	40	R	R
PREPARATIONS & PAINT SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 13					R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 E**

Quotation for: **Paintwork: Prepare roofs, ceilings, walls, cell door, gate and frame, window internal and external screens, overhead grid units and paint it accordingly.**

No.	Bill of Quantities	Unit	Quantity	Rate	Amount (Excl Vat)
14	Paintwork-Painting of all gutters, downpipes, Fascia boards Pipework, drainage grids etc. Sand down, apply 1 coat rust repellent NS4 where needed and apply 2 coats Roofguard Atlantic Blue SANS approved to a smooth covered area. To match existing.	m ²	80	R	R
15	Prepare sitting benches - Wash all concrete benches with sugar soap solvent, sand down with sandpaper, apply one coat universal undercoat and two coats Bovine enamel or similar SANS approved to a smooth covered area	m ²	60	R	R
PREPARATIONS & PAINT SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 14					

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 E**

Quotation for: **Paintwork: Prepare roofs, ceilings, walls, cell door, gate and frame, window internal and external screens, overhead grid units and paint it accordingly.**

ANNEXURE "B" SPECIFICATION INDEX MUST BE AS FOLLOWS	
ANNEXURE "C" BILL OF QUANTITIES TOTALS BROUGHT OVER MUST BE AS FOLLOWS	
PREPARATIONS & PAINT SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 12	R
PREPARATIONS & PAINT SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 13	R
SUB-TOTAL	R
TOTAL CARRIED OVER TO SUMMARY PAGE	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 F**

Quotation for: **Carpentry work: Remove, prepare and replace ceilings and doors**

No:	SPECIFICATION
1	Remove loose, damaged and incorrect ceiling materials, repair, prepare internal and external Rhino/ fibre cement ceilings, cornice, wooden doors and Ironmongery according to specifications and set minimum requirements
1.1	Specifications and set minimum requirements:
1.1.1	Materials and services must be provided to remove loose, damaged and incorrect carpentry work; repair and prepare Rhino/ fibre cement ceilings, cornice, wooden doors and Ironmongery to receive new paint. Rhino/ fibre cement Ceilings, wooden doors and Ironmongery repairs and finishing's must be rendered according to set National Building Regulations with SANS (SABS) materials and accessories.
1.1.2	Gypsum rhino ceiling length required as confirmed on site.
1.1.3	Thickness of rhino/fibre cement ceiling boards 6mm.
1.1.4	Ceiling boards to be fixed by means of drywall screws, screw heads to be primer coat with universal undercoat, spot putty to heads and painted as per requirements.
1.1.5	Width of rhino ceiling/fibre cement ceiling boards to be 900mm or 1.2m.
1.1.6	Gypsum/ polystyrene curved/profiled cornice 75mm-150mm to be replaced to match existing.
1.1.7	Fixing method-Gypsum cornice to be fasten with drywall screws and polystyrene cornice to be fixed with no more nail silicone sealant
1.1.8	Bischoff/jointing strips to be white steel or Pvc to match existing, strips to be primer coated with universal undercoat prior to installation.
1.1.3	Take Note: All electrical lights, light switches, exposed wiring must be made safe and sealed before industrial cleaning work are to be attended to accordingly.
CARPENTRY SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 1	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 F**

Quotation for: **Carpentry work: Remove, prepare and replace ceilings and doors**

No:	SPECIFICATION
2	Remove loose, damaged and incorrect materials, repair, prepare internal and external wooden doors and Ironmongery according to specifications and set minimum requirements
2.1	Specifications and set minimum requirements:
2.1.1	Materials and services must be provided to remove loose, damaged and incorrect carpentry work; Replace damaged hinges and Ironmongery. Repairs and finishing's must be rendered according to set National Building Regulations with SANS (SABS) materials and accessories.
2.1.2	Complete door furniture handles, mortice locks/euro double cylinder sets to be supplied and installed.
2.1.3	Door furniture must accommodate a euro cylinder/ mortice lock set complete with chrome plated handles, lock box, screws and strike plate etc.
2.1.4	Dimensions for Euro lock set 150mm x 150mm
2.1.5	Dimensions for Cylinder lock set case 100mm x back set 82mm x for end 22mm
2.1.6	Steel butt Hinges 100mm x 75mm x 3mm
CARPENTRY SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 2	

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No **AE DUDU 01/2026 F**

Quotation for: **Carpentry work: Remove, prepare and replace ceilings and doors**

No:	Bills of Quantities	Unit	Quantity	Rate	Amount (excl VAT)
3	Ceiling Cell Passage -Repair and make good rhino/nutec ceiling board including Cornice, new screw and alignment of ceiling	m ²	23	R	R
4	Secure all wooden door hinges by means of new screws, replacement of hinges and replacing of ironmongery where needed to match existing SANS approved	no	08	R	R
5	Remove and replace wooden door locks 4 lever Euro cylinder locks to match existing.	no	05	R	R
CARPENTRY SERVICES WITH ALL MATERIALS AND ACCESSORIES: PAGE 3				TOTAL	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No AE DUDU 01/2026 F**Quotation for: Carpentry work: Remove, prepare and replace ceilings and doors**

TOTALS BROUGHT OVER MUST BE AS FOLLOWS	
TOTAL PRICE PLUMBING SERVICES WITH ALL MATERIALS AND ACCESSORIES PAGE 3	R
TOTAL CARRIED OVER TO SUMMARY PAGE 4	R

Date:**Signature of compliance of all the above.****Postal Address / Firm stamp**

Requisition No: **AE DUDU 01/2026 G**

Quotation for: **Occupational Health and Safety: Compliance, execution and documents**

No:	SPECIFICATIONS				
1	Occupational Health and Safety: Compliance must be managed and documented daily.				
	SPECIFICATIONS AND SET MINIMUM REQUIREMENTS.				
1.1	Security of materials, plant, machinery, etc. must be for the cost of the contractor; the state must not be accountable for losses, theft, etc.				
1.2	All relevant OHS documentation must be updated and compiled daily, from date of site handover to date of practical completion and it must be included within the unit as priced.				
1.3	Project: OHS files must always be on site and available. Apon project completion OHS file to be handed to the client. Safety file must be updated on regular basis during site meetings and/or technical meetings.				
1.4	Safety: All site personnel, subcontractor personnel, visitors, etc. on site must be always equipped with PPE in accordance to set standards and regulations				
1.5	First aider with first aid box must be appointed and qualified to manage injuries and handling serious injuries etc.				
1.6	Contractor to be provided with a checklist for compliance, legal appointments, letter of good standing, risk assessment methodology, medical assessments,				
	Bills of Quantities	Unit	Quantity	Rate	Amount Excl. (VAT)
1.7	Occupational Health and Safety compliance and accountability must be for the appointed contractor according to specifications and set minimum requirements.	item	01	R	R
OHS SAFETY FILE AND COMPLIANCES: PAGE 1				TOTAL	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 G**Quotation for: **Occupational Health and Safety: Compliance, execution and documents**

TOTALS BROUGHT OVER MUST BE AS FOLLOWS	
TOTAL PRICE FROM PAGE 1	R
TOTAL CARRIED OVER TO SUMMARY PAGE	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

Requisition No: **AE DUDU 01/2026 A, B, C, D, E, F, G**


Quotation for: **Summary page: Masonry, Plumbing, Electrical, Steel Work, Painting, Carpentry and OHS pricing summary**

TOTAL SUMMARY OF A, B, C, D, E, F, G BROUGHT OVER MUST BE AS FOLLOWS	
TOTAL PRICE FROM AE DUDU 01/2026 A	R
TOTAL PRICE FROM AE DUDU 01/2026 B	R
TOTAL PRICE FROM AE DUDU 01/2026 C	R
TOTAL PRICE FROM AE DUDU 01/2026 D	R
TOTAL PRICE FROM AE DUDU 01/2026 E	R
TOTAL PRICE FROM AE DUDU 01/2026 F	R
TOTAL PRICE FROM AE DUDU 01/2026 G	R
TOTAL	R
CONTINGENCIES 5 %	R
SUB TOTAL	R
VAT 15%	R
GRAND TOTAL	R

Date:

Signature of compliance of all the above.

Postal Address / Firm stamp

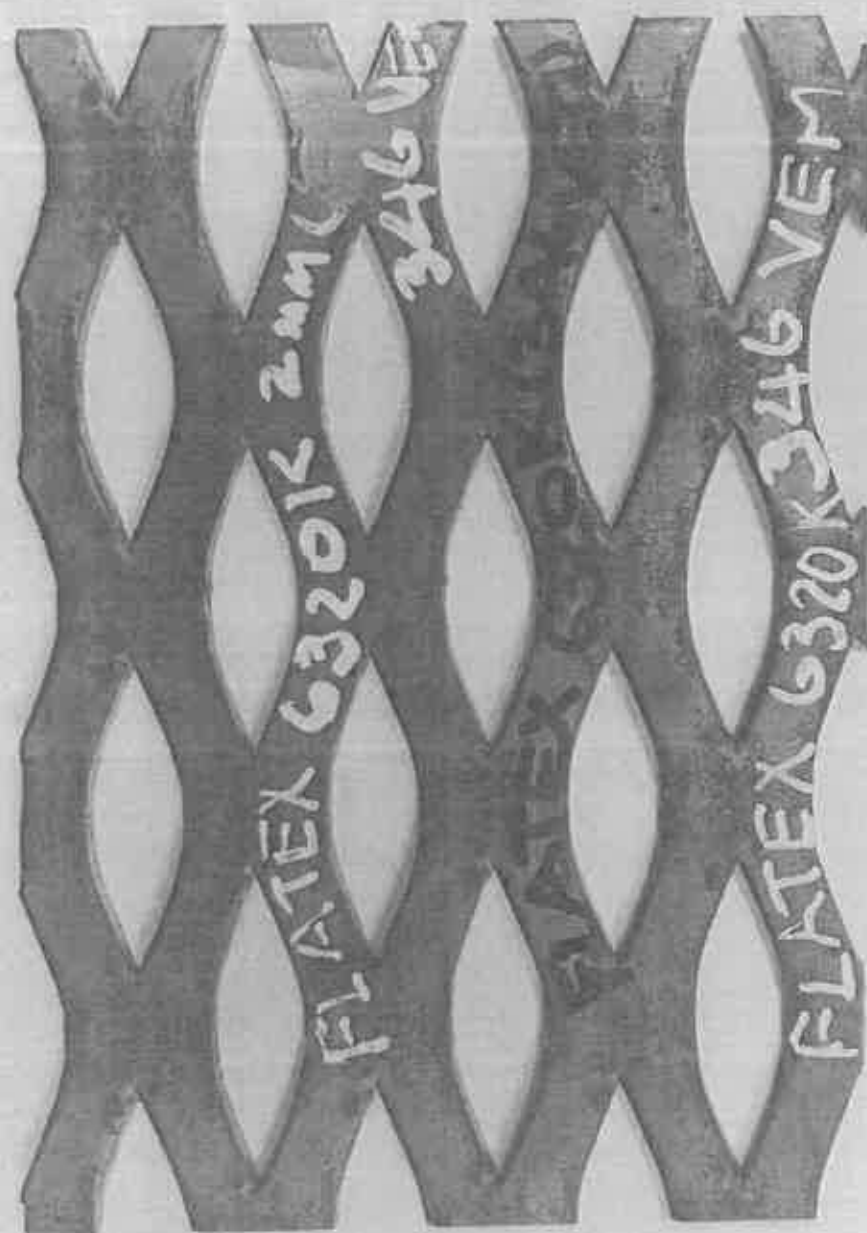

All steel to be galvanised
All steel work to be hot dipped
galvanised, all in accordance
with SANS Specification 121
(SABS ISO 1461).
- see PW 371 Section 12
Clause 12.1 to 12.3



ELEVATION OF SOLID STEEL DOOR
(TYPE T2)

Responses to these items are
 used only to supply missing
 values when not approved
 products are available and can
 be substituted with prior
 approval from SAPH BLM
 Report Barbed Products
 Tel (913) 645-0725
 Fax (913) 645-1192

DO NOT REMOVE



DEPARTMENT OF
PUBLIC WORKS
P.O. Box 200
Proctor
00081
Tel 0123 137 2000

TM 24-24



ASCOMMITTEA


**YOUTH AFRICAN
POLICE SERVICE**

**TYPE CELL DOOR
ELEVATIONS**


NAME: AS ECHOEN DATE: JULY 2012 POL: 2012/01

All work according to Departmental Specification PW371

All steel to be Galvanised
All steel work to be hot dipped
galvanized, all in accordance
with SANS Specification 121
(SABS ISO 1461).
- see PW 371 Section 12
Clause 12.1 to 12.3

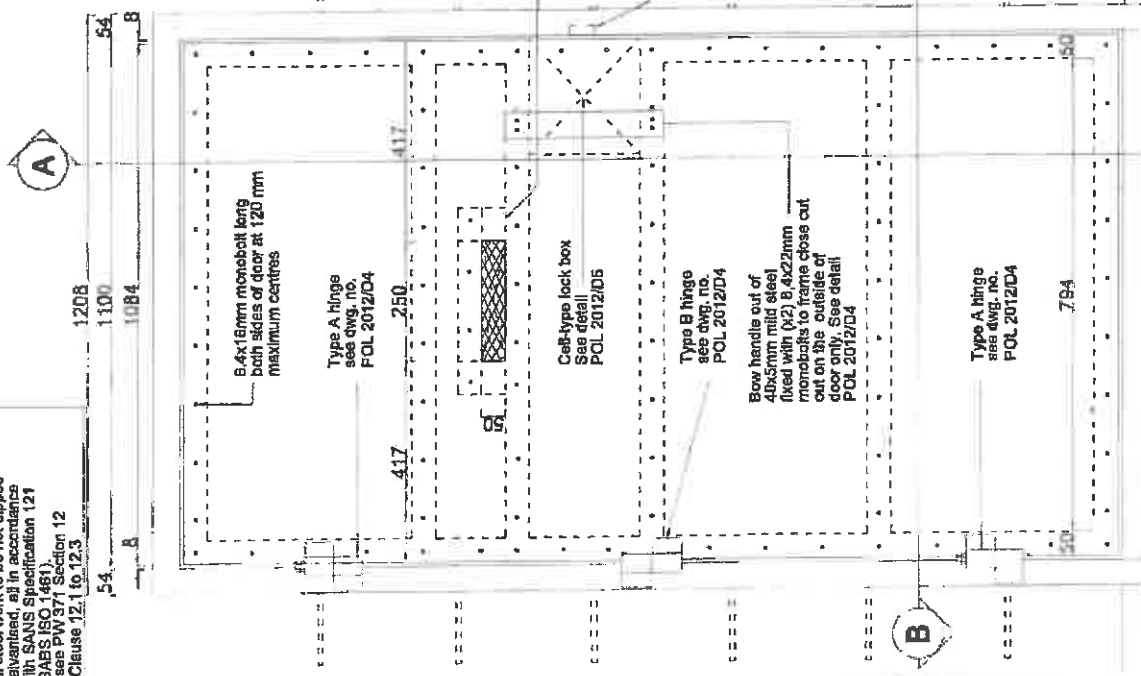

ELEVATION OF SOLID STEEL DOOR
WITH VIEWING PANEL (TYPE T1) SCALE 1:10

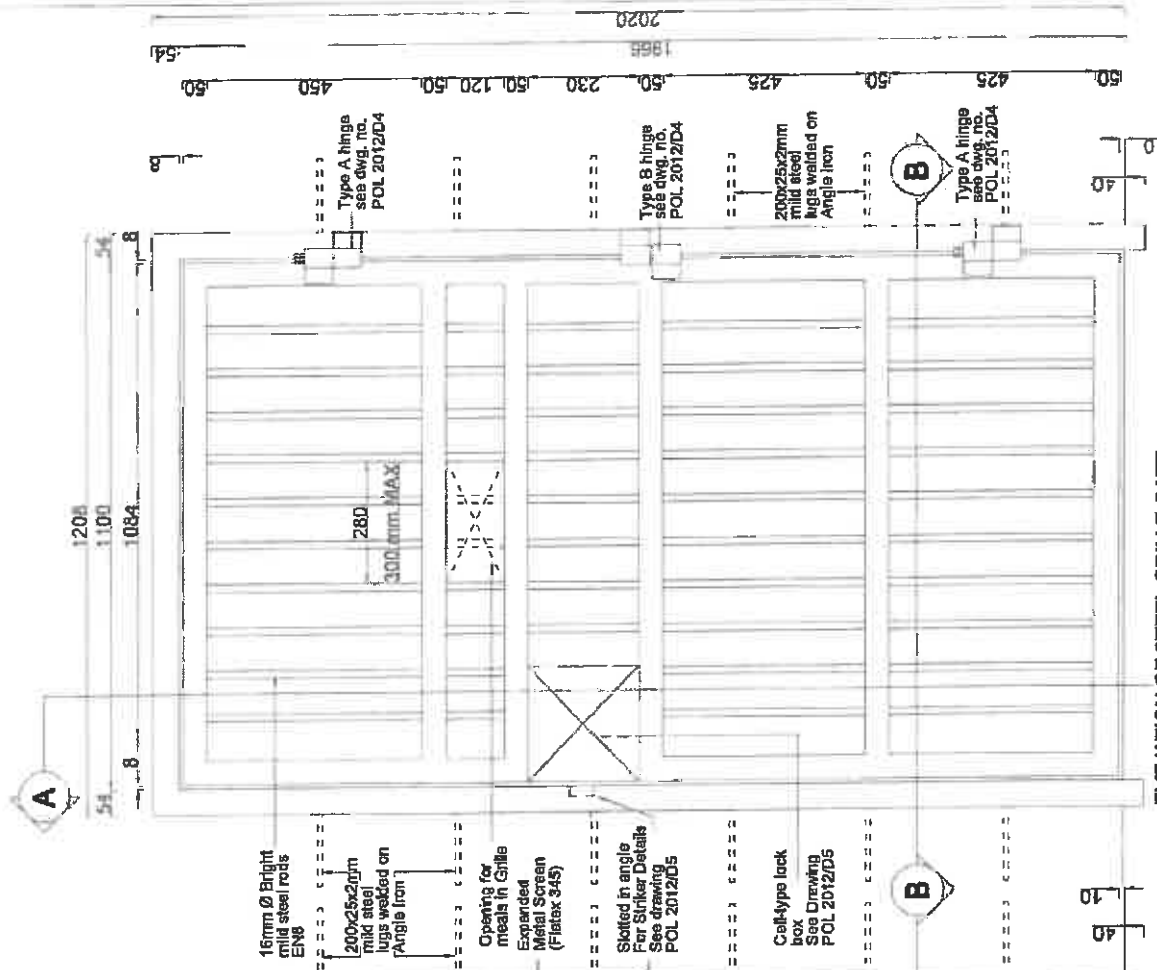

ELEVATION OF STEEL GRILLE GATE
(TYPE T3/1) SCALE 1:10

THE UNIVERSITY OF CHICAGO

NOTE
References to book names are
used only to simplify ordering.
Various smaller and approved
products are available and can
be substituted with price
approved from SUPS-BOM
Excel Business Products.
Tel 0123 645 8728
Fax 0123 645 8762

PC012012-01-DW
CBI NOTED



DEPARTMENT OF
PUBLIC WORKS
P.O. Box 200
Pittsford
0004
Tel (012) 897 2000

Even Greater Safety
with
Intelligent
Design™

BOUTHE ASTROCAN

TYPE CELL DOOR ELEVATIONS

WCS **Original**

with As Above **Date KENART**

JULY 2012 **Number**

POL 2012/01a


Police number

Note A

6.4x16mm long monobolt
both sides of door at 120 mm
maximum centres

Note B

Bow handle out of 40x6mm mild
steel fixed with 6.4x22mm long
monobolts to frame close out
on this outside of door only
See Detail POL 2012/D4

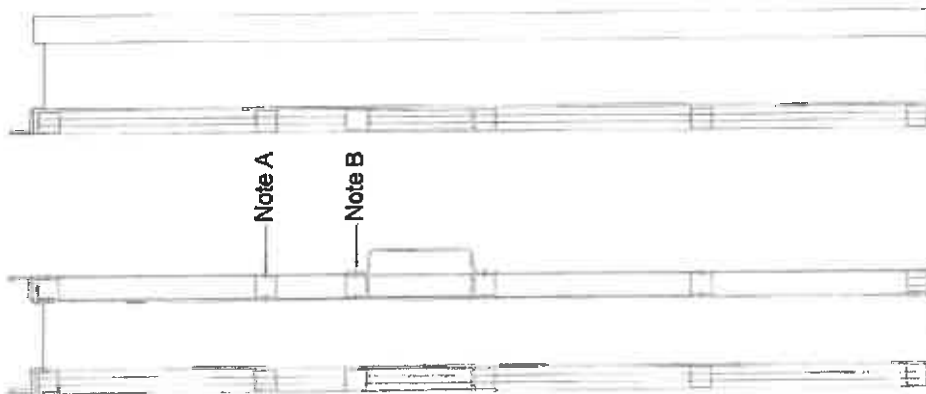

SECTION A-A


SCALE 1:10

CELL DOOR &
GRILLE GATE

SECTION A-A

SCALE 1:10

GRILLE GATE
ONLY

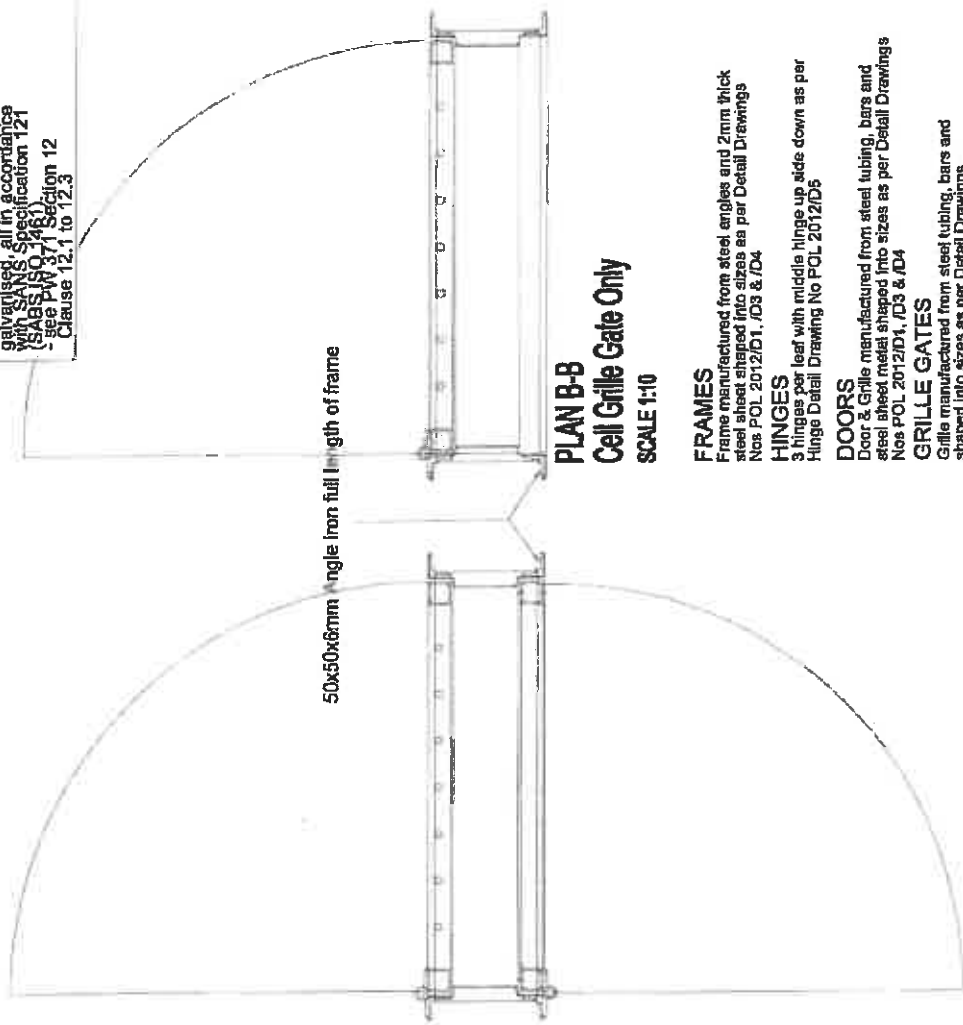

PLAN B-B

Cell Grille Gate Only

SCALE 1:10

NOTE:

All work according to Departmental
Specification PW 371

All steel to be Galvanised

All steel work to be hot dipped
galvanised, all in accordance
with SANS Specification 121

- See PW 371 Section 12


Clause 12.1 to 12.3

NOTE Reference to this drawing must only be made in conjunction with the relevant drawing and specification. It is the responsibility of the designer to ensure that the drawing is used in the correct context.		Copyright reserved to the Department of Public Works and Roads
POL 2012/D2/D4 CELL DOOR & GRILLE GATE		DEPARTMENT OF PUBLIC WORKS Private Bag 205 Pretoria 0001 Tel: 012 345 6789 Fax: 012 345 6789
ARCHITECTURAL DRAWING		SOUTH AFRICAN POLICE SERVICE
TYPE CELL DOOR PLANS & SECTIONS		DATE: 1 JULY 2012 BY: J. J. J. J. J. FOR: POL 2012/D2

NOTE:

All work according to Departmental Specification PW 271
All steel to be Galvanneal
All steel work to be hot dipped galvanneal, all in accordance with SANS Specification 121 (SANS 121:1981)
- see PW 371 Section 12
- Clause 12.1 to 12.3

NOTE:
Fit Top & Bottom Hinges to Cell Door or Grille Gate to allow for sufficient play for at least 4 mm play either up or down.
Adjust setting bolts to the specified top gap between leaf and frame. There after weld inside hinges (up side down as shown) into place allowing a space of 4 mm between the two parts for further future adjustment.

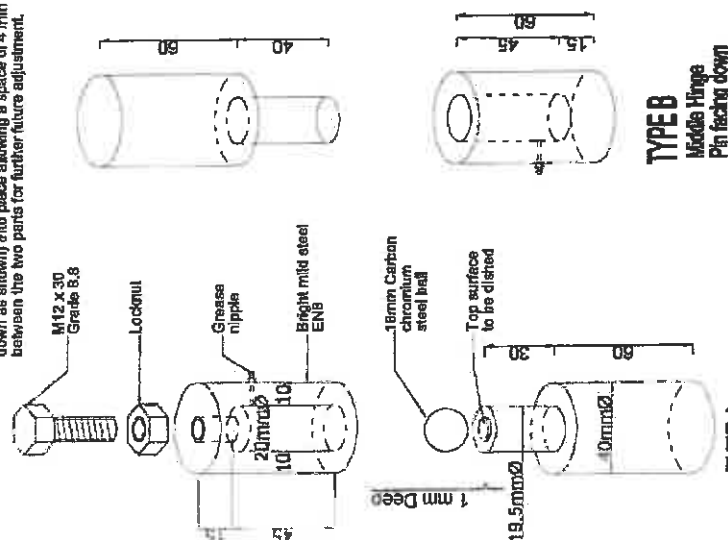


TYPE A

Top & Bottom Hinge
Pin facing up

DETAIL OF CELL DOOR HINGES
SCALE 1:2

SEE NOTE 1

DETAIL OF BOW HANDLE
SCALE 1:2

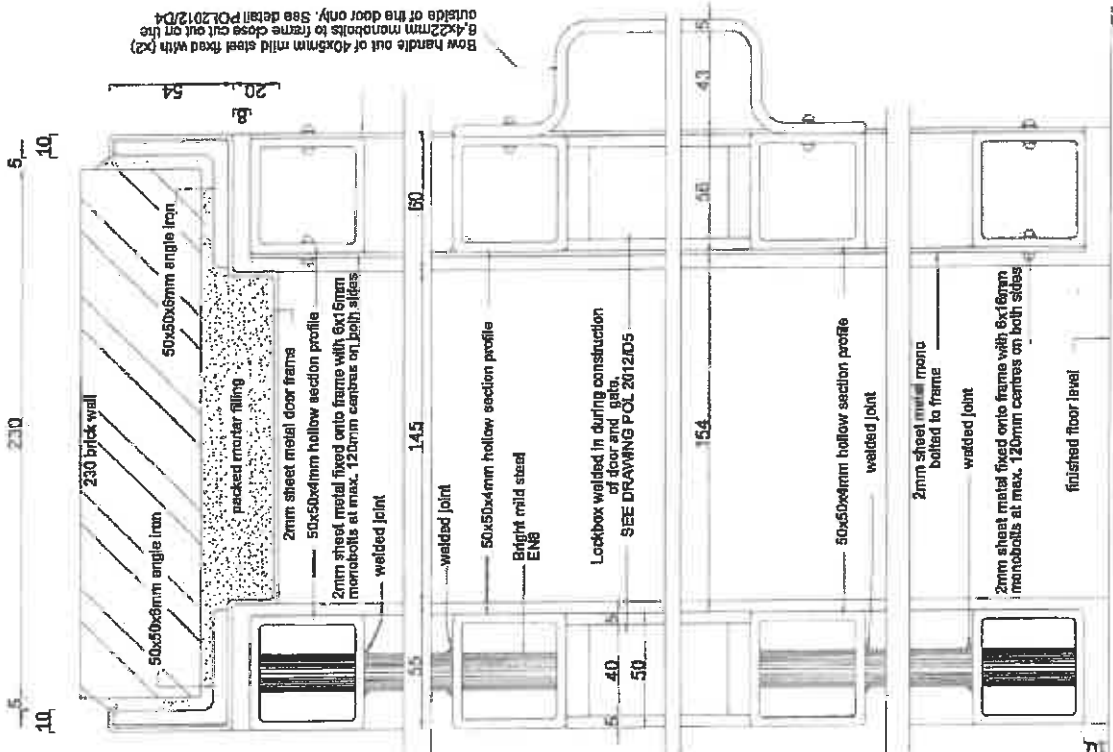

DETAIL SECTION AA
SCALE 1:2

NOTE

Reference to both frame and leaf to be supplied, to be hot dipped galvanneal, all in accordance with SANS Specification 121 (SANS 121:1981)
- see PW 371 Section 12
- Clause 12.1 to 12.3

POLICE DRAWING
POLICE SECTION AA
AND DETAILS



ARCHITECTURAL

SOUTH AFRICAN
POLICE SERVICE



**TYPE CELL DOOR
SECTION AA
AND DETAILS**

Author: KENWAT
Date: JULY 2013
Drawing No: POL 2012D4





F-DF-SAP

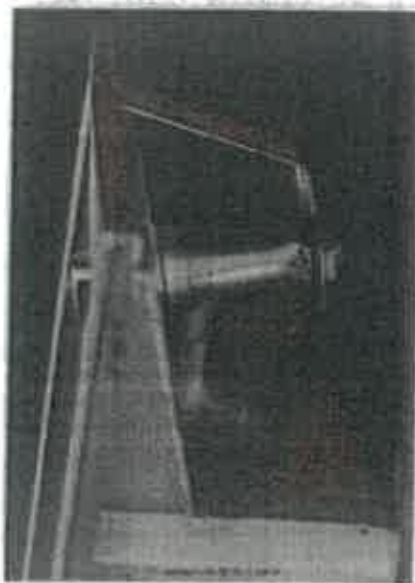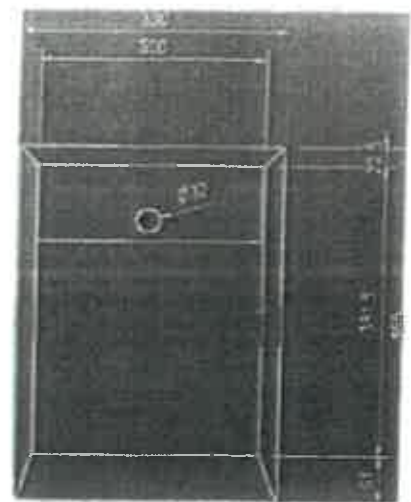

Factory fitted metered tap that runs for 8-15 seconds.



Back end of the recessed drinking fountain showing tap inlet and waste.

Product Enquiry


1/1/2016

1/1/2016

We use cookies to ensure that we give you the best experience on our website. If you continue to use this site we will assume that you are happy with it.

[Accept](#) [Read more](#)

NOTE Reference to this drawing is for information only. It is not to be used for any other purpose. The drawing is the property of the Department of Public Works and is not to be reproduced without the written consent of the Department. Approved: SAF 2012 Date: 14 JUL 2012 For: SAF 2012		DEPARTMENT OF PUBLIC WORKS Private Bag 200 Pretoria 0001 Tel: (012) 367 2000 Fax: (012) 367 2000 T.A. 0000	ARCHITECTURAL SOUTH AFRICAN POLICE SERVICE	TYPE CELL SHOWER DETAIL B & SECTION
CELL SHOWER DETAILS		SAF 2012	SAF 2012	SAF 2012

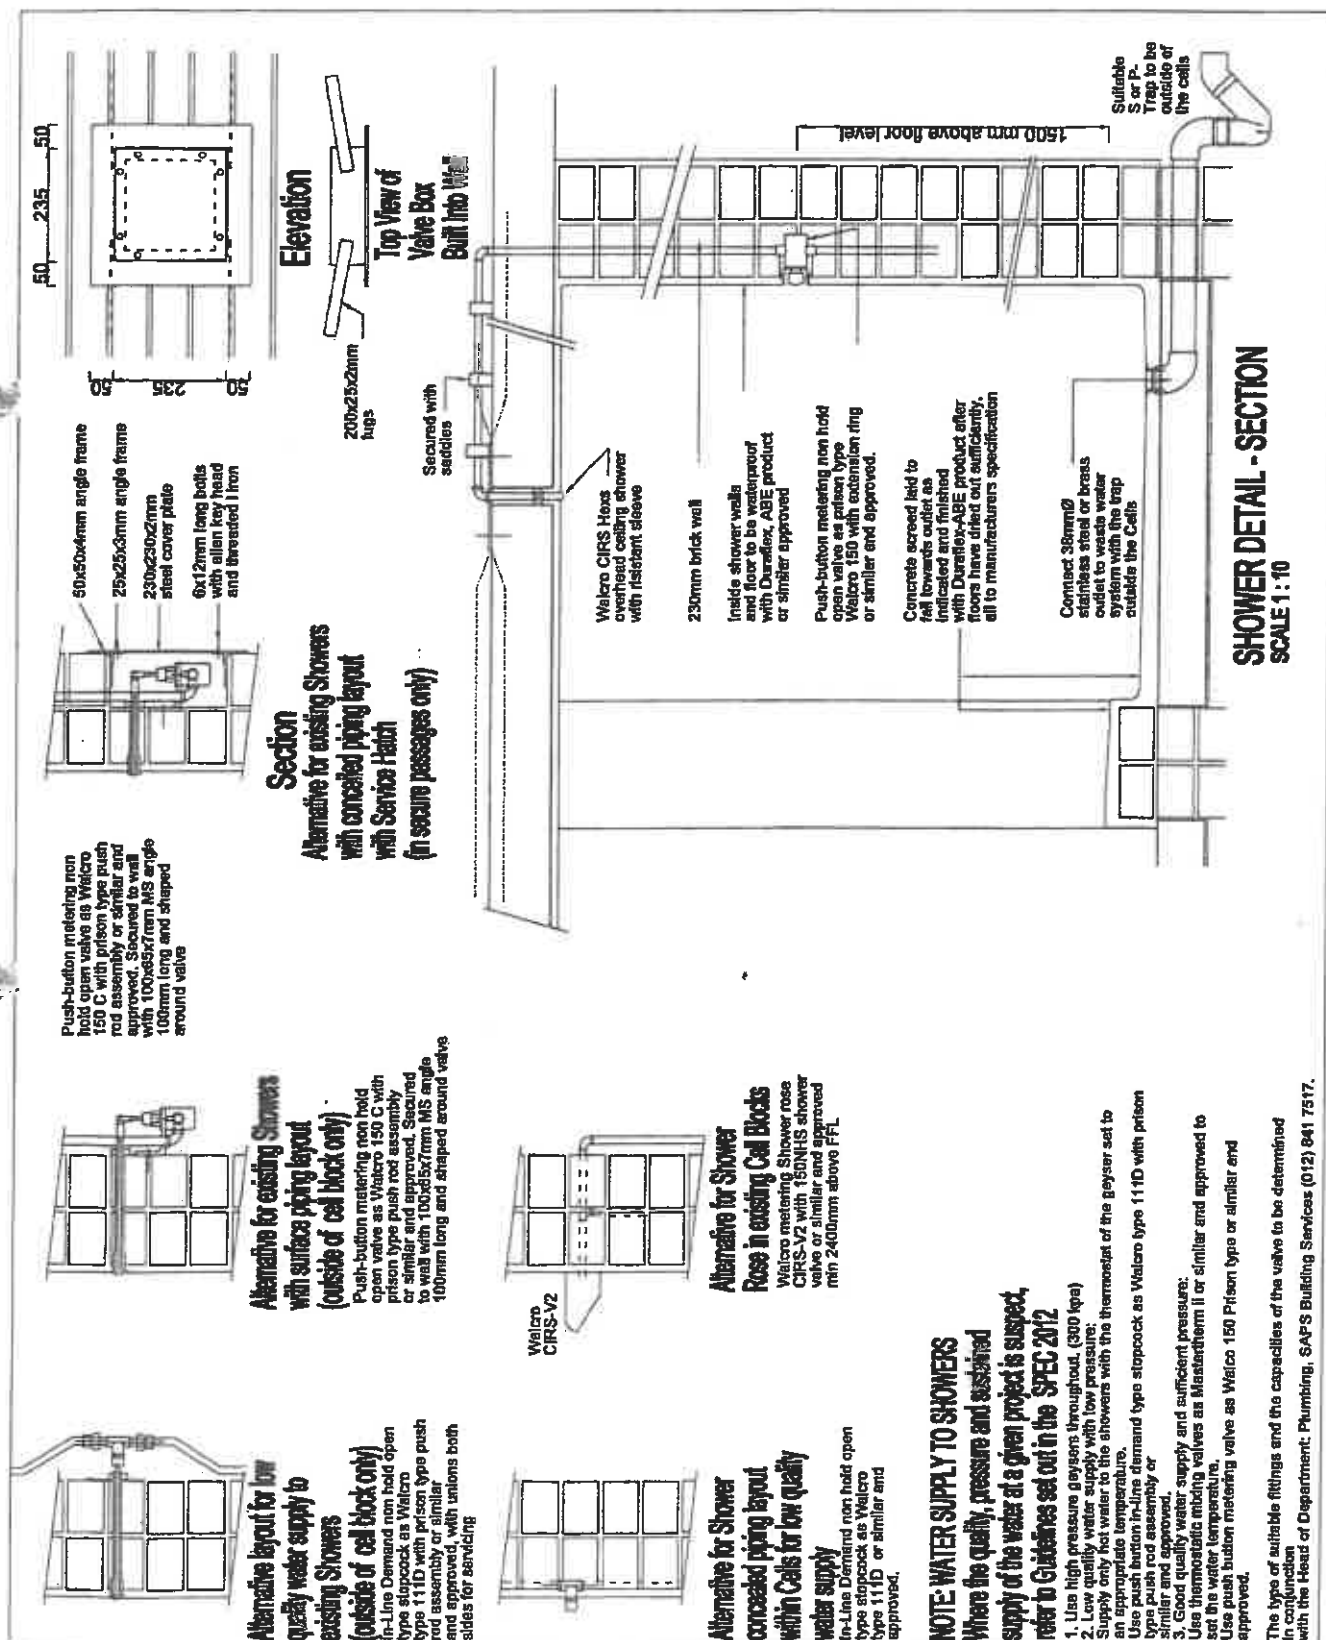



Rada thermostatic mixing valves for anti-scald protection

For commercial individual and group showering, hand washing and bathing

Anti-scald protection for the family in public ablutions



RADA 320 F
Thermostatic mixing valve



RADA 425 F
Thermostatic mixing valve



RADA MEYNELL 15/3



RADA 222 DK-LF

The Rada thermostatic mixing valve employs two advanced thermoscopic temperature sensors to provide blended water at safe and accurate temperatures for showering and hand basins.

RADA SAFE

Rada is the solution to protect the public and children from accidental scalding hot water

Why use Rada thermostatic?

The Radatherm cartridge constantly senses and reacts to deliver a consistent safe blended water temperature. The valve prevents the ablution user from receiving the scalding hot water in a geyser at around 60-65°C.

Instead it will accurately reduce the hot water down to a safe temperature.

Skin injuries by scalding

Temperature	Contact time
48°C	5 Minutes
51°C	2 minutes
54°C	30 seconds
57°C	10 seconds
60°C	5 seconds
63°C	3 seconds
65°C	1.5 seconds


What they do:

- Thermostatic mixing valves accurately control the temperature of water for showering, bathing and hand-washing.
- They should maintain the pre-selected temperature even if the water pressures and temperatures vary when other appliances are used.
- Installed and maintained correctly, they can significantly reduce the risk of scalding.
- In the event of cold water supply failure, the thermostatic mixing mechanism will automatically shut down the flow to prevent discharge of dangerously hot water. Similarly, in the event of hot water failure to prevent cold water shock.

How do they work?


- Hot and cold water enters the valve and is mixed to a temperature pre-selected by the user or installer.
- This is achieved automatically by a thermally sensitive mechanism thermostat or thermistor, within the valve that proportions the amount of hot and cold water entering to produce the required blend.
- The mechanism automatically compensates for any variations in supply pressures or temperatures to maintain the pre-selected temperature.

Pressure & Temperature




WAL 508-001, Ø84mm type combination temperature and pressure gauge. Back entry

Temperature



WAL Ø60mm temperature gauge
Range: 0° - 120°C. Back entry

Walcro CIRS-V2



Code: Walcro CIRS-V2


Designed for commercial and industrial showering applications. Features vandal resistant properties, internal strainer and provides jet type spray thanks to the internal propeller and thus is far less susceptible to lime scale blocking. The shower rose was specially designed to save water and does not require a regulator.

Inlet connection: 1/2" BSP female (15mm)

Flow rate range: 6 litre/min to 8 litre/min, Pressure dependant


Minimum pressure: 1 bar

Strainer: Internal - removable for cleaning

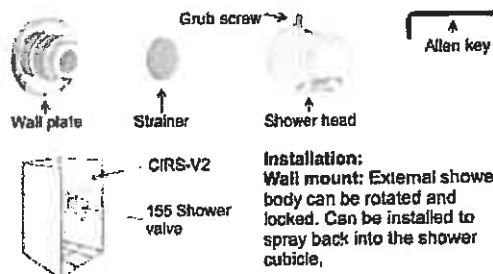

Installation:
Wall mount: External shower body can be rotated and locked. Can be installed to spray back into the shower cubicle.

Walcro CIRS-V3

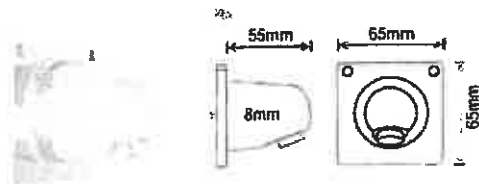

Code: Walcro CIRS-V3

High Risk, Vandal Resistant Shower Rose with Rotational Flow Technology

Vandal resistant selectable levels of security

- Tiled-in + wall pins
 - Tiled-in
 - Surface mounted with pins
- Perfect for mining, prisons and any public ablution shower where vandalism is a high risk.


Walcro's Rotational Flow Technology design ensures that there are no small holes that can easily get blocked with lime or dirt. The V3 has 1 large outlet for long term non-clogging. Internal strainer - to stop large dirt / stone particles.

Inlet connection: 1/2" BSP female (15mm)

Minimum pressure: 1 bar

Flow rate range: 6 litre/min to 8 litre/min, Pressure dependant

Illustration of Walcro group metering shower principle with a Rada mixing valve

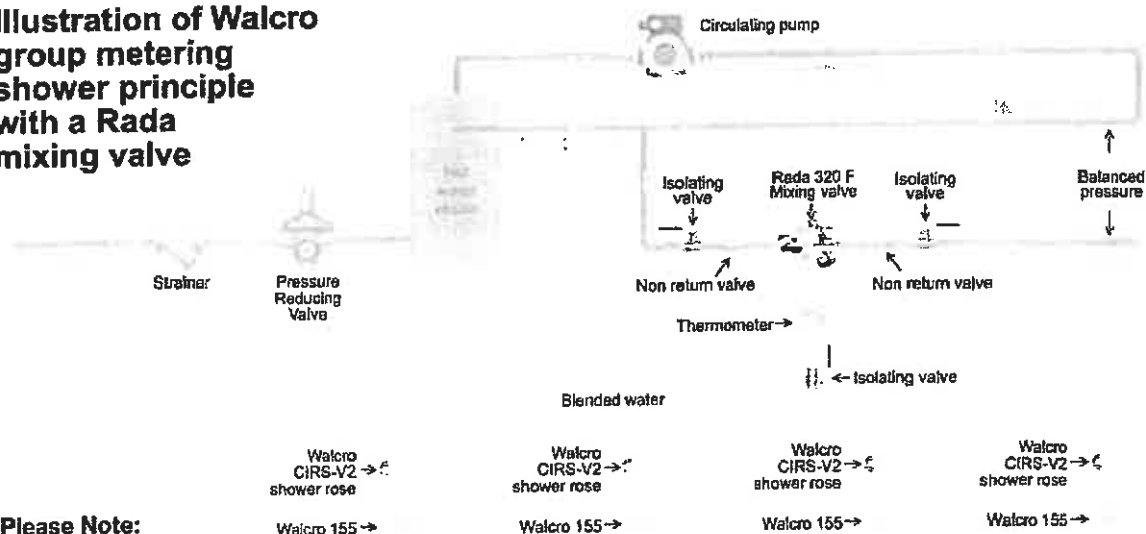

Please Note:
Not all valves required are shown.

All steel work to be hot dipped galvanized, all in accordance with BAH3 Specification 121 (BAH3 190 1481).
- see PW 371 Section 12
Clause 12.1 to 12.3

Top surface to be drilled

60

30

Ø10mm2

**Top & Bottom Hinge
Pin Loading**

DETAIL OF CELL DOOR HINGES
SCALE 1:2

**DETAIL OF
BOW HANDLE
SCALE 1/2**

[illegible]

DETAIL SECTION A-A
SCALE 1/2"

LOCKS AND LOCKBOXES (CAN BE SUPPLIED BY
SAPS LOGISTICS PRETORIA) WELDED INTO
DOOR AND GATE. ORDER AND SUPPLIES TO BE
CO-ORDINATED AND ACQUIRED BY SCM
(BUILDING SERVICES) PRETORIA
TEL: (012) 841 7388. BUT PROCURED
FROM THEM AGAINST THE CONTRACT BUDGET.

Information is made available
and only to properly identify
the person and (optional)
products are available and can
be substituted with other
approved from 8448 824
Edward Gordon, President
Tel (212) 465-8726
Fax (212) 845-8726

FOR THE FUTURE
WE'VE GOT TO
LOOK BACK



DEPARTMENT OF
PUBLIC WORKS
P.O. Box 2025
Portland, Oregon 97208
Phone: 503/596-3000
Toll Free: 1-800-555-5555
Fax: 503/596-3000

THE CELL DOOR & GATE LOCK BOX TO HAVE A KEYHOLE ONLY ON THE EXERCISE YARD SIDE. CELL SIDE TO BE BLOCKED OFF.

Lock as supplied separately

10x1.5 mm
thread
countersunk
flat head
bolts

LOCK-TOP ELEVATION

SCALE 1:2

**TYPE CELL DOOR
LOCK & LOCK BOX**

Name: Joe Chynoweth Date: JULY 2013
 Title: RECEIVED POL 2012/08

LOCK-SIDE ELEVATION

SCALE 1:2

LOCK BOX - FRONT ELEVATION

SCALE 1:2

LOCK BOX - TOP ELEVATION

SCALE 1:2

141

Note A

6.4x150mm long monobolt
both sides of door at 120 mm
maximum centres

Note B

Bow handle out of 40x50mm mild
steel fixed with 6.4x22mm long
monobolts to frame close cut
out on the outside of door only
See Detail POL2012D4

Note A

Note B

SECTION A-A

SCALE 1:10

CELL DOOR &
GRILLE GATE

SECTION A-A

SCALE 1:10

GRILLE GATE
ONLY

PLAN B-B

Cell Door & Grille Gate

SCALE 1:10

PLAN B-B

Cell Grille Gate Only

SCALE 1:10

50x50x6mm Angle iron full length of frame

NOTE:

All work according to Departmental
Specification PW-371

All steel to be Galvanised

All steel work to be not dipped
galvanised, all in accordance
with SANS 10169 Specification 121

See PW-371 Section 12

Clause 12.1 to 12.3

NOTE

References to lock frames are
used only to specify casting
types and not to specify
products are available and from
in which they are
approved from SANS 324
Approved Suppliers:
T.M. Schutte
Tel: 011 841 8728
Fax: 011 841 8728

POL2012-02 NEW
CELL DOOR PLANS &
SECTION

DEPARTMENT OF
POLICE SERVICES
Private Bag 206
Pretoria
0001
Tel: (011) 357 3050
T.M. Schutte
Chief Designer

ARCHITECTURAL

SOUTH AFRICAN
POLICE SERVICE

TYPE CELL DOOR
PLANS & SECTIONS

As Shown
Date: 28 JULY 2012
By: T.M. Schutte
For: POL 2012/02

1018 (STANDARD DOORS) 1208 (TYPE T3/1)

894 (STANDARD DOORS) 1084 (TYPE T3/1)

CELL SIDE

hinge to detail see drawing POL 2012/D4

40 X 8 mm flat steel welded to angle iron to attach hinge as shown Cut aperture into sheet metal and weld directly on to tubing

40 x 8 mm flat steel welded directly on square tubing frame. Cut aperture into sheet metal and weld directly on to tubing. Close cutout with welding joint

50x50x4mm hollow steel section

50x50x6mm angle iron

10

55

55

55

55

55

55

55

55

55

55

55

55

55

18mmØ Bright mild steel rods EN8

200x25x2mm mild steel lugs welded on to frame to be built into every 4 brick courses

lock bolt with a 65x20x25mm long mortar box

17x50mm aperture in frame and 50x50x6mm angle iron at centre of lock box position for

2mm sheet metal door frame

2 mm sheet metal fixed onto frame with 6x16mm monobolts at max. 120mm centres on both sides

50x50x4mm hollow steel tubing

2mm sheet metal door frame

40 x 8 mm flat steel welded to square tubing frame. Cut aperture into sheet metal and weld directly on to tubing

hinge to detail see drawing POL 2012/D4

230 facebrick wall

50x50x6mm angle iron

40 X 8 mm flat steel welded to angle iron to attach hinge as shown Cut aperture into sheet metal and weld directly on to tubing

50x50x6mm angle iron

200x25x2mm mild steel lugs welded on to frame to be built into every 4 brick courses

17x50mm aperture in frame and 50x50x6mm angle iron at centre of lock box position for

lock bolt with a 65x20x25mm long mortar box



NOTE:
All work according to Departmental Specification PW 371
All steel to be Galvanised
All steel work to be not dipped galvanised, all in accordance with SANS Specification 121 (SABS ISO 1461).
- see PW 371 Section 12
Clause 12.1 to 12.3

EXERCISE YARD / PASSAGE SIDE

PLAN SECTION B-B

SCALE 1:2

TYPE CELL DOOR
SECTION B-B

Author	Architect	Engineer	Checker
Mr. J. M. M. M.	Mr. J. M. M. M.	Mr. J. M. M. M.	Mr. J. M. M. M.
Date	Date	Date	Date
JULY 2012	JULY 2012	JULY 2012	JULY 2012
Project	Project	Project	Project
POL 2012/D3	POL 2012/D3	POL 2012/D3	POL 2012/D3



SECTION
(External Windows)
SCALE 1:20

EXTERIOR SCREEN

**Purpose made Screen to Specification,
Size & Details as Standard Drawing
POL 2012AW2 and POL 2012AW3**

FURNITURE

2x Cylinder Padlocks (Solid 630 or similar & approved).
One key to pass all padlocks per project (Duplicate keys)

WINDOW FRAME

**Purpose made Window to Specification,
Size & Details as Standard Drawing**

CLASS
FALL 2011

5.4 mm Laminated Safety Glass

FURNITURE

Purpose made Handle & Hinges
to Specification, Size & Details
as per Standard Drawing

PLITY

Putty to be primed and painted with Enamel paint
Colour to match either galvanising or painted frames
see PW 371

INTERIOR SCREEN

Purpose made Fixed Screen to Specification,
Size & Details as Standard Drawing
POL 2012WF2 and POL 2012WF3

NOTE
References to trade names are used only to simplify labeling. Various similar and approved products are available and can be substituted with other approved firm SAPS SGMs (Export Sanction) Products.
Tel (012) 845 8728
Fax (012) 845 8702




ARCHITECTURAL
POLICE SERVICE

**TYPE CELL WINDOW
DETAIL PLAN
& DETAILS**


As Soon
JULY 2012
POL 2012AH

NOTE:
All work according to Departmental Specification PW 371
All steel to be Galvanised
All steel work to be hot dipped galvanised, all in accordance with SABS Specification 783.
- see PW 371 Section 13
Clause 13.1 to 13.3

NOTE
Cell Windows in External Walls
to be maximum of 2 brick courses
below Concrete Slab Top of Cell
Window between Cell & Cell Yards
to be at Door Height.

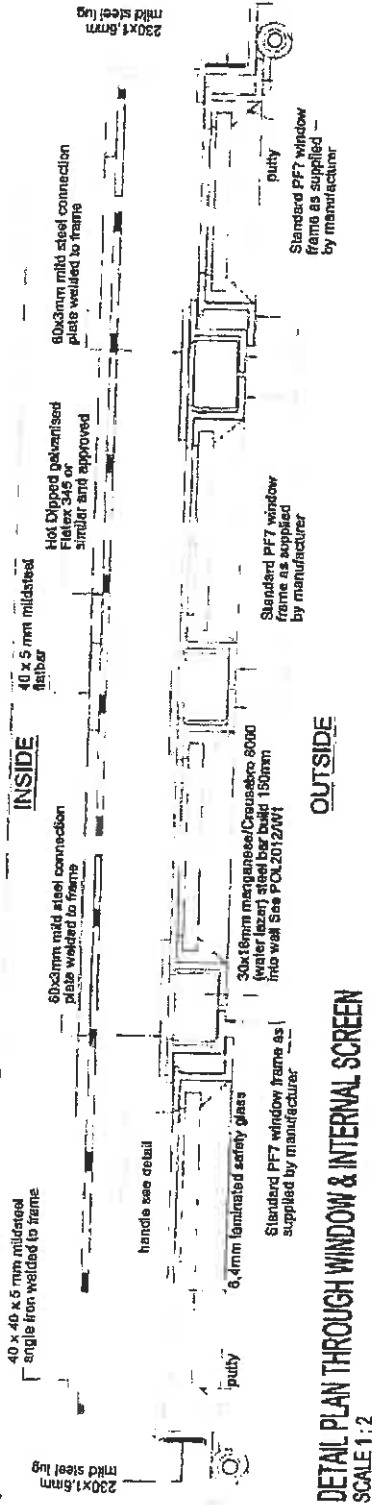


DETAIL PLAN THROUGH WINDOW & INTERNAL SCREEN
SCALE 1:2

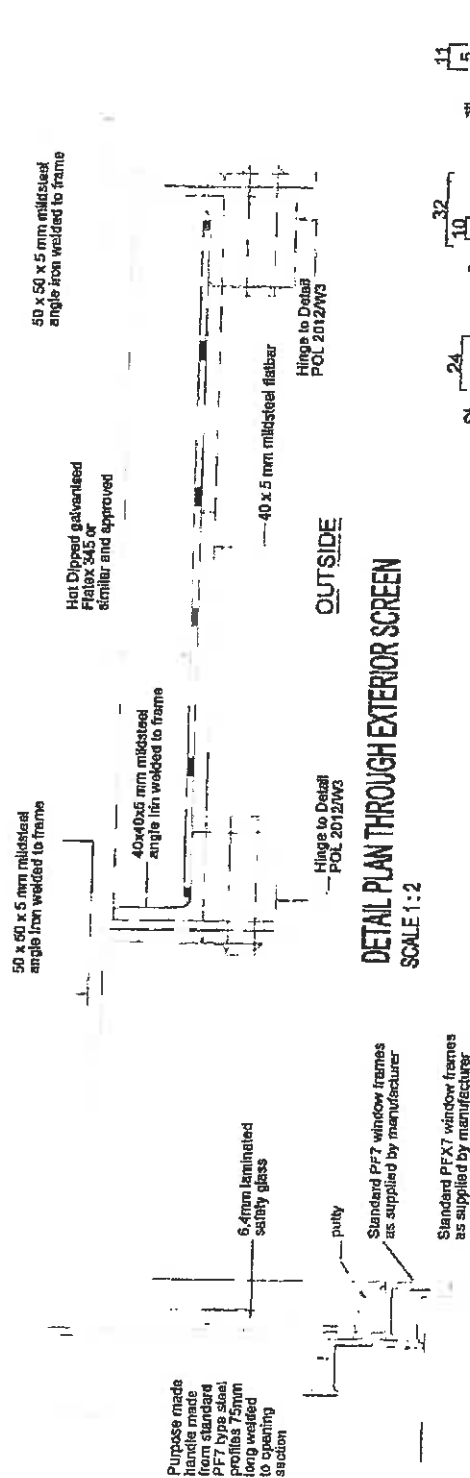

DETAIL PLAN THROUGH EXTERIOR SCREEN
SCALE 1:2

DETAIL OF HANDLE
SCALE 1:2



NOTE:
All work according to Departmental Specification PW 371
All steel to be Galvanised
All steel work to be hot dipped galvanised in accordance with SABS Specification 703, - see PW 371 Section 13
Clause 13.1 to 13.3



DETAIL OF WINDOW HINGE
SCALE 1:2

100%

NOTE
Reference is made to the use of any material, including but not limited to, which is not specified in the drawings, and which is to be used in the construction of the work, shall be of a quality and standard approved by the Engineer in Charge.



TYPE CELL WINDOW DETAIL PLAN DETAILS
As Shown
18.12.2012
POL 2012/W3



NAME: AS SHOWN
 DATE: JULY 2012
 POL: 2012N25

330 mm WALL.
See Annexure B & C

200x100x5 mm high tensile
steel mesh in wall behind WC cubicle

WALCRO No 104C brass back entry
Toilet Flush Valve with integral vacuum
breaker and modified push-rod connector
or similar approved

Pushrod assembly

20mm Galv. pipe threaded with
lock-nut and socket

Holder bar

38mm Ø brass supply pipe, bend and pin
connector for Salihass Steel WC Pans

WC Pan


Mortar filling

Note:
No plumbing
connection
inside wall
space

Alternately in areas with
a high lime content use
low level cistern with
1.15° H₂O flush valve
(spec.) in
SABS Duralite / Paltor
cisterns or similar and
approved.

Connect Tap to
15mm Ø cold
water supply
hand wash basin

Connect 38mm Ø
outlet to waste
water system
P-Trap located
outside cell

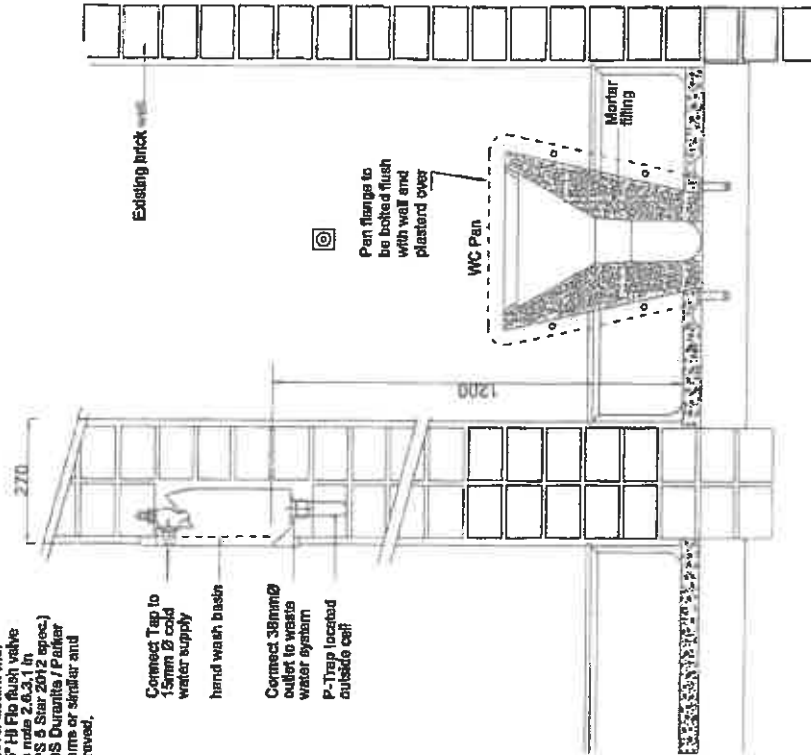

SPECIFICATION

OVE Model OSPAI or FRANKE Model 330185 or similar and approved
vandal proof WC pan manufactured from 1.2mm grade 304 (8/10)
stainless steel, fully welded and polished to a no.4 satin finish,
L=485mm, W=390mm, H=435mm with circular flushing rim & bowl,
full flow P-trap, 38mm Ø supply flush pipe: both with
sufficient length to protrude through the wall.
(All connections to be outside). Integral 38mm wide
flange to bottom slides & top, 7 times bolted to wall
& floor complete with expanded metal mesh for mechanical
bond for plastered to the pan flange. Required pipe lengths
to be determined on site.

WALCRO No104C or similar and approved brass back entry
non hold open Toilet Flush Valve with integral vacuum
breaker & modified push-rod connector, complete with 38mm
flushpipe, bend & pin connector.
Present type brass finished ECCNOFLUSH as type KCF3.404 is
an approved alternative including elbow. Straight pipe and
pin connector

WC PAN DETAIL SECTION

SCALE 1:10

SECTION THROUGH TOILET CUBICLE WITH WASH HAND BASIN DETAIL (Drinking Fountain)

SCALE 1:10

NOTE

Attention is drawn to the fact that the
toilet pan must be installed in such a
manner as to ensure that the
pan flange is bolted flush with the
wall and plastered over.
Special fasteners must be used.
For details see
P. 102/103/104
P. 102/103/104

Architectural
W.C. PAN DETAIL SECTION
& ELEVATION



Architectural
W.C. PAN DETAIL SECTION
& ELEVATION

TYPE CELL WC PAN
DETAIL SECTION
& ELEVATION


Architectural
W.C. PAN DETAIL SECTION
& ELEVATION
P.O. 2012/81



ANNEX – A

- Description: SAPX597 with external flanges with 450 mm long extended pipes
- Product code: 2540164 / 336185
- Order code: F SAPX597

1.6mm S/S



1.6mm S/S

1.2mm S/S



Top view of the SAPX597 toilet pan showing dimensions in mm



Side view of the SAPX597 toilet pan showing dimensions in mm

Maximum Security Toilet with 1.6mm S/S Pan and 1.2mm S/S Flange

Stainless steel prison toilets

SAPX597 Maximum Security toilet

SAPX597 Heavy Duty Wall and Floor Mounted WC Pan 355 x 550 x 485 mm high. Flange SA to manufacture Unit from Grade 304 (18/10) Stainless Steel 1.2 mm and 1.6 mm gauge. Unit to be manufactured with a crested concealed flushing rim and integral F-Flap with a 100 mm outlet pipe and a 38 mm back entry inlet pipe extended to 450 mm. The pan to be manufactured with a shroud with external flanges for securing the pan through the wall and into floor with anchor bolts. (Bolts elsewhere measured)

- Grade 304 (18/10) Stainless Steel 1.2 mm / 1.6 mm gauge
- Hygienic and vandal resistant
- Pressed components to ensure consistent quality and performance
- 6 liters flushing
- Heavy duty outer casing conceals the plumbing
- Pressed concealed flushing rim
- Provision for secured fixing through wall and into floor
- Optional outlet and flush inlet pipes are available which can be shortened / lengthened to suit plumbing
- Sub-assembly of pan is pickled and passivated to prevent corrosion of the building. (See the installation instructions)



BASTERFIELD

04VF_WAL103LC WALCRO CONCEALED TOILET FLUSHING VALVE

THE ADVANTAGES OF FLUSHING VALVES

The Walcro flushing valve provides instantaneous, repeatable and vandal resistant flushing systems. The flushing valve excels in high volume traffic usage and can easily cope with consecutive flushing where a cistern and sewerage could fall with inadequate water delivery with only partially filled cisterns being flushed. The Walcro flushing valves are adjustable on site to ensure only the required quantity of water is used to promote water saving.

STANDARD FEATURES:


- CONCEALED BACK ENTRY TOILET FLUSHING VALVE
- Ø20MM BSP
- PRESSURE RANGE 100KPA - 600KPA

ORIGIN OF MANUFACTURE


Manufactured in South Africa.

SPECIFICATION		
MODEL	SIZE	ENTRY
04VF_WAL-103IC	20	Concealed back entry

BUTTON	
VR	

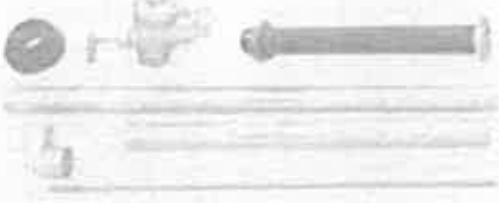PACKAGE INCLUDES


20mm BSP DZR brass toilet flushing valve
WC pan adaptor,
VR button and housing assembly
Push Rod
Concealed flush pipes and bend

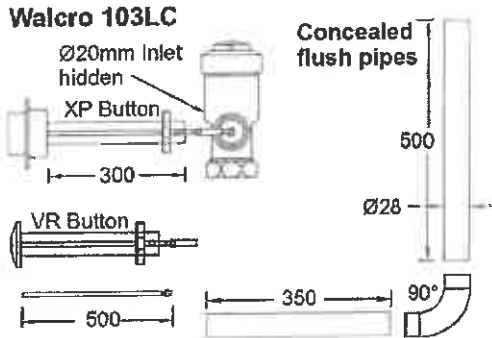DIMENSIONS	
 Walcro 103LC Ø20mm Inlet hidden XP Button 300 VR Button 500 350 90°	Concealed flush pipes 500 Ø28

04VF_WAL103LC WALCRO CONCEALED TOILET FLUSHING VALVE

BASTERFIELD
ENGINEERING (PTY) LTD
Registration Number 2016/02470307
cnr Joseph Road & Nyweheid Street, Tynney, Germiston, South Africa 1401
101 Bedfordview 2008 ☎ 011 822 9991 Fax 011 822 9988
Email sales@basterfield.co.za service@basterfield.co.za

BASTERFIELD
BUILDING PRODUCTS




Rada thermostatic mixing valves for anti-scald protection

For commercial individual and group showering, hand washing and bathing

Anti-scald protection for the family in public ablutions



RADA 320 F
Thermostatic
mixing valve



RADA 425 F
Thermostatic
mixing valve



RADA MEYNELL 15/3



RADA 222 DK-LF

The Rada thermostatic mixing valve employs two advanced thermoscopic temperature sensors to provide blended water at safe and accurate temperatures for showering and hand basins.



Rada is the solution to protect the public and children from accidental scalding hot water

Why use Rada thermostatic?

The Radatherm cartridge constantly senses and reacts to deliver a consistent safe blended water temperature. The valve prevents the ablation user from receiving the scalding hot water in a geyser at around 60-65°C.

Instead it will accurately reduce the hot water down to a safe temperature.

Skin injuries by scalding

Temperature	Contact time
48°C	5 Minutes
51°C	2 minutes
54°C	30 seconds
57°C	10 seconds
60°C	5 seconds
63°C	3 seconds
65°C	1.5 seconds

What they do:

- Thermostatic mixing valves accurately control the temperature of water for showering, bathing and hand-washing.
- They should maintain the pre-selected temperature even if the water pressures and temperatures vary when other appliances are used.
- Installed and maintained correctly, they can significantly reduce the risk of scalding
- In the event of cold water supply failure, the thermostatic mixing mechanism will automatically shut down the flow to prevent discharge of dangerously hot water. Similarly, in the event of hot water failure to prevent cold water shock.

How do they work?

- Hot and cold water enters the valve and is mixed to a temperature pre-selected by the user or installer.
- This is achieved automatically by a thermally sensitive mechanism thermostat or thermistor, within the valve that proportions the amount of hot and cold water entering to produce the required blend.
- The mechanism automatically compensates for any variations in supply pressures or temperatures to maintain the pre-selected temperature.

Walker, Gros-walker gauges

Pressure & Temperature



Connection
Ø15mm

WAL 508-001, Ø84mm type combination temperature and pressure gauge. Back entry

Temperature




Connection
Ø15mm

WAL Ø80mm temperature gauge
Range: 0° - 120°C. Back entry

Water saving shower metering valves


Shower applications

Model	Walcro 155 with wall plate	Walcro 155S with sleeve
Metering shower valves		
DZR Brass		
Made in South Africa		
		
	Valve in wall Inlet Ø15mm 30kPa - 600kPa	Valve in wall Inlet Ø15mm 30kPa - 600kPa
Recommended minimum 100kPa for a reasonable shower	Code: Walcro 155 Ø15mm BSP, Built-in, shower metering valve with internal flow control, strainer, no-hold feature and water saving shut off.	Code: Walcro 155S Ø15mm BSP, Built-in with sleeve, shower metering valve with internal flow control, strainer, no-hold feature and water saving shut off.
		
		High risk vandal resistant applications


Walcro 155 & 155S Shower metering options

rada Blend and water mixing with Rada
low volume mixing valves, either one
or two hot and cold water services

Blended water with Rada Anti-scald
safety protection
Hot water 155 metering valve is also available for hot only

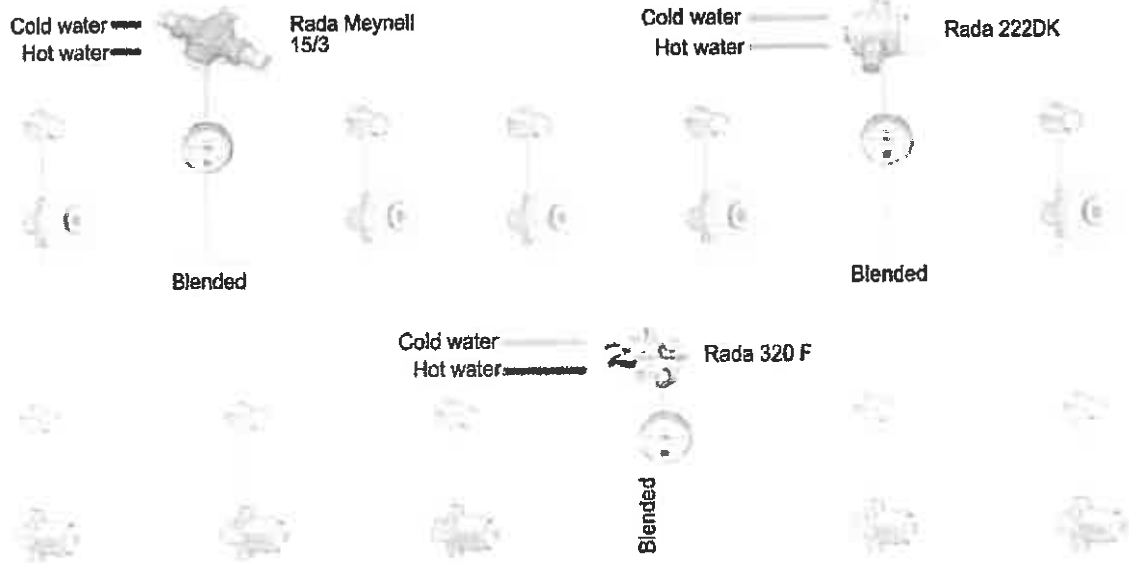

Walcro CIRS-V2



Code: Walcro CIRS-V2


Designed for commercial and industrial showering applications. Features vandal resistant properties, internal strainer and provides jet type spray thanks to the internal propeller and thus is far less susceptible to lime scale blocking. The shower rose was specially designed to save water and does not require a regulator.

Inlet connection: 1/2" BSP female (15mm)


Flow rate range: 6 litre/min to 8 litre/min, Pressure dependant

Minimum pressure: 1 bar

Strainer: Internal - removable for cleaning

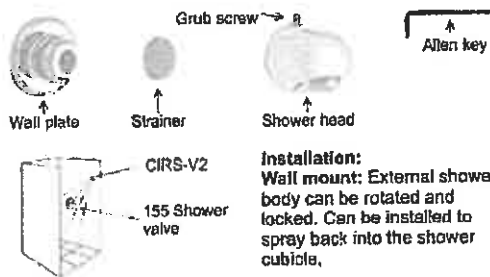

Walcro CIRS-V3

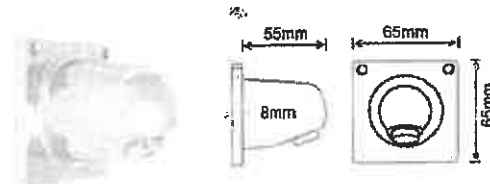

Code: Walcro CIRS-V3

High Risk, Vandal Resistant Shower Rose with Rotational Flow Technology

Vandal resistant selectable levels of security

- Tiled-in + wall pins
 - Tiled-in
 - Surface mounted with pins
- Perfect for mining, prisons and any public ablution shower where vandalism is a high risk.


Walcro's Rotational Flow Technology design ensures that there are no small holes that can easily get blocked with lime or dirt. The V3 has 1 large outlet for long term non-clogging. Internal strainer - to stop large dirt / stone particles.

Inlet connection: 1/2" BSP female (15mm)

Minimum pressure: 1 bar

Flow rate range: 6 litre/min to 8 litre/min, Pressure dependant

Illustration of Walcro group metering shower principle with a Rada mixing valve

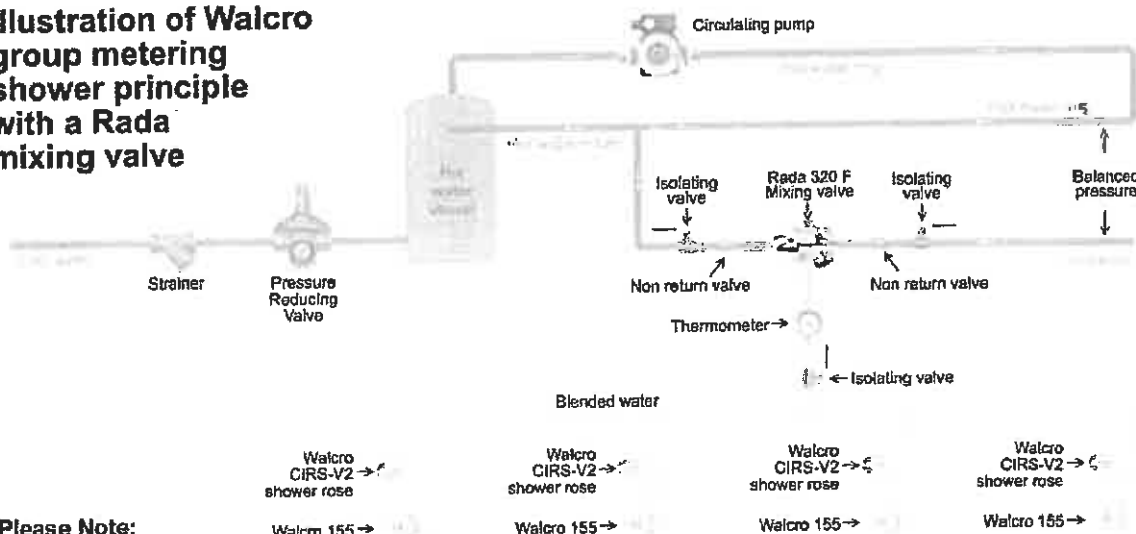

Walcro

Metering valve


Basin metering valve
Walcro
 Made in South Africa

Hands free abluion washing in toilet abluion blocks

Model	Walcro 155K No-touch metering basin valve - knee operated	Walcro SSP/15 High neck basin spout
Special application metering valve	Knee operated → activate, release, → self closing	
DZR Brass	Recommend 3 - 4 bar. Do not use this valve with high pressure!	
Made in South Africa	Supplied with ball valve	
	Inlet Ø15mm 50kPa - 500kPa	Inlet Ø15mm
NB: This is NOT a process valve for repeated use!	Code: Walcro 155K Ø15mm BSP, knee operated, wall mounted, chrome metering valve with internal flow control and ball valve for no-touch water saving hand washing.	Code: Walcro SSP/15: Ø15mm BSP, chrome, high neck basin spout for easy hand washing and use with Walcro 155K.

Additional information

High neck spout for easy hand and arm no-touch washing with the Walcro 155K



Note:
 Both hot and cold water supplies must be pressure balanced

Rada Meynell 15/3 Thermostatic mixing valve

INDIVIDUAL / GROUP



The Rada Meynell 15/3 thermostatic mixing valve is the perfect solution for 'under basin' type installations to provide a high level of safe anti-scald protection for hand washing applications. The 15/3 is housed in a plastic outer casing for tamper proof temperature adjustment.

Specification
 Rada Meynell 15/3: 1/2" thermostatic mixing valve. Supplied complete with white plastic outer casing and integral check valves and strainers.

Rada 222 DK-LF Thermostatic mixing valve




GROUP



The Rada 222 DK-LF thermostatic mixing valve with 'Radatherm' technology is ideal for anti-scald small group hand basin applications. The valve features a pre-set maximum temperature safety stop concealed in a locked temperature shroud to prevent unwanted tampering.


Specification
 Rada 222 DK-LF: 3/4" Thermostatic mixing valve incorporating 'Radatherm' cartridge, complete with integral check valves and strainers.

Blended water systems with Rada thermostatic mixing valves are used for anti-scald safety and to limit hot water wastage. The preferred hot water temperature is set at the Rada valve thus ensuring safe and usable water temperature delivery for rapid processing. Rada mixing valves should be sized correctly - contact us for assistance.




Toilet flushing valves

Concealed / Duct WC specifications - Special models for stainless steel prison type WC pans

Model	Walcro 103	Walcro 105	Walcro 104
Toilet flushing valves			
SANS 1240			
DZR Brass			
Made in South Africa			
			
	Valve hidden in duct Inlet Ø20mm 100kPa - 600kPa	Valve hidden in duct Inlet Ø25mm 60kPa - 600kPa	Valve hidden in duct Inlet Ø25mm 60kPa - 600kPa
			
	Only VR button visible inside toilet cubicle	Only VR button visible inside toilet cubicle	Only VR button visible inside toilet cubicle
	Code: Walcro 103LC-SS Ø20mm BSP, concealed, toilet flushing valve with S.S. WC pan adaptor, VR button and concealed flush pipe for S.S. pan.	Code: Walcro 105C-SS Ø25mm BSP, concealed, toilet flushing valve with S.S. WC pan adaptor, VR button and concealed flush pipe for S.S. pan.	Code: Walcro 104C-SS Ø25mm BSP, concealed, toilet flushing valve with S.S. WC pan adaptor, VR button, isolating check valve, telescopic adjustment and concealed flush pipe for S.S. pan.
Supplied with valve			
			

Please note the differences between the prison stainless steel pan and the standard stainless steel pan

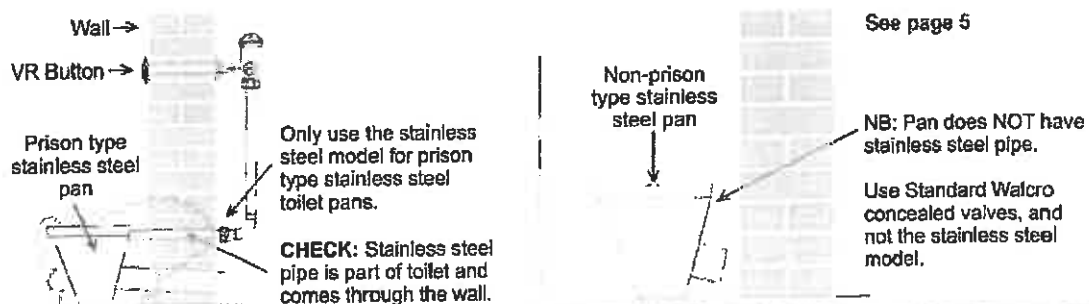

Walcro specialises in high risk / vandal resistant prison and police facility valves