

SCOPE OF WORKS PRESENTATION: CONSULTING ENGINEERING SERVICES (CAPEX)

CLARIFICATION MEETING

WESTERN REGION

21 FEBRUARY 2024

SANRAL



BUILDING SOUTH AFRICA
THROUGH BETTER ROADS

TENDER CLARIFICATION FOR PROJECTS

No.	Contract Number	Description
1	N.001-030-2024/1RF	CONSULTING ENGINEERING SERVICES FOR THE UPGRADE FROM SINGLE TO DUAL CARRIAGEWAY ON NATIONAL ROUTE 1 SECTION 3 FROM GLEN HEATLIE (KM 14.00) TO HEXRIVER PASS (KM 47.00)
2	N.001-040-2024/1RF	CONSULTING ENGINEERING SERVICES FOR THE UPGRADING (DUALLING) OF NATIONAL ROUTE 1 SECTION 4 BETWEEN TOUWS RIVER (KM 0.00) AND JAGERSKRAAL (KM 23.00)
3	N.001-040-2024/2RF	CONSULTING ENGINEERING SERVICES FOR THE UPGRADING (DUALLING) OF NATIONAL ROUTE 1 SECTION 4 BETWEEN JAGERSKRAAL (KM 23.00) AND MONUMENT RIVER (KM 46.00)
4	N.002-020-2021/1RF	CONSULTING ENGINEERING SERVICES FOR THE UPGRADING (DUALLING) OF NATIONAL ROUTE 2 SECTIONS 2 & 3 FROM HOUWHOEK PASS (KM 38.00) TO CALEDON (KM 2.40)
5	N.002-060-2020/2RF	CONSULTING ENGINEERING SERVICES FOR THE UPGRADE FROM SINGLE TO DUAL CARRIAGEWAY ON NATIONAL ROUTE 2 SECTION 6 FROM DEKRIET (KM 25.4) TO GOURITSMOND (KM 57.4)
6	N.002-060-2020/3RF	CONSULTING ENGINEERING SERVICES FOR THE UPGRADE FROM SINGLE TO DUAL CARRIAGEWAY ON NATIONAL ROUTE 2 SECTION 6 FROM GOURITSMOND (KM 57.4) TO MOSSELBAYWEST (KM 82.5)
7	N.002-070-2020/1RF	CONSULTING ENGINEERING SERVICES FOR THE UPGRADE FROM SINGLE TO DUAL CARRIAGEWAY ON NATIONAL ROUTE 2 SECTION 7 BETWEEN DIE VLEIE (KM 43.58) TO SWARTVLEI RIVER (KM 54.4)
8	N.002-080-2020/1RF	CONSULTING ENGINEERING SERVICES FOR THE UPGRADE FROM SINGLE TO DUAL CARRIAGEWAY ON NATIONAL ROUTE 2 SECTION 8 BETWEEN SWARTVLEI RIVER (KM 0.0) TO GOUKAMMA (KM 16.7)
9	N.010-110-2025/2RF	CONSULTING ENGINEERING SERVICES FOR THE IMPROVEMENT ON NATIONAL ROUTE 10 SECTION 11 BETWEEN VAALKOPPIES (KM 100.00) AND UPINGTON (KM 116.707)
10	N.012-070-2019/1RF	CONSULTING ENGINEERING SERVICES FOR THE IMPROVEMENT ON NATIONAL ROUTE 12 SECTION 7 FROM BRITSTOWN (KM 0.0) TO STRYDENBURG (KM 77.23)


TENDER CLARIFICATION FOR PROJECTS (cont...)

No.	Contract Number	Description
11	N.012-091-2024/1RF	CONSULTING ENGINEERING SERVICES FOR THE DEVELOPMENT OF A NEW BYPASS ON NATIONAL 12 SECTIONS 9 & 10 NEAR KIMBERLEY
12	N.014-060-2025/1RF	CONSULTING ENGINEERING SERVICES FOR THE IMPROVEMENT OF NATIONAL ROUTE 14 SECTION 6 FROM JENKINS FARMS (KM 22.4) TO KATHU (KM 49.24)
13	N.014-070-2024/1RF	FOR CONSULTING ENGINEERING SERVICES FOR THE IMPROVEMENT ON NATIONAL ROUTE N14 SECTION 7 FROM KATHU (KM 0.00) TO KURUMAN (KM 47.3)
14	N.018-010-2023/1RF	CONSULTING ENGINEERING SERVICES FOR THE IMPROVEMENT OF NATIONAL ROUTE 18 SECTION 1 FROM WARRENTON (KM 0.0) TO NC/NW BORDER (KM 54.59)
15	R.031-080-2024/2RF	CONSULTING ENGINEERING SERVICES FOR THE IMPROVEMENT OF NATIONAL ROUTE R31 SECTION 8 FROM R31/N8 ROUNDABOUT (KM 31.0) TO R31/N8 I/S (KM 39.79)
16	R.300-010-2022/1RF	CONSULTING ENGINEERING SERVICES FOR THE CONSTRUCTION OF NEW FACILITIES ON NATIONAL ROUTE R300 SECTION 1 FROM KM 28,60 TO KM 32,00 AND THE COMPLETION OF STELLENBERG INTERCHANGE (R300/N1)

C3.1.2. LOCATION OF THE PROJECTS


N.001-030-2024/1RF

CONSULTING ENGINEERING SERVICES FOR THE UPGRADE FROM SINGLE TO DUAL CARRIAGEWAY
ON NATIONAL ROUTE 1 SECTION 3 FROM GLEN HEATLIE (KM 14.00) TO HEXRIVER PASS (KM 47.00)

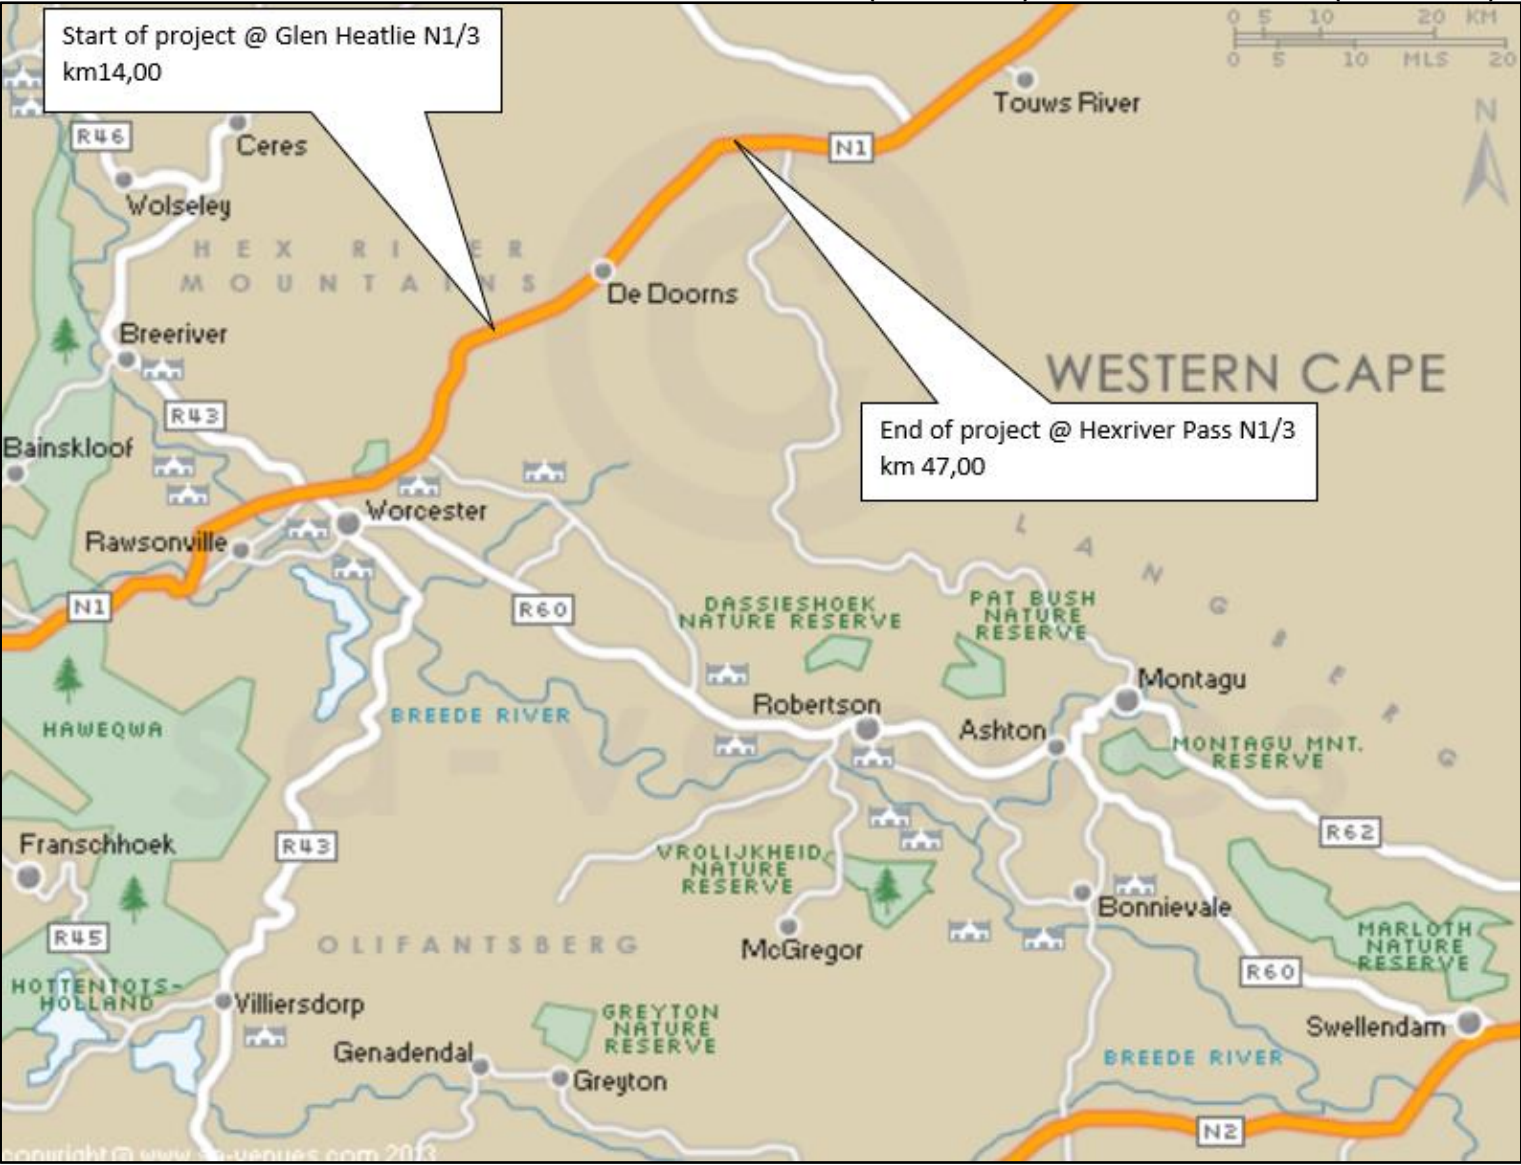


N.001-040-2024/1RF

CONSULTING ENGINEERING SERVICES FOR THE UPGRADING (DUALLING) OF NATIONAL ROUTE 1 SECTION 4 BETWEEN TOUWS RIVER (KM 0.00) AND JAGERSKRAAL (KM 23.00)

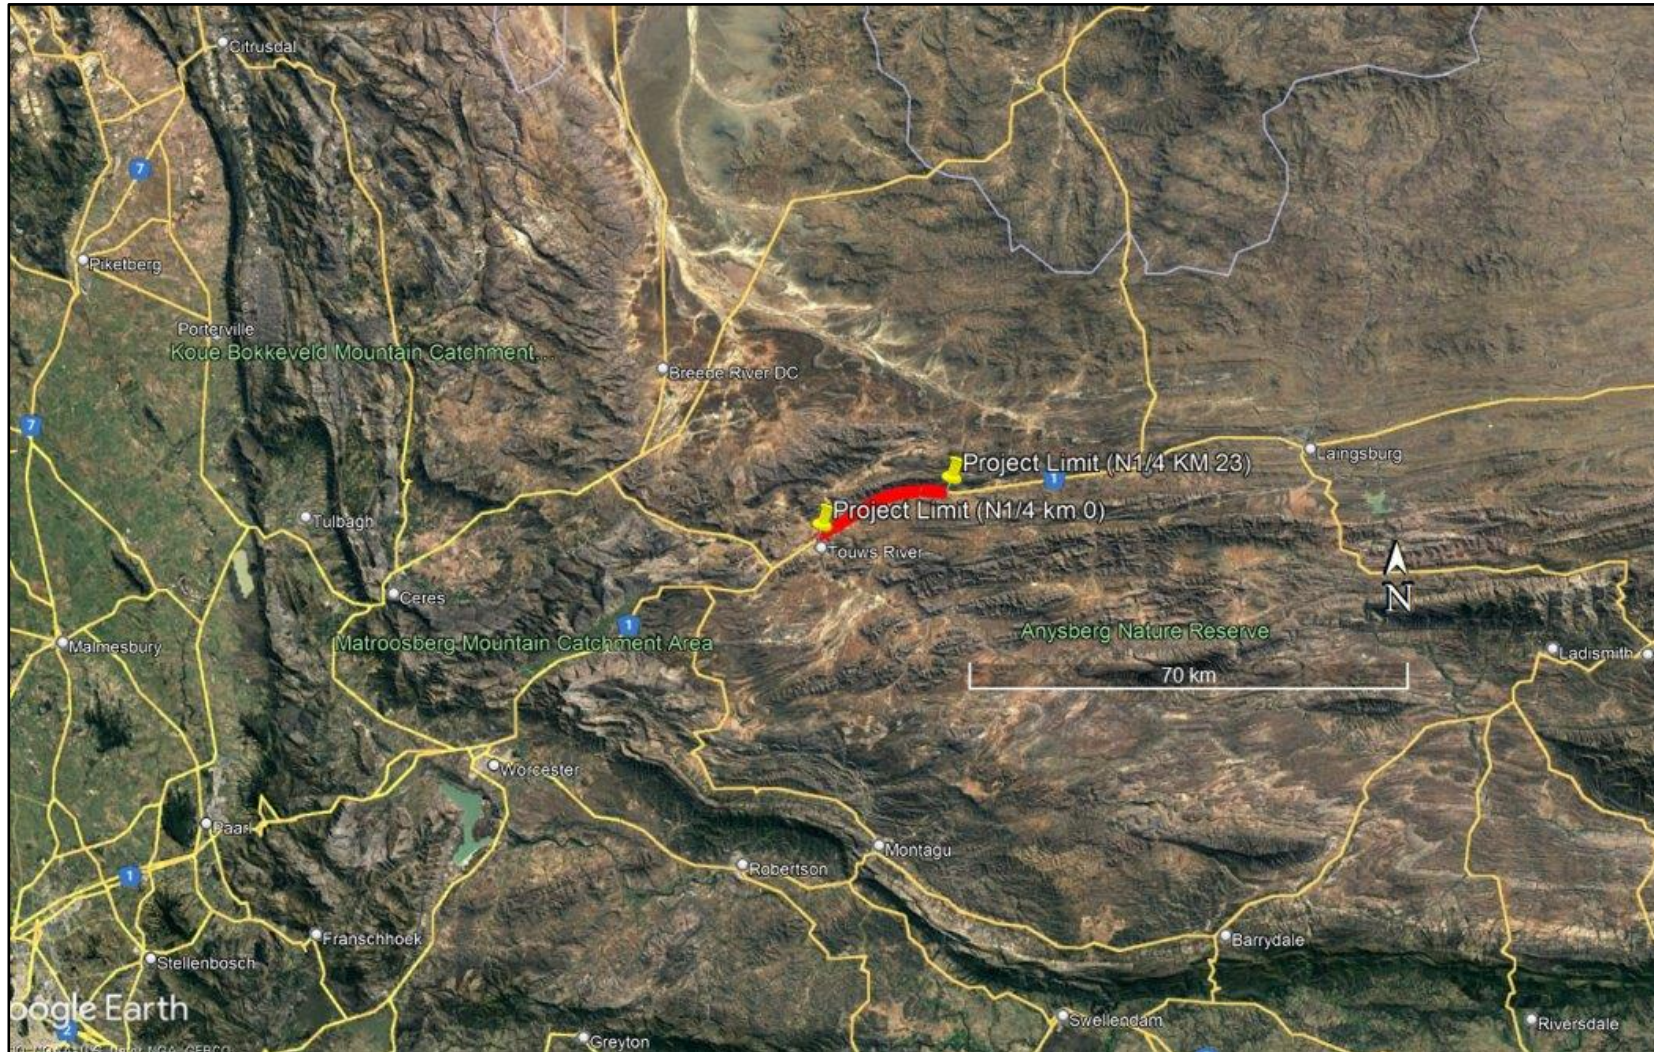


N.001-040-2024/2RF

CONSULTING ENGINEERING SERVICES FOR THE UPGRADING (DUALLING) OF NATIONAL ROUTE 1 SECTION 4 BETWEEN JAGERSKRAAL (KM 23.00) AND MONUMENT RIVER (KM 46.00)

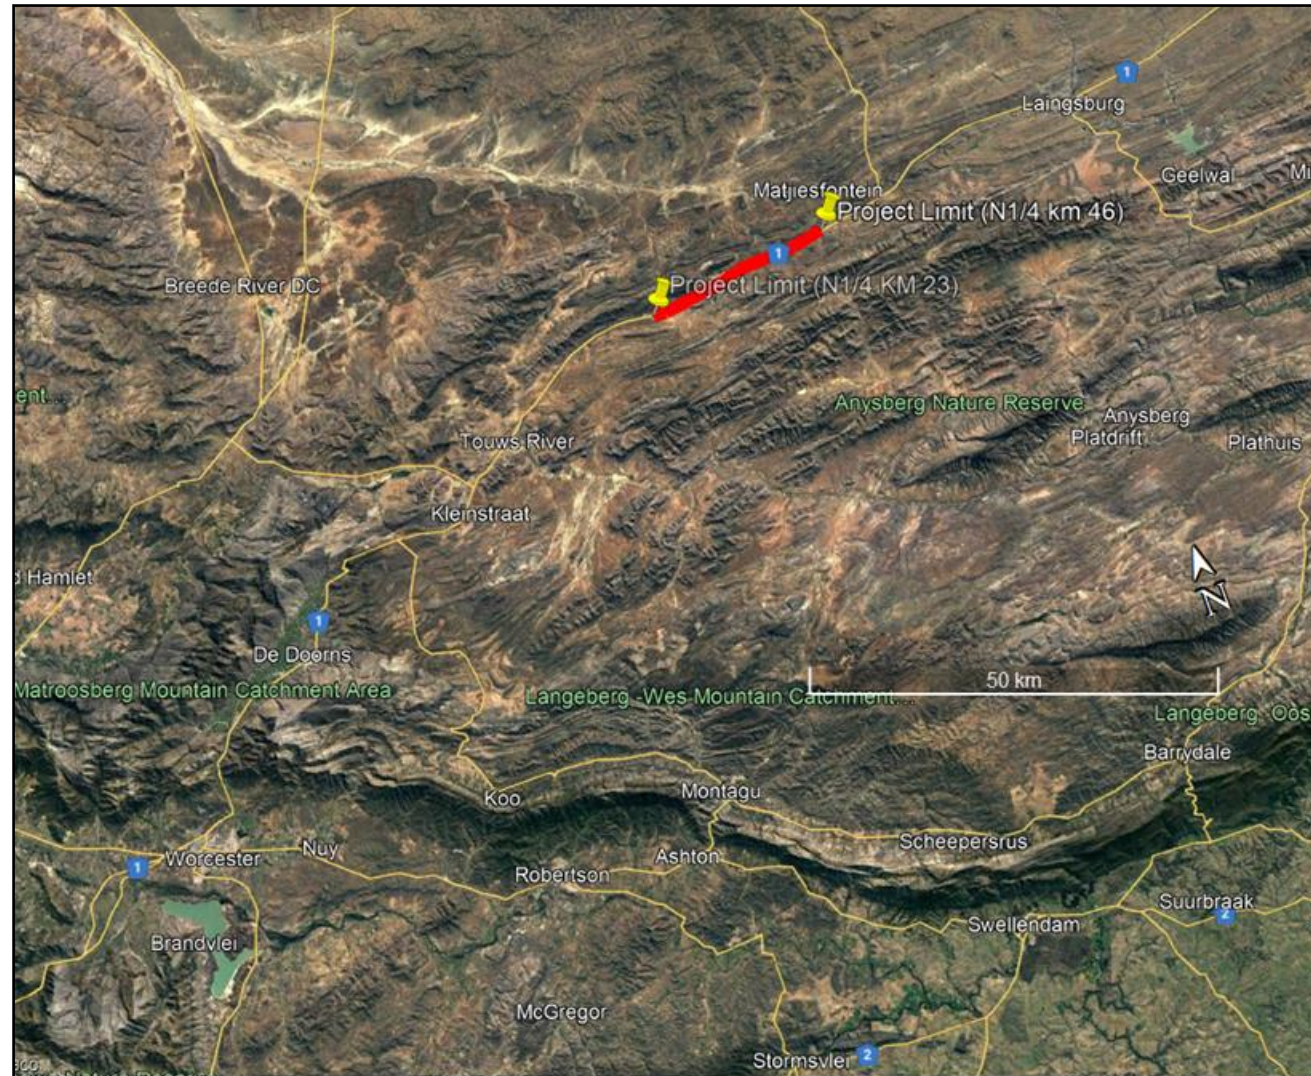



N.002-020-2021/1RF

CONSULTING ENGINEERING SERVICES FOR THE UPGRADING (DUALLING) OF NATIONAL ROUTE 2
SECTIONS 2 & 3 FROM HOUWHOEK PASS (KM 38.00) TO CALEDON (KM 2.40)

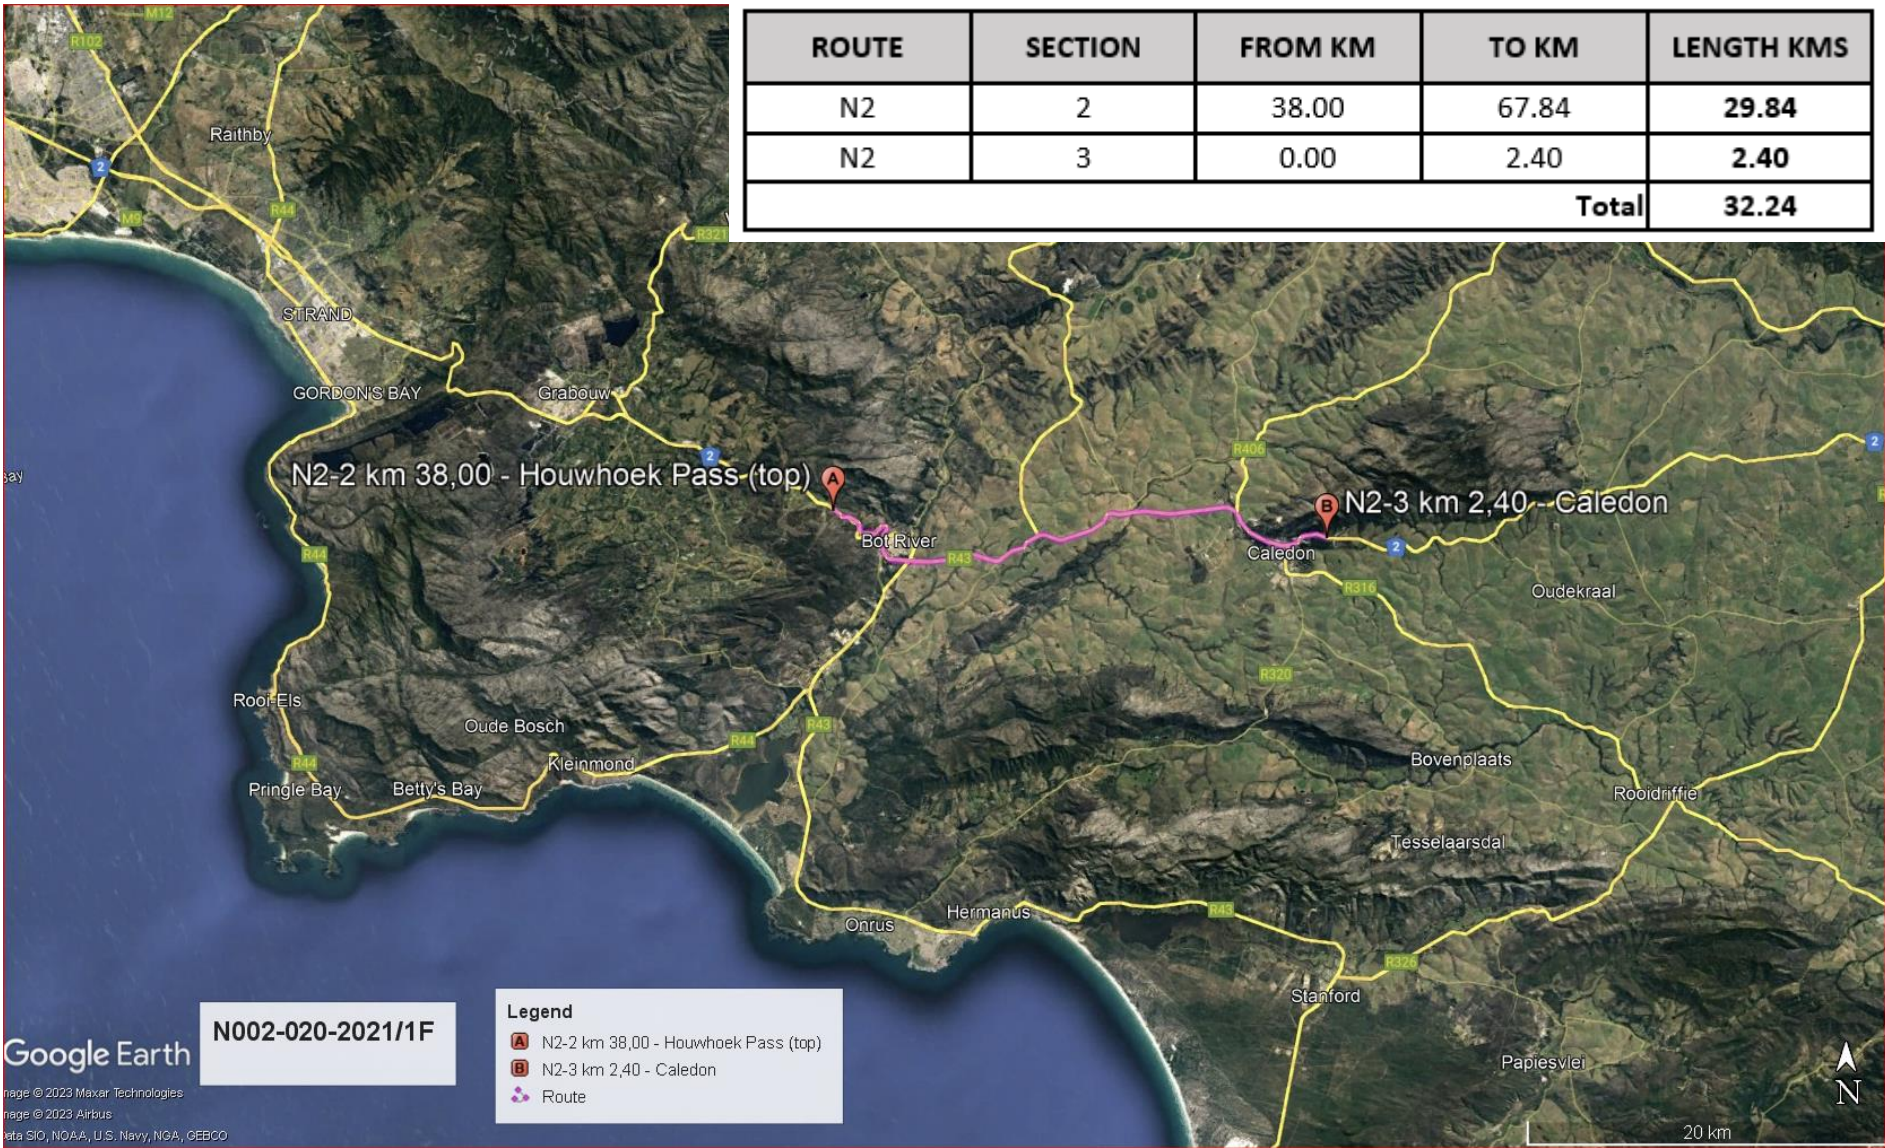

N.002-060-2020/2RF

CONSULTING ENGINEERING SERVICES FOR THE UPGRADE FROM SINGLE TO DUAL
CARRIAGEWAY ON NATIONAL ROUTE 2 SECTION 6 FROM DEKRIET (KM 25.4) TO
GOURITSMOND (KM 57.4)

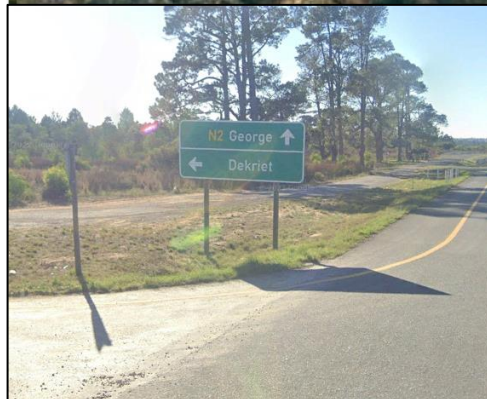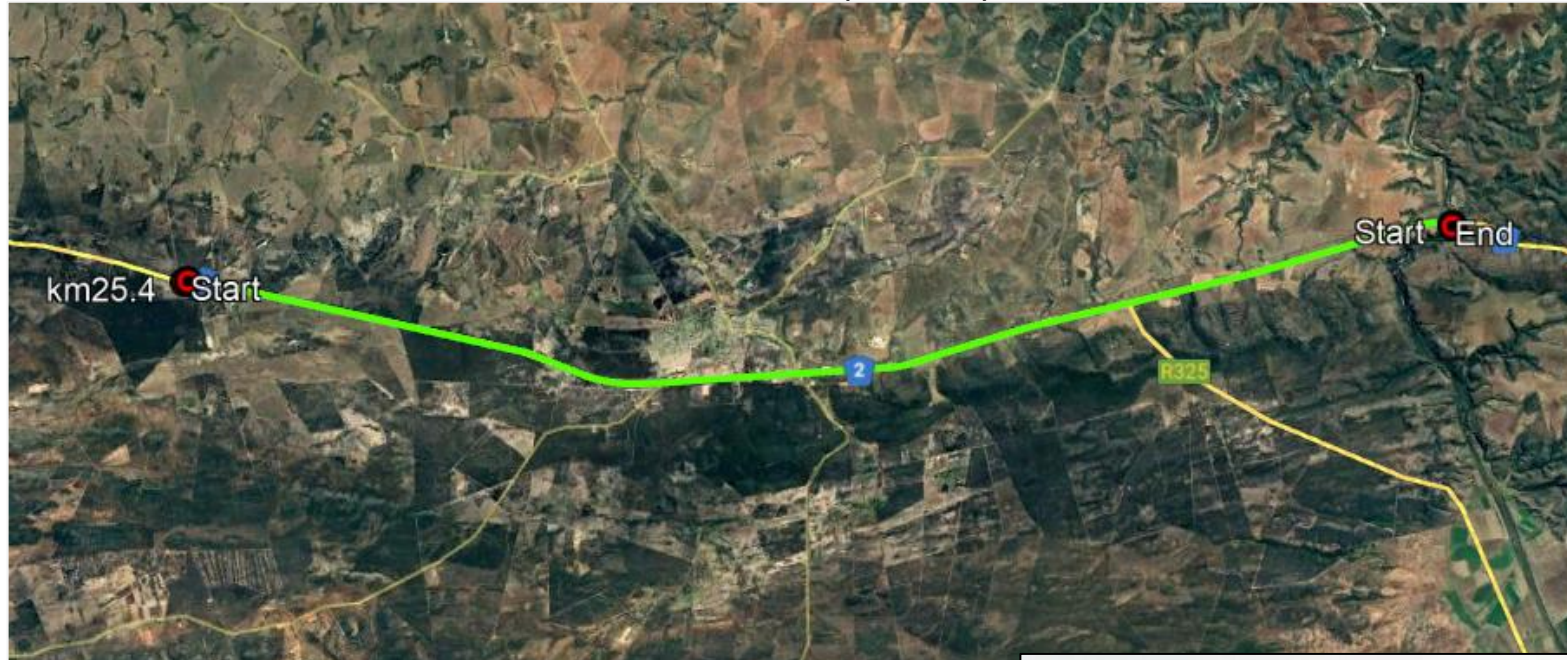

N.002-060-2020/3RF

CONSULTING ENGINEERING SERVICES FOR THE UPGRADE FROM SINGLE TO DUAL CARRIAGEWAY ON NATIONAL ROUTE 2 SECTION 6 FROM GOURITSMOND (KM 57.4) TO MOSSELBAYWEST (KM 82.5)




N.002-070-2020/1RF

CONSULTING ENGINEERING SERVICES FOR THE UPGRADE FROM SINGLE TO DUAL CARRIAGEWAY ON NATIONAL ROUTE 2 SECTION 7 BETWEEN DIE VLEIE (KM 43.58) TO SWARTVLEI RIVER (KM 54.4)



N.002-080-2020/1RF

CONSULTING ENGINEERING SERVICES FOR THE UPGRADE FROM SINGLE TO DUAL CARRIAGEWAY ON NATIONAL ROUTE 2 SECTION 8 BETWEEN SWARTVLEI RIVER (KM 0.0) TO GOUKAMMA (KM 16.7)

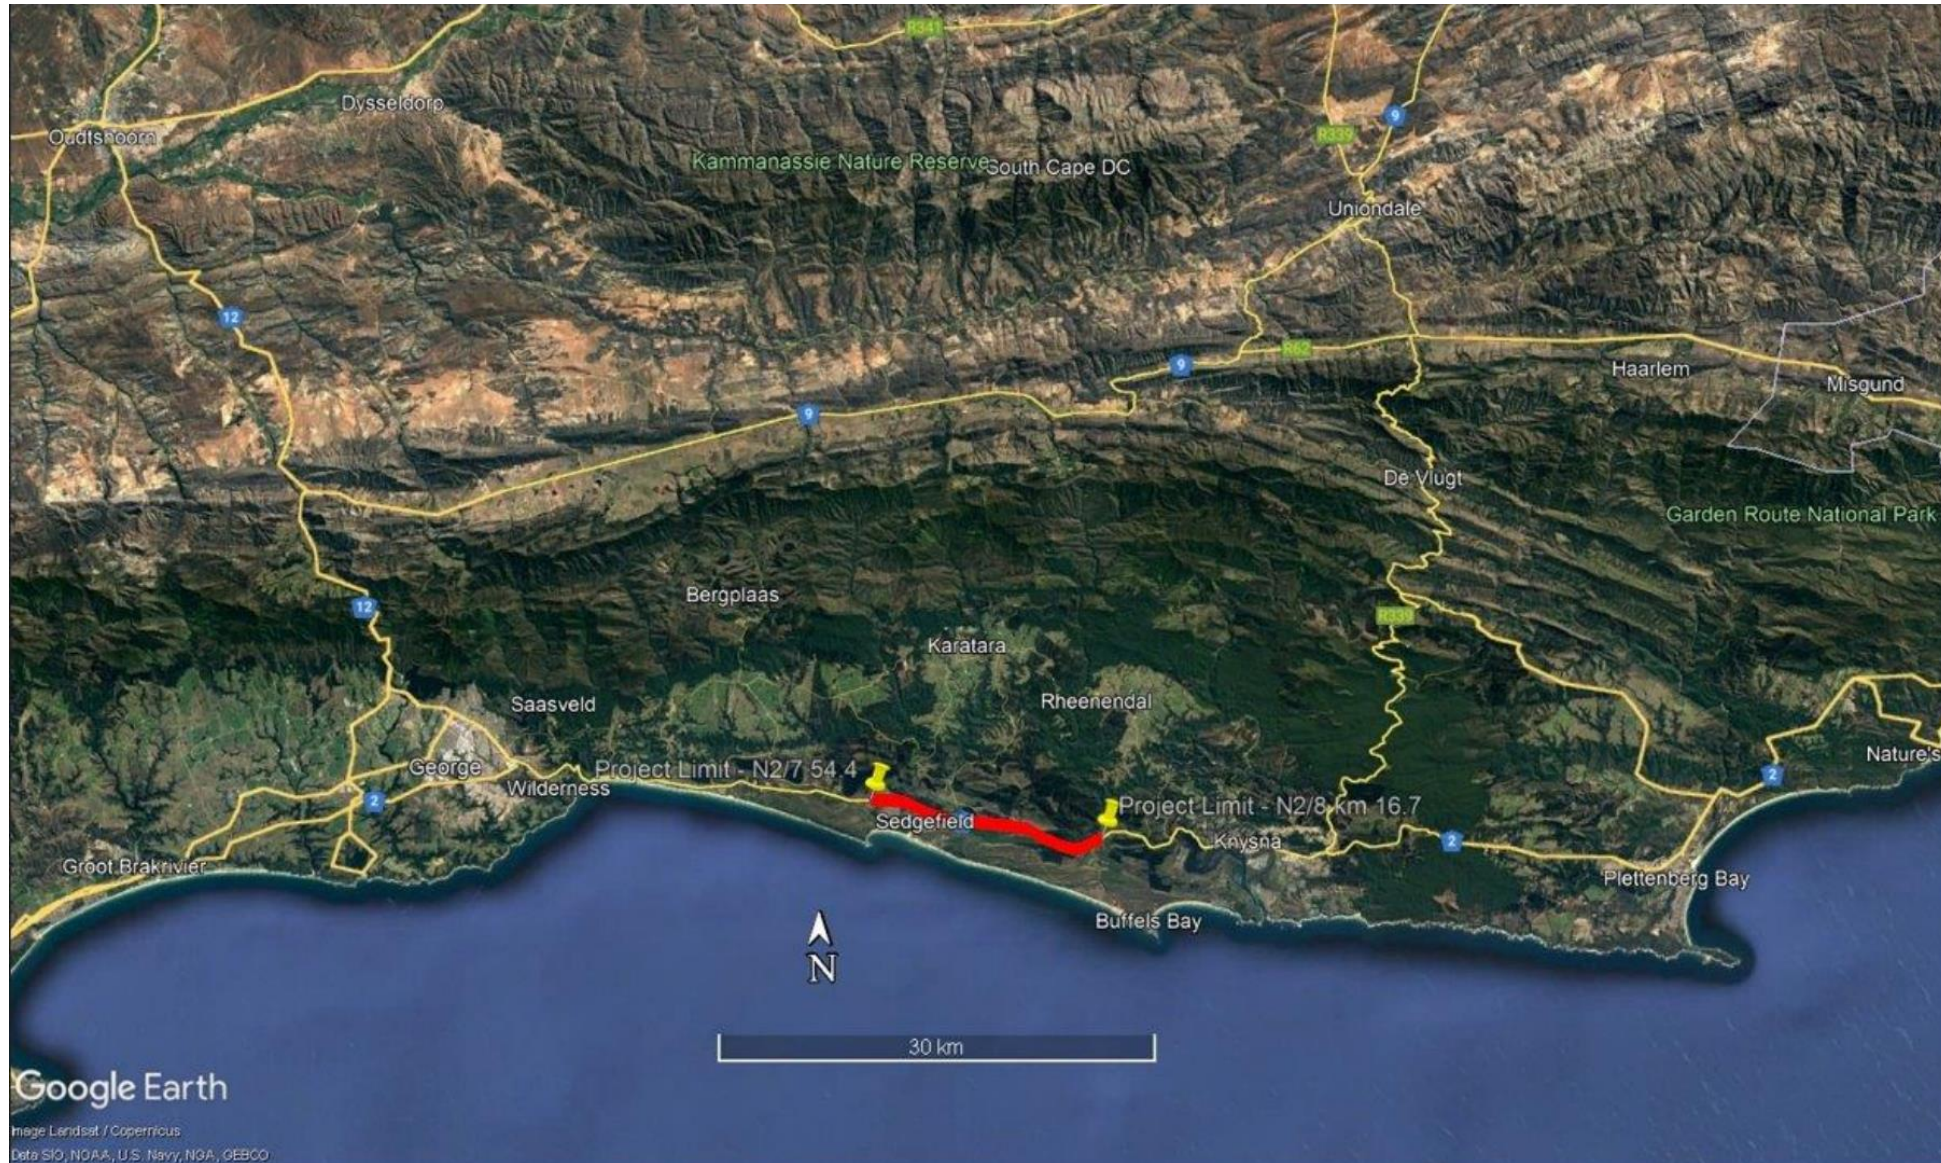


N.010-110-2025/2RF

CONSULTING ENGINEERING SERVICES FOR THE IMPROVEMENT ON NATIONAL ROUTE 10 SECTION
11 BETWEEN VAALKOPPIES (KM 100.00) AND UPINGTON (KM 116.707)



N.012-070-2019/1RF

CONSULTING ENGINEERING SERVICES FOR THE IMPROVEMENT ON NATIONAL ROUTE 12 SECTION 7
FROM BRITSTOWN (KM 0.0) TO STRYDENBURG (KM 77.23)

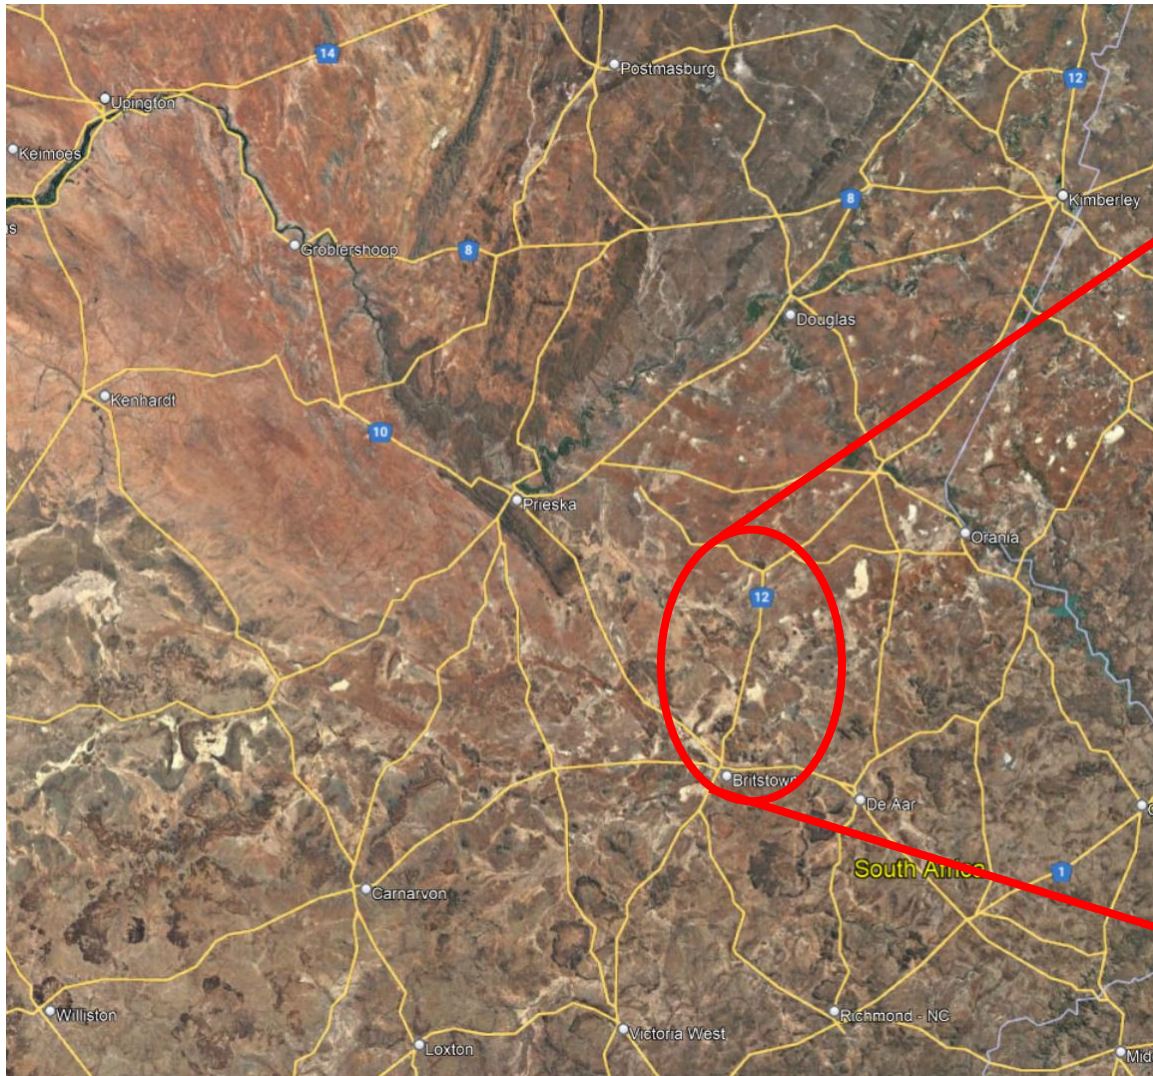


N.012-091-2024/1RF

CONSULTING ENGINEERING SERVICES FOR THE DEVELOPMENT OF A NEW BYPASS ON NATIONAL
12 SECTIONS 9 & 10 NEAR KIMBERLEY




N.014-060-2025/1RF

CONSULTING ENGINEERING SERVICES FOR THE IMPROVEMENT OF NATIONAL ROUTE 14 SECTION 6
FROM JENKINS FARMS (KM 22.4) TO KATHU (KM 49.24)

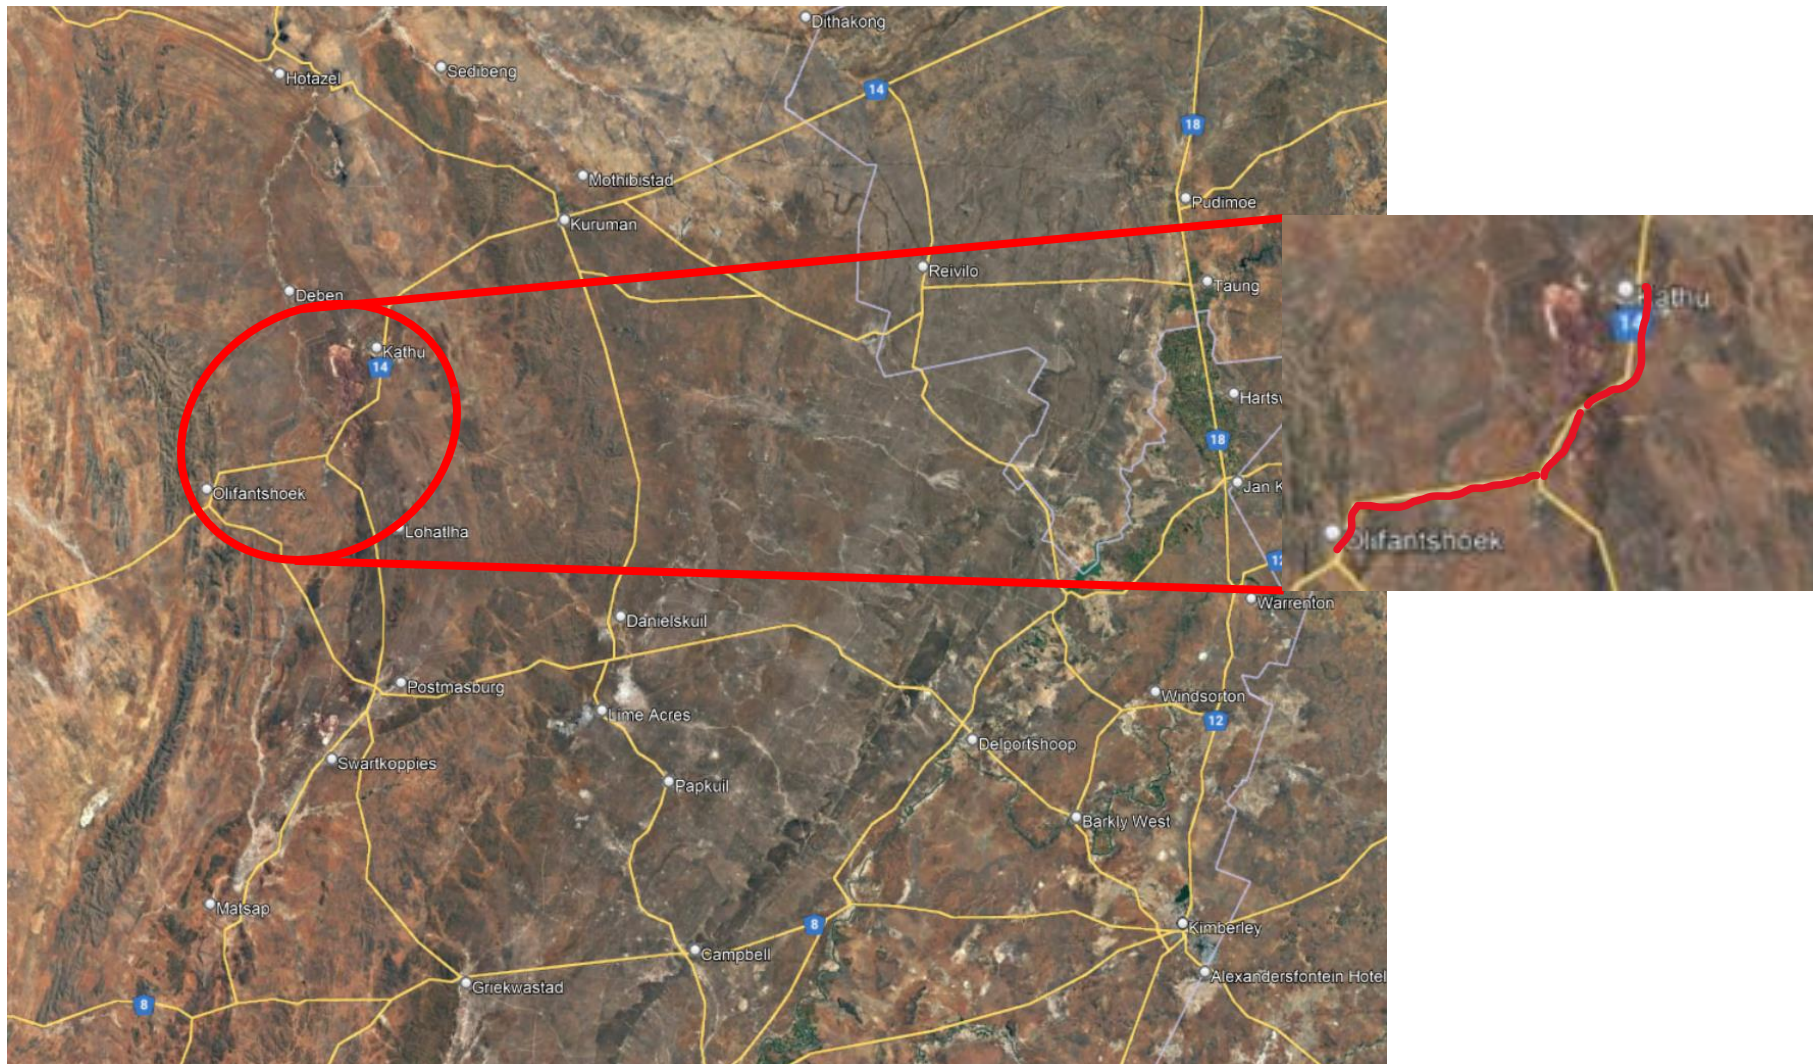


N.014-070-2024/1RF

FOR CONSULTING ENGINEERING SERVICES FOR THE IMPROVEMENT ON NATIONAL ROUTE N14
SECTION 7 FROM KATHU (KM 0.00) TO KURUMAN (KM 47.3)

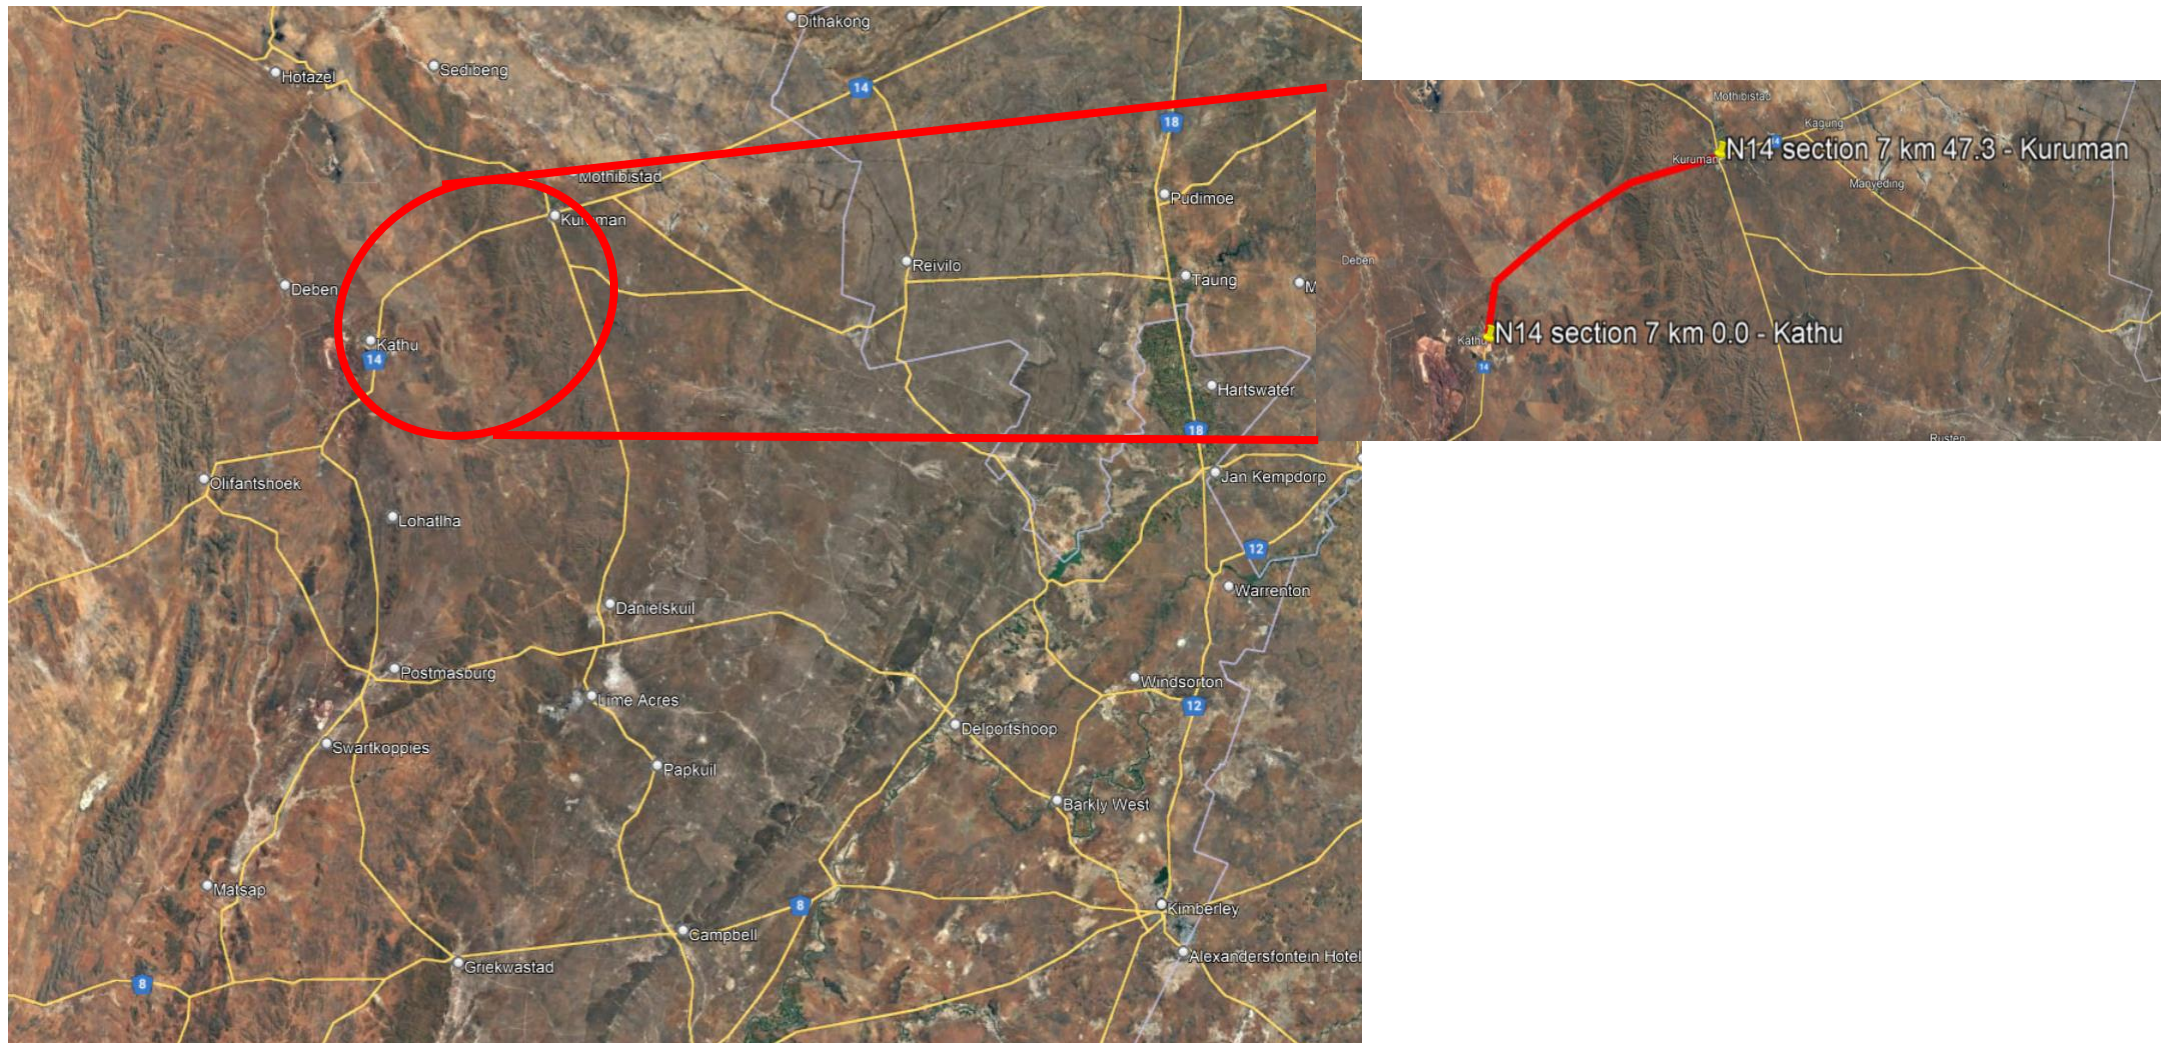

N.018-010-2023/1RF


CONSULTING ENGINEERING SERVICES FOR THE IMPROVEMENT OF
NATIONAL ROUTE 18 SECTION 1 FROM WARRENTON (KM 0.0) TO NC/NW BORDER (KM 54.59)

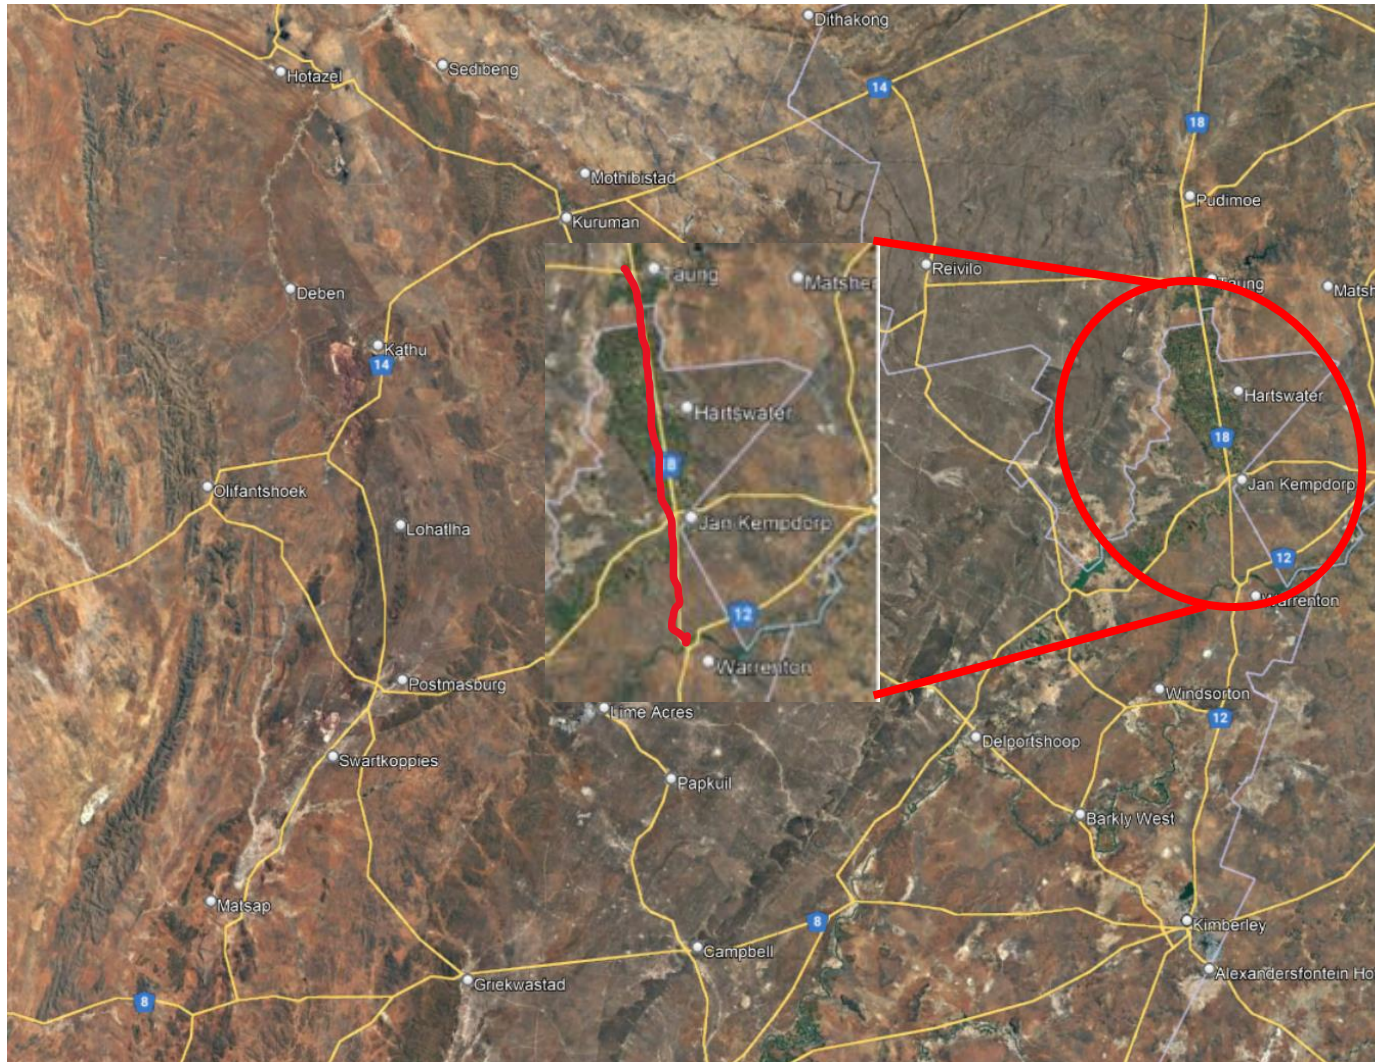

R.031-080-2024/2RF

Improvement of National Route R31 Section 8 from R31/N8 Roundabout (km 31.0) to R31/N8 I/S (km 39.79)


ROUTE	SECTION	FROM KM	TO KM	LENGTH KMS
R31	8	31	39,79	8.79
Total =				8.79

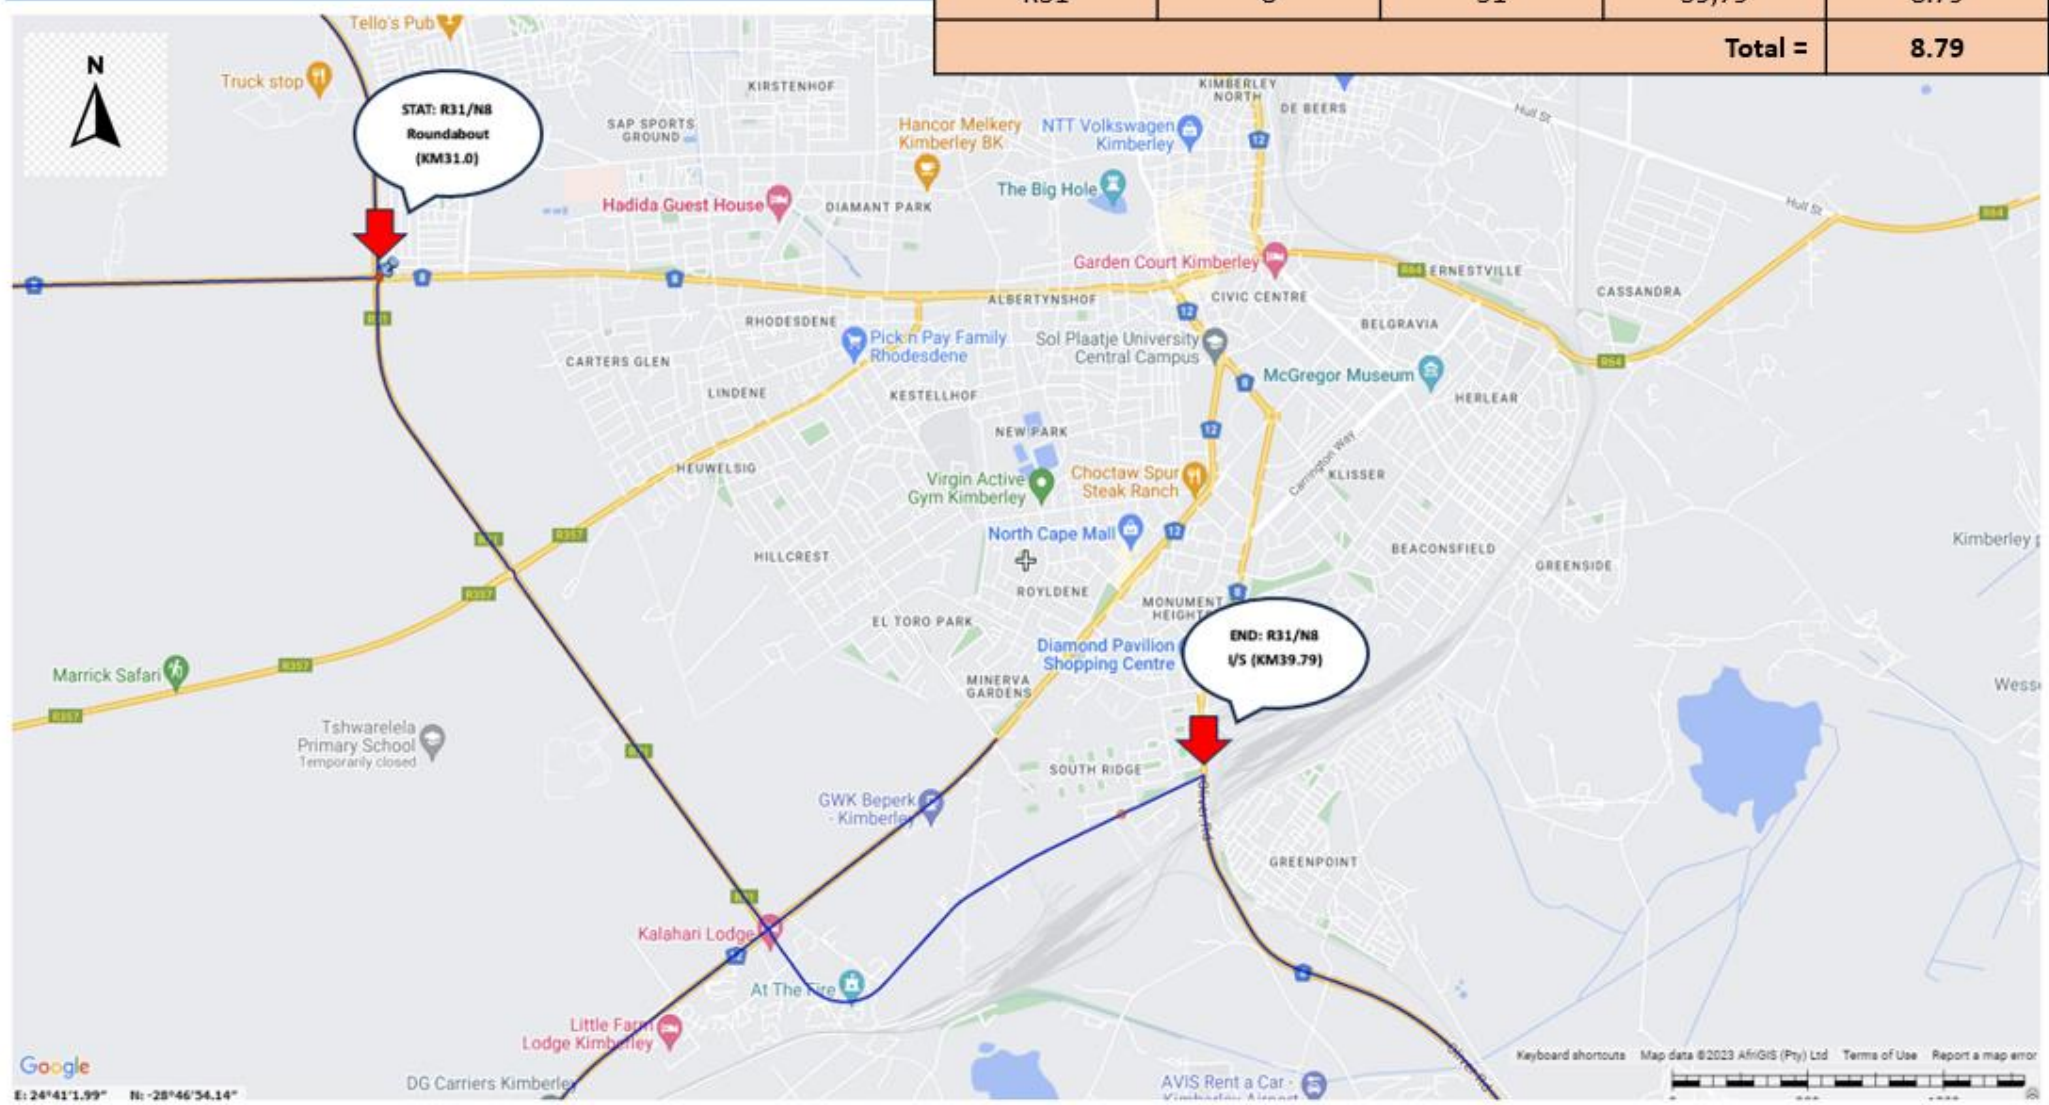


R.300-010-2022/1RF

CONSULTING ENGINEERING SERVICES FOR THE CONSTRUCTION OF NEW FACILITIES ON NATIONAL ROUTE R300
SECTION 1 FROM KM 28,60 TO KM 32,00 AND THE COMPLETION OF STELLENBERG INTERCHANGE (R300/N1)

ROUTE	SECTION	FROM KM	TO KM	LENGTH KMS
R300	1	28.60	32.00	3.40
Ramp A	-	East	North	1.82
Ramp D	-	West	North	0.72
Ramp G	-	North	West	1.83
Ramp H	-	North	East	0.63
Total				8.40

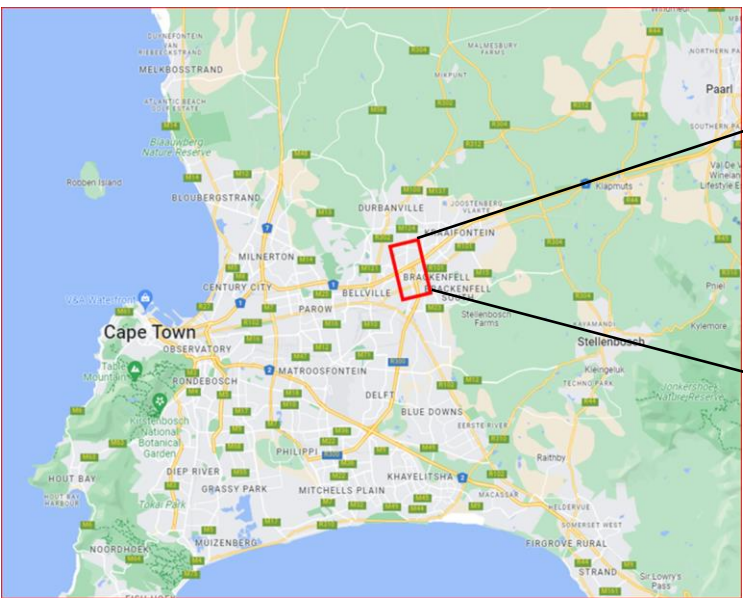

R.300-010-2022/1RF (contd.)

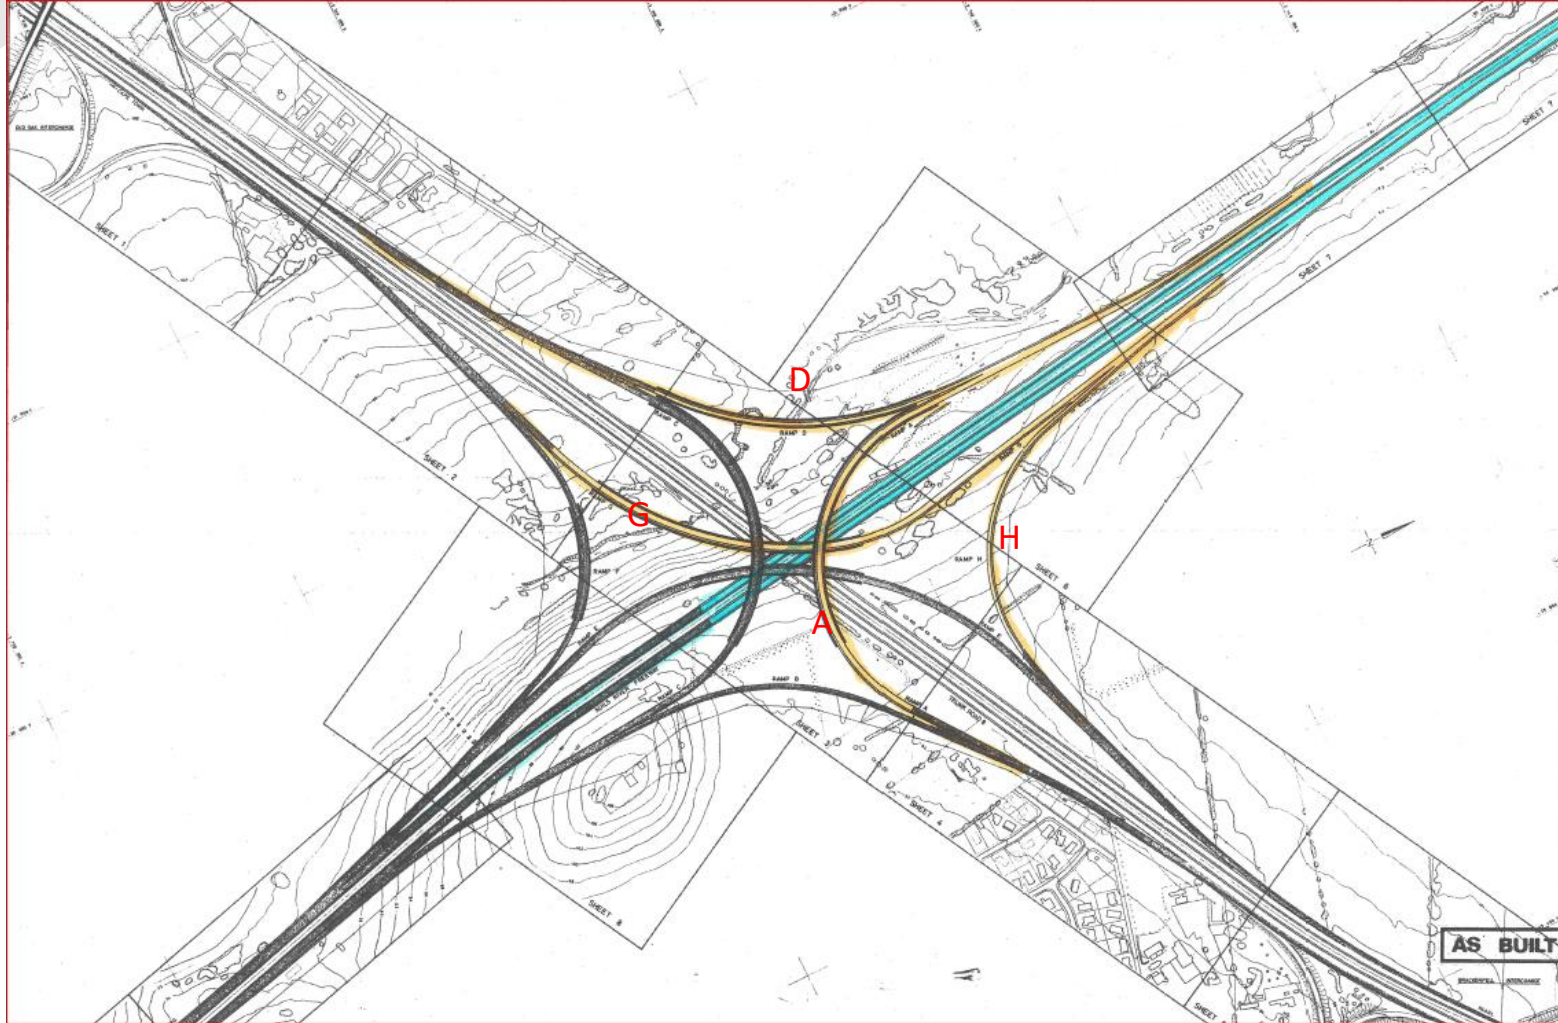


**AS-BUILT DRAWING (c. 1980's)
WITH FUTURE BUILD HIGHLIGHTED**

- R300 mainline extension shown in blue
- New ramps shown in orange

Ramp	Direction	Viaduct?
A	East to North	YES
D	West to North	YES
G	North to West	YES
H	North to East	NO

- Four-level systems interchange

Level	Roads
1 (lowest)	N1 carriageways
2	R300 carriageways
3	Ramp E (South to East) – existing Ramp G (North to West) – new
4 (highest)	Ramp C (West to South) – existing Ramp A (East to North) – new

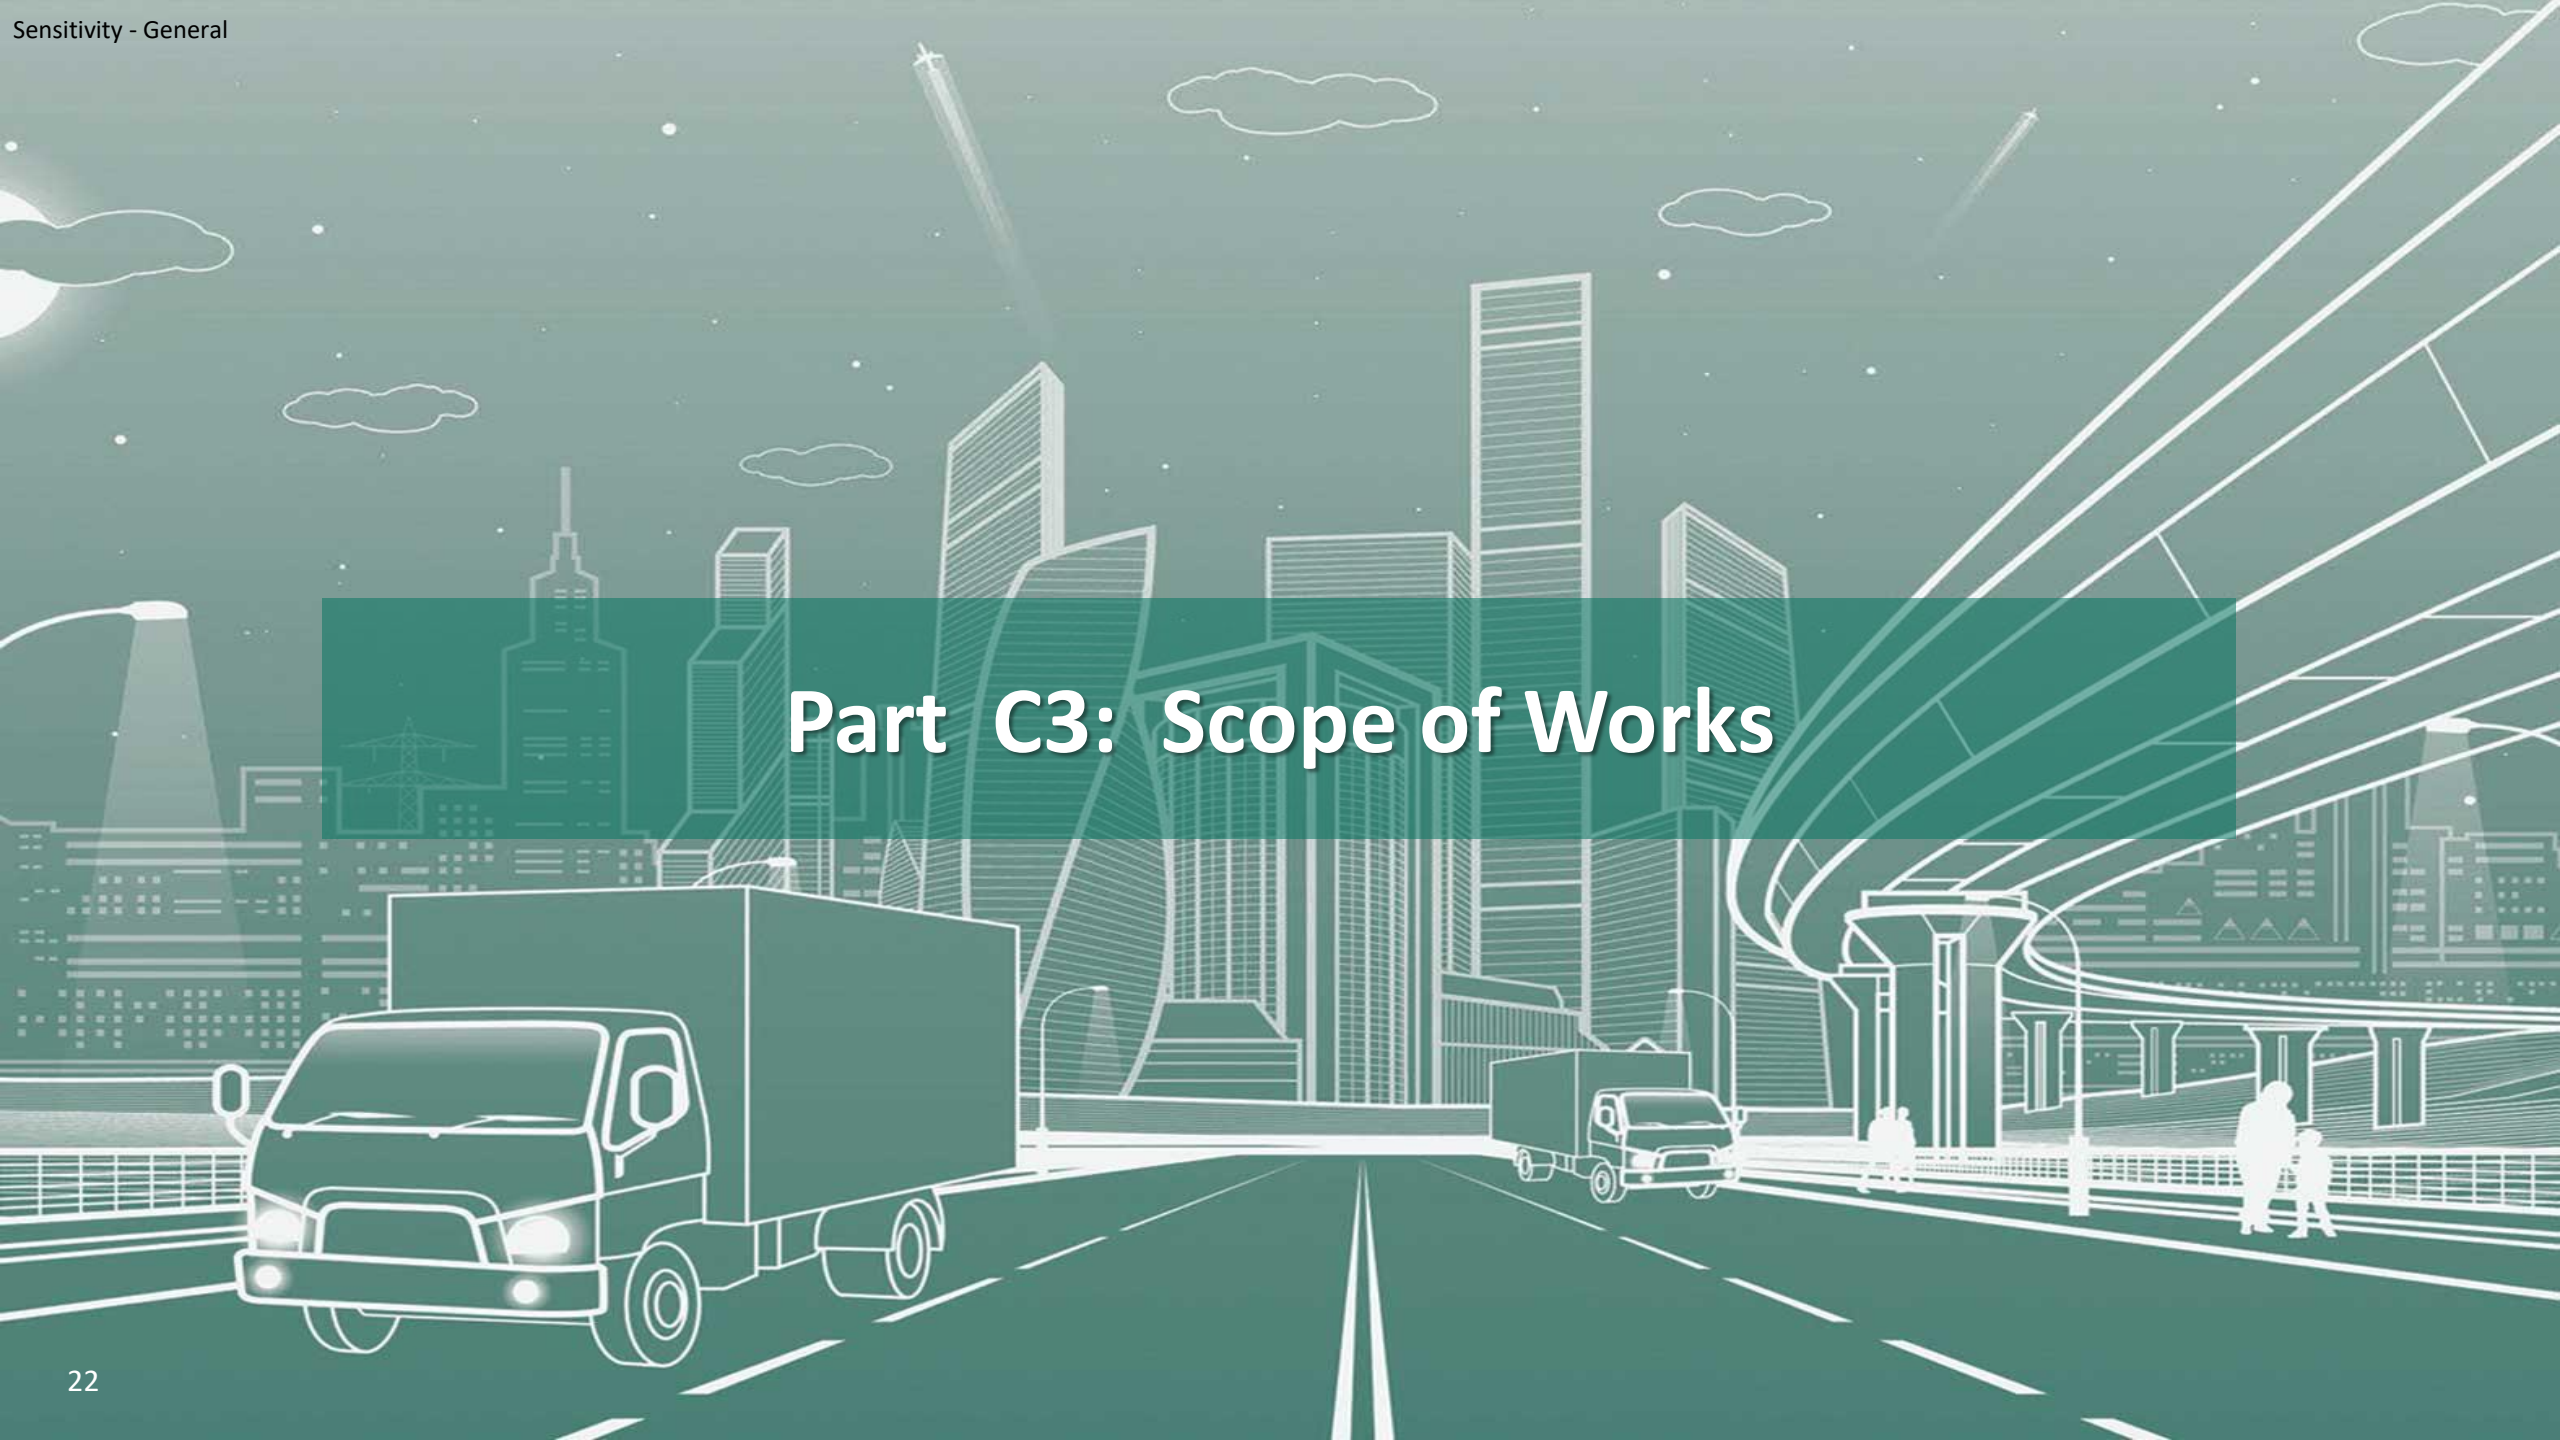

Part C3: Scope of Works

C3.1.3 Description of the project:

Please refer to C3.1.3 in the tender document for the various project descriptions.

The Services required of the Service Provider are divided into the following distinct stages:

- Project Assessment.
- Investigations for Design Development.
- Design Development which shall include the following phases:
 - o Preliminary design
 - o Detailed design
- Tender Documentation.
- Clarification Meeting, Tender Period and Tender Evaluation.
- Administration and Monitoring of the Works Contract.
- Additional duties, Special Services and Specialist Advice.
- Quality Control: Works Contract.
- Close Out.

C3.1 GENERAL REQUIREMENTS

C3.1.4 Determination of Remuneration

(a) Fee determination

Table C3.1.4(b): Percentage points for phases/stages: Road Works, Structures, Building and Other

Type of Service	Concept Design (CD)	Preliminary Design (PD)	Detailed Design (DD)	Administration & Monitoring of works contract (AMW)	Close out (CO)	Total
Full service	5%	21%	42%	27%	5%	100%
CD	100%	0%	0%	0%	0%	100%
CD & PD	20%	80%	0%	0%	0%	100%
CD ,PD& DD	8%	31%	61%	0%	0%	100%
PD	0%	100%	0%	0%	0%	100%
PD & DD	0%	33%	67%	0%	0%	100%
DD, AMW, CO	0%	0%	63%	31%	6%	100%
PD, DD, AMW, CO	0%	22%	44%	28%	6%	100%
AMW & CO	0%	0%	0%	83%	17%	100%

C3.1 GENERAL REQUIREMENTS

C3.1.5 Employer's Cost Estimate

The sum of the estimated costs of the relevant work types (including pro-rata of Chapter 1.3 (Contractor's Site Establishment and General Obligations) of COTO Draft Standard Specifications) forms the basis on which the Service Provider shall tender his fee to cover all his costs to develop the detailed design including training.

Project assessment costs and production of tender documentation including evaluation of tenders received are not considered to contribute to the development of the design and are separately billed.

The final cost of the Works will, however, depend on the strategy selected by the Employer based on the most appropriate and cost-effective options identified by the Service Provider during the project assessment and design phases. Scope of work changes may cause an increase or decrease in the fee offered to produce the design.

C3.1.5 Employer’s Cost Estimate – Works

No.	Contract Number	Cost Estimate: Roadworks (excl. VAT)	Cost Estimate: Structures (excl VAT)	Cost Estimate: Electrical (excl VAT)	Total Cost Estimate
1	N.001-030-2024/1RF	R1.17 billion	R350 million	R15 million	R1.54 billion
2	N.001-040-2024/1RF	R850 million	R50 million	R10 million	R910 million
3	N.001-040-2024/2RF	R850 million	R50 million	N/A	R900 million
4	N.002-020-2021/1RF	R1 579 million	R116 million	R28 million	R1 723 million
5	N.002-060-2020/2RF	R1.3 billion	R150 million	R120 million	R1.57 billion
6	N.002-060-2020/3RF	R1.1 billion	R250 million	R100 million	R1.45 billion
7	N.002-070-2020/1RF	R550 million	R100 million	R10 million	R660 million
8	N.002-080-2020/1RF	R850 million	R50 million	R10 million	R910 million
9	N.010-110-2025/2RF	R190 million	R10 million	R25 million	R225 million
10	N.012-070-2019/1RF	R1 450 million	R50 million	N/A	R1 500 million
11	N.012-091-2024/1RF	R400 million	R100 million	R50 million	R550 million
12	N.014-060-2025/1RF	R403 million	R36 million	N/A	R439 million
13	N.014-070-2024/1RF	R925 million	R15 million	N/A	R940 million
14	N.018-010-2023/1RF	R820 million	R110 million	N/A	R930 million

C3.1.5 Employer’s Cost Estimate – Works (Cont...)

No.	Contract Number	Cost Estimate Excl. VAT (Roadworks)	Cost Estimate (Structures)	Cost Estimate: Electrical (excl VAT)	Total Cost Estimate
15	R.031-080-2024/2RF	R148 million	R15 million	N/A	R163 million
16	R.300-010-2022/1RF	R607 million	R653 million	R55 million	R1 315 million

C3.1.7 Stakeholder and Community Liaison and Social Facilitation

(a) Purpose: To give effect to the need for transparency and inclusion in the process of delivering services, the Service Provider shall liaise with the project Stakeholders and affected Communities for the duration of the contract's life cycle. This shall be achieved through structured engagement with the PLC which was established for this purpose.

d) Target Area for the sourcing of labour for Construction Contract:

The target area for the sourcing of labour only needs to be defined in consultation with the Project Liaison Committee (PLC) and may typically include:

- (i) One or more Provinces;
- (ii) One or more Metropolitan and District Municipalities;
- (iii) One or more Local Municipalities; or
- (iv) One or more Wards that are wholly located within an area within a predefined radius of the construction activity.
- (v) One or more of the areas listed in the definition of Designated Groups.

C3.1.7 Stakeholder and Community Liaison and Social Facilitation

(f) Project Liaison Committee (PLC) and Project Management Team (PMT):

A Project Liaison Committee (PLC) has either been established prior to commencement of the contract or shall be established as soon as possible by the Service Provider. The PLC represents the project's Stakeholders. The PLC consist of representatives of project Stakeholders and affected communities.

Where a PLC has not been established, the Service Provider, under the guidance of the Employer, shall establish such a committee within the boundaries of the Local and/or District Municipality. Allowance has been made for these requirements in the Pricing Schedule under Additional Duties.

C3.1 GENERAL REQUIREMENTS

C3.1.9 Project Programme

Table 3.1.9: Project Programme

	Project Stage/Phase	Stage/Phase Completion Date
A	Submission of Tenders / Proposals	Friday, 15 March 2024
B	Appointment of Service Provider	September 2024
C	Project Hand-over meeting	October 2024
D	First Progress meeting	November 2024
E	Submission of draft Assessment Report	February 2025
F	Submission of draft Concept Design Report	N/A
G	Submission of draft Preliminary Design Report	April 2025
H	Submission of Gateway Review Report (if applicable)	June 2025
I	Submission of Road Safety Audit Report: Stage 1 Feasibility and Preliminary Design	May 2025
J	Submission of draft Detailed Design Report including Structures, Drainage & Geotechnical Reports	July 2025
K	Submission of Road Safety Audit Report: Stage 3: Detail Design	September 2025
L	Submission of design information to SANRAL's Property Service Provider (PSP) for land acquisition purposes	August 2025
M	Submission of Basic Assessment Report or full EIA report	August 2025
N		
O		
P	Submission of WULA to approving authority	September 2025
Q	Submission of EMP's to approving authority	September 2025
R	Submission of Draft Tender Documents for the Works and final Detailed Design Reports	January 2026
S	Tender Advertisement	February 2026
T	Submission of Final Tender Documents for the Works	February 2026
U	Clarification Meeting	March 2026
V	Tender Closure	April 2026
W	Submission of Tender Evaluation Report	N/A
X	Works Contract Handover	June 2026
Y	Submission of draft Contract Report & as-built data	Within 3 months of issue of Taking-over Certificate for the Works
Z	Submission of final Contract Reports and as-built data	Within 1 month of issue of Performance Certificate for the Works

The program for each project will vary according to the specific project and scope requirements

C3.1 GENERAL REQUIREMENTS

C3.1.11 Personnel Requirements

Minimum Requirements

Position	Minimum Qualification/Registration	Minimum Relevant Experience (years) ³	Other Requirements
Project Leader	Pr Eng ¹ or Pr Tech Eng ¹	10	In permanent employment of the tendering entity
Assistant Project Leader	Pr Eng ¹ or Pr Tech Eng ¹	<10	In permanent employment of the tendering entity or Targeted Enterprise
Design Specialist	Pr Eng ¹ or Pr Tech Eng ¹	10	
Assistant Design Specialist	Pr Eng ¹ or Pr Tech Eng ¹	<10	In permanent employment of the tendering entity or Targeted Enterprise
Surveyor	Registered Professional Surveyors, Technologist Surveyors, Technician Surveyors	5	Member of SAGC ⁶
Engineering Geologist	Pr Sci.Nat ⁴	5	SAIEG ³

KEY PERSONS

Personnel requirements will vary depending on each projects specific scope requirements

Personnel requirements will vary depending on each projects specific scope requirements

Position	Minimum Qualification/Registration	Minimum Relevant Experience (years) ³	Other Requirements
Environmental Practitioner	Refer to sub-service procurement document		
OHS Specialist	Design Phase: SACPCMP ⁵ registration as a Professional Construction HSE Agent Construction Phase: SACPCMP ⁵ registration as a Professional Construction HSE Agent or Manager	As required by SACPCMP ⁵	
Road Safety Audit Team Leader	Pr Eng ¹ or Pr Tech Eng ¹	10	Road safety course (5 CPD) Minimum 2 (two) audits within 3 (three) years
Contract Engineer	Pr Eng ¹	10	In permanent employment of the tendering entity
Assistant Contract Engineer	Pr Eng ¹ or Pr Tech Eng ¹	<10	In permanent employment of the tendering entity or Targeted Enterprise
Engineer's Representative (RE)	Pr Eng ¹ or Pr Tech Eng ¹	10	
Assistant RE	Candidate Technician ¹	3	
Senior Materials Technician	None specified	20	
	National Diploma in civil engineering	10	
	Pr Techni Eng ¹	5	
Materials Technician	None specified	10	
	National Diploma in civil engineering	5	
	Pr Techni Eng ¹	2	
Trainee Technician	Candidate Technician	0	

C3.1 GENERAL REQUIREMENTS

C3.1.11 Personnel Requirements

a) Key persons

The Service Provider's key persons become a contractual commitment upon award. However, the Employer recognises that key persons may for some or other reason not be available for the full duration of the project and any changes to those listed are, to all intents and purposes, a change or variation to the contract. Any proposed change should be handled formally by way of written request and approval, but does not require a Works Authorisation to be submitted. Replacement personnel shall be of same or better competence and experience as those initially accepted. Re-evaluation by the Employer of any replacement key persons shall be paid for by the Service Provider as specified in Section 3.8 unless the circumstances dictating the change are completely outside of the Service Provider's control.

The key persons required for this project are listed in Form C1.2.2 Contract Data: Information provided by the Employer. The tenderer must list proposed candidates for the prescribed positions in the core team in Form C1.2.3 Contract Data: Information provided by the Tenderer.

The key personnel required are project specific but will typically be comprised of: (Refer to tender document for project specific list.)

- Project Leader
- Design Specialist (Pavement and materials engineer)
- Design Specialist (Structural Engineer – if required)
- Design Specialist (Geometrical Engineer – if required)
- Any additional design specialist if required (Project specific)

C3.1 GENERAL REQUIREMENTS

C3.7.3 Establishment of supervisory personnel on site

a) Supervisory team

The Service Provider shall be required to provide a team on site to monitor, administer and measure the Works in accordance with the requirements of the Works Contract, Employer's standard requirements and industry good practice.

Provision has been made in the Pricing Schedule for the envisaged staffing requirement. The establishment of such staff, however, shall be subject to the approval of the Employer. For the envisaged scope of the Works, the supervisory team will consist of at least the following:

- i) Resident Engineer
- ii) Assistant Resident Engineer/s
- iii) Materials Technician / Senior Materials Technician
- iv) Trainee Technician
- v) Trainee (student)
- vi) Project Liaison Officer
- vii) Administrative Assistants (data capture)
- viii) Mentors/Coaches for Targeted Enterprises (sub-contractors)

The minimum requirements for qualification and experience of the supervisory team are specified in Clause C3.1.11.

PART C4: SITE INFORMATION

Project specific details can be found under the site information section which include some of the following technical details pertaining to:

- Location of the project
- Geometric information
- Traffic information
- Pavement information
- Materials Sources
- Drainage
- Road Furniture

The as-built and historic data for each route section will be available on SARDS online (please refer to the SARDS Manual provided)

THANK YOU!

END