
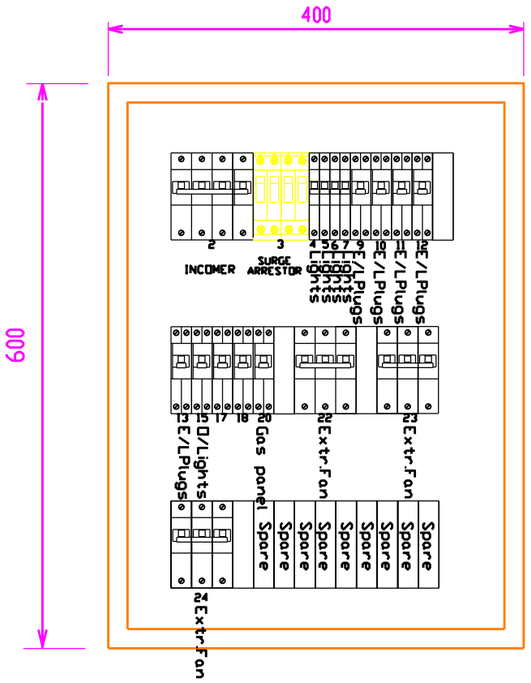


LAYOUTWITHOUT DOOR

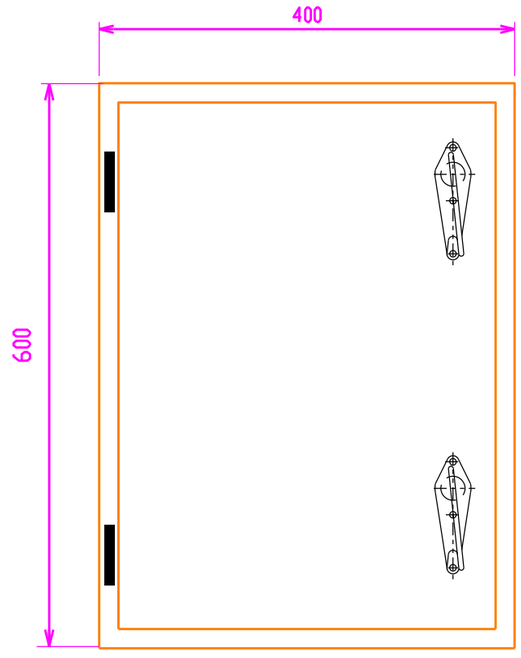

LAYOUT WITH DOOR

N O T E

ENCLOSURE SHALL BE:

1. MANUFACTURE FROM 1.6mm MILD STEEL
2. FLUSH MOUNTED, FRONT ACCESS
3. ELECTRIC ORANGE IN COLOUR
4. TOP AND BOTTOM ENTRY
5. LOCKABLE DOOR LATCH TYPE: BARKER NELSON SERIES 24
6. EQUIPPED WITH DOORS AND INNER FACIA PLATES
7. ENCLOSURE TO HAVE SPACE FOR 30% ADDITIONAL CIRCUITS
8. BOARD TO BE IP 44
9. SWITCH SOCKET OUTLET NEUTRALS TO BE NUMBERED AS PER CORRESPONDING LIVE CIRCUIT NUMBER

CLIENT: TRANSNET national ports authority

Client Name:	
Designation & Section:	ELECTRICAL ENGINEER: PORT ENGINEERING
Client Signature:	Project Phase: 0
Date:	
Contact No.'s:	

No.	DATE	REVISION DETAIL
00	11-12-2020	ORIGINAL
01	27-11-2022	APPROVED FOR CONSTUCTION (AFC)

Main Contractor:

Stateway Switchboards (Pty) Ltd.

55 Second Road, Linbro Park Sandton | P.O. Box 1055 Linbro Park 2065 | TEL. +27(0) 11 021 7260 FAX. +27(0) 86 503 2258

Main Contractor:	STATEWAY SWITCHBOARDS (PTY.) LTD.
ZML Africa Drawing No.	TNPA/2020

Consultant:

Z.M.L Africa Group
Engineering Africa Forward

Site Address:
Sturrock Dry Dock, Cape Town

Building Name:
Combined Pumphouse and Graving Dock Substation

Project Description:
Sturrock Dry Dock Electrical Infrastructure Upgrades: - Sketch Plan

Drawing Description:
Lighting and Small Power lighting DB

Drawn:	P.MAZIBUKO	Date:	29 / 07 / 2021
Designer / Checked:	M.SHEZI	Scale:	AS SHOWN
Approved:	M.SHEZI	Drawing Size:	A3
Prof Reg. No.	20110108	Revision No:	01
Signature:			27/11/2022

Drawing Number: TNPA/2020-000-E-LSP-0001

Site & Building No.	Floor No.	Discipline & Service Type

Sheet Number	Project Number	Proposal No
005		000