

Contact persons:
Francois Swanepoel
& Sunette Laurie



Email: Swanepoelf@arc.agric.za; SLaurie@arc.agric.za

SPECIFICATIONS FOR GLASSHOUSE C12

FEBRUARY 2025

TABLE OF CONTENTS

1.	INTRODUCTION	6
1.1.	INTRODUCTION AND BACKGROUND	6
1.2.	PROJECT LOCATION.....	6
1.3.	PROJECT OBJECTIVE	7
1.4.	PURPOSE OF THE REPORT	7
1.5.	STRUCTURE OF REPORT	7
2.	GREENHOUSE C12- DESIGN SPECIFICATIONS	8
2.1.	OVERVIEW.....	8
2.2.	GREENHOUSE STRUCTURE.....	9
2.2.1.	DIMENSIONS.....	9
2.2.2.	STRUCTURAL SPECIFICATIONS	10
2.2.2.1.	DEMOLITION.....	10
2.2.2.2.	FOUNDATIONS	10
2.2.2.3.	DRAINAGE	10
2.2.2.4.	FLOORS.....	11
2.2.2.5.	WALLS.....	11
2.2.2.6.	GUTTERS.....	11
2.2.2.7.	DOORS	11
2.2.2.8.	FRAME OF THE GREENHOUSE ROOF STRUCTURE	12
2.3.	CLADDING	12
2.3.1.	ROOF AND GABLE FONTS.....	12
2.3.2.	EXTERNAL HAIL PROTECTION	13
2.4.	COOLING, HEATING AND CLIMATE SYSTEMS	13
2.4.1.	HEATING COOLING	13
2.4.2.	VENTILATION	13
2.4.3.	HUMIDIFICATION.....	13
2.5.	CLIMATE CONTROL SYSTEM.....	14
2.6.	GROWING SYSTEMS.....	14
2.6.1.	TABLES	14

2.7.	WATER SYSTEMS	15
2.7.1.	WATER SOURCE	15
2.7.2.	IRRIGATION	15
2.7.3.	FERTIGATION	16
2.7.4.	SERVICE WATER	16
2.8.	ELECTRICAL SYSTEMS	16
2.8.1.	GENERAL.....	16
2.8.2.	GREENHOUSE.....	16
2.8.3.	CORRIDOR	17
2.9.	EQUIPMENT	17
2.9.1.	FOOTBATHS	18
2.9.2.	AIR-CURTAIN	18
2.9.3.	BASIN	18
2.9.4.	ROLLABLE CURTAINS	18
3.	GENERAL SPECIFICATIONS	19
3.1.	ELECTRICAL SYSTEMS	19
3.1.1.	GENERAL INFORMATION ON ELECTRICAL SYSTEMS	19
3.1.2.	LIGHTS.....	20
3.2.	CHANNELS	21
3.2.1.	CHANEL CONSTRUCTION	21
3.2.2.	GRID OVER CHANNEL.....	21
3.3.	CLIMATE CONTROL SYSTEM.....	22
3.3.1.	SMS WARNING SYSTEM	24
3.3.2.	ELECTRICITY METER	24
3.3.3.	CONCRETE PLINTH OF AC UNITS.....	24
3.3.4.	WIRE / CABLE MANAGEMENT	24
3.3.5.	SERVICE PLAN	24
3.4.	LOCK AND DOORS	25
3.5.	CONCRETE FLOOR	25
3.6.	STEEL TABLES	26

3.7.	FIRE EXTINGUISHERS.....	26
3.8.	DESIGN	26
3.9.	TRELLIS SUPPORT SYSTEM	26
3.10.	IRRIGATION	27
3.11.	ALTERNATIVE WATER SUPPLY.....	27
3.11.1.	WATER TANK	27
3.11.2.	BASE FOR WATER TANK.....	28
3.11.3.	WATER PUMP SYSTEM.....	28
3.12.	SERVICE WATER.	28
3.13.	PURIFIED WATER SYSTEM.....	29
3.14.	FOOT BATH.....	29
3.15.	AIR CURTAIN	29
4.	NAME BOARDS.....	30
5.	PRICING DATA.....	31
5.1 –	PRICING INSTRUCTIONS	31
5.1.1 –	PAYMENT SCHEDULE.....	32
5.1.2 –	BILLS OF QUANTITIES / SCHEDULE OF QUANTITIES.....	32
	APPENDIX A: GREENHOUSE C12 CONCEPT LAYOUT	34

LIST OF FIGURES

Figure 1-1: Site location.....	6
Figure 2-1: Greenhouse C12.....	9
Figure 2-2: C12 Drawing	10
Figure 2-3: Face brick Wall for C12	11
Figure 2-4: Multi-wall Polycarbonate Sheeting.....	13
Figure 2-5: Greenhouse C12 - HVAC	14
Figure 2-6: Growing tables.....	15
Figure 2-7: Example of Low Hanging grow lights.....	17
Figure 2-8: Rollable Curtains.....	19

Figure 3-1: Example of Growth Lights (Note: this example is not ip65 rated)	20
Figure 3-2: light and timer configuration	21
Figure 3-3: Typical Channel Cross Section	21
Figure 3-4: Grid Over Channel	22
Figure 3-5: Electrical Box	23
Figure 3-6: Electric Box	23
Figure 3-7: wire Mesh	24
Figure 3-8: Trellis Support	27
Figure 4-1: C12 Name Board	31
Figure 5-1: BOQ	33

LIST OF TABLES

Table 2-1: C12 Greenhouse Structure Specifications	12
--	----

1. INTRODUCTION

This chapter is discussed under the following headings:

- Introduction and background
- Project location
- Project objective
- Purpose of the report
- Structure of the report.

1.1.INTRODUCTION AND BACKGROUND

The Agricultural Research Council (ARC) of South Africa has identified a need to enhance its research facilities. With a vision to bolster the nation's agricultural research capabilities, the Council has initiated an RFQ (Request for Quotation) for the comprehensive refurbishment and construction of this glasshouse complex. The glasshouse, spanning an area of about 200 m², is pivotal for myriad research purposes. The project emphasises modern, energy-efficient solutions, from advanced cooling and heating systems to computerised control setups. With water sustainability and solar energy utilisation also on the agenda, the Council's objective is clear: to cultivate state-of-the-art, eco-conscious research environments that drive agricultural innovation forward.

1.2. PROJECT LOCATION

The project is situated at the Vegetable Industrial and Medicinal Plants Institute of the Agricultural Research Council (ARC-VIMP) located on the R573 KwaMhlanga/Moloto Road near Roodeplaat in Pretoria, South Africa.



FIGURE 1-1: SITE LOCATION

1.3. PROJECT OBJECTIVE

The primary objective of this project is to refurbish and construct a state-of-the-art glasshouse complex for the Agricultural Research Council of South Africa. This enhancement aims to bolster the nation's agricultural research capabilities by creating modern, energy-efficient, and eco-conscious research environments.

1.4. PURPOSE OF THE REPORT

The purpose of the detailed specification is to clearly outline greenhouse specific requirements and materials, ensuring that there is a common and clear understanding of the greenhouse components and their functional requirements. The specification will aid the tenderer to price the design build project and to execute the design on appointment.

1.5. STRUCTURE OF REPORT

The report comprises the following sections:

- Section 2: Greenhouse C12- design specifications
- Section 3: General Specifications
- Section 4: Name Boards
- Section 5: Pricing Data
- Drawing

2. GREENHOUSE C12- DESIGN SPECIFICATIONS

This chapter will focus on the C12 design specifications. The design specifications for the C12 greenhouse will be subdivided into ten (10) sub-sections which include:

- Overview
- Greenhouse structure
- Structural specifications
- Cladding
- Cooling, heating and climate systems
- Climate control
- Growing systems
- Water systems
- Electrical systems
- Equipment

2.1.OVERVIEW

The C12 Greenhouse currently comprises of 11 compartments with a central passage. It is set for a complete overhaul. The existing structure, which includes its foundations, will need to be demolished to make way for a newly designed greenhouse tailored to meet research needs.

The redesigned greenhouse will feature 9 compartments. The layout will include a large single compartment designated as C12.1. From C12.2 to C12.9, the greenhouse will maintain a central passage that facilitates efficient access between compartments. The new construction is specifically aimed at enhancing capabilities in the precision-controlled breeding of selected root tuberous vegetables, including sweet potatoes, cassava, and amadumbe.



FIGURE 2-1: GREENHOUSE C12

2.2.GREENHOUSE STRUCTURE

2.2.1. DIMENSIONS

Growing Area: 9 Bays 4 x (2.3m x 4.6m)

2x (4.7m x 4.6m)

2x (7m x 4.6m)

1x (8.8m x 11.3)

Passage: 1 Passage (16.3m x 1.6m)

Total Area: Approx. 293m²

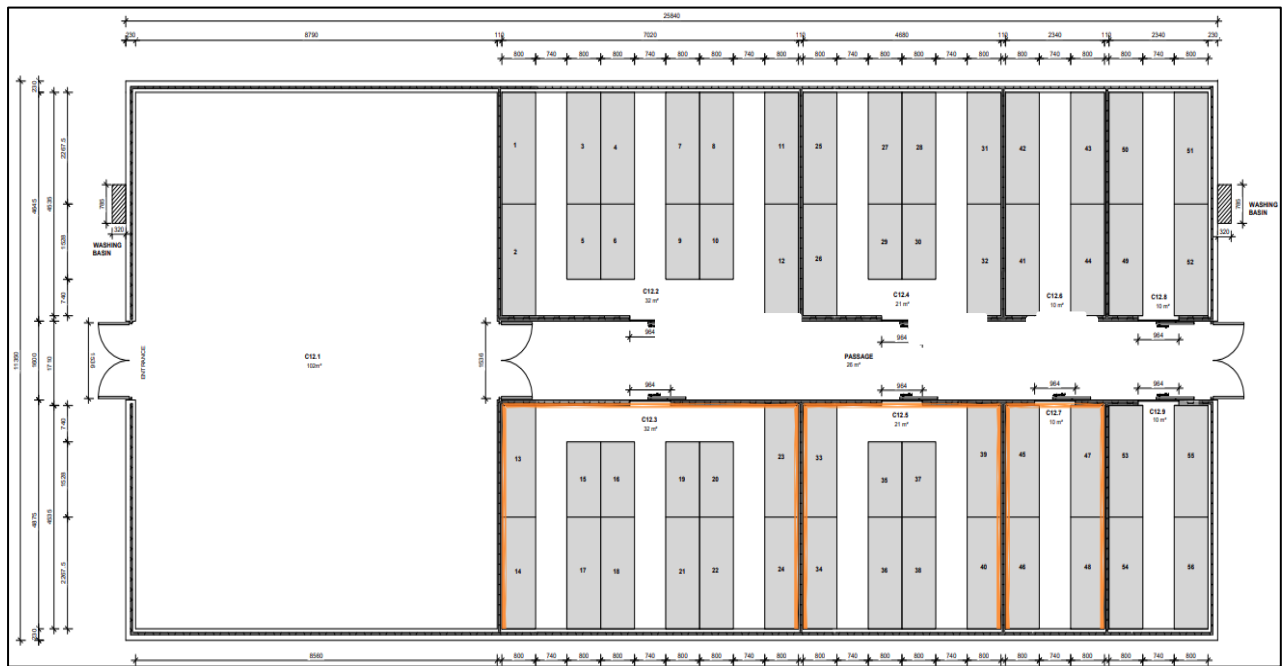


FIGURE 2-2: C12 DRAWING

2.2.2. STRUCTURAL SPECIFICATIONS

2.2.2.1. DEMOLITION

- Complete demolition of the existing structure with exception of the hail protection structure. This can be dismantled and then rebuilt. Remove all debris from the Roodeplaat campus and responsible disposal of all resultant debris in accordance with environmental and safety regulations

2.2.2.2. FOUNDATIONS

- New foundation required
- Apron for the area surrounding the greenhouse must be concrete
- Concrete should extend to C11 greenhouse on the west, to the adjacent building on the north and to C13 on the eastern side.

See paragraph Concrete

2.2.2.3. DRAINAGE

A new drainage system will need to be constructed. The drainage in the compartments will be done utilising surface flow up to an inlet that will discharge into the channel. Greenhouse C12 will require a drainage channel to enable the construction of separate outlets into the channel from each of the compartments. The channel will be in the centre of the floor where the current drainage pipes are located.

See paragraph : Channel

2.2.2.4. FLOORS

- The existing surface bed must be repaired, clean and dry with all debris removed before applying a heavy-duty self-levelling screed sloping towards the draining outlets.
- See paragraph: Concrete floor.

2.2.2.5. WALLS

- Face brick walls will be required due to tables being positioned near the wall.
- Face brick walls of 0.8m height will be required for each compartment. The face brick must be no less than FBS with 24 MPa

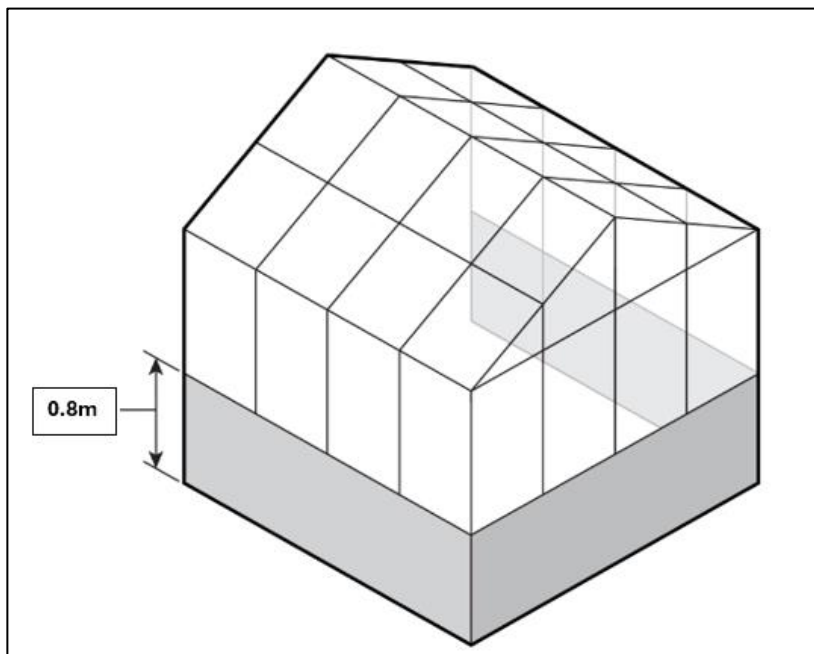


FIGURE 2-3: FACE BRICK WALL FOR C12

2.2.2.6. GUTTERS

- None

2.2.2.7. DOORS

- One lockable entrance door – Northern Side at C12.1
 - One aluminium frame and leaf double door (large dimensions)
 - One aluminium double door (1.71 x 2.25) (w*h) on the northern side of corridor C12.1 which will also be the entrance of the passage; as indicated by drawing.
 - Combination lock
- One lockable entrance door – Southern Side leading into the passage.
 - One aluminium frame and leaf double door (standard dimensions)
 - Combination lock

- Sliding doors for compartments C12.2 – C12.9. Each sliding door must have a heavy-duty sliding door system. The sliding door must be of aluminium with 6.4mm safety glass and be able to seal to prevent insects and/or pests from entering.
- Sealed single aluminium frame and leaf door that opens towards the corridor.
- With standard lock and key system as supplied by door manufacturer.

2.2.2.8. FRAME OF THE GREENHOUSE ROOF STRUCTURE

- Frame to be constructed with steel or aluminium that is compatible with Polycarb glazing.

TABLE 2-1: C12 GREENHOUSE STRUCTURE SPECIFICATIONS

COMPONENT	TYPE
Greenhouse Structure	Gable Roof
Size	As per approved greenhouse shop drawings (close as possible to match existing) Approx height of existing: • Eave Height – 2.18m • Ridge Height – 4.22m • Gable End Height – 2.04m
Material	Custom

2.3.CLADDING

The cladding for this greenhouse will include the following components:

- Walls and Roof
- External hail protection

2.3.1. ROOF AND GABLE FRONTS

All walls and roofs need to provide a durable, thermally insulating, and light-transmitting covering for the greenhouse roof and gable fronts that facilitates optimal plant growth and protection from external elements.

- Multi-wall polycarbonate (PC) sheets (6 -10mm) fixed to purpose made aluminium frame with end caps for sealing of top and bottom edges to keep moisture and debris out.
- Customized to fit the specific measurements of the greenhouse structure.
- Dimensions will be finalized based on detailed shop drawings.
- Panels will be pre-cut to fit the designated roof and gable areas, including allowances for thermal expansion and contraction.
- All walls will need to be multi-wall polycarbonate (PC) sheets (6 -10mm)
- Ensure all panels are adequately sealed at both ends.

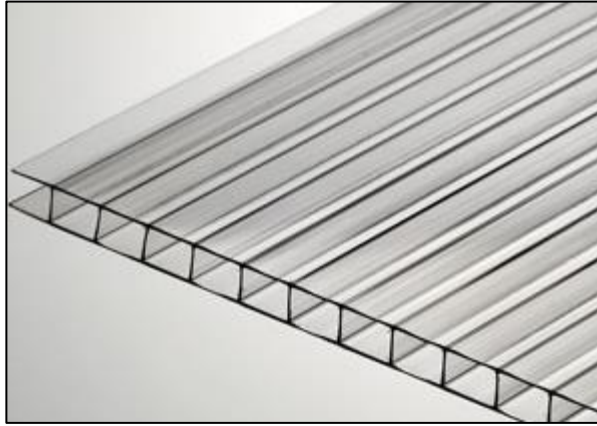


FIGURE 2-4: MULTI-WALL POLYCARBONATE SHEETING

2.3.2. EXTERNAL HAIL PROTECTION

- Protecting the roof area for compartments C12.1 – C12.9 constructed from galvanized steel mesh or similar approved.
- External hail protection will be needed to ensure all polycarbonate panels are protected.
- Retain and adjust existing hail structure
- Provide galvanized welded mesh with a 25.4mm x 12.7 mm aperture and 1.5 mm thickness as a separate line item for all hail protection structures

2.4.COOLING, HEATING AND CLIMATE SYSTEMS

The cooling, heating and climate systems can be broken down into the following:

- Heating and cooling
- Ventilation
- Humidification

2.4.1. HEATING COOLING

- HVAC system will be dual-function units capable of both heating and cooling.
- Each compartment must be able to control heating and cooling independently; should be able to achieve between 10 and 35°C, suitable for the specific location and independent of external climate conditions and factors and adjacent compartments.
- See Paragraph : Climate control system

2.4.2. VENTILATION

- Natural ventilation will be required for each compartment.
- Openable natural ventilation levers

2.4.3. HUMIDIFICATION

- Foggers and Misters

- Each compartment may be equipped with foggers and misters capable of delivering a fine spray if required to achieve and maintain uniform humidity levels.
- Control and Integration
 - The humidification equipment will need to be fully integrated with the greenhouse's centralized computerized control system. The integration will allow for automated adjustments based on real-time humidity data.
- Relative Humidity Levels
 - The system will need to maintain relative humidity levels between 60% and 80% within each compartment.
 - Relative humidity levels must be able to turn off completely when needed.

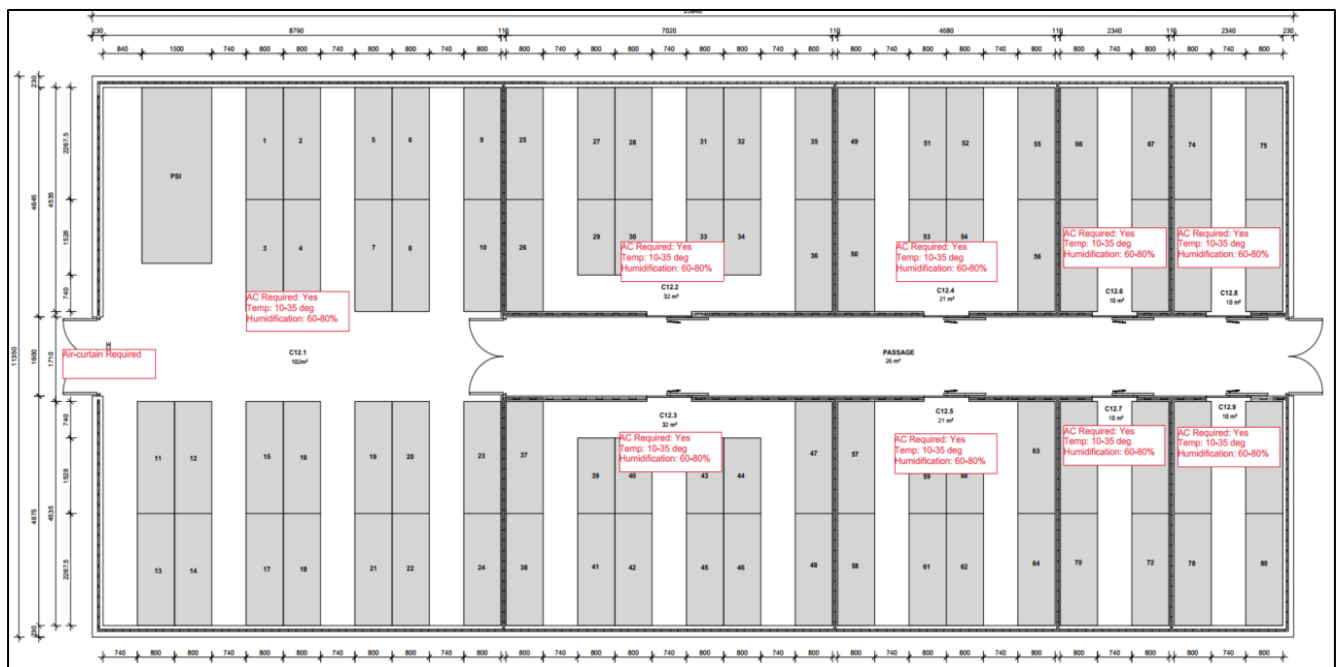


FIGURE 2-5: GREENHOUSE C12 - HVAC

2.5.CLIMATE CONTROL SYSTEM

See Paragraph: CLIMATE CONTROL SYSTEM

2.6.GROWING SYSTEMS

2.6.1. TABLES

The C12 greenhouse will need to consist of moveable steel tables

- Mild steel tables with rust resistant paint, able to carry heavy pots with approx. load carrying capacity of 150kg per m².(refer to image below)
 - Compartment C12.1 – None

- Compartment C12.2 – 8 x (2.26m x 0.8m) (L*W) & 4 x (1.53m x 0.8m) (L*W)
- Compartment C12.3 – 8 x (2.26m x 0.8m) (L*W) & 4 x (1.53m x 0.8m) (L*W)
- Compartment C12.4 – 6 x (2.26m x 0.8m) (L*W) & 4 x (1.53m x 0.8m) (L*W)
- Compartment C12.5 – 6 x (2.26m x 0.8m) (L*W) & 4 x (1.53m x 0.8m) (L*W)
- Compartment C12.6 – 4 x (2.26m x 0.8m) (L*W)
- Compartment C12.7 – 4 x (2.26m x 0.8m) (L*W)
- Compartment C12.8 – 4 x (2.26m x 0.8m) (L*W)
- Compartment C12.9 – 4 x (2.26m x 0.8m) (L*W)



FIGURE 2-6: GROWING TABLES

2.7. WATER SYSTEMS

The water systems for the C12 greenhouse will consist of:

- Water source
- Irrigation
- Fertigation
- Service Water

2.7.1. WATER SOURCE

The water supply to the greenhouse will need to tie into existing water reticulation system with the need for 1x backup water tank to provide an auxiliary water supply during potential interruptions of primary water supply.

See paragraph – Alternative water supply

2.7.2. IRRIGATION

- Dripper irrigation system
- See paragraph Irrigation

2.7.3. FERTIGATION

- Manual fertigation will be used to deliver nutrient solutions to the plants.

2.7.4. SERVICE WATER

- See paragraph Service water.

2.8.ELECTRICAL SYSTEMS

2.8.1. GENERAL

- **All equipment must be equipped with Surge arresters and lightning protection**
- **See paragraph: General information on electrical systems**

2.8.2. GREENHOUSE

- Excavation of all materials for trenches, concrete capping, backfill, compact and dispose of surplus material as required from Substation C, to Sub DB12
- Removal and disposal of existing equipment, cabling, and all associated existing electrical infrastructure from point of supply in Substation C, to Sub DB12, including but not limited to Kiosk C and Sub DB12 with associated cables and switchgear.
- Installation of the following:
 - Appropriately sized three phase circuit breaker in LV panel in substation C based on expected demand
 - Low voltage cables installed in trenches, including
 - Cable terminations
 - Bare copper earth conductors
 - Cable ends for copper earth conductor including glands, lugs and connections
 - All other components as required for supply from Substation C to the distribution kiosk (Kiosk C).
 - 1 Kiosk with lockable doors complete with all necessary components, including, but not limited to busbars, switchgear, internal wiring, blanking plates, labelling etc. The kiosk is to be connected to the newly installed Sub DB in the passage.
 - PVC Insulated Conductors
 - PVC Insulated Earth Conductors
 - Galvanised screwed conduit including bending, jointing, short lengths, draw boxes, couplings, bends, saddles, hospital saddles and wastage conduit ends.

- Low hanging vaporproof light fittings equipped with white and RGB LED's for compartments C12.3, C12.5 and C12.7 including wiring. Height of the lights above ground level as per user requirements.
- Appropriately sized socket outlets and isolators for the applicable HVAC installation , PLC box and compartment C12.1 for phenotyping machine (as seen on concept drawing)
- Install a three phase electrical meter to measure electrical consumption for the green house complex, include phase failure and surge arrestor for protection
- Wall mounted lockable box complete with all equipment associated with a PLC system.



FIGURE 2-7: EXAMPLE OF LOW HANGING GROW LIGHTS

2.8.3. CORRIDOR

- Removal of all existing, dilapidated electrical components and equipment.
- Installation of:
 - Socket outlets including wiring
 - Lighting including wiring
 - Conductors and earth conductors required for lighting and socket outlets
 - 1 surface mounted DB with lockable doors complete with all necessary components, including, but not limited to busbars, switchgear, internal wiring, blanking plates, labelling etc.

2.9.EQUIPMENT

The equipment for the C12 greenhouse includes the following components

- Footbaths
- Air curtains

- Basin
- Low hanging lights and rollable curtains

2.9.1. FOOTBATHS

- See paragraph: Foot bath
- Location
 - Installed inside the corridor at both entrances; as a secondary sanitation measure.

2.9.2. AIR-CURTAIN

- See Paragraph: Air curtain

2.9.3. BASIN

One (1) hand wash basin and sanitizer dispenser centrally placed in corridor.

Two (2) washing basin outside on each of the southern and northern end. Used for washing of tray and pots and should include faucets with both hot and cold water options.

- Material
 - Stainless steel for its durability, resistance to rust, and ease of cleaning. Securely mounted.
- Dimensions
 - Adequately sized to accommodate the largest trays and pots used in the greenhouse. Typical dimensions might be 120 cm in length, 60 cm in width, and 40 cm in depth.
- Depth
 - Sufficient depth to prevent splashing and handle large volumes of water, usually around 40 cm.
- Placement
 - Located in the corridor (refer to drawing). The basins should be securely mounted to the floor to prevent movement during use and equipped with a high-capacity drain to prevent clogging.

2.9.4. ROLLABLE CURTAINS

Install rollable canvas curtains in compartments C12.3, C12.5, and C12.7 to effectively block light from entering adjacent compartments and those across the corridor.

The specific locations for these curtains are indicated in the concept drawing provided below.



FIGURE 2-8: ROLLABLE CURTAINS

Mechanical principle must be similar to a Poultry house curtain.

- ◆ Use 500g/m² canvas curtains as side cladding. Canvas curtain to be raised and lowered with 3mm- and 6mm steel cable as per drawing B2000/3.
- ◆ Use 75mm cast iron pulley for main cable redirection and 40mm plastic pulleys for sub-cable redirection on the curtain.
- ◆ Use a hand winch for raising and lowering the curtain.

3. GENERAL SPECIFICATIONS

3.1.ELECTRICAL SYSTEMS

3.1.1. GENERAL INFORMATION ON ELECTRICAL SYSTEMS

- **All equipment must be equipped with Surge arresters and lightning protection**
- Contractor to provide as-built drawings based on the completed installation in AutoCAD 2023/4 as well as PDF formats. Hard copies shall form part of the handover documents.
- Contractor to provide 3 sets of handover documentation that includes all equipment datasheets, guarantees and warranties, operation and recommended maintenance manuals for all equipment and the installation.
- Issuing of an electrical certificate of compliance to achieve occupation for each installation is required
- All equipment and products used for the electrical installation shall be SABS approved and shall bare the SABS stamp of approval. This includes but not limited to, circuit breakers, light switches, socket outlets, isolators, wiring and cables, conduit and accessories, and light fittings. Non-compliance of

this clause will result in rejection of the installation and all costs pertaining to rectifying the installation shall be born to the contractor.

- All designs and installation shall be done in accordance to the following standards:
 - SANS 10142-1: The wiring of premises Part 1: Low voltage installations
 - SANS 10114-1: Interior Lighting: Artificial lighting of interiors
 - SANS 10114-2: Interior Lighting: Emergency lighting
 - SANS 10389-1: Artificial lighting of exterior areas for work and safety
 - SANS 10389-2: Exterior security lighting
 - SANS 10400: The application of the National Building Regulations
 - SANS 204: Energy Efficiency in Buildings
 - SANS 10313: Protection against lightning
 - SANS 61024: Protection of structures against lightning
 - All municipal regulations pertaining to building codes and health and safety requirements
 - South African Occupational Health and Safety Act (Act 85 of 1993).

3.1.2. LIGHTS

Photo indicates the Growth and normal LED light on each fitting

- Lights must be mounted underneath the trellis system.
- All lights must me IP 65 rated (Dust tight & protecting from water jets in any direction)
- Led lights: Similar or equal to
 - <http://a365.acdc.co.za/Images//spec/LEDT8PG-A3FR.pdf>
 - Similar or equal to: <https://www.acdc.co.za/pages/led-grow-lights>
- Complete with T8 fittings, switch etc.



FIGURE 3-1: EXAMPLE OF GROWTH LIGHTS (NOTE: THIS EXAMPLE IS NOT IP65 RATED)

Light switches for grow lights

- 24 hour geyser timer with 8 programs mounted to wall plate
- Timer must be mounted into wall switch plate
- All wire must be in plastic trunking
- 24 hour geyser timer with 8 programs mounted
- Timer front must flush with wall (Not protruding)
- 2 lever switch plate. (1) activate lights with timer (2) activate lights



FIGURE 3-2: LIGHT AND TIMER CONFIGURATION

3.2.CHANNELS

The channel final dimensions must be minimum 300mm wide and 300mm deep to enable a clear level difference between the channel invert and the inlet from the different compartments. This will prevent backflow and possible cross contamination between the compartments if there is a blockage in the channel. The channel is also covered by a galvanised steel grid to prevent tripping and enable access into the compartments with trollies. The typical channel cross section can be seen in Figure 3-3

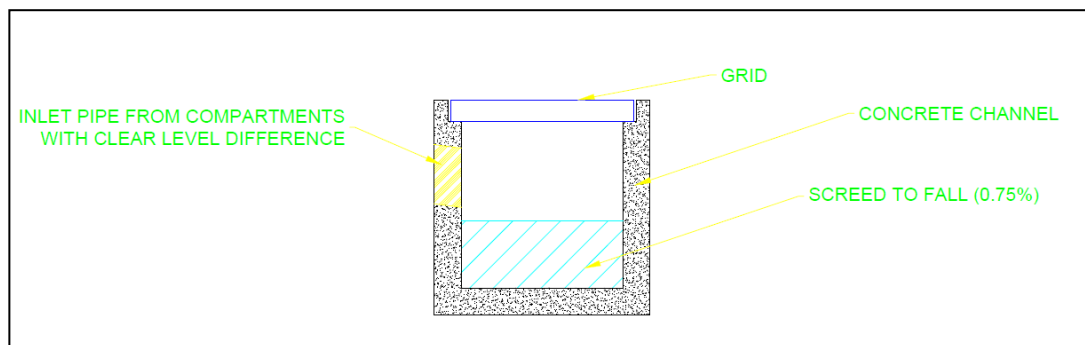


FIGURE 3-3: TYPICAL CHANNEL CROSS SECTION

3.2.1. CHANNEL CONSTRUCTION

- Floor of channel must be 80mm thick 20 MPa ready-mix concrete
- Sides must be build up with bricks, mortar with and plaster or 80mm cast concrete.
- Slope of the channel must be minimum 1:40

3.2.2. GRID OVER CHANNEL

- Heavy duty Mentis steel grating (see picture below)

- Mentis grading must be framed in 40 x 40 x 5 angle iron, the frame must be anchor in to the brick or concrete walls
- Material: **Galvanized** Heavy duty steel grating and frames.

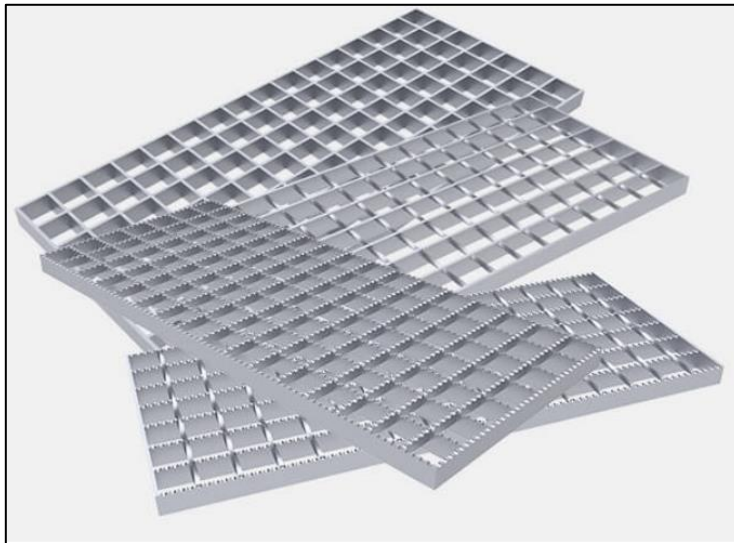


FIGURE 3-4: GRID OVER CHANNEL

3.3.CLIMATE CONTROL SYSTEM

The climate control system must be designed to provide precise regulation of environmental conditions within each compartment of the greenhouse independently and consist of the following:

- Remove and take ownership of old cooling/heating systems for a discount price
- Existing aircons to be dismantled
- All HVAC must be digitally controlled
- Install a physical internet cable (optic fibre) from A11 or nearest office building in compartment C12.1
- A centralized, computerized system will manage and regulate the climate within each compartment of the greenhouse
- The system will need to continuously monitor the temperature and humidity levels in each compartment using a minimum of 3 sensors, ensuring that the environmental conditions are within the specified parameters.
- Automated controls will adjust heating, cooling, and humidity based on real-time data received from the sensors.
- HVAC system will be dual-function units capable of both heating and cooling.
- Design parameters of $\pm 3500 \text{ Btu/hr/m}^2$
- Capable of achieving and maintaining temperatures from as low as 10°C to as 40°C as specified for C12, suitable for the specific location and

independent of external climate conditions and factors and adjacent compartments.

- Capable of multiple settings per day e.g. Day and night setting
- Each unit must have the capability to independently control the temperature in its designated compartment, without affecting adjacent areas.
- Integration with a centralized computerized control system for precision management.
- Manufacture and install purpose made galvanized ducting internally insulated.
- 2x washable filter sets per unit in return ducting
- Supply and install a double deflection supply air grill per unit
- Supply and install one return air grille per unit.
- The air conditioners control unit will be housed in a steel metal electrical enclosure (IP65) with all the relevant switch gear to control the AC units, one metal electrical enclosure per compartment
- Supply and install new electrical cables from the distribution board.
- All cables must be in galvanized steel trunking or galvanized wire trays
- Screens may be installed to aid temperature control.



FIGURE 3-5: ELECTRICAL BOX

3.3.1. SMS WARNING SYSTEM

- Alarming system that will send a warning if temperatures are out of range.
- The system must be accessible via cloud, desktop, and mobile platforms, and must utilize the existing internet infrastructure within the office area. The contractor is required to extend this existing internet service (Wi Fi) to ensure comprehensive coverage throughout the entire greenhouse
- SMS sim card and pre-loaded data to be able to send all warning messages for 1 year

3.3.2. ELECTRICITY METER

- 3 Phase electricity meter to measure the electricity consumption off each green house complex

3.3.3. CONCRETE PLINTH OF AC UNITS

- All AC units must have a concrete plinth that is a minimum of 0.5 meter larger on all 3 sides of the AC unit. The 4th side is facing the glasshouse.
- Slightly slope away from the structure (1:100)
- Compacting of soil. Minimum of two (2) successful Dynamic Cone Penetrometer (DCP) test per unit to be recorded by a trained operator. The maximum allowable displacement per blow is 15mm to a depth of 0.5m deep.
- Minimum reinforcement for concrete Ref. 245 (200 x 200 x 6.3 mm) SANS 1024:2012 welded steel mesh
- 25 MPa Concrete mixes must be supplied by an approved ready mix concrete supplier.
- Concrete must be vibrated to expel entrapped air.
- Broom finish of the concrete

3.3.4. WIRE / CABLE MANAGEMENT

- Wire management with cable trays

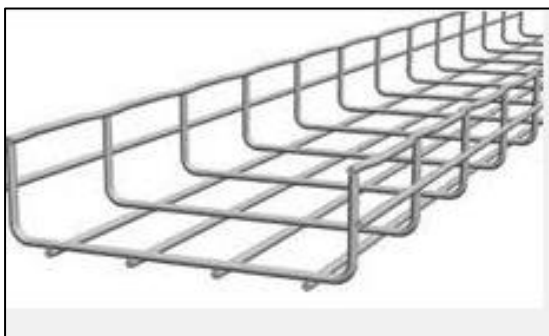


FIGURE 3-7: WIRE MESH

3.3.5. SERVICE PLAN

Once works completion has been received for the entire project, the contractor will make provision for a 12-month maintenance period. This maintenance will include all maintenance activities required for the system and equipment to perform as

intended and reach the required design lifetime. Equipment maintenance will include all regular maintenance that the installation must undergo at specific periods, like changing filters. The contractor will need to arrange access to the site with the client and will need to align maintenance activities with the client's operational requirements.

All services shall be carried out by person who hold valid Air conditioning and refrigeration certificate or certificate in safe handling of refrigerant from a recognized institution. verifiable proof of registration (Certificate/card) as Air conditioning/ Refrigeration Technician or Certificate in Safe handling of Refrigerant shall be submitted with this bid. Tenderer shall provide a list of competent registered name/names that will be made available to perform any duties for and on behalf of the bid on this contract

3.4.LOCK AND DOORS

- All doors and locks, etc must be of industrial standard.
- Replace door lock, complete with strike plate, mortise lock, chrome plated handles and door stop. SABS Approved:
- All doors, door frames and window frames must be clean, dry, firm and dust free, painted with similar or equal to one coat merit universal undercoat (UC1) (before glazing) and apply two coats of paint similar to Plascon Velvagro to manufacturer's specification. Colour by Engineer.
- All the doors must be in good working condition



3.5.CONCRETE FLOOR

All surfaces should be free from laitance, dust, and other contamination, dry to 75% RH, and free from rising dampness and groundwater pressure. The primed surface should be treated with a solvent-free concrete primer and base coat, followed by a homogeneous concrete sealant. Application must be in accordance with approved applicators, ensuring proper sloping towards the drainage outlets

- Final floor level must be 100 mm above natural ground level
- All compactions by the contractors must be tested with a minimum of two (2) successful Dynamic Cone Penetrometer (DCP) tests per unit to be recorded by a trained operator. The maximum allowable displacement per blow is 15mm.
- Floor must be slope to the outside 1:100
- REF 200 to be installed.
- 20 MPa Concrete Ready mix with a thickness of minimum thickness of 80 mm to be used.
- Concrete Certificate to be handed over to the ARC
- Steel floating surface finish

3.6. STEEL TABLES

- Frame manufactured from angle iron 0.05 x 0.05 x 0.005 m.
- Angel Iron table frame must be invers.
- Legs manufactured from angle iron 0.05 x 0.05 x 0.005 m.
- Sand blasting and hot dip galvanizing after manufacturing
- Work area covering - Flatex 346.

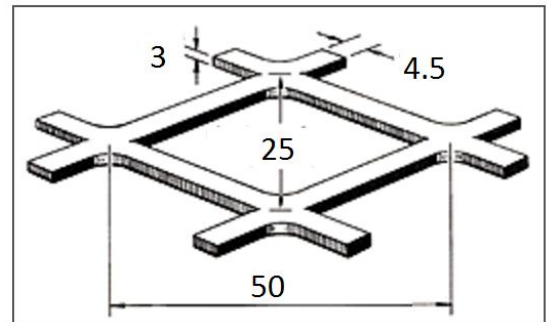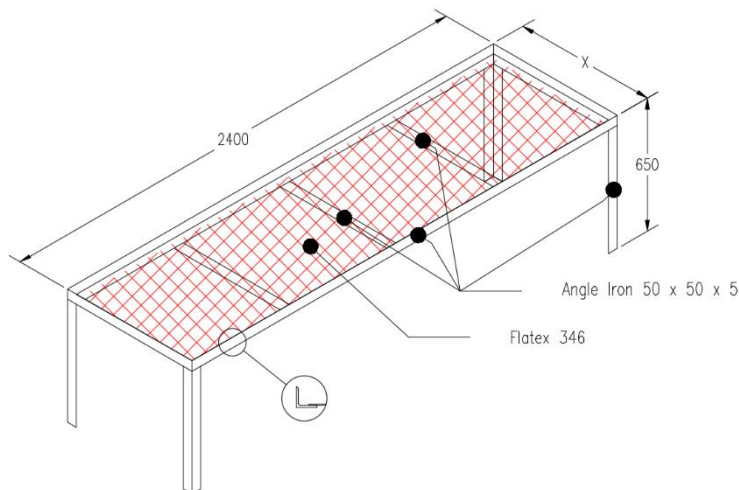

3.7. FIRE EXTINGUISHERS

- Portable fire extinguishers, SANS 1567 & SANS 1910.
- Two 9 kg or 9 Litre fire extinguishers per house complex (Total 8 for this tender)
- Appropriate signage must be mounted on the wall next to fire extinguishers.

3.8. DESIGN

Electrical, Structure and HVAC must be designed and signed off by a professional engineer, register at ECSA.

3.9. TRELLIS SUPPORT SYSTEM

- ARC is open to alternatives suggestions.
- Hot dipped wires
- The design should not interfere with other compartment systems like irrigation, lights or climate control systems.
- Height above floor: 1.5 – 1.8m
- 250mm wide above each table (i.e. 2 rows per compartment)
- 5mm wire, 50 x 50 openings
- Cable tray will also carry the growth lights on the undersides.

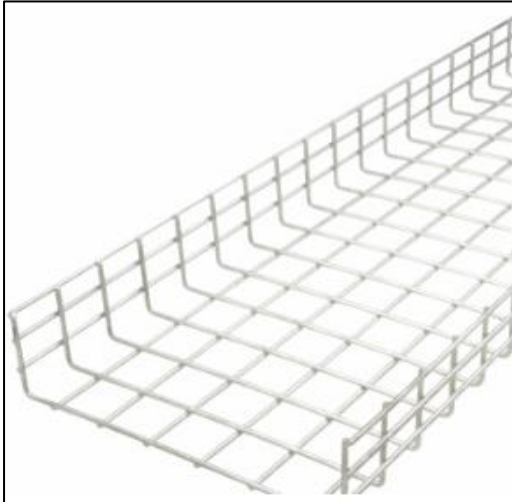


FIGURE 3-8: TRELLIS SUPPORT

3.10. IRRIGATION

The irrigation must be design by an irrigation expert and present to the ARC Engineer for approval.

- Control by Irrigation controller (Computer)
- Minimum one zone (Station) per room
- Each pot must have own drippers 2L/hour.
- 60 pots per room on two tables (2 supply lines)
- Wi-Fi equip.
- Display on the computer.
- All pipes must be not in the pathway of the trollies or human traffic.
- The design must include a main line water filter system.

3.11. ALTERNATIVE WATER SUPPLY

3.11.1. WATER TANK

- Capacity 5000 liter
- No tank stand needed.
- Manufactured from food grade LLDPE plastics
- UV Resistant & BPA free prevents algae growth
- Secure child-safety lids
- Black inner liner – prevents algae growth.
- Supplied with 50/40mm yellow tank connectors at the bottom and top
- Tank must be fill with permeant installed ball valve
- Supplied with strong sealed tank connectors
- 10 year warranty

- Anker to the cement slab with 4 galvanize cables and turn buckles

3.11.2. BASE FOR WATER TANK

- Compacting of soil. Minimum of two (2) successful Dynamic Cone Penetrometer (DCP) test per unit to be recorded by a trained operator. The maximum allowable displacement per blow is 15mm to a dept of 0.5m deep.
- Concrete floor of 200 mm thickness must be cast.
- A minimum of 1m larger than the tank mut be cast around the structure (Veld fires)
- Slightly slope away from the structure (1:100)
- Minimum reinforcement for concrete Ref. 245 (200 x 200 x 6.3 mm) SANS 1024:2012 welded steel mesh
- 25 MPa Concrete mixes must be supplied by an approved ready mix concrete supplier.
- Concrete must be vibrated to expel entrapped air.
- Broom finish of the concrete
- The placing of concrete must be done to maintain the quality and uniformity, and, once the concrete has been placed and vibrated, it is necessary to protect it from drying out and extreme of temperatures. It must also be cured to maintain a satisfactory moisture content and temperature in the concrete during early stages so that the desired properties may develop.

3.11.3. WATER PUMP SYSTEM

- The correct pump motor combination must be design by the irrigation designer to deliver the correct water flow and water pressure to the irrigation system for optimal performance of the irrigation system. The pump must be protected from weather elements and theft.
- Water Pressure to be that standard municipal pressure estimated at 400kPa

3.12. SERVICE WATER.

- Install new galvanized 25 mm water reticulation system for each compartment.
- Supply and install one 25 mm brass bib tap per compartment (SABS approved and similar or equal to Cobra).
- Height of tap, 1 m from ground level.
- Ten meter long, 20 mm diameter hose-pipe for each glasshouse complete with brass cap and lining and clamp (tap connector), with a six year warranty

3.13. PURIFIED WATER SYSTEM

- An in-line filtration unit will be required to remove or kill microbes from the irrigation water.
- UV System
- 110Watts sterilizer
- Flow rate: > 5400 LPH
- Lamp x2 (Length): 925mm
- Housing Material: Stainless steel 304
- Inlet/outlet connections, 1" or 25.4mm
- 2 spare lights for each unit

3.14. FOOT BATH

A foot bath will be required to reduce the risk of contamination and ensure a high level of sanitation by cleaning the footwear of all individuals entering the greenhouse.

- Corrosion-resistant material to withstand constant exposure to water and sanitizing chemicals.
- Adequate size to accommodate at least one person stepping in fully and wide enough to accommodate a lab trolley (0.6 x 1m).



PHOTO: TYPICAL FOOTBATH

3.15. AIR CURTAIN

An air curtain will be required to create an air barrier between the exterior air and the conditioned interior air of the greenhouse. The air curtain will also prevent the infiltration of cold or hot air, insects, fumes, humidity, dust and debris.

- Location
 - Corridor
 - Mounted at the main entrance of the greenhouse corridor.
- Dimensions
 - Span the full width of the door entrance.

- Blower capacity
 - Sufficient to create a downward air stream that covers the entire entrance.
- Functionality
 - The air curtain needs to activate automatically upon door opening.

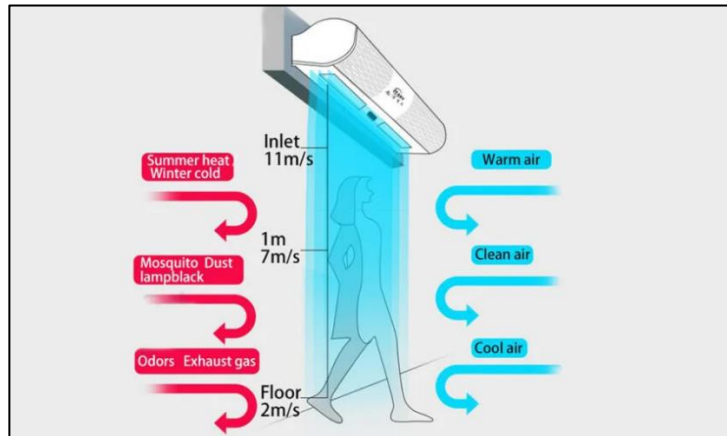


FIGURE 6-8: ILLUSTRATION OF AN AIR-CURTAIN.

4. NAME BOARDS

- To be the same as the existing ones (attached to the building) (ARC to provide details of current specifications of name boards)
- ARC will provide the Artwork in a Microsoft Word format
- Quantity: 10
- Mounting of Name boards on Building and compartments



FIGURE 4-1: C12 NAME BOARD

5. PRICING DATA

5.1 – PRICING INSTRUCTIONS

The Tenderer shall provide a fully itemised bill of quantities, complete with item prices. The bill of quantity shall include at least the following items and allocations:

- Engineering costs
- Preliminaries
- Site establishment
- Site clearing and demobilisation
- Full equipment list broken down into the following levels of detail:
 - Cost of equipment (itemised)
 - Cost of freight
 - Installation cost.
- Provision for spares
- Provision for manuals
- Provision for all taxes applicable to the execution of the Works, including import duties.

The Bill comprises items covering the Contractor's profit and costs of general liabilities and of the Upgrading of Temporary and Permanent Works.

Descriptions in the Bill of Quantities are abbreviated and may differ from those in the Standardized and Project Specifications. No consideration will be given to any

claim by the Contractor submitted on such a basis. Should any requirement of the measurement and payment clause of the appropriate Standardized or Project Specification(s) be contrary to the terms of the Bill, the requirement of the appropriate Standardized, Project, or Particular Specification as the case may be, shall prevail.

The “Occupational Health and Safety Act No 85 of 1993” Construction Regulations are as follows:

- A payment item in the schedule of Quantities / Bill of Quantities must allow the contractors to price for compliance with OHSA and the Construction Regulations.

5.1.1 – PAYMENT SCHEDULE

The Tenderer shall provide a payment schedule.

5.1.2 – BILLS OF QUANTITIES / SCHEDULE OF QUANTITIES

Please note that it is mandatory to submit a complete Priced Bills of Quantities with the Returnable Documents.

Items	Quantity required	Price/Unit	Price (Excl VAT)
1. Shop drawing (as build) of greenhouse			R
2. Renovating			R
3. Climate control system			R
4. Irrigation systems			R
5. Growing systems & trellis support			R
6. Lights and canvas			R
7. Concrete plinths and surroundings			R
8. 1 Year service plans for HVAC and all control systems			R
9. Tables			R
10. Alternative water supply			R
11. Water purification system			R
12. Name boards			R
13. Contingency at 10%			R
Total (excl of Vat)			R
Total (Incl of Vat)			R

FIGURE 5-1: BOQ

APPENDIX A: GREENHOUSE C12 CONCEPT LAYOUT