


CENTLEC (Pty) Ltd

BOX TYPE	2-WAY M/B	4-WAY D/B	6-WAY D/B	8-WAY D/B	1-WAY STUBBY	2-WAY STUBBY
A-TOP L	600	920	1400	1800	400	440
B-TOP W	500	410	530	620	300	440
C-BASE L	660	1080	1500	1950	440	490
D-BASE W	560	580	650	750	340	490
K-BASE H	240	250	250	300	250	250
E-HOLE TL	280	760	1080	1350	180	190
F-HOLE TW	190	240	280	390	80	150
G-HOLE BL	240	700	1000	1250	140	160
H-HOLE BW	160	200	240	350	60	130
I-BOLT W	250	345	406	507	180	240
J-BOLT L	325	486	1168	1570	110	175

NOTES:

1. CONCRETE TO BE OF 10MPA STRENGTH AND CURED FOR 10 DAYS.
2. ENSURE NO CAVITIES AND AIR BUBBLES INSIDE AND FINISH OFF OUTSIDE WITH A TROWEL TO SIZE. TOP AND OUTSIDE SURFACE TO BE FLAT AND SMOOTH.
3. CAST FOUR M12 x 150mm GALV. ANCHOR BOLTS EXACT AS PER SIZES I & J WITH WASHER AND NUTS FITTED. EXTRUDING AT LEAST 40MM
4. CAST/INSERT TWO GALV. STEEL WIRE LIFTING HANDLES AS INDICATED (NOT FOR 2- WAYS).
5. 6-WAY AND 8-WAY PLINTHS TO HAVE AT LEAST TWO STEEL REINFORCING RODS INSERTED BOTH SIDES AT TWO LEVELS.

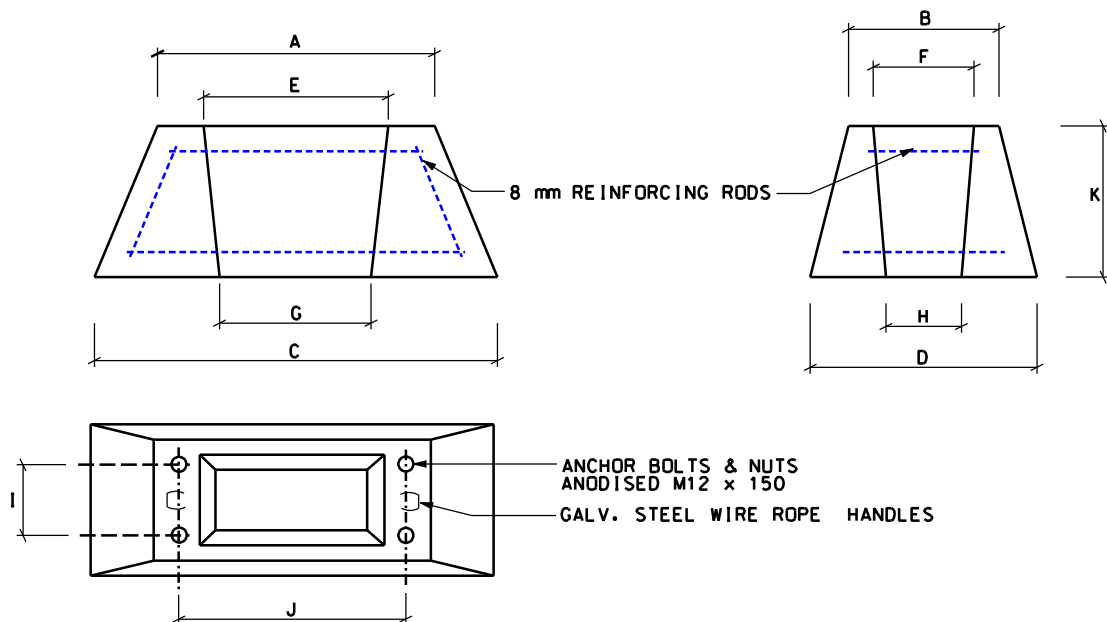

REV.	VERWYS.	DATE	DATUM	AUTH.	PARAF.	REVISION.	WYSICING.	DESCRIPTION	BESKRYWING
DESIGNED K. BOOYSEN DRAWN F.B. FOURIE SCALE 1 : 1500 DATE 23 AUGUST 2004 FIRST DRG. PERS. A C DE WET CHECKED CHECKED DESIGN & DEVELOPMENT A.MGOQI ONTWERP K. BOOYSEN GETEKEN F.B. FOURIE SKAAL 1 : 1500 DATUM 23 AUGUST 2004 EERSTE TEKENAAR A C DE WET NAGESIEN NAGESIEN ONTWERP & ONTWIKKELING A.MGOQI CENTLEC (Pty) Ltd Reg No 2003/0162/07 PRIVATE BAG X14, BRANDHOF 9324 Tel: 051 - 4092238 Fax: 051 - 4092388 UTILIZATION B. DE JAGER CUSTOMER SERVICES S.J. vd BERG REGIONAL SERVICES X.FAKU EXECUTIVE MANAGER: ENGINEERING L.G. KRITZINGER TITLE CONCRETE PLINTHS FOR METER AND DISTRIBUTION BOXES DRAWING Nr. TS - 5 - 55								TITEL DRAWING Nr. REV. VERWYS.	