

Transnet Freight Rail

an Operating Division **TRANSNET SOC LTD**

[Registration Number 1990/000900/30]

REQUEST FOR PROPOSAL (RFP)

FOR THE MAINTENANCE OF RAILWAY TRACK WITH AN ON-TRACK HIGH PRODUCTION SCREENING MACHINE ON ALL LINES OWNED AND MAINTAINED BY TRANSNET

RFP NUMBER	: SIC24023CIDB (HOAC VAR 52802)
ISSUE DATE	: 26 May 2025
COMPULSORY BRIEFING	: Not Applicable
CLOSING DATE	: 09 June 2025
CLOSING TIME	: 12h00pm
TENDER VALIDITY PERIOD	: 12 weeks from closing date

Contents

Number	Heading
--------	---------

The Tender

Part T1: Tendering Procedures

- | | |
|------|--|
| T1.1 | Tender Notice and Invitation to Tender |
| T1.2 | Tender Data |

Part T2: Returnable Documents

- | | |
|------|-----------------------------|
| T2.1 | List of Returnable Document |
| T2.2 | Returnable Schedules |

The Contract

Part C1: Agreements and Contract Data

- | | |
|------|------------------------------|
| C1.1 | Form of Offer and Acceptance |
| C1.2 | Contract Data (Parts 1 & 2) |
| C1.3 | Form of Guarantee |

Part C2: Pricing Data

- | | |
|------|----------------------|
| C2.1 | Pricing Instructions |
| C2.2 | Price List |

Part C3: Scope of Work

- | | |
|------|---------------------|
| C3.1 | Service Information |
|------|---------------------|

Part C4: Affected Property

- | | |
|------|-------------------|
| C4.1 | Affected Property |
|------|-------------------|

T1.1 TENDER NOTICE AND INVITATION TO TENDER

SECTION 1: NOTICE TO TENDERERS

1. INVITATION TO TENDER

Responses to this Tender [hereinafter referred to as a **Tender**] are requested from persons, companies, close corporations or enterprises [hereinafter referred to as a Tenderer].

DESCRIPTION	For the Maintenance of Railway Track with an on-track High Production Screening machine on all lines owned and maintained by Transnet.
TENDER DOWNLOADING	This Tender may be downloaded directly from the National Treasury eTender Publication Portal at www.etenders.gov.za and the Transnet website at https://transnetetenders.azurewebsites.net (please use Google Chrome to access Transnet link) FREE OF CHARGE.

COMPULSORY TENDER CLARIFICATION MEETING	Not Applicable
CLOSING DATE	12:00pm on 09 June 2025 Tenderers must ensure that tenders are uploaded timeously onto the system. If a tender is late, it will not be accepted for consideration.

2. TENDER SUBMISSION

Transnet has implemented a new electronic tender submission system, the e-Tender Submission Portal, in line with the overall Transnet digitalization strategy where suppliers can view advertised tenders, register their information, log their intent to respond to bids and upload their bid proposals/responses on to the system.

a) The Transnet e-Tender Submission Portal can be accessed as follows:

Log on to the Transnet eTenders management platform website (<https://transnetetenders.azurewebsites.net>);

- Click on "ADVERTISED TENDERS" to view advertised tenders;
- Click on "SIGN IN/REGISTER – for bidder to register their information (must fill in all mandatory information);

- Click on "SIGN IN/REGISTER" - to sign in if already registered;
 - Toggle (click to switch) the "Log an Intent" button to submit a bid;
 - Submit bid documents by uploading them into the system against each tender selected.
 - **Tenderers are required to ensure that electronic bid submissions are done at least a day before the closing date to prevent issues which they may encounter due to their internet speed, bandwidth or the size of the number of uploads they are submitting. Transnet will not be held liable for any challenges experienced by bidders as a result of the technical challenges. Please do not wait for the last hour to submit. A Tenderer can upload 30mb per upload and multiple uploads are permitted.**
- b) The tender offers to this tender will be opened as soon as possible after the closing date and time. Transnet shall not, at the opening of tenders, disclose to any other company any confidential details pertaining to the Tender Offers / information received, i.e. pricing, delivery, etc. The names and locations of the Tenderers will be divulged to other Tenderers upon request.
- c) Submissions must not contain documents relating to any Tender other than that shown on the submission.

3. CONFIDENTIALITY

All information related to this RFP is to be treated with strict confidentiality. In this regard Tenderers are required to certify that they have acquainted themselves with the Non-Disclosure Agreement. All information related to a subsequent contract, both during and after completion thereof, will be treated with strict confidence. Should the need however arise to divulge any information gleaned from provision of the Works, which is either directly or indirectly related to Transnet's business, written approval to divulge such information must be obtained from Transnet.

4. DISCLAIMERS

Tenderers are hereby advised that Transnet is not committed to any course of action as a result of its issuance of this Tender and/or its receipt of a tender offer. In particular, please note that Transnet reserves the right to:

- 4.1. Award the business to the highest scoring Tenderer/s unless objective criteria justify the award to another tenderer.
- 4.2. Not necessarily accept the lowest priced tender or an alternative Tender;



- 4.3. Go to the open market if the quoted rates (for award of work) are deemed unreasonable;
- 4.4. Should the Tenderers be awarded business on strength of information furnished by the Tenderer, which after conclusion of the contract is proved to have been incorrect, Transnet reserves the right to terminate the contract;
- 4.5. Request audited financial statements or other documentation for the purposes of a due diligence exercise;
- 4.6. Not accept any changes or purported changes by the Tenderer to the tender rates after the closing date;
- 4.7. Verify any information supplied by a Tenderer by submitting a tender, the Tenderer/s hereby irrevocably grant the necessary consent to the Transnet to do so;
- 4.8. Conduct the evaluation process in parallel. The evaluation of Tenderers at any given stage must therefore not be interpreted to mean that Tenderers have necessarily passed any previous stage(s);
- 4.9. Unless otherwise expressly stated, each tender lodged in response to the invitation to tender shall be deemed to be an offer by the Tenderer. The Employer has the right in its sole and unfettered discretion not to accept any offer.
- 4.10. Not be held liable if tenderers do not provide the correct contact details during the clarification session and do not receive the latest information regarding this RFP with the possible consequence of being disadvantaged or disqualified as a result thereof.
- 4.11. Transnet reserves the right to exclude any Tenderers from the tender process who has been convicted of a serious breach of law during the preceding 5 [five] years including but not limited to breaches of the Competition Act 89 of 1998, as amended. Tenderers are required to indicate in tender returnable [clause 12 on T2.2-11], [**Breach of Law**] whether or not they have been found guilty of a serious breach of law during the past 5 [five] years.
- 4.12. Transnet reserves the right to perform a risk analysis on the preferred tenderer to ascertain if any of the following might present an unacceptable commercial risk to the employer:
 - *unduly high or unduly low tendered rates or amounts in the tender offer;*
 - *contract data of contract provided by the tenderer; or*
 - *the contents of the tender returnables which are to be included in the contract.*

5. Transnet will not reimburse any Tenderer for any preparatory costs or other work performed in connection with this Tender, whether or not the Tenderer is awarded a contract.

6. NATIONAL TREASURY'S CENTRAL SUPPLIER DATABASE

Tenderer are required to self-register on National Treasury's Central Supplier Database (CSD) which has been established to centrally administer supplier information for all organs of state and facilitate the verification of certain key supplier information. The CSD can be accessed at <https://secure.csd.gov.za/>. Tenderer are required to provide the following to Transnet in order to enable it to verify information on the CSD:

Supplier Number..... and Unique registration reference number.....(**Tender Data**)

**Transnet urges its clients, suppliers and the general public
to report any fraud or corruption to
TIP-OFFS ANONYMOUS: 0800 003 056 OR Transnet@tip-offs.com**

T1.2 TENDER DATA

The conditions of tender are the Standard Conditions of Tender as contained in Annex C of the CIDB Standard for Uniformity in Engineering and Construction Works Contracts. The Standard for Uniformity in Construction Procurement was first published in Board Notice 62 of 2004 in Government Gazette No 26427 of 9 June 2004. It was subsequently amended in Board Notice 67 of 2005 in Government Gazette No 28127 of 14 October 2005, Board Notice 93 of 2006 in Government Gazette No 29138 of 18 August 2006, Board Notice No 9 of 2008 in Government Gazette No 31823 of 30 January 2009, Board Notice 86 of 2010 in Government Gazette No 33239 of 28 May 2010, Board Notice 136 of 2015 in Government Gazette 38960 of 10 July 2015 and Board Notice 423 of 2019 in Government Gazette No 42622 of 8 August 2019.

This edition incorporates the amendments made in Board Notice 423 of 2019 in Government Gazette 42622 of 8 August 2019. (see www.cidb.org.za).

The Standard Conditions of Tender make several references to Tender data for detail that apply specifically to this tender. The Tender Data shall have precedence in the interpretation of any ambiguity or inconsistency between it and the Standard Conditions of Tender.

Each item of data given below is cross-referenced in the left-hand column to the clause in the Standard Conditions of Tender to which it mainly applies.

Clause	Data
C.1.1 The <i>Employer</i> is	Transnet SOC Ltd (Reg No. 1990/000900/30)
C.1.2 The tender documents issued by the <i>Employer</i> comprise:	
Part T: The Tender	
Part T1: Tendering procedures	T1.1 Tender notice and invitation to tender T1.2 Tender data
Part T2 : Returnable documents	T2.1 List of returnable documents T2.2 Returnable schedules
Part C: The contract	
Part C1: Agreements and contract data	C1.1 Form of offer and acceptance C1.2 Contract data (Part 1 & 2) C1.3 Form of Securities
Part C2: Pricing data	C2.1 Pricing instructions C2.2 Price List

	Part C3: Scope of work	C3.1 Service Information
	Part C4: Affected Property	C4.1 Affected Property
C.1.4	The Employer's agent is:	Procurement Officer
	Name:	Sidney Moyana
	Address:	Carlton Centre, 23rd Floor, 150 Commissioner Street, Johannesburg, 2001
	Tel No.	011 308 1748
	E – mail	Sidney.moyana@transnet.net

C.2.1 Only those tenderers who satisfy the following eligibility criteria are eligible to submit tenders:

1. Step One - Eligibility in terms of the Construction Industry Development Board:

- a) Only those tenderers who are registered with the CIDB, or are capable of being so prior to the evaluation of submissions, in a contractor grading designation equal to or higher than a contractor grading designation determined in accordance with the sum tendered or a value determined in accordance with Regulation 25 (1B) or 25(7A) of the Construction Industry Development Regulations, designation of **9CE or higher** class of construction work, are eligible to have their tenders evaluated.
- b) Joint Venture (JV)
Joint ventures are eligible to submit tenders subject to the following:
 1. every member of the joint venture is registered with the CIDB;
 2. the lead partner has a contractor grading designation of not lower than one level below the required class of construction works under consideration and possesses the required recognition status; and
 3. the combined Contractor grading designation calculated in accordance with the Construction Industry Development Regulations is equal to or higher than a Contractor grading designation determined in accordance with the sum tendered for a 9CE or higher class of construction work or a value determined in accordance with Regulation 25(1B) or 25(7A) of the Construction Industry Development Regulations
 4. The tenderer shall provide a certified copy of its signed joint venture agreement.

Step Two - Weighted scoring / 100***

Commercial Scoring: 90 Points

Specific Goals: 10 Points

Step Three - Due Diligence

Transnet will conduct due diligence on preferred bidder to verify and validate bid submissions on the following:

Health and Safety, Risk, Environmental and Finance will be assessed

- Risk Management
- Health and Safety Management
- Environmental Management
- Financial Assessment

Step Four - Objective Criteria

Transnet reserves the right to overlook the preferred bidder(s) if they do not meet the requirements stated under the Objective Criteria. Due to the urgency of the project, Objective Criteria will be used to verify the capacity of the bidders, to mitigate any risk for operations that Transnet cannot mitigate. The below requirements will be verified under Objective Criteria:

- Bidders must submit a signed and dated letter, on the machine owner's official letterhead, confirming ownership of the machine.

Step Five - Post Tender Negotiations

- Respondents are to note that Transnet may not award a contract if the price offered is not market-related. In this regard, Transnet reserves the right to engage in PTN with the view to achieving a market-related price or to cancel the tender. Negotiations will be done in a sequential manner i.e.:
 - first negotiate with the highest ranked bidder or cancel the bid, should such negotiations fail,
 - negotiate with the 2nd and 3rd ranked bidders (if required) in a sequential manner.
- In the event of any Respondent being notified of such short-listed/preferred bidder status, his/her bid, as well as any subsequent negotiated best and final offers (BAFO), will automatically be deemed to remain valid during the negotiation period and until the ultimate award of business.
- Should Transnet conduct post tender negotiations, Respondents will be requested to provide their best and final offers to Transnet based on such negotiations. Where a market related price has been achieved through

negotiation, the contract will be awarded to the successful Respondent(s).

Step Six - Award of business and conclusion of contract

C.2.12 No alternative tender offers will be considered.

C.2.13.3 Each tender offer shall be in the **English Language**.

C.2.13.5 The *Employer's* details and identification details that are to be shown on each tender offer package are as follows:

Identification details:

The tender documents must be uploaded with:

- Name of Tenderer:
- Contact person and details:
- The Tender Number: SIC24023CIDB (HOAC VAR 52802)
- The Tender Description: For the Maintenance of Railway Track with an on-track High Production Screening machine on all lines owned and maintained by Transnet

Documents must be marked for the attention of:

Employer's Agent: Sidney Moyana

C.2.13.9 Telephonic, telegraphic, facsimile or e-mailed tender offers will not be accepted.

C.2.15 The closing time for submission of tender offers is:

Time: **12:00pm** on the **09 June 2025**

Location: The Transnet e-Tender Submission Portal:

(<https://transnetetenders.azurewebsites.net>);

NO LATE TENDERS WILL BE ACCEPTED

C.2.16 The tender offer validity period is **12 weeks** after the closing date. Tenderers are to note that they may be requested to extend the validity period of their tender, on the same terms and conditions, if Transnet's internal evaluation and governance approval processes has not been finalised within the validity period.

C.2.23 The tenderer is required to submit with his tender:

1. A valid Tax Clearance Certificate issued by the South African Revenue Services.
Tenderers also to provide Transnet with a TCS PIN to verify Tenderers compliance status.
2. A **valid B-BBEE Certificate** from a Verification Agency accredited by the South African Accreditation System [**SANAS**], or a **sworn affidavit** confirming annual

turnover and level of black ownership, in line with the code of good practice, together with the tender;

3. A valid CIDB CRS Number in order to confirm the required designated grading;
4. Proof of registration on the Central Supplier Database;
5. Letter of Good Standing with the Workmen's compensation fund by the tendering entity or separate Letters of Good Standing from all members of a newly constituted JV.

Note: Refer to Section T2.1 for List of Returnable Documents

- C.3.11. Only tenders that are Administratively and Substantively Responsive will be evaluated further in accordance with the 90/10 preference points systems as described in Preferential Procurement Regulations.

90 where the financial value of one or more responsive tenders received have a value equal to or above R50 million, inclusive of all applicable taxes.

Evaluation Criteria	Final Weighted Scores
Price	90
Specific goals - Scorecard	10
TOTAL SCORE:	100

Up to 100 minus W_1 tender evaluation points will be awarded to tenderers who complete the preferencing schedule and who are found to be eligible for the preference claimed. **Should the evidence required for any of the Specific Goals applicable in this tender not be provided, a tenderer will score zero preference points for that particular "Specific Goal".**

In terms of Transnet Preferential Procurement Policy (TPPP) and Procurement Manuals, the following preference points must be awarded to a bidder who provides the relevant required evidence for claiming points

Selected Specific Goal	Number of points allocated (90/10)
B-BBEE Level of contributor (1 or 2)	5
Creation of new jobs and labour intensification	5
Non-Compliant and/or B-BBEE Level 3-8 contributors	0

The following Table represents the evidence to be submitted for claiming preference points for applicable specific goals in a particular tender:

Specific Goals	Acceptable Evidence
B-BBEE	B-BBEE Certificate / Sworn-Affidavit B-BBEE Certificate (in case of JV, a consolidate scorecard will be accept) as per DTIC guidelines
Promoting exports orientated production for Job creation	T2.2-08 Job-Creation Returnable Schedule

The maximum points for this bid are allocated as follows:

DISCRIPTION	POINTS
PRICE	90
B-BBEE Level of contributor (1 or 2)	5
Creation of new jobs and labour intensification	5
Total points for Price and Specific Goals must not exceed	100

Note: Transnet reserves the right to carry out an independent audit of the tenderers scorecard components at any stage from the date of close of the tenders until completion of the contract.

C.3.13 Tender offers will only be accepted if:

1. The tenderer or any of its directors/shareholders is not listed on the Register of Tender Defaulters in terms of the Prevention and Combating of Corrupt Activities Act of 2004 as a person prohibited from doing business with the public sector;
2. the tenderer does not appear on Transnet's list for restricted tenderers and National Treasury's list of Tender Defaulters;
3. the tenderer has fully and properly completed the Compulsory Enterprise Questionnaire and there are no conflicts of interest which may impact on the tenderer's ability to perform the contract in the best interests of the Employer or potentially compromise the tender process and persons in the employ of the state.
4. Transnet reserves the right to award the tender to the tenderer who scores the highest number of points overall, unless there are **objective criteria** which will justify the award of the tender to another tenderer. Objective criteria include but are not limited to the outcome of a due diligence exercise to be conducted. The due diligence exercise may take the following factors into account inter alia;

the tenderer:

- a) is not under restrictions, or has principals who are under restrictions, preventing participating in the employer's procurement,

-
- b) is not undergoing a process of being restricted by Transnet or other state institution that Transnet may be aware of,
 - c) can, as necessary and in relation to the proposed contract, demonstrate that he or she possesses the professional and technical qualifications, professional and technical competence, financial resources, equipment and other physical facilities, managerial capability, reliability, experience and reputation, expertise and the personnel, to perform the contract,
 - d) has the legal capacity to enter into the contract,
 - e) is not insolvent, in receivership, under Business Rescue as provided for in chapter 6 of the Companies Act, 2008, bankrupt or being wound up, has his affairs administered by a court or a judicial officer, has suspended his business activities, or is subject to legal proceedings in respect of any of the foregoing,
 - f) complies with the legal requirements, if any, stated in the tender data and
 - g) is able, in the option of the employer to perform the contract free of conflicts of interest.

C.3.17 The number of paper copies of the signed contract to be provided by the Employer is 1 (one).

T2.1 List of Returnable Documents

2.1.1 Returnable Schedules:

General:

- T2.2-01 Health and Safety Management
- T2.2-01a Health and Safety Cost Breakdown
- T2.2-01b Health and Safety Questionnaire
- T2.2-01c E4E TFR SHE Specification
- T2.2-01d Section 37 Mandatory Agreement
- T2.2-01e BBD8210_VER_1 E7 1
- T2.2-02 Environmental Management
- T2.2-03 Authority to submit tender
- T2.2-04 Record of addenda to tender documents
- T2.2-05 Letter of Good Standing
- T2.2-06 Risk Elements

Agreement and Commitment by Tenderer:

- T2.2-07: CIDB SFU ANNEX G Compulsory Enterprise Questionnaire
- T2.2-08 Job-Creation Schedule
- T2.2-09 Non-Disclosure Agreement
- T2.2-10 RFP Declaration Form
- T2.2-11 RFP – Breach of Law
- T2.2-12 Certificate of Acquaintance with Tender Document
- T2.2-13 Service Provider Integrity Pact
- T2.2-14 Supplier Code of Conduct
- T2.2-15 POPIA

1.3.2 Bonds/Guarantees/Financial/Insurance:

- T2.2-16 Insurance provided by the Contractor
- T2.2-17 Three (3) years audited financial statements

1.3.3 Transnet Vendor Registration Form:

- T2.2-19 Supplier Declaration Form

2.2 C1.1 Offer portion of Form of Offer & Acceptance

2.3 C1.2 Contract Data Part Two (Data by Contractor)

2.4 C1.3 Forms of Securities

2.5 C2.2 Price List

T2.2-01: Assessment Schedule - Health and Safety Requirements

Submit the following documents as a minimum with your tender:

1. The Tenderers must provide their own project specific health and safety Plan.
2. Health and safety cost breakdown (Bill of Quantities)
3. Safety, Policy signed by the Chief Executive Officer, must include or cover the following five elements –
 - Commitment to Safety, prevention of pollution,
 - Continual improvement,
 - Compliance to legal requirements, appropriate to the nature of contractor's activities,
 - Hold management accountable for development of the safety systems
 - Include objectives and targets.
4. Table or outline the Roles & Responsibilities, such as S16.2 CEO, CR8.1 Construction manager, CR8.2 Assistant Construction manager, CR8.5 Safety officer, CR8.7 Construction Supervisor, CR8.8 Construction assistant supervisor, CR9.1 Risk Assessor, 17.1 SHE Reps, etc. as per the Occupational health and safety Act 85 of 1993
5. List of job categories for project and competencies required per category and develop a training Matrix for all employees who will be working on the project. This matrix must include Management and highlight training planned dates.
6. Overview of the project specific Baseline Risk Assessment (RA), indicating major activities of the project
7. **Three years** synopsis of SHE incidents, description, type and action taken to prevent re-occurrence.
8. Complete and return with tender documentation the Contractor Safety Questionnaire included as an Annexure B.

Attached submissions to this schedule:

.....
.....
.....
.....
.....
.....
.....
.....
.....

The assessment of the Tenderer's Health and Safety Requirements will be as follows:

Assessment remarks						
Criteria/ Measures	SHE Plan, Letter of Good standing & Safety, Health & Environmental Policy	Roles & Responsibilities as stipulated from above	List of Job Categories for project as stipulated from above	Overview of the project specific Baseline Risk Assessment (RA), indicating major activities of the project namely:	Three years synopsis of SHE incidents, descriptions, type and action taken	Complete and return the Contractor Safety Questionnaire attached hereto
Not submitted	The Tenderer has submitted no information or inadequate information to determine a score.					
Poor: Submitted, not scope specific and coherent	SHE Plan is not project specific and information supplied is totally insignificant to achieve the required standard of service. The health and safety bill of quantities supplied is totally insignificant to achieve the required standard of service.	Roles and responsibilities do not meet the Occupational health and safety Act as per construction regulations and TFR health and safety specification.	Key responsible persons are not included on training matrix as per proposed organogram structure.	Information supplied is totally insignificant/inadequate to achieve the required standard of service.	Information supplied is totally insignificant/inadequate to achieve the required standard of service.	Information supplied is totally insignificant/inadequate to achieve the required standard of service.

	1 of the 5 key policy components are recognized and meet the Employer's requirement.					
Fair Submitted, scope specific, coherent and lacks evidence	SHE plan is project specific, but the information lacks convincing evidence, that stated Employer's requirements will be met. The information provided in the Health and safety bill of quantities is poor and lacks convincing evidence. There's a medium risk that stated Employer's requirements will not be met. 2 of the 5 key policy components are recognized and meet the	Roles and responsibilities are unlikely to ensure compliance as per the works information and not in line with OHS Act and TFR health and safety specification.	Not all key responsible persons are included in the training matrix. Training matrix submitted does not cover all SHE training listed on Health and Safety specification. Training matrix not signed by responsible personnel.	Poor response/answer/solution lacks convincing evidence, medium risk that stated Employer's requirements will not be met.	Poor response/answer/solution lacks convincing evidence, medium risk that stated Employer's requirements will not be met.	Poor response/answer/solution lacks convincing evidence, medium risk that stated Employer's requirements will not be met.

	Employer's requirement.					
Good Submitted scope specific, coherent and has some evidence.	SHE plan is project specific. The information is satisfactory to the particular aspect, and evidence given is sufficient that Employers requirements will be met. The information provided in the Health and safety bill of quantities is satisfactory and the evidence is convincing, that stated Employer's requirements will be met. 3 of the 5 key policy components are recognized and meet the Employer's requirements.	Satisfactory response on roles and responsibilities as per Employer's requirements.	Satisfactory response on the list of job categories and trainings as per proposed project organogram structure. Training matrix covers most of the trainings listed on TFR Health and safety specification.	Satisfactory response/answer/solution to the particular aspect of the requirement, evidence given that the stated Employer's requirements will be met.	Satisfactory response/answer/solution to the particular aspect of the requirement, evidence given that the stated Employer's requirements will be met.	Satisfactory response/answer/solution to the particular aspect of the requirement, evidence given that the stated Employer's requirements will be met.
Better Submitted, scope specific, coherent and has nearly all	SHE plan is project specific. The information is good and demonstrate real understanding & ability to meet stated	Roles and responsibilities are likely to ensure compliance as per Works Information,	Most of key persons listed on the training matrix as per proposed project organogram structure. Trainings	Good response/answer/solution which demonstrates real understanding and	Good response/answer/solution which demonstrates real understanding and	Good response/answer/solution which demonstrates real understanding and evidence of ability to meet

of the evidence required.	Employer's requirements. The information provided in the Health and safety bill of quantities is good and demonstrates real understanding and evidence of ability to meet stated Employer's requirements. 4 of the five key policy components are recognized and meets the Employer's requirements.	OHS Act and TFR health and safety specification.	specified on the matrix are in line with TFR health and safety specification.	evidence of ability to meet stated Employer's requirements.	evidence of ability to meet stated Employer's requirements.	stated Employer's requirements.
---------------------------	--	--	---	---	---	---------------------------------

Best/excellent Submitted, scope specific, coherent and has substantial evidence for all items.	She plan is project specific. The information is very good and gives real confidence that the tenderer, is most likely to ensure compliance with stated Employer's requirements. The information provided in the Health and safety bill of quantities is very good and gives real confidence that the tender is most likely to ensure compliance with stated Employer's requirements. All 5 key policy components are recognized and meets the Employer's requirements.	Roles and Responsibilities most likely to ensure compliance as per requirements of OHS Act and TFR Health and Safety Management Specification.	Training matrix include Management and all employees /personnel in the project. Training matrix had been signed by responsible personnel.	Very good response/answer/solution gives real confidence that the tenderer is most likely to ensure compliance with stated Employer's requirements.	Very good response/answer/solution gives real confidence that the tenderer is most likely to ensure compliance with stated Employer's requirements.	Very good response/answer/solution gives real confidence that the tenderer is most likely to ensure compliance with stated Employer's requirements.
---	--	---	--	--	--	--

Transnet Freight Rail

Tender Number: SIC24023CIDB (HOAC VAR 52802)

Description of the Service: For the Maintenance of Railway Track with an on-track High Production Screening machine on all lines owned and maintained by Transnet.

T2.2-01a Health and Safety Cost Breakdown

NB: This Safety Cost breakdown is required to illustrate to Transnet that safety costs have been factored into your tender price, and will not be paid for as a separate expense.

Tenderer (Company)	Responsible Person	Designation	Date
Project/Tender Title	Project/Tender No.	Project Location / Description	

#	Cost element	Unit Cost (R)	# of Units	Total Cost (R)
1.	Human Resources			
2.	Systems Documentation			
3.	Meetings & Administration			
4.	H&S Training			
5.	PPE & Safety Equipment			
6.	Signage & Barricading			
7.	Workplace Facilities			
8.	Emergency & Rescue Measures			
9.	Hygiene Surveys & Monitoring			
10.	Medical Surveillance			
11.	Safe Transport of Workers			
12.	HazMat Management (e.g. asbestos /silica)			
13.	Substance Abuse Testing (3 kits @R500 pm)			
14.	H&S Reward & Recognition			
15.	Other			

Total Health and Safety Estimate (R)	
Total Estimate Value (R)	
H&S Cost as % of Tender value	

Transnet Freight Rail

Tender Number: SIC24023CIDB (HOAC VAR 52802)

Description of the Service: For the Maintenance of Railway Track with an on-track High Production Screening machine on all lines owned and maintained by Transnet.

T2.2-01b: Health and Safety Questionnaire

Health, Safety Questionnaire

1. SAFE WORK PERFORMANCE

1A. Injury Experience / Historical Performance - Alberta

Use the previous three years injury and illness records to complete the following:

Year			
Number of medical treatment cases			
Number of restricted work day cases			
Number of lost time injury cases			
Number of fatal injuries			
Total recordable frequency			
Lost time injury frequency			
Number of worker manhours			

1 - Medical Treatment Case	Any occupational injury or illness requiring treatment provided by a physician or treatment provided under the direction of a physician
2 - Restricted Work Day Case	Any occupational injury or illness that prevents a worker from performing any of his/her craft jurisdiction duties
3 - Lost Time injury Cases	Any occupational injury that prevents the worker from performing any work for at least one day
4 - Total Recordable Frequency	Total number of Medical Treatment, Restricted Work and Lost Time Injury cases multiplied by 200,000 then divided by total manhours
5- Lost Time Injury Frequency	Total number of Lost Time Injury cases multiplied by 200,000 then divide by total manhours

1B. Workers' Compensation Experience

Use the previous three years injury and illness records to complete the following (if applicable):

Industry Code: Industry Classification:

Year			
Industry Rate			
Contractor Rate			
% Discount or Surcharge			

Is your Workers' Compensation account in good standing? ☐ Yes ☐ No
(Please provide letter of confirmation)

2. CITATIONS

2A. Has your company been cited, charged or prosecuted under Health, Safety and/or Environmental Legislation in the last 5 years?
☐ Yes ☐ No
If yes, provide details:

2B. Has your company been cited, charged or prosecuted under the above Legislation in another Country, Region or State?
☐ Yes ☐ No
If yes, provide details:

3. CERTIFICATE OF RECOGNITION

Transnet Freight Rail

Tender Number: SIC24023CIDB (HOAC VAR 52802)

Description of the Service: For the Maintenance of Railway Track with an on-track High Production Screening machine on all lines owned and maintained by Transnet.

Does your company have a Certificate of Recognition? ☐ Yes ☐ No If Yes, what is the Certificate No. _____ Issue Date _____

4. SAFETY PROGRAM

Do you have a written safety program manual? ☐ Yes ☐ No If Yes, provide a copy for review					
Do you have a pocket safety booklet for field distribution? ☐ Yes ☐ No If Yes, provide a copy for review					
Does your safety program contain the following elements:					
	YES	NO		YES	NO
CORPORATE SAFETY POLICY	☐	☐	EQUIPMENT MAINTENANCE	☐	☐
INCIDENT NOTIFICATION POLICY	☐	☐	EMERGENCY RESPONSE	☐	☐
RECORDKEEPING & STATISTICS	☐	☐	HAZARD ASSESSMENT	☐	☐
REFERENCE TO LEGISLATION	☐	☐	SAFE WORK PRACTICES	☐	☐
GENERAL RULES & REGULATIONS	☐	☐	SAFE WORK PROCEDURES	☐	☐
PROGRESSIVE DISCIPLINE POLICY	☐	☐	WORKPLACE INSPECTIONS	☐	☐
RESPONSIBILITIES	☐	☐	INVESTIGATION PROCESS	☐	☐
PPE STANDARDS	☐	☐	TRAINING POLICY & PROGRAM	☐	☐
ENVIRONMENTAL STANDARDS	☐	☐	COMMUNICATION PROCESSES	☐	☐
MODIFIED WORK PROGRAM	☐	☐			

5. TRAINING PROGRAM

5A. Do you have an orientation program for new hire employees? ☐ Yes ☐ No If Yes, include a course outline. Does it include any of the following:					
	YES	NO		YES	NO
GENERAL RULES & REGULATIONS	☐	☐	CONFINED SPACE ENTRY	☐	☐
EMERGENCY REPORTING	☐	☐	TRENCHING & EXCAVATION	☐	☐
INJURY REPORTING	☐	☐	SIGNS & BARRICADES	☐	☐
LEGISLATION	☐	☐	DANGEROUS HOLES & OPENINGS	☐	☐
RIGHT TO REFUSE WORK	☐	☐	RIGGING & CRANES	☐	☐
PERSONAL PROTECTIVE EQUIPMENT	☐	☐	MOBILE VEHICLES	☐	☐
EMERGENCY PROCEDURES	☐	☐	PREVENTATIVE MAINTENANCE	☐	☐
PROJECT SAFETY COMMITTEE	☐	☐	HAND & POWER TOOLS	☐	☐
HOUSEKEEPING	☐	☐	FIRE PREVENTION & PROTECTION	☐	☐
LADDERS & SCAFFOLDS	☐	☐	ELECTRICAL SAFETY	☐	☐
FALL ARREST STANDARDS	☐	☐	COMPRESSED GAS CYLINDERS	☐	☐
AERIAL WORK PLATFORMS	☐	☐	WEATHER EXTREMES	☐	☐

5B. Do you have a program for training newly hired or promoted supervisors? ☐ Yes ☐ No

(If Yes, submit an outline for evaluation. Does it include instruction on the following:

	Yes	No		Yes	No
EMPLOYER RESPONSIBILITIES	☐	☐	SAFETY COMMUNICATION	☐	☐
EMPLOYEE RESPONSIBILITIES	☐	☐	FIRST AID/MEDICAL PROCEDURES	☐	☐
DUE DILIGENCE	☐	☐	NEW WORKER TRAINING	☐	☐
SAFETY LEADERSHIP	☐	☐	ENVIRONMENTAL REQUIREMENTS	☐	☐
WORK REFUSALS	☐	☐	HAZARD ASSESSMENT	☐	☐
INSPECTION PROCESSES	☐	☐	PRE-JOB SAFETY INSTRUCTION	☐	☐
EMERGENCY PROCEDURES	☐	☐	DRUG & ALCOHOL POLICY	☐	☐
INCIDENT INVESTIGATION	☐	☐	PROGRESSIVE DISCIPLINARY POLICY	☐	☐
SAFE WORK PROCEDURES	☐	☐	SAFE WORK PRACTICES	☐	☐
SAFETY MEETINGS	☐	☐	NOTIFICATION REQUIREMENTS	☐	☐

6. SAFETY ACTIVITIES

Do you conduct safety inspections?

Yes ☐ No ☐ Weekly ☐ Monthly ☐ Quarterly ☐

Describe your safety inspection process (include participation, documentation requirements, follow-up, report distribution).

Who follows up on inspection action items?

Do you hold site safety meetings for field employees? If Yes, how often?

Yes ☐ No ☐ Daily ☐ Weekly ☐ Biweekly ☐

Do you hold site meetings where safety is addressed with management and field supervisors?

Yes ☐ No ☐ Weekly ☐ Biweekly ☐ Monthly ☐

Is pre-job safety instruction provided before to each new task? ☐ Yes ☐ No

Is the process documented? ☐ Yes ☐ No

Who leads the discussion?

Do you have a hazard assessment process? ☐ Yes ☐ No

- Are hazard assessments documented? If yes, how are hazard assessments communicated and implemented on each project? Who is responsible for leading the hazard assessment process?

Does your company have policies and procedures for environmental protection, spill clean-up, reporting, waste disposal, and recycling as part of the Health & Safety Program?

☐ Yes ☐ No

How does your company measure its H&S success?

- Attach separate sheet to explain

7. SAFETY STEWARDSHIP

7A Are incident reports and report summaries sent to the following and how often?

	Yes	No	Monthly	Quarterly	Annually
Project/Site Manager	☐	☐	☐	☐	☐
Managing Director	☐	☐	☐	☐	☐
Safety Director/Manager	☐	☐	☐	☐	☐
/Chief Executive Officer	☐	☐	☐	☐	☐

7B How are incident records and summaries kept? How often are they reported internally?

	Yes	No	Monthly	Quarterly	Annually
Incidents totaled for the entire company	☐	☐	☐	☐	☐
Incidents totaled by project	☐	☐	☐	☐	☐
• Subtotaled by superintendent	☐	☐	☐	☐	☐
• Subtotaled by foreman	☐	☐	☐	☐	☐

7C How are the costs of individual incidents kept? How often are they reported internally?

	Yes	No	Monthly	Quarterly	Annually
Costs totaled for the entire company	☐	☐	☐	☐	☐
Costs totaled by project	☐	☐	☐	☐	☐
• Subtotaled by superintendent	☐	☐	☐	☐	☐
• Subtotaled by foreman/general foreman	☐	☐	☐	☐	☐

7D Does your company track non-injury incidents?

	Yes	No	Monthly	Quarterly	Annually
Near Miss	☐	☐	☐	☐	☐
Property Damage	☐	☐	☐	☐	☐
Fire	☐	☐	☐	☐	☐
Security	☐	☐	☐	☐	☐
Environmental	☐	☐	☐	☐	☐

8 PERSONNEL

List key health and safety officers planned for this project. Attach resume.

Name	Position/Title	Designation

Supply name, address and phone number of your company's corporate health and safety representative. Does this individual have responsibilities other than health, safety and environment?

Name	Address	Telephone Number

Other responsibilities:

9 REFERENCES

List the last three company's your form has worked for that could verify the quality and management commitment to your occupational Health & Safety program

Name and Company	Address	Phone Number

HEALTH AND SAFETY SPECIFICATION FOR MAINTENANCE OF RAILWAY TRACK WITH AN ON-TRACK HIGH PRODUCTION SCREENING MACHINE ON ALL LINES OWNED AND MAINTAINED BY TRANSNET

CONTRACT NUMBER:	HOAC VAR 52802	
CONTRACT LOCATION:	Nationally	
CONTRACT DURATION:	24 MONTHS	
CONTRACT MANAGER:	Khangwelo Nemushungwa	
TRIM CONTRACT REPRESENTATIVE / TECHNICAL OFFICER:	Khangwelo Nemushungwa	
CHS AGENT:		
HEALTH AND SAFETY SPECIFICATION APPROVAL		
	NAME:	SIGNATURE:
TRIM CONTRACT MANAGER / CONTRACT REPRESENTATIVE	Khangwelo Nemushungwa	 DATE:
CHS AGENT / SAFETY SPECIALIST / MANAGER	Abram Motshegare	 DATE:

Contractor Health and Safety Specification

Table of Contents

1. Purpose	6
2. Scope.....	6
3. Definitions.....	6
4. Abbreviations	10
5. Health and Safety Management Plan	11
6. Policy.....	12
7. Hazard Identification and Risk Assessment.	12
7.1 Baseline Risk Assessments	13
7.2 Task-Based Risk Assessments	13
7.3 Pre-Task Hazard Assessments	13
8. Legal and Other Requirements	14
9. Objectives	14
10. Resources, Accountabilities and Responsibilities	14
10.1 Contractor Construction Manager	15
10.2 Contractor Health and Safety Officers	15
10.3 Contractor Supervisors.....	16
10.4 Health and Safety Representatives	16
10.5 First Aiders.....	16
10.6 Duties of Client.....	17
10.7 Operational legal appointment letters	17
11. Cost of health and safety	18
12. Competence, Training and Awareness.....	18
12.1 Induction Training	19
12.2 Specific Training and Competency Requirements	19
13. Communication, Participation and Consultation	19
13.1 Toolbox Talks.....	19
13.2 Daily Safe Task Instructions (DSTI's)	19
13.3 Suggestions	20
13.4 Meetings.....	20
13.4.1 Contractor health and safety (OHS Act Section 19)	20
13.4.2 Site Meetings	20
13.5 Health and Safety Notice Boards	20

13.6 Involvement (Other)	21
14. Documentation and Document Control	21
14.1 Contractor compliance File Requirements (Health and Safety File)	21
15. Notification of Construction Work	22
16. Operational Control	22
16.1 Safe Work Procedures	22
16.2 National Railway Safety Regulator Act / Railway Safety	23
16.3 Planned Task Observations	23
16.4 General Rules of Conduct	24
16.5 Site Access	24
16.5.1 Access Control and Security	24
16.5.2 Trespassing	25
16.5.3 Visitors	25
16.5.4 Alcohol, Drugs and Other Intoxicating Substances	25
16.5.5 Firearms, Ammunition and Offensive Weapons	26
16.5.6 Vehicles	26
16.6 Mobile Equipment and Light Vehicles	26
16.6.1 Light Vehicles	29
16.6.2 Mobile Equipment	30
16.6.3 Tyre and Rim Safety	32
16.6.4 Roads	32
16.7 Signs and Notices	32
16.8 Machinery	33
16.9 Barricading	33
16.10 Working from fall risk position (working at heights)	35
16.10.1 Fall protection	35
16.10.2 Falling Objects	37
16.10.3 Ladders	37
16.11 Permit to Work	39
16.12 Isolation and Lockout	41
16.12.1 Personal Locks	43
16.13 Electrical Safety	43
16.13.1 Electrical Installations	44
16.13.2 Arc Flash Safety	46
16.13.3 High Voltage Power Lines	46
16.13.4 Portable Electrical Equipment	47
16.14 Confined Spaces	50
16.15 Electrically Powered Tools and Equipment	52
16.16 Pneumatically Powered Tools and Equipment	52
16.17 Hydraulically Powered Tools and Equipment	53
16.18 Hand Tools	53
16.18.1 Stanley Knives / Utility Knives	54

16.19 Inspection of Equipment and Tools	54
16.20 Manual Handling and Vibration	54
16.21 Personal Protective Equipment	56
16.21.1 Head Protection.....	57
16.21.2 Eye Protection	57
16.21.3 Hearing Protection	57
16.21.4 Respiratory Protection.....	58
16.21.5 Hand and Arm Protection	59
16.21.6 Foot Protection.....	60
16.21.7 Clothing	60
16.21.8 Body Protection	60
16.21.9 Electrical Protective Equipment.....	61
16.21.10 Jewellery.....	62
16.21.11 Hair	62
16.21.12 Task-Specific PPE	62
16.22 Sun Protection.....	62
16.23 Fuel / Flammable Liquid Storage and Refuelling	63
16.24 Fire Protection and Prevention.....	64
16.25 Smoking.....	67
16.26 Housekeeping.....	67
16.27 Waste Management	68
16.28 Stacking and Storage	68
16.29 Demarcation.....	68
16.30 Facilities.....	69
16.31 Occupational Hygiene	69
16.32 Lighting	70
16.33 Hearing Conservation.....	71
16.34 Particulate and Gas / Vapour Exposures	72
16.34.1 Respiratory Protection Devices	73
16.34.2 Asbestos and Non-asbestos Fibrous Silicates	74
16.35 Hazardous Chemical Substances	75
16.36 Radiation	77
16.37 Thermal Stress	78
16.38 Fitness for Work and Fatigue Management.....	79
16.39 Legionnaires Disease	81
16.40 HIV / AIDS	82
16.41 Ballast Screeners	82
17. COVID-19 Compliance.....	82
18. Structure	83
19. Emergency Preparedness and Response	83
19.1 First Aid Kits.....	85
20. Management Review	85

21. Management of Change	86
22. Sub-contractor Alignment / Stakeholder management	86
23. Section 37(2) Mandatary Agreement	87
24. Incident Reporting and Investigation	87
25. Non-conformance and Action Management	88
26. Performance Assessment and Auditing	89
26.1 Reporting on Performance	89
26.2 Audits and Inspections.....	90

1. Purpose

This specification identifies and encompass the working behaviours and safe work practices that are expected from Contractors, Consultant, Visitors and Suppliers on the maintenance of railway track with an on-track high production screening machine project as required by Occupational Health and Safety Act 85 of 1993, Construction Regulation of 2014, National Railway Safety Regulator Act 16 of 2000 (including applicable SANS standards) and Transnet Contractor Management Procedure.

All contractors and service providers must take careful note of these requirements and must ensure that adequate provision has been made to ensure compliance. This Specification has been compiled to cover a wide range of construction/ work activities. In order to determine which requirements are applicable, the contractor must conduct a health and safety risk assessment specific to the project and specific to the contractor's scope of work. All applicable requirements must be addressed in the Contractor's Health and Safety Management Plan.

This Specification will be reviewed and updated periodically as and when necessary to address and / or include:

- Changes in legislation;
- Client requirements;
- Leading practices; and
- Lessons learnt from incidents.

The specification provides the minimum site-specific specification requirements.

2. Scope

This Specification applies to maintenance of railway track with an on-track high production screening machine project, and to all persons working on or visiting the project. The requirements specified in this document are applicable to the contractor as well as any sub-contractors, Principal Contractors, Contractors, Consultant, Vendors and Visitors that may be appointed by Transnet as an Employer. It is the contractor's responsibility to ensure that all subcontractors comply fully with all legal requirements as well as the requirements of this health and safety specification.

Normal production ballast screening machine for open line with fan wagon and dust suppression mechanism plus a Ballast Regulator, Heavy Ballast Tamper, Ballast Stabiliser, 5 self-discharging spoil wagons and a TLB including all associated labour, supervision, road vehicles, ancillary tools and equipment, fuels, lubricants, spare parts, and consumables.

This process must be capable of screening ballast self-propelled on any site. The process must be able to work at any time of the day and night with no restrictions (wet conditions, hard ballast, etc.).

3. Definitions

Acceptable Risk

A risk that has been reduced to a level that can be tolerated having regard for the applicable legal requirements and the Health and Safety Policy adopted for the project.

ALARP (As Low as Reasonably Practicable)

The concept of weighing a risk against the sacrifice needed to implement the measures necessary to avoid the risk. With respect to health and safety, it is assumed that the measures should be implemented unless it can be shown that the sacrifice is grossly disproportionate to the benefit.

Applicant (Permit to Work)

A person requesting permission to perform work for which a Permit to Work is required. Applicants must be authorised (in writing) to receive (or accept) Permits to Work and must be competent to do so by virtue of their training, experience and knowledge of the area or plant in which the work is to be performed.

Authorised Person (Permit to Work)

A person (typically a Project employee or an employee of the client) who has been authorised (in writing) by the Transnet Contract Manager to issue Permits to Work within the scope of his designation. A person may only be appointed to issue Permits to Work if he has undergone training and has been assessed and found competent in systems, plant and equipment operation within the scope of his designation.

Barricade

A temporary structure that is erected as a physical barrier to prevent persons from inadvertently coming into contact with an identified hazard.

Consequence

The outcome of an event expressed qualitatively or quantitatively.

Contractor

An employer (organisation) or a person who performs **ANY** work and has entered into a legal binding business agreement contract to supply a product or provide services to Transnet. This applies to the Suppliers, Vendors, and Consultants, Service providers or Contractors performing construction work (includes Principal Contractor) **NB:** A Contractor is an employer in his/her own right.

Contract Manager

Transnet employee appointed to liaise with the contractor to ensure that the specifications of the contract are met (with special emphasis on safety, technical specifications, inspection of quality and quantity of work). It includes a Technical Officer, Depot Engineering Manager, Engineering Technician, Engineer, Maintenance Supervisor's etc.

Competent Person

A person who has in respect of the work or task to be performed the required knowledge, training, experience, and qualification (as per Construction Regulation, 2014).

Confined Space

An enclosed, restricted, or limited space in which because of its construction, location or contents, or any work activity carried on therein, a hazardous substance may accumulate, or an oxygen deficient atmosphere may occur, and includes any chamber, tunnel, pipe, pit sewer, container,

valve, pump, sump, or similar construction, equipment, machinery, or object in which a dangerous concentration of gas, vapour, dust or fumes may be present.

Construction Supervisor

A competent person responsible for supervising construction activities on a construction site

Clearance Certificate

A signed declaration by an Isolation Officer that a specified hazardous energy source associated with a particular system, plant or item of equipment has been isolated in accordance with an approved Isolation and Lockout Procedure.

Discipline Lock (many locks with a restricted number of identical keys)

Attached at a Lockout Station or at a Local Isolation Point in order to lock out a system, plant or equipment. A Discipline Lock (e.g. A Low Voltage Electricity Discipline Lock) is owned by an Isolation Officer who has been authorised in writing to isolate and lockout a particular hazard (e.g. Low voltage electricity).

Equipment Lock (many locks with one unique key)

Attached directly to pieces of equipment in order to lock them out. Equipment Locks may only be used by Isolation Officers who have been authorised in writing to perform isolation and lockout procedures. The key must have a solid key ring that fits over an Isolation Bar.

First-Aid Injury (FA)

A first-aid injury is any one-time treatment and any follow up visit for observation of minor scratches, cuts, burns, splinters and the like which do not normally require medical care. Such treatment is considered to be first aid even if administered or supervised by a medical practitioner. First aid includes any hands-on treatment given by a first aider. (E.g. Band-Aid, washing, cleansing, pain, relief).

Railroad Vehicle

Means a vehicle that can travel on rail and road

Hazard

A source of potential harm in terms of human injury or ill health, or a combination of these.

Hierarchy of Controls

A sequence of control measures, arranged in order of decreasing effectiveness, used to eliminate or minimise exposure to workplace health and safety hazards:

- Elimination – Completely removing a hazard or risk scenario from the workplace.
- Substitution – Replacing an activity, process or substance with a less hazardous alternative.
- Isolation (Engineering) Controls – Isolating a hazard from persons through the provision of mechanical aids, barriers, machine guarding, interlocks, extraction, ventilation or insulation.
- Administrative Controls – Establishing appropriate policies, procedures and work practices to reduce the exposure of persons to a hazard. This may include the provision of specific training and supervision.
- Personal Protective Equipment – Providing suitable and properly maintained PPE to cover and protect persons from a hazard (i.e. Prevent contact with the hazard).

Isolation and Lockout Procedure

A plant or equipment-specific procedure that describes the method, and sequence to be followed, for rendering equipment, plant and systems safe to work on.

Isolation Bar

A device used at a Lockout Station to which anyone is able to attach a Personal Lock making it impossible for an Isolation Officer to remove the key to the Equipment Locks, thus preventing the de-isolation of a system, plant or equipment while it is still being worked on. A Discipline Lock must always be the first lock attached to an Isolation Bar and last to be removed.

Isolation Officer

A person (typically a Project employee or an employee of the client) who has been authorised (in writing) by the Transnet Contract Manager to perform isolation and lockout procedures. A person may only be appointed as an Isolation Officer if he has undergone training and has been assessed and found competent in the isolation and lockout of systems, plant and equipment within the scope of his designation.

Incident

An event (or a continuous or repetitive series of events) that results or has the potential to result in a negative impact on people (employees, contractors, and visitors), the environment, operational integrity, assets, community, process, product, legal liability and / or reputation.

Likelihood

A description of probability or frequency, in relation to the chance that an event will occur.

Lost Time Injury (LTI)

Any occurrence that resulted in a permanent disability or time lost from work of one day/shift or more.

If an employee is injured and cannot return to work in the next shift (will ordinarily miss one whole shift), and the department brings the employee in to only receive treatment by the Supervisor/ Return to Work Coordinator in that shift, this is still considered an LTI.

Lost Time Injury Frequency Rate (LTIFR) - Number of LTI's multiplied by 1 million or 200,000 and divided by labour hours worked.

Light Vehicle

A vehicle that:

- Can be licensed and registered for use on a public road;
- Has four or more wheels, and seats a maximum of 12 adults (including the driver);
- Requires the driver to hold only a standard civil driving licence; and
- Does not exceed 4.5 tonnes gross vehicle mass (GVM), which is the maximum loaded mass of the motor vehicle as specified by:
 - ♦ The vehicle's manufacturer; or
 - ♦ An approved and accredited automotive engineer, if the vehicle has been modified to the extent that the manufacturer's specification is no longer appropriate.

Examples of light vehicles include passenger cars, four-wheel drive vehicles, sports utility vehicles (SUVs), pick-ups, minibuses, and light trucks.

Any vehicle falling outside of this definition must be considered mobile equipment.

Medical Treatment Injury (MTI)

A work injury requiring treatment by a Medical Practitioner, and which is beyond the scope of normal first aid including initial treatment given for more serious injuries. The procedure is to be of an invasive nature (e.g. Stitches, removal of foreign body).

Mobile Equipment

A vehicle (wheeled or tracked) that generally requires:

- The driver to hold a specific state or civil license.

Examples of mobile equipment include, but are not limited to, dump trucks, water trucks, graders, dozers, loaders, excavators, forklifts, tractors, back-actors, bobcats, mobile cranes, tele-handlers, drill rigs, buses and road-going trucks.

Near Hit

An incident that has occurred that did not result in any injuries, illnesses, environmental or property damage but had the potential to cause an injury, illness, environmental or property damage.

Occupational Health Practitioner

An occupational medicine practitioner or a person who holds a qualification in occupational health recognised as such by the South African Medical and Dental Council as referred to in the Medical, Dental and Supplementary Health Service Professions Act, 1974 (Act No. 56 of 1974), or the South African Nursing Council as referred to in the Nursing Act, 1978 (Act 50 of 1978)

Personal Lock

A single lock with one unique key controlled by the owner. Used for personal protection.

Regulation

In the context of this guideline, 'Regulation(s)' refers to the Construction Regulations, 2014 required by Section 43 of the Occupational Health and Safety Act 85 of 1993, published under Government Notice R 84 in Government Gazette 37305 of February 2014.

Risk

A combination of the likelihood of an occurrence of a hazardous event or exposure and the severity of injury or ill health that can be caused by the event or exposure.

Risk Assessment

A process of evaluating the risk arising from a hazard, taking into account the adequacy of any existing control measures, and deciding on whether or not the risk is acceptable.

Risk Management

The systematic application of management policies, processes and procedures to identifying hazards, analysing and evaluating the associated risks, determining whether the risks are acceptable, and controlling and monitoring the risks on an ongoing basis.

4. Abbreviations

DSTI - Daily Safety Task Instruction

CR – Construction Regulations

EPCM - Engineering Procurement and Construction Management

HIRA - Hazard Identification and Risk Assessment

HEALTH AND SAFETY - Integrated Management System

MS - Management System

OHS Act - Occupational Health and Safety Act

SOC - Safety Observation and Conversation

VFL - Visible Felt Leadership

OHS - Occupational Health and Safety

SACPCMP - The South African Council for Project and Construction Management Professions,

5. Health and Safety Management Plan

The contractor must prepare, implement, and maintain a contract specific Health and Safety Management Plan. The plan must be based on the requirements set out in this specification, risk assessment as well as all applicable legislation. It must cover all activities that will be carried out on the project site(s), from mobilisation and set-up through to rehabilitation and decommissioning.

The plan must demonstrate the contractor's commitment to HEALTH AND SAFETY and must, as a minimum, include the following:

- A copy of the contractor's **Health and Safety Policy**;
- Procedures concerning **Hazard Identification and Risk Assessment**, including both Baseline and Task-Based Risk Assessments;
- Arrangements concerning the identification of applicable **Legal and Other Requirements**, measures to ensure compliance with these requirements, and measures to ensure that this information is accessible to relevant personnel;
- Details concerning **Health and Safety Objectives** – a process must be in place for setting objectives (and developing associated action plans) to drive continual improvement;
- Details concerning **Resources, Accountabilities and Responsibilities** – this includes the assignment of specific health and safety responsibilities to individuals in accordance with legal or project requirements, including the appointment of a Project Manager, Health and Safety Officers, Supervisors, Health and Safety Representatives, and First Aiders;
- Details concerning **Competence, Training and Awareness** – a system must be in place to ensure that each employee is suitably trained and competent, and procedures must be in place for identifying training needs and providing the necessary training;
- **Communication, Participation and Consultation** arrangements concerning health and safety, including Safety Observations and Coaching, Toolbox Talks, Daily Safe Task Instructions, project health and safety meetings, and notice boards;
- **Documentation and Document Control** – project-specific documentation required for the effective management of health and safety on the project must be developed and maintained, and processes must be in place for the control of these documents;
- Processes and procedures for maintaining **Operational Control**, including rules and requirements (typically contained in Safe Work Procedures) for effectively managing health and safety risks, particularly critical risks associated with working at heights, confined spaces, mobile equipment and light vehicles, lifting operations, hazardous chemical substances, etc.;
- **Emergency Preparedness and Response** procedures;
- **Management of Change** – a process must be in place to ensure that health and safety risks are considered before changes are implemented;

- **Sub-contractor Alignment** procedures – a process must be in place for the assessment of sub-contractors and suppliers with regard to health and safety requirements and performance (before any contract or purchase order is awarded);
- **Measuring and Monitoring** plans, including a plan for the measuring and monitoring of employee exposure to hazardous substances or agents (e.g. Noise, dust, etc.) In order to determine the effectiveness of control measures;
- **Incident Reporting and Investigation** procedures describing the protocols to be followed with regard to incident reporting, recording, investigation and analysis;
- **Non-conformance and Action Management** procedures concerning the management of corrective actions;
- **Performance Assessment and Auditing** procedures concerning health and safety performance reporting, monthly internal audits to assess compliance with the project health and safety requirements, and daily site health and safety inspections; and
- Details concerning the **Management Review** process followed to assess the effectiveness of health and safety management efforts.

Prior to mobilisation, the Health and Safety Management Plan must be forwarded to the Transnet Contract Manager for review. The plan will be audited for completeness and, if found to be adequate, will be accepted (typically “with comments”). Work may not commence until the plan has been accepted.

Any proposed amendments or revisions to the contractor’s Health and Safety Management Plan must be submitted to the TFR Contract Manager for acceptance.

Should it be identified that the contractor has overlooked a high-risk activity, and as a result has omitted the activity and associated control measures from the Health and Safety Management Plan, the plan will not be approved.

6. Policy

The contractor must develop, display, and communicate a Health and Safety Policy that clearly states the contractor’s values and objectives for the effective management of health and safety as required by OHS Act of 1993, 7(3) and SANS 3000-1:2016.

The policy must be signed, dated, and must be reviewed annually. The policy must commit to:

- Compliance with all applicable legal requirements;
- The effective management of health and safety risks;
- The establishment of measurable objectives for improving performance, and the provision of the necessary resources to meet these objectives;
- The prevention of incidents; and
- Achieving continual improvement with regard to health and safety performance.

All employees of the contractor as well as the employees of any sub-contractors that may be appointed by the contractor must be made aware of the policy. This must be done through Health and Safety Induction Training and Toolbox Talks.

A copy of the policy must be displayed.

7. Hazard Identification and Risk Assessment.

Detailed hazard identification and risk assessment processes must be followed for all work to be performed as well as for all associated equipment and facilities as required by legislation.

7.1 Baseline Risk Assessments

The client must conduct a detailed Baseline Risk Assessment identifying foreseeable hazards and risk scenarios associated with the contractor's scope of work on the work site(s) as required by legislation and Transnet Contractor Management Procedure. The baseline risk assessment shall be used to develop this specification.

7.2 Task-Based Risk Assessments

The contractor must ensure that effective procedures and risk assessment processes are in place to control hazards and to mitigate risks to levels that are as low as is reasonably practicable.

The contractor must carry out detailed project-specific Task-Based Risk Assessments which must be facilitated by a competent person who has been appointed in writing. The contractor's site management representatives, supervisory personnel, technical experts (as required) and workforce personnel directly involved with the task being examined must participate in the risk assessment process. An attendance register must be completed and retained.

A Task-Based Risk Assessment must at least:

- Be accompanied by a Work Method Statement (describing in sufficient detail how the specific job or task is to be performed in a logical and sequential manner);
- Provide a breakdown of the job or task into specific steps;
- Identify the hazards and potential risk scenarios associated with each step;
- Include consideration of possible exposure to noise, heat, dust, fumes, vapours, gases, chemicals, radiation, vibration, ergonomic stressors, or any other occupational health hazard or stressor;
- Describe the control measures that will be implemented to ensure that the risks are managed to levels that are as low as is reasonably practicable; and
- Assign an initial risk rating (without taking any control measures into consideration) and a residual risk rating (taking the identified control measures into consideration) to each risk scenario.

A Task-Based Risk Assessment must be reviewed and, if necessary, updated:

- On an annual basis (as a minimum);
- When changes are made to the associated Work Method Statement;
- Legislative changes; and
- Following an incident.

7.3 Pre-Task Hazard Assessments

A pre-task hazard assessment must be completed before commencement of a task or whenever a change is identified while carrying out an activity. Before carrying out the particular task that involves the identified change, a few minutes must be spent identifying the hazards and risks associated with that task as well as suitable control measures. Any deviation from what was discussed during the Daily Safe Task Instruction (prior to the activity commencing), or anything that was not discussed, constitutes a change.

8. Legal and Other Requirements

The Contractor must comply with the requirements of all applicable legislation as well as Transnet and contract-specific standards and procedures as amended from time to time. The Contractor must compile and maintain a register of all legal and other requirements applicable to the work that will be carried out and / or services that will be provided. This register must be updated regularly to ensure that it remains relevant.

Applicable laws and standards must be appropriately communicated to all employees of the contractor (as well as the employees of any sub-contractors that may be appointed by the contractor) through training, Toolbox Talks, and Daily Safe Task Instructions. The Contractor shall submit proof of registration and Letter of Good Standing with the compensation fund or with a licensed compensation insurer as contemplated in the Compensation for Occupational Diseases Act, 1993 (Act No. 130 of 1993) for his company and each of his subcontractors'.

No contractor may do any work for TFR without a valid letter of good standing. The Contractor must ensure that the Letter of Good Standing remains valid for the duration of the contract period. The letter of good standing must reflect the name of the Contractor and/or Sub-contractor, registration number and, expiry date.

9. Objectives

In order to drive continual improvement, the contractor must set contract-specific and measurable objectives and develop improvement action plans to achieve these objectives. These objectives must be aligned with the objectives set for the contract as a whole. Eliminating hazards, minimising risks, preventing incidents, injuries, and illnesses, and ensuring legal compliance must be the primary considerations for setting objectives.

When setting objectives, consideration must be given to the following:

- Leading indicators such as inspection findings, audit findings, hazard reporting, and observations;
- Lagging indicators (i.e. Incidents including Near Hits);
- Leading practices and lessons learnt; and
- Injury frequency rates with due understanding that the goal is "no harm".

The improvement action plans must specify adequate resources required to achieve the objectives, the person's responsible, and realistic timeframes for completion.

The objectives and associated improvement action plans must be documented and communicated to all contractor employees. Furthermore, to ensure that the objectives remain relevant, they must be reviewed on a yearly basis and whenever significant change has taken place (i.e. Changes to activities, scope of work, operating conditions, etc.).

Performance reviews must be carried out at quarterly intervals to assess and document performance against these personal or team objectives.

If a reward or incentive scheme is introduced, it must be designed in such a manner that health and safety performance is not compromised in order to maximise financial reward.

10. Resources, Accountabilities and Responsibilities

The Contractor must adequately allocate resources, responsibility, and accountability to ensure the effective implementation, maintenance and continual improvement of the

contractor's HEALTH AND SAFETY management system for the contract. The contractor must comply with the requirements of all applicable legislation concerning health and safety related appointments and delegations for the contract.

An organogram specific to the contract must be documented and maintained. All roles that carry HEALTH AND SAFETY accountability and / or responsibilities must be included, and all individuals that carry health and safety appointments must be clearly identified and appointed in writing.

Documented proof of each appointment must be retained.

The contractor's managers and supervisors at all levels must demonstrate their commitment and support by adopting a risk management approach to all health and safety issues. These individuals must consistently take immediate and firm action to address violations of health and safety rules and must actively participate in day-to-day activities with the objective of preventing harm.

The contractor's management representatives are responsible and accountable for health and safety performance. All costs associated with meeting these responsibilities shall be borne by the contractor.

Any cost associated with any work stoppage due to non-compliance with a health and safety requirement shall be for the contractor's account.

10.1 Contractor Construction Manager

The Contractor must appoint a competent Construction Manager who shall be responsible for the successful and safe completion of all work to be carried out by the contractor, including the duty of ensuring occupational health and safety compliance.

The appointed Construction Manager may not manage any work on or in any site other than the site in respect of which he or she has been appointed.

The contractor must upon having considered the size of the project, in writing appoint one or more Assistant Construction Managers for different sections thereof: Provided that the designation of any such person does not relieve the Construction Manager of any personal accountability for failing in his or her management duties in terms of this regulation.

10.2 Contractor Health and Safety Officers

The contractor must appoint a full-time Construction Health and Safety Officer for the duration of the contract who is registered with the SACPCMP (The South African Council for Project Construction Management Professions).

The Construction Health and Safety Officer shall have sound knowledge of the Occupational Health and Safety Act and its regulations, SANS 3000-1:2016, National Environmental Management Act, and associate environmental requirements such as Waste and Water Acts and Hazard Identification and Risk Management processes.

The contractor must ensure that each Construction Health and Safety Officer is adequately equipped to enable him to perform his duties effectively.

10.3 Contractor Supervisors

The contractor must ensure that all works are supervised at all times by an adequate number of qualified, competent and appointed supervisors who have experience in the type of work being carried out.

No work may be carried out without an appointed supervisor being physically present in the work area and daily safety task instruction. The Construction Supervisor appointed may not supervise any work on or in any site other than the site in respect of which he or she has been appointed: Provided that if a sufficient number of competent employees have been appropriately designated under on all the relevant sites, the appointed construction supervisor may supervise more than one site.

Each supervisor must accept these responsibilities in writing as part of his appointment and must be provided with all the necessary equipment to enable him/her to perform his responsibilities.

The contractor must, upon having considered the size of the work to be performed, in writing appoint one or more competent employees for different sections thereof to assist the construction supervisor, and every such employee has, to the extent clearly defined by the contractor in the letter of appointment, the same duties as the construction supervisor: Provided that the designation of any such employee does not relieve the construction supervisor of any personal accountability for failing in his or her supervisory duties in terms of this regulation

10.4 Health and Safety Representatives

The team of employees on site must have a health and safety representative deployed on the work site(s), a Health and Safety Representative must be elected and appointed. Taking into consideration the number of employees deployed, the geographical area in which the work is taking place, the different work disciplines, and the shift pattern (if applicable), the contractor must ensure that an adequate number of Health and Safety Representatives (at a minimum ratio of one Health and Safety Representative per 50 employees) are elected and appointed to effectively represent all site personnel as required by the OHS Act 85 of 1993, section 17 - 18.

Each Health and Safety Representative must attend a training course for health and safety representatives. The cost of this training shall be for the contractor's account.

The contractor must make the necessary allowances for the Health and Safety Representatives to carry out their duties as specified in the applicable legislation.

The contractor must ensure that an appropriate method of identification of each Health and Safety Representative by employees on site.

10.5 First Aiders

The Contractor shall ensure that their employees receive prompt first aid treatment in case of injury or emergency. The Contractor must have the necessary equipment and/or facility on site for treatment of injured persons.

If 10 or more employees are deployed on the work site(s), at least one trained and competent First Aider must be in place and appointed. Taking into consideration the number of employees deployed, the geographical area in which the work is taking place, the different work disciplines, and the shift pattern (if applicable), the contractor must ensure that an adequate number of First Aiders (at a minimum ratio of one First Aider per

50 employees) are in place and have been appointed to administer first aid treatment should this be required.

First Aid training must be done through an accredited training institution. The cost of this training shall be for the contractor's account.

The contractor must ensure that an appropriate method of identification of each First Aider by employees.

10.6 Duties of Client

Transnet shall perform the duties of a client as per the Construction Regulations of 2014, National Safety Regulator Act 16, SANS 3000-1:2016 and Transnet Contractor Management Procedure.

Transnet shall appoint a Construction Health and Safety Agent who is registered with the SACPCMP who shall ensure that the duties of Transnet as the client as per Construction Regulation 5 are performed and complied with. The Construction Health and Safety Agent must be involved in all stages of contract management and take charge of all the health and safety related matters on behalf of Transnet.

10.7 Operational legal appointment letters

The contractor must ensure other legal appointment letter are compiled and be submitted with the Contractor compliance plan. Below is some appointment required as per the legislation, the appointment letters varies based on the scope of work;

- OHS Act 16(2)
- Sec 17,18,19 Health and Safety Representative
- GSR 3(4) First Aider
- GAR 9(2) Incident investigator
- GMR 2(1) Supervisor of machinery
- GMR 2(7) Assistant Supervisor of machinery
- CR 4(1)(c) Principal Contractor
- CR 8(1) Construction Manager
- CR 8(2) Assistant Construction Manager
- CR 8(7) Construction Supervisor
- CR 8(8) Assistant Supervisor of construction work
- CR 8(5) Construction Health and Safety Officer
- CR 9(1) Construction Risk Assessor
- CR 10(1)(a),(b) Fall protection plan Developer
- CR 10(2)(d) Inspector of fall arrest system
- CR 14(2) Scaffolding Supervisor
- DMR 17(2),18 Inspector of lifting machinery
- CR17(8) Material hoist Inspector
- CR 19(2)(g)(i) Explosive powered tool issuer
- CR 23(1)(k) Construction vehicle and mobile plant Inspector
- CR 24(d) Temporary Electrical Installation Controller
- CR 24(e) Temporary Electrical Installation Inspector
- CR 28(a) Stacking and storage Supervisor
- CR 29(h) Fire extinguisher inspector
- EMR 8(8) Appointment for electrical installation in hazardous location- Master Electrician (Inspector)
- EIR 9 Installation Electrician appointment

11. Cost of health and safety

The Contractor shall ensure that it has made adequate provision for the cost of health and safety measures in the tender offer. The Contractor shall ensure that its subcontractors have made adequate provision for the cost of health and safety measures in the tender offer.

12. Competence, Training and Awareness

Each employee (including sub-contractor employees) must be suitably trained and competent, and must understand the health and safety hazards, risks and control measures associated with his work.

The contractor must implement systems and procedures to ensure that the necessary competencies required by employees are identified (by occupation), along with selection, placement and any training requirements;

Please Note: Specific competency profiles and selection criteria (fitness for work) must be developed for all roles where significant health or safety risk exists.

Please Note: A formal training needs analysis must be carried out based on the competency profiles and a training matrix must be developed for the scope of work.

Roles requiring technical certification, registration or licensing are identified and documented, and these roles are filled only by suitably qualified personnel;

All employees hold and maintain the required competencies and are under competent supervision. Refresher training is carried out as required. Records of education, qualifications, training, experience and competency assessments are maintained on site for all employees. The effectiveness of training is reviewed and evaluated;

Prior to the commencement of any work, including mobilisation and site set-up activities, the contractor must provide, to the satisfaction of the nominated contract management representative, current documentation verifying that the contractor's employees, as well as the employees of any appointed sub-contractors, are competent and have the necessary qualifications, certificates, licences, job skills, training and experience (as required by this specification and applicable legislation) to safely carry out the work that is to be performed. The Contractor and sub-contractor must ensure that all identified training as per training matrix takes place.

A contractor must at all times keep on his or her work site, records of the health and safety induction training and such records must be made available on request to an inspector, the client, the client's agent or the principal contractor;

An Employee Profile (dossier) must be completed for each employee who will be performing work on site. All documentation pertaining to an employee's competence (i.e. certified copies of qualifications, certificates and licences as well as proof of job skills, training and experience) must be maintained in this dossier.

If it is determined through observation that an employee is not yet competent to carry out a particular task in a safe and capable manner, the employee will be required to cease work immediately and must either be reassigned or be retrained at the contractor's expense.

The contractor must ensure that the training institutions and trainers that are used are appropriately registered with a governing authority. Foreign qualifications held by employees in health and safety critical roles must be verified against the requirements of local legislation.

12.1 Induction Training

Each employee must attend all mandatory induction Training applicable to the work activities and Health and safety induction training pertaining to the hazards prevalent on the site at the time of entry. No employee will be permitted to enter any work site until he has attended this training. The contractor must keep the proof of induction on the contractor compliance file.

Furthermore, employees must attend (where applicable) Area/job-Specific Training pertaining to the particular hazards identified in the area(s) where the employees will be working. No employee will be permitted to enter a work area until he has attended the relevant area/job-specific training.

12.2 Specific Training and Competency Requirements

An employee must be trained, assessed and found competent before he will be given authorisation to perform certain tasks or fill certain roles.

The contractor shall make arrangements with the Transnet Contract Manager for training that are only offered or unique to Transnet. Such training shall be for the cost of the contractor.

13. Communication, Participation and Consultation

The contractor must establish and maintain effective communication and consultative processes for the duration of the contract to ensure that employees are kept up to date with regard to critical, health and safety related information and prompt feedback is provided.

13.1 Toolbox Talks

The contractor must prepare a Toolbox Talk on a weekly basis and must share it with all personnel for which the contractor is responsible (including all sub-contractors). Toolbox Talks must address health and safety issues that are relevant to the work performed on the work site(s) and must include information and / or knowledge sharing, lessons learnt from incidents that have occurred, information concerning specific hazards and / or risks and control measures to prevent injury, etc.

Attendance records must be kept and maintained in the contractor's compliance file.

13.2 Daily Safe Task Instructions (DSTI's)

At the start of each day or shift, prior to the start of any work, each appointed supervisor must inspect the work area for which he is responsible and ensure that it is safe. He must then conduct a Daily Safe Task Instruction (DSTI) with his work team specifically concerning the tasks that they will be performing during the course of the day or shift. The relevant Task-Based Risk Assessment for the activity must be used as the basis for the discussion. The correct work method must be reiterated, and the identified hazards, risks and control measures must be discussed with the team.

If the work method changes after activities have already begun, the DSTI must be revisited and updated with the team, and the changes must be signed off by the relevant contractor Construction Manager.

Every member of the work team must sign the DSTI attendance register, and records must be kept and maintained in the contractor's health and safety file.

The contractor's Health and Safety Officer must evaluate the content of the DSTI's to ensure that they are task specific.

13.3 Suggestions

All employees must be encouraged to submit suggestions to enhance health and safety management on the work site(s). A process must be in place for documenting, evaluating, implementing (as appropriate), archiving and recognising the improvement ideas.

13.4 Meetings

13.4.1 Contractor health and safety (OHS Act Section 19)

The contractor must schedule and hold health and safety meetings at least quarterly and keep minutes of each meeting and attendance records in the contractor compliance file.

The meeting must address the following as a minimum:

- New incidents for the period and corrective actions taken or to be taken;
- Implementation status of outstanding actions associated with previous incidents;
- SOC's, PTO's and DSTI's carried out for the period and action required to correct trends identified;
- Results of any audits, inspections (including H&S Rep inspections) or site visits carried out;
- A look ahead to ensure that appropriate health and safety planning and preparation is done for upcoming work;
- Risk Assessments, Safe Work Procedures, etc. That are outstanding or due for review (as well as the quality of these documents); and
- Any other health and safety related matter.

13.4.2 Site Meetings

In addition to the contractor health and safety meetings, the Transnet Contract Manager will schedule and chair monthly Site Meetings that the contractor must attend.

The meeting will address the following as a minimum:

- Feedback from the contractor concerning health and safety performance for the period;
- New incidents for the period and corrective actions taken or to be taken;
- Implementation status of outstanding actions associated with previous incidents;
- SOC's, PTO's and DSTI's carried out for the period and action required to correct trends identified;
- Results of any audits, inspections or site visits carried out;
- A look ahead to ensure that appropriate health and safety planning and preparation is done for upcoming work;
- Risk Assessments, Safe Work Procedures, etc. That are outstanding or due for review (as well as the quality of these documents); and
- Any other health and safety related matter.

13.5 Health and Safety Notice Boards

The contractor must where practicable, provide and maintain a Performance Board that must display the health and safety performance indicators, and a site plan indicating evacuation routes and emergency assembly point locations.

13.6 Involvement (Other)

The participation of all contractor (and sub-contractor) employees in activities that promote improvements in health and safety performance must be encouraged. In particular, this must include their appropriate involvement in:

- Hazard identification, risk analysis and determining control measures;
- Incident investigation; and
- Reviewing policy and objectives.

14. Documentation and Document Control

The contractor must establish a process for the systematic control of health and safety records and related data. Controls must be in place for the creation, receipt, secure storage, maintenance, accessing, use and disposal of such records and data.

The document control process must:

- Provide for the review, revision and version control of documents;
- Uniquely identify documents (as appropriate) to control their use and function;
- Require approval of the documents for adequacy prior to issue;
- Clearly identify changes and record the status of any revisions to documents; and
- Provide for the effective distribution of documents to, and where necessary the timely removal of obsolete documents from, all points of issue and use.

Each record must be legible, identifiable and traceable, and must contain adequate information and data for its purpose. The retention, confidentiality and security of records and data must be maintained in a manner that is appropriate for the nature of the records and data, and in accordance with any applicable data or privacy protection legislation.

Personal information originating from medical surveillance and occupational hygiene monitoring must be reported in a form that respects the privacy of the individual but enables management to fulfil their duty of care obligations to employees.

14.1 Contractor compliance File Requirements (Health and Safety File)

The contractor must compile and maintain a file containing all necessary compliance related documentation. Transnet should provide construction work permit and to be kept on site at all times. The contents of the file will be audited by a Transnet Contract Manager or any person delegated by him on a monthly basis.

Required documentation includes, but is not limited to, the following:

- Letter of Good Standing from the Compensation Commissioner or Licensed Insurer;
- Proof of Public Liability Insurance;
- Scope of Work under the contract;
- List of Contacts and their Telephone Numbers;
- Health and Safety Policy;
- Health and Safety Management Plan;
- Client Health and Safety Specification
- Section 37(2) Mandatory Agreement
- Legal Register;
- Organisational Chart for the contract;
- Appointment Letters (appointment of the contracting company, and appointments for all persons with health and safety related responsibilities);
- Notifications to the relevant authorities that construction work is in progress;
- Task-Based Risk Assessments;

- Health and Safety Objectives, and associated Improvement Action Plans;
- Safe Work Procedures, Work Instructions and Work Method Statements;
- Planned Task Observations;
- Fall Protection Plan (for work at height);
- A dossier (Equipment Profile) for each fuel-driven vehicle or machine;
- Inspection Registers, Forms and Checklists;
- PPE Issue Registers;
- Safety Data Sheets;
- Emergency Response Procedures;
- Incident Records;
- A dossier (Employee Profile) for each employee containing: a copy of the employee's Identity Document or Passport, Valid Medical Certificate of Fitness, Training Records, Certificates of Competency; and Copies of Licences;
- Meeting Minutes;
- HEALTH AND SAFETY Performance Reports;
- Copies of Inspection and Audit Reports; and
- Daily Safe Task Instructions (DSTI's) and Toolbox Talks.

The contractor must ensure that an equivalent file is compiled and maintained by each appointed sub-contractor. A copy of the compliance file must be provided to the Transnet at the end of the contract.

15. Notification of Construction Work

A contractor who intends to carry out any construction work other than work contemplated in Construction Regulation 3(1), must at least 7 days before that work is to be carried out notify the provincial director in writing in a form similar to Annexure 2 if the intended construction work will—

- include excavation work;
- include working at a height where there is risk of falling;
- include the demolition of a structure; or
- include the use of explosives to perform construction work.

A contractor who intends to carry out construction work that involves construction of a single storey dwelling for a client who is going to reside in such dwelling upon completion, must at least 7 days before that work is to be carried out notify the provincial director in writing in a form similar to Annexure 2 of the CR regulations.

16. Operational Control

For contract operations and activities, the contractor shall implement and maintain:

- Operational controls, as applicable to the organization and its activities;
- The organization shall integrate those operational controls into its overall OH&S Management System;
- Controls related to purchased goods, equipment and services;
- Controls related to contractors and other visitors to the workplace;
- Documented procedures, to cover situations where their absence could lead to deviations from the OH&S policy and the objectives;
- Stipulated operating criteria where their absence could lead to deviations from the OH&S policy and objectives.

16.1 Safe Work Procedures

The contractor must develop, document and implement Safe Work Procedures for all activities involving significant health or safety risk. These procedures must detail the control measures required to effectively manage the health and safety risks associated with the work activities.

Each Safe Work Procedure must be consistent with the Task-Based Risk Assessment completed for the activity.

Every person engaged in an activity for which a Safe Work Procedure has been developed must receive suitable training on the procedure.

Furthermore, the contractor must develop, document, communicate and implement formal procedures, work instructions and / or programmes for the operation, maintenance, inspection and testing of all plant and equipment (including protective systems and devices) brought onto the project site(s).

16.2 National Railway Safety Regulator Act / Railway Safety

The Contractor shall ensure that its equipment, machinery and employees when on TFR premises complies fully with all applicable railway safety requirements and/or regulations of the National Safety Regulator Act 16 of 2002 and the relevant SANS Codes of Practice.

The Contractor when engaging subcontractor must review the capability of the proposed contractor to comply with specified railway safety requirements and/or regulations.

The Contractor and/or his subcontractors must grant TFR access, during the term of the contract, to review any railway safety related activities, including the coordination of such activities across all parts of the organisation.

The Contractor shall ensure that where applicable, such work is performed by person who has the necessary competencies as required in terms of any applicable railway safety standard or code of practice

The Contractor shall ensure that all his employees are protected from the risk of being hit by moving trains.

The Contractor shall ensure that on track machines are only operated with the Transnet Track inspector/Track master in charge of on-track machine present on the machine. Transnet Track inspector/Track master in charge of on-track machine must have passed the appropriate road knowledge, theoretical and practical examinations and must be licenced competent.

16.3 Planned Task Observations

All contractor, management supervisors must perform Planned Task Observations (PTO's) to verify that the control measures that have been identified in Safe Work Procedures (and associated Risk Assessments) are being adhered to and are being properly implemented, and to provide guidance where deviations are noted.

Each supervisor must complete at least one PTO per day involving one or more employees in his work team.

When an unsafe act or condition is identified, the supervisor must coach the work team to correct the act or condition in line with the Safe Work Procedure.

Where valid changes to the work method are identified, the supervisor must ensure that the Safe Work Procedure and Risk Assessment are updated to reflect the current practice.

Transnet Contract Manager may carry out PTOs on contractor employees on an ad hoc basis. Should deviations from the contractor's Safe Work Procedures be observed, the work may be stopped until these deviations are rectified.

16.4 General Rules of Conduct

All persons are required to conform to the following rules of conduct while on the site.

The following acts are prohibited:

- Engaging in practical jokes, horseplay, scuffling, wrestling, fighting, or gambling;
- Assault, intimidation, or abuse of any person;
- Insubordination towards any supervisor or manager;
- Refusing to carry out a reasonable and lawful instruction concerning health and safety;
- Entry into any restricted area (including barricaded areas), unless authorised to do so by the responsible person;
- Unauthorised use / operation of any equipment or machinery;
- Negligently, carelessly or wilfully causing damage to any property;
- Destroying or tampering with safety devices, signs, or signals;
- The use of water from fire hydrants or hose reels for any purpose other than extinguishing a fire;
- The wilful and unnecessary discharging of fire extinguishers;
- Refusing to give evidence or deliberately making false statements during incident investigations;
- Bringing alcohol, drugs, or any other intoxicating substance onto site;
- Bringing a firearm, ammunition, or any other offensive weapon onto site;
- Bringing animals onto site;
- Running, except in an emergency;
- The use of an iPod (or similar) whilst working on site;
- Sleeping on the job;
- Building fires on site, unless in a suitably constructed barbequing facility; and
- Pouring / pumping / flushing any substance (chemical / hydrocarbon / wastewater) into a storm water drain, onto bare soil, or into any area where the substance is not effectively contained.
- Walking, sitting or sleeping on the rail
- Touching of any loose lying electric wires
- Coming into close proximity to live OHTE (maintain clearance of 3 metres)

Any of the above actions may result in the temporary or permanent removal of the offending person(s) from site, as well as possible prosecution. The decision of the Transnet Contract Manager shall be final and binding in respect of any dispute that may arise from the interpretation of these requirements.

16.5 Site Access

The Contract Manager shall issue a site access certificate to the contractor after he has evaluated and is satisfied with the contractor compliance file.

16.5.1 Access Control and Security

The contractor must comply with all access control, procedures and systems applicable to the work site. Failure to comply with these requirements will be viewed as a serious safety breach and may result in the permanent removal of the individual(s) / contracting company from site or suspension without payment.

No access card will be issued unless valid proof of identification is provided. For foreign labour, an access card will only be issued if a valid work visa is produced.

The contractor must assess the security risks and implement appropriate measures. Where such measures include hiring of contract security services, the Contractor must inform the

Transnet Contract Manager and obtain written authorisation. All contractors are to strictly adhere to all security requirements on the premises.

16.5.2 Trespassing

The contractor must ensure that no employee (including sub-contractor employees) trespasses on any land lying beyond the boundaries of the work site. The contractor's activities must be confined to the specified work areas, and access to these areas may only be by means of specified routes.

If instructed by a Transnet Contract Manager to do so, the contractor must remove any employee who fails to comply with this requirement from the work site.

16.5.3 Visitors

Visitors (including reps and suppliers) must be advised in advance of the mandatory Personal Protective Equipment (PPE) requirements for the site and must arrive with all of this PPE.

All visitors must sign in the visitor's register and undergo a visitor induction briefing before entering the site. A visitor access card will be issued to each visitor on conclusion of the induction briefing.

Whilst on site, visitors must be accompanied at all times by an appropriately senior employee who has been inducted fully.

When leaving the site, each visitor must return his or her visitor access card to the security personnel posted at the entrance / exit. A visitor will not be permitted to leave the site until he or health and safety produces the access card that was issued.

Note: Any request (typically made by a government official) to carry out a site inspection must be referred to the Transnet Contract Manager. The contractor must not arrange any such inspection without prior approval from the Transnet Contract Manager.

16.5.4 Alcohol, Drugs and Other Intoxicating Substances

The contractor must ensure that all personnel under his authority do not at any time enter the site or perform any work whilst under the influence of alcohol, a drug, or any other intoxicating substance. Selling or possessing drugs, alcoholic beverages or any other intoxicating substance on the site is strictly prohibited.

A drugs and alcohol testing program will be implemented. Persons entering the site will be randomly tested. Any person who tests positive for alcohol or drug consumption will be subject to disciplinary action and shall be permanently removed from the site.

Any person have the opportunity to rather report that he/she is under the influence before accessing the work site – in these cases the employee may only be send home for the day but will then be tested for the following five days (each day) on his return to the site. If it is found that the same person is frequently reporting that he/she is under the influence before even accessing the work site. It shall be the responsibility of the Transnet Contract Manager to take disciplinary action and remove such a person's form the site.

Should the actions and / or demeanour of an employee suggest possible narcosis or drunkenness, the employee must be removed from the site. This may be done without testing.

Note: All personnel involved in an incident / accident must immediately be subjected to an alcohol test and a drug test as part of the investigation.

16.5.5 Firearms, Ammunition and Offensive Weapons

Firearms, ammunition, and offensive weapons of any kind are strictly prohibited. No person may enter /shall not be permitted to enter the site carrying any such item.

16.5.6 Vehicles

All vehicles brought onto site must meet the safety requirements. All road-going vehicles used by the contractor on the site must be roadworthy and registered with the relevant traffic authority. A vehicle will not be permitted to enter the site in an un-roadworthy condition.

No vehicle shall be permitted to enter the site unless it is duly authorised. Access permits are vehicle-specific and may not be transferred between vehicles.

The contractor must allow any vehicle that is brought onto site (including privately owned vehicles) to be searched at any time while on the premises, or when entering or leaving the premises. The contractor is solely responsible for the safety and security of all vehicles (including private vehicles) that he brings onto the site.

The driver / operator of any vehicle / mobile equipment must carry a copy of his appointment with him at all times. Each driver / operator must:

- Comply with all site rules and regulations pertaining to traffic and the safe operation of vehicles / mobile equipment;
- Obey all road signs;
- Obey all instructions given by security or emergency services personnel;
- Remain within the boundaries of the site; and
- Ensure that the vehicle that he is operating is never overloaded, and that loads are always properly secured.

In the interest of safety, only the minimum number of vehicles required by the contractor to complete the work under the contract will be permitted to enter the site.

When not in operation, the contractor's vehicles / mobile equipment must be parked within the boundaries of his lay-down area or yard. Parking is only permitted in designated parking areas. All cars are parked on site at the owner's risk.

In the event of a vehicle accident on site, the driver(s) must report the incident immediately and must remain at the scene until a Transnet Contract Manager arrives, or until a Transnet Contract Manager authorises him to leave (unless, of course, the driver requires medical attention).

16.6 Mobile Equipment and Light Vehicles

Contractor must ensure all light vehicles and mobile equipment to be used (including, but not limited to, lift and carry cranes (or mobi-lifts), mobile cranes, forklifts, mobile elevating work platforms (e.g. Cherry pickers), tractors, dozers, dump trucks, haul trucks, graders, excavators, loaders, back-actors, drill rigs, and road-going cars, light delivery vehicles, and trucks) comply with the requirements of all applicable legislation. The contractor remains responsible for meeting this requirement even if the equipment to be used is leased or provided by a sub-contractor (i.e. not owned directly by the contractor).

An Equipment Profile (dossier) must be compiled for each light vehicle and each item of mobile equipment to be used on the site.

All mobile equipment and light vehicles (used for work purposes) must be subject to a risk assessment. The assessment must involve operators and maintenance personnel and address all aspects of safe operation including handling, vehicle selection, vehicle journey, driver vision, brake failure, tyre blow out, and access and egress for operators and maintenance personnel.

Each light vehicle and each item of mobile equipment must be serviced and maintained as prescribed by the manufacturer of the vehicle or equipment.

No major repairs or services may be carried out on site. No repairs may be carried out by a driver or operator. Only suitably qualified and competent persons may carry out repair work.

An appropriate pre-operation safety check based on a risk assessment must be carried out for each light vehicle or item of mobile equipment driven or operated for work purposes. For each vehicle or equipment type, an approved checklist must be in place (and must be used). The pre-operation check must include, but not be limited to, inspection and / or testing of the following safety critical features:

- Brakes (testing method must be provided);
- Wheels and tyres (including the spare);
- Lights and indicators;
- Steering;
- Seats and seat belts; and
- Windscreen and windows, including windscreen wipers and washers.

Should any critical feature be defective or damaged, the vehicle or equipment may not be operated until it has been fully repaired.

Supervisors must review the completed checklists on a daily basis to satisfy themselves that there are no major deficiencies that could place a driver or operator at risk and that faults are attended to immediately. Records of inspections must be kept in vehicle or mobile equipment.

No person may drive or operate any light vehicle or item of mobile equipment without authorisation. All drivers and operators must be appointed in writing by the contractor's Construction Manager. No driver or operator may be appointed without proof that the individual has been trained, tested and found competent, or is currently licensed. Contractor must implement a system for renewal of licences.

The appointment letter must specify the type of vehicle or equipment for which authorisation is being given and must clearly confirm that the driver or operator:

- Is 18 (eighteen) years of age or older;
- Has undergone a medical examination and has been declared fit for work by an occupational health practitioner; and
- Has received suitable training and has been found competent or is in possession of a valid driving licence issued by a state, provincial or civil authority that is applicable to the class of vehicle or equipment that is to be driven or operated.

The principal accountability for preventing accidents and incidents lies with the driver or operator of a light vehicle or item of mobile equipment, as he is in full control of any given situation at any given time. It must be stressed to each driver and each operator that safety is his prime responsibility – this must be clearly instructed and understood.

Drivers and operators must be empowered to stop driving or operating immediately should an unsafe condition arise and refuse to drive or operate any light vehicle or item of mobile equipment that is defective and / or has any inoperative safety features. Similarly, a supervisor must never force a driver or operator to drive or operate a defective vehicle or item of equipment.

If a driver or operator does not adhere to the site rules and regulations, his appointment must be withdrawn, and he must not be permitted to continue with his duties. If necessary, site access will be denied (either temporarily or permanently) to any driver or operator who is deemed to not be adhering to site requirements.

No person may drive or operate a light vehicle or item of mobile equipment if he suffers from a medical condition that places both him and those around him at risk of injury. A fit-for-work policy must be in place, incorporating clearly defined maximum levels of drugs (including prescribed medication) and alcohol permitted in the system of a driver or operator. Daily alcohol testing and random drug testing must be carried out.

Supervisors must regularly check on the physical condition of drivers and operators during the course of a shift. A system must be in place to manage driver fatigue.

No eating or drinking is permitted while driving or operating a light vehicle or item of mobile equipment.

A mobile phone, whether hands-free or not, may only be used by the driver or operator of a light vehicle or item of mobile equipment when the vehicle or equipment is stationary and in a safe location.

Behaviour-based observations and coaching must include the operation of light vehicles and mobile equipment.

A site-specific traffic management plan must be compiled and submitted to the Transnet Contract Manager for approval. The design and layout of the road system (including entrance and exit points, intersections and other potential points of interaction between pedestrians, light vehicles and mobile equipment) must be reviewed periodically. A risk assessment must be carried out prior to any changes being made to traffic movements or road systems.

Designated walkways (both indoors and outdoors) must be provided for pedestrians, and pedestrians must make use of these walkways. Good lighting must be provided along all walkways, particularly at road junctions. Wherever possible, rigid barricading must be used to separate pedestrians from moving light vehicles and / or mobile equipment.

No pedestrians are permitted on haul roads (or as far as this can reasonably be achieved in situations where a haul road runs through an area occupied by a local community). All personnel must be transported to site and must be dropped off at a designated area. Pedestrians and cyclists must give way to light vehicles and / or mobile equipment except at pedestrian crossings.

Controls must be in place to ensure the safety of people working on roads, including those working on broken-down vehicles.

Speed limits and traffic rules must be reviewed regularly and must be rigorously enforced. Local traffic rules must be complied with at all times.

All light vehicles and mobile equipment must give way to emergency vehicles.
Pedestrians and light vehicle drivers must be made aware of the blind spots associated with mobile equipment.

The driver or operator of a light vehicle or item of mobile equipment must stop the vehicle or equipment and sound the horn before proceeding at blind corners, where his view of the path or intended path is obstructed, and when entering or leaving a building.

Whenever a light vehicle or item of mobile equipment is stopped or parked, the handbrake (if applicable) must be applied. Measures (such as chocking or the use of ditches or trenches) must be in place for the immobilisation of parked mobile equipment. A parked light vehicle must be chocked in situations where the vehicle would roll forwards or backwards if placed in neutral with the handbrake disengaged.

No light vehicle or item of mobile equipment may be left unattended with the engine running or with a key in the ignition.

No light vehicle or item of mobile equipment may be parked so as to cause an obstruction to any roadway, passage or access way. No light vehicle or item of mobile equipment may be parked within 50 metres of a loading or off-loading point.

Light vehicles and mobile equipment must be loaded safely. All loads must be secure and must be within the load limit of the vehicle or equipment. A load must be properly secured before the vehicle or equipment is set in motion. Adequate precautions must be taken for any overhanging load.

No unauthorised light vehicle or item of mobile equipment may enter a restricted area or building.

16.6.1 Light Vehicles

All Contractors must ensure that Light vehicles have the following minimum safety features:

- Fixed seats and suitable seat (safety) belts for all occupants (i.e. Driver and all passengers);
- Roll-over protection for all vehicles intended to be driven on dirt or steep roads;
- Cargo barriers and load restraints for all vehicles designed for carrying loads other than passengers), or that are unable to have cargo separated from the occupant carrying space of the vehicle; and
- An air bag on the driver's side, and where available as a manufacturer fitted item, a passenger's air bag;
- A Reverse Alarm.

All Contractors must ensure that Light vehicles that interact with mobile equipment are equipped or fitted with:

- Systems that enable positive communication with the equipment operators (e.g. a two-way radio);
- A high visibility flag (e.g. A whip flag or buggy whip);
- An amber flashing light (revolving or strobe);
- Reflective taping; and

- High visibility signage (i.e. Vehicle call numbers) facilitating easy and positive identification from a reasonable distance.

All Contractors must ensure that Light vehicles carry:

- Emergency roadside triangles or beacons (three of either);
- Chock blocks for preventing uncontrolled movement of the vehicle when parked;
- A flashlight;
- A fire extinguisher (2.5kg DCP);
- A first aid kit; and
- Survival or emergency equipment (e.g. a vehicle recovery kit) suitable for the operating environment.

A change management process must accompany all vehicle modifications, including the attachment of any equipment.

Should any safety critical feature be defective or damaged, the vehicle must be withdrawn from service until it has been fully repaired. Inspection and maintenance must be undertaken on critical features such as:

- Wheels and tyres (including the spare);
- Steering, suspension and braking systems;
- Seats and seat belts;
- Lights, indicators and reflectors;
- Windscreen and windows, including windscreen wipers and washers;
- The vehicle structure itself; and
- Other safety-related items on the vehicle body, chassis or engine, including instrumentation.

Persons may only be transported in vehicles equipped with manufacturer fitted or approved seats and seat belts. Seat belts must be worn by all occupants of a light vehicle (i.e. the driver and all passengers) at all times.

Only the driver and one passenger are permitted in the cab (front) of a light delivery vehicle. No personnel may be transported in the load-bin of a light delivery vehicle, even if the vehicle is fitted with a canopy. Only tools and equipment may be transported in the load-bin. Furthermore, no persons may be transported in a trailer behind a vehicle.

Light vehicle running lights (low-beam headlights) must be switched on at all times when the vehicle is in operation.

All Contractors must have a system in place to ensure that drivers receive adequate training to ensure that the vehicle intended to be operated or driven can be operated or driven safely.

16.6.2 Mobile Equipment

All Contractors must ensure that Mobile equipment have the following minimum safety specifications:

- Fixed seats and seat belts for all occupants;
- Adequate lighting, including headlights, tail, turn and brake lights, and an amber flashing light (revolving or strobe);
- An identified isolation and lockout point;
- Adequate walkways, railings, steps and grab handle combinations, and boarding facilities including an alternative path of disembarking in the event of an emergency;
- Collision-avoidance technology and / or procedures;
- A reversing alarm or warning device;

- Chock blocks for preventing uncontrolled movement of rubber-tyred equipment when parked;
- A horn;
- Effective windscreen wipers;
- Effective guarding on accessible moving parts;
- A speedometer (if the mobile equipment is capable of exceeding the lowest applicable speed limit);
- High visibility signage (i.e. Mobile equipment call numbers) facilitating easy and positive identification from a reasonable distance; and
- A security system to prevent unauthorised operation.

Mobile equipment must have the following minimum safety specifications, unless a risk assessment stipulates otherwise:

- Approved or certified roll-over protection;
- Fail-to-safe brakes;
- A fire detection and suppression system capable of being activated from both ground level and cabin level (for certain types of mobile equipment, a suitably sized fire extinguisher may be adequate);
- A non-handheld two-way radio or another form of communication;
- Falling object protection (a protective structure over the operator cabin);
- An enclosed and tight-sealing air-conditioned cabin with suitable protective glass; and
- A means of moving supplies and personal items into and out of the operator cabin that enables an operator to continuously maintain three points of contact while boarding and disembarking the equipment (e.g. A backpack or shoulder strap bag).

When purchasing or hiring equipment, the ergonomics of the cabin must be considered, specifically with regard to the seating, operator controls and retrofitted devices.

Fleet and control consistency must be considered in order to minimise the possibility of operator error when changing machines.

Procedures must be in place to ensure that mobile equipment is only operated on sufficiently stable surfaces and on gradients that are within the limits of safe operation.

Seat belts must be used in all cases, by all occupants. Apart from the driver or operator, only an appointed flagman may be transported in mobile equipment (with the exception of buses) and **only if** the equipment is fitted with a passenger seat. No passengers are permitted on a lift and carry crane (or mobi-lift), mobile crane, forklift, mobile elevating work platform (e.g. A cherry picker), tractor, dozer, dump truck, grader, excavator, loader, back-actor, drill rig, or similar.

Procedures must be in place for the safe isolation and lockout of mobile equipment.

Where two or more items of mobile equipment must be operated in proximity to each other, or where an item of mobile equipment must be operated in proximity to persons on foot, a risk assessment involving all persons who will be working in the area must be conducted prior to the work commencing. In such a work area:

- No item of mobile equipment may be driven to within 5 metres of another item of mobile equipment without the operator first making eye contact with, and signalling his intentions to, the other operator who must acknowledge that he understands and that it is safe to proceed.
- No person on foot may work or be positioned within 5 metres of an item of mobile equipment that is in operation. Before approaching mobile equipment on foot, a person must make eye contact with, and clearly signal his intentions to, the operator

of the equipment. The operator must cease to operate the equipment and must indicate that he understands and that it is safe to approach.

In certain circumstances (determined through risk assessment), mobile equipment may only move and operate with dedicated flagmen in place:

- Where flagmen are used, it must be ensured that the flagmen, mobile equipment operators, and all other personnel working in the vicinity of the mobile equipment, receive suitable training with regard to signals and signalling to ensure effective communication. The training must be formal and recorded, and competency must be tested.
- A flagman and the mobile equipment operator that he is directing must maintain eye contact. The flagman must never position himself where the equipment operator cannot see him.
- Should a mobile equipment operator lose sight of his flagman, he must stop his activities immediately until contact has been re-established.

Operators must report conditions and practices that do not conform to procedure.

16.6.3 Tyre and Rim Safety

A Tyre Management Plan must be established to address issues including fire, heating, explosion, electrical contact, separations, maintenance, tyre changes, etc. and reviewed every twelve months. Safe Work Procedures must be in place for all tyre maintenance and servicing activities and for tyre fire emergency response.

16.6.4 Roads

Roads with high risks activities and traffic interface shall be controlled by trained flagman, no road may be closed without permission from a Transnet Contract Manager.

A dust control plan must be in place for the site and, in particular, for all roads. Any spillage in a roadway must be cleaned up immediately. Ground pollution (e.g. Oil, diesel or hydraulic fluid spillages) must not, and will not, be tolerated. If substances are spilled on a road or any other portion of the site, the contaminated ground must be dug out and the resulting hole backfilled with clean material which must be suitably compacted. The contaminated soil must be disposed of as required by the applicable legislation.

16.7.6 Railroad Vehicles (RRV)

The Contractor shall ensure that Road-rail Vehicle (RRV) is only operated by a person who is competent and licensed to operate such RRV.

The Contractor shall ensure that the RRV is operated with the Transnet Track Inspector/Track Master in charge of on-track machine present on the RRV. Transnet Track Inspector/Track Master in charge of on-track machine must have passed the appropriate road knowledge, theoretical and practical examinations and must be licenced competent.

The Contractor shall ensure that the RRV is properly maintained and in a serviceable condition to operate on road and railway line.

16.7 Signs and Notices

The contractor must ensure that all required safety signs and notices comply and are prominently displayed in accordance with the applicable legislation, national standards and good safety practice.

No person may deface or damage any safety sign or notice. No person may remove or alter any safety sign or notice unless authorised to do so.

16.8 Machinery

The contractor must ensure that all plant and equipment brought onto the site is:

- Appropriate for the type of work to be performed
- Approved, inspected, tested, numbered and tagged (if appropriate) before being brought onto site
- Properly maintained in accordance with the manufacturer's recommendations; and
- Placed on a register and checked at least once per month or as required by the applicable legislation.
- Only operated by persons who have been trained to operate such machinery.

The contractor must supply, at his cost, all items of plant and equipment necessary to perform the work and must maintain all items in good working order. Should any plant or equipment become inoperable for a period that is having or will have a significant impact on the work schedule, the contractor must, on instruction from the Transnet Contract Manager, remove the out of service plant or equipment and replace it with similar fully operational plant or equipment at no additional cost.

No item of plant or equipment delivered to site for use on the contract may be removed from the site prior to the completion of the contract without approval in writing from the Transnet Contract Manager.

Items of plant or equipment brought onto site by the contractor or his sub-contractors may be inspected by a Transnet Contract Manager. Should the Transnet Contract Manager determine that any item is inadequate, faulty, unsafe or in any other way unsuitable for the safe and satisfactory execution of the work for which it is intended, the contractor must, on instruction from the Transnet Contract Manager, immediately remove the item from the site and replace it with a safe and adequate substitute. In such a case, the contractor or his sub-contractor shall not be entitled to additional payments or deadline extensions in respect of any delay caused.

16.9 Barricading

All applicable legislation concerning barricading must be complied with at all times.

Each contractor required to erect barricading on the work site(s) must develop, document and implement Safe Work Procedures that are aligned with the requirements of this specification.

Barricading must be erected to:

- Prevent persons from making contact with an identified hazard;
- Provide warning of the existence of a hazard;
- Prevent unauthorised access (by people, vehicles and mobile equipment) into an area where a hazard exists or where a hazardous activity is being carried out;
- Define the boundaries of a hazardous location and / or restricted area; and
- Allow a work team to perform hazardous tasks without persons unfamiliar with the hazard(s) accessing the area.

Although not limited to these situations, barricading must be erected or installed:

- Around excavations (trenches, pits, etc.) (refer to the Excavation Standard);
- To protect openings and edges (to prevent persons from falling, all openings and edges associated with floors, stairs, and the open sides of buildings and structures during the course of construction must be protected by sturdy, rigid barriers capable of withstanding a force of at least 110 kilograms applied in any direction at any point) (refer to the Working at Heights Standard);
- To prevent access into areas where overhead work is in progress;
- To route vehicles safely through (or around) construction areas; and
- To protect members of the public who may be in the vicinity of a work or construction site (by preventing access).

A barricade must present a sturdy physical barrier to entering an area. Therefore, plastic cones, post and chain systems, "danger tape" and "snow netting" will not be accepted as barricading and may only be used for the purposes of low-risk demarcation.

Regardless of the type of barricade used, the following requirements must be met:

- The installation, alteration and removal of barricades must be supervised by a competent person;
- The barricading must be uniformly and intelligently configured;
- The barricading must be stable, conspicuous and effective;
- The barricading must completely surround the work or hazardous area;
- General access requirements around the work or hazardous area (such as pedestrian walkways, operational access, or general thoroughfares) must be taken into consideration when erecting a barricade;
- The extent of the area that is barricaded must be kept to a minimum so as not to unnecessarily restrict access to other areas. If access routes to other areas are blocked by the barricade, alternative routes must be identified and signposted
- All barricaded areas must have properly designated points of entry and exit for persons and / or vehicles. Each pedestrian access point must be fitted with a self-closing gate. A sign indicating, "DESIGNATED ACCESS POINT – AUTHORISED PERSONNEL ONLY", must be fitted to each gate;
- Additional signage providing warning of specific hazards (e.g. falling objects, electricity, etc.) Including, "NO UNAUTHORISED ENTRY", must be attached to all gates and, where required, to the barricading itself. The signage must be visible from all angles and must be large enough to be read from a distance of 10 metres;
- Barricading must be clearly visible at all times (day and night). If necessary, flashing warning lights must be used;
- Tags must be attached to the barricading displaying the name and cell phone number of the person responsible for the barricade, and specifying the reason for the barricading and the date on which it is scheduled to be removed;
- Should a person require access to a barricaded area, authorisation must be obtained from the person responsible for the erection of the barricade. The hazards that are present and the Personal Protective Equipment that must be worn within the barricaded area must be communicated to the person seeking access;
- Each barricade must be listed in a register, and each must be inspected daily to ensure that it is still intact and that its positioning is still effective;
- All barricades must be properly maintained and repaired as required;
- When the work has been completed and the hazard has been eliminated, all barricading must be removed without delay. A barricade may not be left in place if no hazard exists;
- Before a barricade is removed (allowing general access), the area must be inspected by the person responsible for the work that was carried out, to ensure that the area is once

again safe. If applicable, the person accepting the area back for general use shall do so on completion of his own safety inspection;

- Authorisation to remove (or modify) a barricade may only be granted by the person responsible for the erection of the barricade.

16.10 Working from fall risk position (working at heights)

All applicable legislation concerning work performed from a fall risk position must be complied with at all times. Fall prevention or fall protection measures must be in place whenever the potential exists for a person to fall from a fall risk position.

16.10.1 Fall protection

Whenever there is a risk of falling from a fall risk position, whenever there is a risk of falling onto dangerous equipment or machinery even if the potential fall distance is less than 2 metres, or whenever work must be carried out within 2 metres of an opening through which (or an edge over which) a person could fall, no work may commence unless:

- a fall protection (and rescue) plan is in place (prepared by a competent person, and implemented by the contractor);
- A detailed task-specific risk assessment has been carried out;
- A safe work procedure is in place for the task to be performed;
- A permit to work has been obtained; and
- Each person has been provided with suitable fall protection equipment.

Fall protection equipment (either fall restraint or fall arrest equipment) must be used at all times whilst the work is being carried out.

To prevent persons from falling, fall restraint equipment must be used whenever work must be carried out within 2 metres of an opening through which (or an edge over which) a person could fall. Fall arrest equipment must be used whenever the potential exists for a person to fall 2 metres or more.

A person has been provided with suitable fall protection equipment if he is secured by means of an approved full body harness (well fitted) with two shock absorbing lanyards or an inertia reel (when fall arrest equipment is required) or two short restraining lanyards (when fall restraint equipment is required), double or triple action snap hooks (or karabiner type rings), and secure anchorage points (a person's lanyard may be attached either directly to an anchorage point or indirectly through the use of a variety of systems that incorporate a lifeline).

A dual lanyard system must be used to ensure that at least one connection point is maintained at all times.

Note: When selecting fall arrest equipment, care must be taken to ensure that the potential fall distance is greater than the height of the person plus the length of the lanyard with its shock absorber deployed (taking the height of attachment into account).

Anchorage points must, where practical, be above the head of the person, and must ensure that in the event of a fall the person will neither swing nor touch the ground.

All permanent anchorage points must be designed and approved by a professional structural engineer.

All anchorage points must be periodically inspected and tested by a competent person to ensure that they are secure and can support the required load. A system must be in place to identify anchorage points as authorised for use. Temporary anchorage points (and lifeline systems) may only be used if a competent person has certified them safe to use.

If an elevating work platform is used, such equipment must be fitted with a fixed anchorage point for the attachment of fall protection equipment.

The use of fall protection (fall restraint or fall arrest) systems must be avoided wherever and whenever possible through design, the installation of physical barriers that protect persons from falling and employing alternative methods of working. Only if physical barriers protecting against free falls cannot be installed must fall protection equipment be used.

Fall protection (fall restraint or fall arrest) systems are items of personal protective equipment and, if required, must be purchased, installed and provided to employees. Prior to commencing with any work at height, an assessment must be conducted to determine if the work requires the use of fall protection equipment, and if so, which fall protection system is the most appropriate for the work.

There must be a system for ensuring that fall protection equipment is:

- Tested and certified for use;
- Inspected by the user before use; and
- Destroyed following a fall or where inspection has shown evidence of excessive wear or mechanical malfunction.

All persons that are required to work at height (in order to carry out routine or non-routine tasks) must first be trained and certified competent to do so. Furthermore, each person must be in possession of a valid medical certificate of fitness specifically indicating that the person is fit to work at height.

All persons required to use personal fall protection equipment must be trained and certified competent in the correct selection, use, maintenance and inspection of such equipment.

All fall protection equipment must be thoroughly inspected on a monthly basis by competent persons appointed in writing and each item of equipment must be tagged to show when it was last inspected. All inspections must be recorded in a register. On finding defective or damaged equipment, appropriate action must be taken by the competent person (i.e. the destruction of the equipment to prevent further use).

Persons making use of personal fall protection equipment must do so in strict accordance with the instructions or requirements specified by the manufacturer or supplier of the equipment or system.

Specific pre-use inspection, maintenance and fitting protocols must be established in accordance with the manufacturer's requirements or guidelines and these protocols must be followed by all users of the fall protection equipment.

Solvents may not be used to clean fall protection equipment. Only manufacturer-approved cleaning solutions may be used.

No person required to use personal fall protection equipment may work in isolation (a minimum of two persons working together is required).

Competent supervision must be in place at all times for all work carried out at height. Supervisors must be appointed in writing.

Emergency response (rescue) procedures for the rapid retrieval of suspended persons in the event of a fall from height must be prepared and tested.

Note: Even though there is no risk of free fall, fall protection equipment may be required in situations where there is a risk of falling, slipping or sliding down a slope of more than 45 degrees.

Note: The maximum service life of fall protection equipment manufactured of synthetic fibre shall be 5 years from the date of first use and / or manufacture unless otherwise specified by the manufacturer.

A person may climb or descend a ladder without fall protection provided that he is able to use both hands and legs to do so, faces the ladder, and uses one step at a time. The ladder must be tied off or supported at its base.

Prior to any roof work being performed, or prior to persons accessing a roof, a structural engineer must verify that the roof is of sound construction and that it is capable of supporting the weight of the persons as well as any equipment that may be required. Should the engineer's findings be to the contrary, alternative methods of performing the work must be found. Particular care must be taken when work is carried out on an asbestos cement roof or a fibreglass roof.

16.10.2 Falling Objects

In the process of planning work activities, the risks associated with falling objects (i.e. materials, tools or equipment) must be assessed and appropriate control measures must be identified, implemented, and monitored taking the following hierarchy of controls into consideration:

- Preventing objects from falling – by using containment sheeting, toe boards, lanyards to secure tools (to a person or to the structure), ropes or chains to secure equipment (to the structure), lift boxes, brick cages, etc. and by properly securing loads when lifted by crane or hoist;
- Protecting people from falling objects – by establishing barricaded exclusion zones, installing catch platforms or catch nets, displaying warning signage, and posting safety watchers and / or traffic controllers; and
- Personal Protective Equipment (particularly safety helmets and safety boots) – protective equipment is a last line of defence and must be worn.

Where overhead work is being carried out, barricading must be erected around the work area (at the level at which the work is taking place and at every level below including ground level) to prevent persons from entering such an area and potentially being struck by falling objects.

Wherever hazards related to falling objects exist, appropriate warning signage (i.e. "Overhead Work In Progress" and "No Unauthorised Access") must be prominently displayed.

No items are permitted to lie loose in elevated positions (e.g. nuts and bolts must be securely stored) and good housekeeping standards must be maintained at all times. No tools, equipment, material, debris, waste, etc. may be dropped from height. Objects must be lowered or chuted to ground level in a safe and controlled manner.

16.10.3 Ladders

All ladders used on site must be of sound construction and adequate strength.

Only non-conductive ladders made of wood or fibreglass may be used for electrical work or work being performed in proximity to energised electrical equipment. Metal ladders and ladders with metal reinforcing may not be used.

The use of makeshift ladders is forbidden.

All ladders must be numbered, listed in a register, and inspected by a competent person on a monthly basis (the results of each inspection must be recorded in the register).

Before using a ladder, the user must inspect it for damage. Ladders with missing, broken, cracked or loose rungs, split stiles, missing or broken spreaders (stepladders) or any other form of damage or defect may not be used. A damaged ladder must be removed from service (and tagged, "Out of Service") without delay and must then either be repaired (if possible) or destroyed to prevent further use.

Persons must receive instruction in the correct use and proper care of ladders.

Ladders may only be used as a means of access and egress. The use of ladders as working platforms is prohibited, except for inspection and carrying out minor tasks (i.e. light work and short duration) such as changing a light bulb.

Ladders may not be positioned horizontally and used as walkways or runways or as scaffolding.

All portable ladders must be fitted with non-skid safety feet (or some other means to prevent the base of the ladder from slipping) and the feet must always be placed (stand) on a firm level surface. The use of bricks, stones, wood or any other material to level the stiles of a ladder is prohibited. Ladders may not be placed on movable bases such as boxes, tables, trucks, etc. The base or foot of a ladder must always be secured to prevent it from slipping. The ladder must be held by an assistant if the base cannot be secured in any other way (e.g. tied off).

A straight ladder must extend at least one metre above its support (or above the working platform that it is providing access to). The top of the ladder must be tied off (or otherwise secured to its support) to prevent accidental movement. A straight ladder must be placed at a safe angle, i.e. tilted at a ratio of approximately 4:1, meaning that the base of the ladder must be one metre away from the wall (or other vertical surface) for every four metres of height to the point of support.

A stepladder may never be used as a straight ladder. A stepladder must be opened fully, and the spreaders must be locked securely.

When using an extension ladder, at least four rungs must always overlap at the centre of the ladder.

Ladders may not be joined together unless they have been specifically designed and manufactured for that purpose.

A suspended ladder (i.e. not standing on a base) must be attached in a secure manner to prevent undue swinging or swaying, and to ensure that it cannot be displaced.

A ladder may not be placed against a window, glass or any other material which is unlikely to withstand the force exerted on it by the top of the ladder.

A ladder may not be placed in front of a door or window that opens towards the ladder unless the door or window has been locked or barricaded. When a ladder is used near an entrance or exit, the base of the ladder must be barricaded.

Materials and / or equipment may not be placed in close proximity to the base or landing of any ladder.

When ascending or descending a ladder, a person must always face the ladder and use both hands (i.e. maintain three points of contact). Nothing may be carried up or down a ladder if it prevents the person from holding on to the ladder with both hands. Tools must always be properly secured. This can be achieved by attaching them to the wrist using lanyards or placing them in a tool belt around the waist. Tools and materials may also be carried in a bag over the shoulder or hoisted to the landing using a tool bag and rope.

Only one person at a time may use (i.e. be positioned on) a ladder.

No person may stand or step above the third rung from the top of a straight ladder or above the second highest step of a stepladder.

Overreaching from a ladder is prohibited. If the target is not within comfortable reach, the person must climb down and reposition the ladder. No person may run up or down a ladder or jump from the lower rungs or steps to the ground.

All ladders must be properly maintained and cared for. Ladders must be stored under cover and should be hung in a horizontal position from several brackets. No ladder may be left lying on the ground or be left exposed to the weather. A ladder left lying on the ground presents a tripping hazard and it may be damaged by vehicles running over it. No ladder may be left in such a position where it may fall over, be accidentally knocked over, or be blown over by the wind.

Ladders may not be painted, as the paint may conceal damage, defects, labels or other markings. Instead of paint, clear varnish or wood oil may be used to preserve wooden ladders. Ladders must be kept clean, as dirt may conceal damage or defects. Oil or grease accumulation on the rungs of a ladder may cause a person to slip.

Before making use of a ladder, each person must make an effort to remove mud, oil, grease, etc. from his boots.

16.11 Permit to Work

All personnel must comply with the Permit to Work system applicable to the scope of work.

A Permit to Work must be obtained before carrying out any work that involves:

- A hazardous energy source or system, including electricity, compressed fluids (e.g. hydraulics and pneumatics), chemical substances (e.g. toxic, corrosive, flammable or explosive gases and liquids), heat (e.g. steam), radiation, and machinery or materials with potential energy (gravitational and elastic) – isolation and lockout may be required;
- Confined space entry;
- Working at height;
- A critical lift;
- Hot work outside of designated workshops;
- Excavation; or
- A service (e.g. water supply, fire suppression systems, etc.).

Note: A Permit to Work may only be issued by an Authorised Person and may only be received (or accepted) by an appointed Applicant (see Definitions).

Each Permit to Work that is issued must make reference to an approved Task-Based Risk Assessment for the work that is to be carried out.

The Permit to Work system that is employed must incorporate the following basic procedures:

- Prior to meeting with the Authorised Person, the Applicant must familiarise himself with all of the hazards associated with the system, plant, equipment, structure or area on or in which the work must be performed. He must also consider the risks that may arise as a result of the tasks that will be carried out. A Task-Based Risk Assessment must be in place;
- The Applicant must then request permission to carry out the work and must meet with the Authorised Person to discuss and document the scope of the work as well as the hazards, risks and associated control measures. Isolation and lockout requirements must be identified (if applicable). The isolation and lockout process must be initiated by the Authorised Person who must contact the necessary Isolation Officers.

Note: The Applicant must ensure his own safety and that of his team and has the right to accompany the Isolation Officers to verify that all of the necessary locks have been fitted to all of the isolation and lockout points in accordance with the applicable plant or equipment-specific Isolation and Lockout Procedure.

- Once all of the necessary isolations have been completed and the necessary Clearance Certificates have been issued by the Isolation Officer(s) (if applicable), and the Authorised Person is satisfied that the system, plant, equipment, structure or area is safe to work on or in provided all identified precautions are observed by the Applicant, then he must issue (sign) the Permit to Work to the Applicant;
- The Applicant must accept (sign) the Permit to Work. If equipment has been isolated, the Applicant must attach his Personal Lock to the relevant Isolation Bar (or Local Isolation Point) and must ensure that every other person working on the isolated equipment also attaches his or her Personal Lock to the Isolation Bar (or Local Isolation Point) before starting any work;
- Before commencing with any work, the Applicant must discuss the hazards, risks, control measures, precautions and limitations as stated in the Permit to Work (and associated Task-Based Risk Assessment) with all personnel who will be carrying out the work. A register must be kept, and all persons must sign the register once they have been briefed by the Applicant;
- The work performed must be limited to what is described in the Permit to Work;
- When a particular employee has completed his work, he must sign the personnel register to this effect and (if applicable) must remove his Personal Lock from the Isolation Bar (or Local Isolation Point);
- Once all work is complete, the Applicant must:
 - Ensure that all machine guards have been replaced;
 - Ensure that all tools and materials have been removed from the work area; o Ensure that the work area is clean and tidy;
 - Ensure that all Personal Locks (including his) have been removed from the Isolation Bar or Local Isolation Point (if applicable); o Inform the Authorised Person that the work has been completed; and o Sign off the Permit to Work.
- Once the work is complete and the Applicant has signed off the Permit to Work, the Authorised Person must:
 - o Ensure that the relevant Isolation Officers perform all of the necessary de-isolations (if applicable);
 - On completion of the de-isolations, sign off the Permit to Work accepting the system, plant, equipment, structure or area back for service; and
 - Inform all relevant personnel that the system, plant, equipment, structure or area is ready to use.

- Where the work must continue over more than one shift, the Permit to Work must be reviewed at every shift change by an Authorised Person. If the scope of work has changed, the permit must be cancelled and a new permit must be issued.

If any of the original conditions or precautions pertaining to the work is not being complied with, is no longer adequate or is no longer applicable, the Authorised Person must cancel the Permit to Work and must ensure that all work stops until full compliance with either the original or amended (as required) conditions and precautions is achieved and a new permit has been issued.

The Applicant must ensure that the Permit to Work (including the personnel register) is kept where the work is being carried out (i.e. posted on a portable Health and Safety Notice Board) and that the work is monitored against the permit conditions.

All Permit to Work records must be retained and must be made available for inspection when required.

The implementation of the Permit to Work system applicable to the project must be audited on a regular basis by a Transnet Contract Manager. Furthermore, planned task observations must be carried out periodically.

Note: In addition to obtaining Permits to Work as and when required for specific hazardous activities (identified in this specification), each contractor must obtain a General Work Authorisation from a Transnet Contract Manager on a monthly basis. A General Work Authorisation is valid for one calendar month and authorises the contractor's planned work activities. In order to obtain a General Work Authorisation, the contractor must provide a documented work plan for the month together with the necessary Task-Based Risk Assessments.

16.12 Isolation and Lockout

Isolation and lockout procedures that make it impossible to inadvertently energise any system, plant or equipment so isolated, must be in place for all work where hazardous energy sources exist, including electricity, compressed fluids (e.g. hydraulics and pneumatics), chemical substances (e.g. toxic, corrosive, flammable or explosive gases and liquids), heat (e.g. steam), radiation, and machinery or materials with potential energy (gravitational and elastic). These procedures must be strictly enforced and complied to by all personnel.

All Isolation and Lockout Procedures must incorporate the following basic requirements:

- The issuing of a formal Permit to Work for any work that requires the isolation of any system, plant or equipment;
- The use of defined Equipment, Discipline and Personal Locks (see Definitions), and multiple lockout systems (i.e. Isolation Bars and lockout hasps);
- Clear identification of all isolation and lockout points ensuring there is no duplication;
- Isolation of the main energy source;
- The use of slip plates or the blanking off of pipelines or ducting, in addition to the chaining and locking of valves, as determined by a risk assessment;
- Suitable methods of preventing the movement of equipment; and • Methods to test the effectiveness or completeness of the isolation.

Note: No work may commence on a system, plant or equipment until a Permit to Work has been issued by an Authorised Person.

Note: A Permit to Work may only be issued by an Authorised Person once all required Clearance Certificates have been issued by appointed Isolation Officers.

The isolation and lockout system that is employed must incorporate the following basic procedures:

- In accordance with a system, plant or equipment-specific Isolation and Lockout Procedure, an appointed Isolation Officer(s) must isolate all points that need to be isolated in order to render the system, plant or equipment safe to work on. An Equipment Lock (and a suitable, highly visible warning tag) must be attached to each isolation point;
- On completion of an isolation (and lockout), the Isolation Officer must clear the area of all persons and must then carry out tests to ensure that the isolation is effective. This may be done by pressing a start button or by asking a control room operator to try to start the equipment. Special care must be taken to ensure that the attempted starting of the equipment has not been deactivated by another interlock forming part of the system, or by a different up-stream isolation. Alternatively, appropriate equipment may be used to test for energy (e.g. voltage verification or continuity tests).

Note: In the case of electrical isolation, a test for voltage must be carried out, after the switching device, to ensure the absence of voltage.

- The Isolation Officer must place the key to the Equipment Locks on an Isolation Bar (at a Lockout Station) and must then attach a Discipline Lock (to prevent the key from being removed) before issuing a Clearance Certificate;
- The Discipline Lock must remain in place when handing over to subsequent shifts. All Discipline Locks for a particular discipline (e.g. low voltage electricity) must be keyed alike so that any Isolation Officer appointed for that discipline (and issued with a key) can open any of the Discipline Locks used for that discipline.
This enables an Isolation Officer to de-isolate equipment that may have been isolated by another Isolation Officer during an earlier shift. Appointed Isolation Officers for a particular discipline are the only persons permitted to hold keys to the Discipline Locks used for that discipline.

Note: Local isolations do not require the use of Equipment Locks (a Discipline Lock may be attached to the Local Isolation Point by the Isolation Officer, followed by the necessary Personal Locks).

Note: For local isolations, if the Isolation Officer is the only person who will be working on the isolated equipment, then he must attach his Personal Lock to the Local Isolation Point.

- Once all required Discipline Locks are in place (i.e. attached to the Isolation Bar) and all Clearance Certificates have been issued, the Permit to Work may be issued by the Authorised Person;
- Each person who will be working on the isolated system, plant or equipment must then attach his or her Personal Lock to the Isolation Bar before starting any work (including the Isolation Officer, if he intends to work on the isolated unit);
- The attachment of a Personal Lock to the Isolation Bar prevents the removal of the key to the Equipment Locks even if the Discipline Lock is removed;
- When called (by an Authorised Person) to de-isolate the system, plant or equipment (on completion of the work under the Permit to Work), the Isolation Officer must ensure that all Personal Locks have been removed from the Isolation Bar before removing the Discipline Lock and the key to the Equipment Locks;
- Before removing the Equipment Locks and de-isolating the energy source, the Isolation Officer must inspect the system, plant or equipment that was worked on to ensure that

it is safe to perform the de-isolation. This includes guard inspections, housekeeping, ensuring that all doors and covers are in place, and most importantly, ensuring that no persons are present;

- Once all Equipment Locks have been removed and the system, plant or equipment is safe for use, the Isolation Officer must cancel the Clearance Certificate and inform the Authorised Person that the unit has been de-isolated.

Where a system, plant or equipment is sequence interlocked and a hazard could be created through the inadvertent start up or shut down of a system, plant or equipment lying before or after the unit to be worked on, then that system, plant or equipment must also be isolated and locked out.

Redundant or out of service equipment must, in addition to being isolated and locked out using the relevant Discipline Lock, be fitted with a tag indicating why it is out of service, who performed the lockout, and the hazards associated with that equipment.

Where it is necessary to work on live equipment for the purposes of commissioning, testing, adjusting and sampling, such work must be carried out in accordance with a written Safe Work Procedure and controls must be in place to prevent unauthorised access into the work area.

The implementation of the isolation and lockout system and procedures applicable to the project must be audited on a regular basis by a Transnet Contract Manager. Furthermore, planned task observations must be carried out periodically.

16.12.1 Personal Locks

A Personal Lock must be such that it can only be unlocked by the person to whom it belongs. Combination locks may not be used. A Personal Lock, as well as the key(s) to the lock, must be kept under the exclusive control of the person to whom the lock belongs.

A Personal Lock must be issued to each person who requires one, and the person's details must be clearly and permanently engraved directly onto his Personal Lock. Alternatively, a thick durable plastic identification tag may be used that clearly displays the company's name, the employee's name, the employee's company number, and a contact telephone number (the tag must be securely fastened to the Personal Lock). Where the above is handwritten, it must be done using a permanent marker pen and it must be legible.

Each person issued with a Personal Lock must be trained and certified competent in the correct use of such a lock.

A Personal Lock may NEVER be removed by anyone other than the person to whom it belongs, except if the removal (cutting) of the lock is authorised by the Transnet Contract Manager (in the absence of this person, authorisation can only escalate upwards). Furthermore, the removal of the lock must be done under the personal supervision of the Transnet Contract Manager, and in accordance with a written procedure. The removal (cutting) of a Personal Lock may be required if the person who applied the lock is unable or unavailable to remove it on completion of the work (e.g. lost his key, failed to remove his lock before going home, etc.).

16.13 Electrical Safety

The contractor must ensure compliance with Electrical Installation Regulations, Electrical Machinery Regulations, OH&S Act, TFR Electrical Safety Instructions, TFR E7/1 Specification for Works On, Over, Under or Adjacent to Railway Lines and Near High Voltage Equipment and all applicable SANS Codes and Practices.

All electrical work must be carried out by competent personnel in accordance with all legal requirements, codes, design criteria and safety standards applicable to the scope of work.

Each contractor carrying out electrical work on the site(s) must develop, document and implement Safe Work Procedures that are aligned with the requirements of this standard.

All persons who will be carrying out electrical work must be certified against the requirements of job and equipment-specific electrical competency standards for the project, which must address job and equipment-specific Safe Work Procedures.

Each person potentially exposed to electrical hazards must receive electrical hazard training at the commencement of his employment on site and thereafter on an annual basis. The training must address the equipment and conditions specific to the area where the individual will be working. The training material must be documented, and training records must be kept.

16.13.1 Electrical Installations

Each electrical installation (temporary or permanent) installed or worked on by a contractor must be inspected by a Transnet Contract Manager to ensure that the installation complies with all statutory requirements, codes, design criteria and safety standards applicable to the project.

A Transnet Contract Manager must approve all electrical work before the installation is energised. Any installation deemed unsatisfactory by a Transnet Contract Manager must be removed, repaired or modified by the contractor at his expense.

For every permanent or temporary electrical installation, a certificate of compliance must be issued by a competent and appropriately qualified electrician. These certificates must be available for inspection.

Single line diagrams (with supporting documentation) must be produced and maintained for all electrical installations. This information must include system fault calculations, equipment details, electrical protection discrimination curves, and cable ratings.

Work on electrical installations (new installations, and modifications or repairs to existing installations) may only be carried out by qualified and authorised personnel (i.e. electricians).

Electrical safety devices (specifically, earth leakage protection and overcurrent protection) must be installed on all distribution circuits and the settings must be established by suitably qualified personnel.

A suitable numbering and / or labelling system must be used so that each circuit breaker or earth leakage device can be clearly and readily matched with the outlet or equipment that it protects.

To ensure the safety of the user, each distribution panel must be completely enclosed, must be of the dead-front type, and must be properly constructed and earthed.

All electrical cabling must be covered (e.g. in cable trenches) or elevated (in cable trays) to protect it from damage and to eliminate tripping hazards.

All permanent and temporary electrical installations (cabling, sockets, distribution panels, transformers, switchgear, etc.) must be inspected and tested by a competent and suitably qualified electrician on a monthly basis. The testing must include a grounding (earthing) continuity test and testing of the electrical safety devices. Details of these inspections and tests must be recorded in a register which must be made available to the Transnet Contract Manager for inspection.

A rigorous Isolation, Lockout and Permit to Work system must be applied to all electrical work (i.e. work on electrical installations, machinery or equipment). All personnel must comply with the system and procedures applicable to the project.

Before any work on an electrical installation or equipment is carried out, the installation or equipment must be de-energised.

No electrical work may be performed live, regardless of the voltage, unless written approval is obtained from the Transnet Contract Manager (a justification as to why it is necessary for the work to be carried out with the equipment in an energised state must be provided).

For all energised electrical work, a Safe Work Procedure must be in place and, with the exception of voltage testing and where no tools are used, a Permit to Work (specifically authorising energised electrical work) must be issued. When carrying out any energised electrical work, approved electrically insulated gloves, blankets, mats and other protective equipment must be used.

Control centres, switchgear rooms, substations, generators, transformers, capacitor banks, and other similar electrical plant and equipment must be appropriately guarded and labelled and, with the exception of emergency shut-off mechanisms, must be made inaccessible to unauthorised personnel (i.e. plant or equipment of this nature must be positioned within rooms or fenced enclosures which must be kept locked).

Appropriate warning signage must be prominently displayed within, and at all entrances to, these rooms or enclosures. The signage must indicate that unauthorised persons are prohibited from entering, that unauthorised persons are prohibited from handling or interfering with any electrical plant or equipment, the procedure to be followed in the event of a fire, and the first aid procedure to be followed should a person suffer electric shock. Suitable fire-fighting equipment must be provided in all such rooms or enclosures.

All electrical panels must be kept locked (using keyed-alike padlocks). Keys may only be issued to authorised personnel.

All un-insulated (bare) or partially insulated conductors must be enclosed and protected to prevent accidental contact therewith. Measures must be taken to prevent unauthorised access and appropriate warning signage must be conspicuously displayed.

Only authorised persons may enter rooms or enclosures housing electrical plant or equipment, and only authorised persons may access electrical panels or cabinets, and cable ducts or trenches. If any work must be carried out in such an area or on such equipment, a Permit to Work must first be obtained from the Transnet Contract Manager.

No connection to any electrical system may be made without prior approval and a valid Permit to Work from the Transnet Contract Manager.

No electrical equipment or apparatus may be modified without written authorisation from the Transnet Contract Manager.

Conductive ladders may not be used in proximity to non-insulated electrically energised lines or equipment.

All permanent and temporary electrical cables, whether energised or not, must at all times be handled as if they are energised.

Only appropriately certified intrinsically safe electrical equipment may be used in flammable or potentially explosive atmospheres such as in confined spaces. Any equipment or structure on which electric charges may accumulate (such as storage tanks) must be grounded (earthed).

Lightning protection must be provided on all tall structures and buildings. Grounding (earthing) and lightning protection systems and devices must be designed, engineered, selected and installed based on site-specific requirements.

Before carrying out any excavation work, a Permit to Work (specifically authorising the excavation activities) must be obtained from the Transnet Contract Manager. Such a permit must not be issued until it has been verified that no buried hazards or services exist where the excavation work is to be carried out (refer to the Excavation Standard).

16.13.2 Arc Flash Safety

Depending on the scope and nature of the work, a documented arc flash protection programme must be in place that specifies:

- The methodology for calculating incident energies and determining flash protection boundaries; and
- The PPE required (specific to a task and the equipment on which the task is performed) and associated procedures to mitigate the hazard.

The method of calculation must be based on regional electrical code requirements, or if none exist, the Institute of Electrical and Electronics Engineers (IEEE) Standard 1584, or the United States National Fire Protection Association "Standard for Electrical Safety in the Workplace" (NFPA 70E), or published equivalent.

An Arc Flash Hazard Assessment must be carried out based on accurate and current data. All electrical cabinets where the potential for an arc flash hazard exists must be labelled in accordance with the hazard assessment and the potential incident energies calculated.

A process must be in place for updating the Arc Flash Hazard Assessment and labelling as changes and electrical upgrades occur that might affect the available short circuit current on the system.

In order to mitigate the hazard, Safe Work Procedures must be in place and all persons potentially exposed to arc flash hazards must be trained in these Safe Work Procedures and must be supplied with appropriate arc flash PPE.

16.13.3 High Voltage Power Lines

Before any mobile equipment (such as a crane, bulldozer, back-actor, boom truck or drill rig) is mobilised to a work site, an assessment must be carried out (including a thorough inspection of the work site and the access route) in order to clearly identify any overhead or underground power lines.

A system must be in place to mitigate the risks associated with working in close proximity to power lines and suitable measures must be taken to prevent personnel or equipment from coming into contact with power lines. Extreme caution must be exercised.

Where possible, exclusion zones (based on minimum clearance distances specified by the electrical power utility or the Transnet Contract Manager) must be created with rigid barriers and warning signs.

Only in exceptional circumstances, and then only after a detailed method statement and risk assessment has been approved, all necessary mitigation or control measures are in place (including the use of a spotter), and a Permit to Work has been issued by the Transnet Contract Manager, may equipment be operated within one boom length of energised overhead power lines. Suitable protective insulating barriers may need to be used.

If possible, the power lines must be de-energised and isolated while the work is carried out.

All equipment operators and rigging personnel must be trained in the hazards and the applicable safe approach distances (exclusions zones) associated with overhead power lines.

A procedure must be in place for the evacuation of mobile equipment or a vehicle in the event of accidental contact with power lines. All operators must be trained in this procedure and must follow it implicitly.

Scaffolding may not be erected within 5 metres of power lines or overhead track equipment.

16.13.4 Portable Electrical Equipment

Prior to site establishment, each contractor must provide a complete inventory of all portable electrical equipment that he and his sub-contractors intend to use on the site (including plant, machines, appliances, generators, hand tools, lighting, extension cords, etc.). The nameplate data for each item of equipment must be included.

All portable electrical equipment to be used on the site must be supplied and maintained in a serviceable condition.

Any electrical equipment that is in poor condition or is not in proper operating order may not be used. Any electrical equipment that a Transnet Contract Manager deems to be unsafe or unsuitable must be removed from site.

Electrical repair work or diagnostic work on electrical equipment may only be performed by personnel who are competent and authorised to perform this work (i.e. qualified electricians).

With the exception of double-insulated equipment, all electrical equipment must have an equipment grounding (earthing) conductor that connects the frame of the equipment being utilised to the grounding (earthing) conductor of the electricity supply system.

All electrical equipment and all electricity supply systems used (including generators) must be inspected and tested by a registered and competent electrician to ensure that all equipment is properly grounded (earthed).

All electrical equipment used on site must be supplied electricity through (i.e. must be protected by) an approved and tested residual current device (or earth leakage device or unit). If a socket outlet does not have a residual current device in the circuit, a portable

residual current device must be used. Outlets without residual current device protection must be labelled as such.

Any electrical equipment that causes an earth leakage device to trip or deactivate the circuit may not be used again until an electrician has inspected and tested the equipment and has recorded in a register that the equipment is safe to use.

Interlocks may never be removed or modified, and fuse terminals may never be bypassed to keep current flowing in any circuit.

All generators must be fitted with suitable overcurrent protective devices (i.e. circuit breakers or fuses).

All generators must be used in compliance with the manufacturer's requirements. Any proposed modification to a generator must be authorised in writing by the manufacturer prior to the modification being made.

Each welding machine used on site must be fitted with a Voltage Reduction Device (VRD). If this is not practical (i.e. for arc welding processes other than stick welding), a dead man's (isolation) switch in the electrode circuit (operated by a trained observer) may be used as an alternative. All welding machines must be properly grounded (earthed).

All portable electrical hand tools used on the site must be double insulated.

Electrical equipment must be disconnected or unplugged when not in use.

Portable lights must be stable, and each light bulb must be protected by a substantial guard.

Temporary festoon lighting must be double-insulated and must be supported at least 2.5 metres above the floor, if possible.

Handheld lights must be of the all-insulated type and must be extra low voltage (i.e. not exceeding 32V). 120V or 240V handheld lights are not permitted. Any lighting used in hazardous locations (i.e. potentially explosive atmospheres, confined spaces, and damp or wet areas) must be operated at a maximum of 32 volts, unless earthed and protected by earth leakage devices.

No person may wear a watch or any jewellery or carry any metal objects such as a lighter or keys, while working on any electrical system or equipment.

No person may work on or use electrical equipment if his clothing is wet, or any part of his body is in contact with water.

No person may handle electrical equipment, equipment cords or extension cords with wet hands or if the floor or ground surface is wet.

Fire extinguishers filled with carbon dioxide must be used to fight electrical equipment fires (water may never be used). If possible, the electrical equipment should be deenergised before fire-fighting activities commence (refer to the Fire Protection and Prevention Standard).

When cleaning or performing maintenance work on an item of electrical equipment, the equipment must be unplugged.

Equipment may not be unplugged while that equipment is switched on. Nor may equipment be plugged into a receptacle (socket) with the equipment's switch turned on.

Electrical equipment that has a defective plug or wiring may not be used. Repair work to defective or damaged electrical equipment may only be carried out by a qualified electrician.

Extension cords may be used for temporary applications only. Permanent cabling must be installed for long-term needs. Extension cords may not be run through doors, windows, ceilings or holes in walls. An extension cord must be uncoiled completely before it is used. An extension cord must be of sufficient current-carrying capacity to power the equipment that it is supplying electricity to. Cords must not be overloaded.

Extension cords must be unbroken and continuous (i.e. no joins or splices in the cord are permitted). Extension cords may not be daisy-chained (i.e. one extension cord plugged into another extension cord). Extension cords and equipment cords may not be modified to fit a receptacle (socket).

Two-conductor extension cords may not be used. A three-conductor extension cord (i.e. a grounded or earthed cord) must be used even if the equipment that it is supplying electricity to uses a two-prong plug.

Extension cords that are frayed, have insulation tears, cracks or abrasions, have exposed conductors, or have bent, broken or "spread" plug prongs may not be used. Extension cords that will be used outdoors must have heavy duty insulation and must be weather and UV resistant.

All electrical equipment cords and extension cords must be covered or elevated to protect them from damage and to eliminate tripping hazards.

Each contractor is responsible for protecting his electrical equipment from the weather and from possible mechanical damage.

All portable electrical equipment (including generators) must be inspected, tested and tagged by a competent and appropriately qualified electrician on a monthly basis. Details of these inspections and tests must be recorded in a register which must be made available to the Transnet Contract Manager for inspection.

The inspection and testing must include a continuity test of the grounding (earthing) conductor (as applicable) and a complete examination of the equipment or system to assure safe use.

A colour coding system must be used for the tagging of all electrical equipment.

The tag placed on a piece of equipment must be traceable to an entry in a register where the following information concerning the inspection and testing of that piece of equipment must be recorded:

- Date of inspection and testing;
- Equipment description;
- Equipment owner;
- Equipment location;
- Name, signature and licence number of the electrician who carried out the inspection and testing; and
- Comments concerning the inspection and testing, and details of any repair work carried out or required.

Any item of electrical equipment that does not pass an inspection or test must be removed from service (and tagged, "Out of Service") immediately and must then either be repaired (if possible) or removed from site.

Any item of electrical equipment without a tag or with an out-of-date inspection or test may not be used.

Any item of electrical equipment found without a tag or with an out-of-date inspection or test must be removed from service until it has been inspected and tested. If it is found that more than one item of equipment being used by a contractor has not been inspected and tested as required, all work with electrical equipment must be stopped until it can be demonstrated to the satisfaction of the Transnet Contract Manager that the contractor's systems and controls are adequate and fully implemented.

In addition to the formal monthly inspections and testing carried out by an electrician, electrical equipment (particularly extension cords, portable hand tools, welding machines, compressors and pumps) must be visually inspected by the user on a daily basis prior to use. Users must be trained to look for cracks in casings, loose casings, outer cord sheathing that is not being held firmly in position at the equipment, cuts or cracks in cord or cable insulation, exposed conductors, damaged plugs or sockets, and missing covers. Damage and / or defects must be reported immediately.

Personnel must immediately stop using and report any electrical equipment or machinery that is shocking, sparking, overheating or smoking. Corroded outlets, switches and junction boxes must also be reported.

16.14 Confined Spaces

The contractor shall comply to the requirements of General Safety Regulation 5 with regard to confined space entry and working inside confined spaces. This includes working inside tunnels.

Entry into a confined space occurs when a person's whole body, upper body or head is within the confined space. This is not intended to prevent an authorised, competent person from inserting only his arm into the space to test for hazards using appropriate monitoring equipment. Precautions must be taken to prevent persons from being overcome by atmosphere escaping from the confined space.

Before any person enters a confined space, a detailed risk assessment must be carried out, including the need for an authorised person to assess such things as oxygen levels, contaminants, temperature extremes and concentration of flammable substances.

As a minimum the risk assessment shall address the following:

- Isolation and lockout procedures required for chemical substances, mechanical or electrical energy, steam, pressure, heat, gases, liquids and solids;
- Venting, purging, draining and cleaning prior to entering the confined space;
- Hazards created by carrying out particular tasks or through the use of chemical substances in the confined space. Task-Based (or Issue-Based) Risk Assessments and/or Written Safe Work Procedures must be available for work in confined spaces - in particular for abrasive blasting, welding, flame cutting, grinding, chemical/steam cleaning, rubber lining and painting;
- Entry, exit and escape routes as well as barricading;
- The electrical safety, intrinsic safety and other safety specifications of equipment to be used in the confined space (explosive atmospheres must be considered);

- The need to test for presence of toxic/asphyxiant substances, radioactivity, oxygen, temperature extremes and flammable substances prior to entry and during the performance of work;
- Provision of suitable mechanical ventilation and personal protective equipment e.g. lifejackets etc. and in particular the use of respiratory protection such as compressed air breathing apparatus; and
- A ventilation rate suitable for general use must take into account factors such as air contaminant type, rate of generation, rate of oxygen depletion, temperature, efficiency of ventilation distribution and contaminant removal from the breathing zone. Therefore, each situation needs to be evaluated on its own merit by a risk assessment that will select a combination of ventilation method and respiratory protection that suits the particular circumstances. This must be achieved by consultation between competent operations personnel, engineers and a ventilation specialist.
- Lighting

Entry and work inside a permitted confined space must be controlled and regulated by the project Isolation / Lockout and Permit to Work control systems. The Authorised Person issuing the Permit to Work may only do so if the conditions applying to the specific confined space entry have been satisfied and documented.

As a minimum, the following must be included in the permitting process:

- Access barriers to prevent unauthorised entry;
- Isolation procedures for contaminants and other energy sources;
- The need for breathing apparatus / ventilation requirements;
- The sign-in and sign-out of all persons entering the confined space;
- Display of the permit;
- Communication procedures and/or equipment;
- Safety specifications of equipment to be taken into the confined space;
- Barricading of entrances and exits;
- Rescue plan and equipment;
- Standby person(s); and
- A completion and lock-in procedure (to ensure that space is evacuated and adequately secured).

The Permit to Work process must require competent rescue persons with suitable communication, rescue and firefighting equipment to be present where any of the following may exist:

- Compressed air breathing apparatus is required;
- There is a high risk of fires or explosions;
- The atmosphere can rapidly become unsafe for breathing purposes if the mechanical ventilation fails;
- There is a high risk of flooding or engulfment;
- Narrow tunnels or pipes are entered or where exit or escape routes cannot readily be accessed
- Work is done in remote areas; and
- A single person, who cannot be observed directly or is isolated from other workers, does the work.

Where testing for toxic/asphyxiate substances, radioactivity, oxygen, temperature extremes and other health hazards as well as for flammable substances is carried out, it may only be done by persons trained, tested and certified competent in writing to do so.

The ventilation method and quantity must be adequate to ensure oxygen levels and explosive or toxic gas levels remain within acceptable defined limits. Where ventilation is required, this must be covered by an approved documented procedure.

As a minimum standard, the volume of air pumped in and circulated in a confined space needs to be equivalent to 20 times the volume of the space per hour.

Where breathing apparatus or respiratory equipment is required, the contractor's Health and Safety Officer must be consulted with regard to the specification and selection of suitable equipment.

All persons required to use respiratory protection must be medically fit and trained in the correct use of the equipment.

Safe and convenient entry exit and escape routes from the confined space must be provided where possible and practical. Where this cannot be achieved effectively, the risk assessment must determine if a competent rescue person must be on duty at the confined space when work is in progress.

Where a standby/rescue person is required, they will have no other duties and will be positioned outside the confined space entry point at all times while personnel are within the space.

16.15 Electrically Powered Tools and Equipment

All powered hand tools, such as circular saws, drills, chainsaws, percussion tools, jigsaws etc., must be equipped with a constant pressure switch that will shut off the power when the pressure is released. (Exception: this requirement does not apply to concrete vibrators, concrete breakers, powered tampers, jack hammers, rock drills, and similar hand operated power tools).

Electrical power tools must be of the approved double-insulated type. The electric cord, pneumatic or hydraulic supply line of powered tools must not be used for hoisting or lowering of the tool.

Loose clothing, jewellery or gloves that could get caught in the tool must not be worn when operating powered tools. Operators of powered tools who have long hair must keep their hair tied up.

The power source must be disconnected from the tool before making any repairs, servicing, adjustments, or replacing attachments such as drill bits.

16.16 Pneumatically Powered Tools and Equipment

Pneumatic powered tools must only be driven by filtered compressed air with an in-line lubrication system or be lubricated prior to use if there is no in-line lubrication system. When using pneumatic powered tools, the designated tool pressure must be attained by the use of a regulator.

Pneumatic powered tools must be disconnected when not in use. They must not be disconnected from the air supply until all the residual pressure has been released or contained by a shut-off device. Hoses must not be kinked as a means of containment.

Employees operating pneumatic powered tools, and any potentially affected employee in the vicinity of use, must wear suitable personal protective equipment.

All rotary compressed air tools (e.g. drills) must have the rated revolution per minute (RPM) permanently marked on the casing. Only attachments of compatible RPM must be used with these machines.

The actual RPM of the tool must be checked every three months to ensure that the speed is as rated to manufacture specifications.

Pneumatic powered tools must be secured to the air supply hose by an approved positive means to prevent the tool from becoming accidentally disconnected. Safety clips or retainers must be securely installed and maintained on pneumatic impact (percussion) tools to prevent attachments from being accidentally expelled.

All pneumatically driven nailers, staplers, and other similar equipment provided with automatic fastener feed, which operate at more than 100 kPa pressure at the tool, must have a safety device on the muzzle to prevent the tool from ejecting fasteners unless the muzzle is in contact with the work surface.

Compressed air must not be used for cleaning purposes except where reduced to less than 30 kPa, and then only with effective chip guarding and personal protective equipment in place. The 30 kPa requirement does not apply to concrete form, mill scale and similar cleaning purposes. Compressed air must not be pointed at any part of the body or used for cleaning clothing.

Airless spray guns of the type which atomize paints and fluids at high pressures must be equipped with automatic or visible manual safety devices which will prevent pulling of the trigger to prevent release of the paint or fluid until the safety device is manually released. A diffuser nut which will prevent high pressure, high velocity release while the nozzle tip is removed, plus a nozzle tip guard which will prevent the tip from coming into contact with the operator, or other equivalent protection must be provided in lieu of the above.

Abrasive cleaning nozzles must be equipped with an operating valve, which must be held open manually to enable operation. A support must be provided on which the nozzle may be mounted when it is not in use.

16.17 Hydraulically Powered Tools and Equipment

Hydraulic powered tools must use only approved fluid that retains its operating characteristics at the most extreme temperatures to which it will be exposed. The manufacturer's stated safe operating pressures for hoses, valves, pipes, filters and fittings must not be exceeded.

Only manufacturer approved hoses, valves, pipes, filters and fittings must be used.

16.18 Hand Tools

Employees required to use hand tools must receive training relevant to the tool and have their competency assessed in the operation, inspection and maintenance of the tool. Where necessary, additional applicable personal protective equipment must be worn when using hand tools.

Wrenches, including adjustable, pipe, end, and socket wrenches, must not be used when the jaws are sprung to a point where slippage occurs. Impact tools such as drift pins, wedges and chisels, must be kept free of mushroomed heads. The wooden handles of tools must be kept free of splinters or cracks.

Adjustable wrenches must not be used in lieu of ring or open-end type spanners, unless a risk assessment has been conducted and the use of the adjustable wrench is approved by the Transnet Contract Manager. Wherever possible, ring spanners must be used in preference to open end spanners.

Correct hand tools for the job must be used, e.g. screwdrivers must not be used as chisels, and pliers must not be used as hammers.

All wedges and drifts that may spring, fly or fall to lower levels upon impact must be fitted with an attachment which attaches a safety "lanyard" to a solid structure to restrain the impact tool from becoming a projectile.

All hand tools used in elevated areas, that may be dropped or fall to lower levels must be fitted with safety lanyards and attached to solid structures or in the case of podges, scaffold keys etc., attached by wrist lanyard to the user.

Purpose built tools and equipment may not be used unless a risk assessment has been conducted and authorised by the Transnet Contract Manager.

16.18.1 Stanley Knives / Utility Knives

A utility knife must be used as a last resort, when it is the safest tool to use. Always consider alternatives that pose less of a risk to the operator.

Whenever a utility knife is used, ensure that a complete risk assessment is done and that all possible hazards have been addressed.

Only utility knives with retractable blades are to be used. The blade is to be retracted at all times when the knife is not in use or is being stored.

Before using the utility knife, ensure that the tool is in a good condition and the blade is secure in the holder (seated correctly and that there is no play). Ensure that the blade is always sharp and in good condition. This will prevent the use of excessive force.

Always wear cut resistant gloves and safety glasses when using a utility knife. There is always a risk of the blade breaking under tension and becoming a projectile.

Always ensure that you cut away from your body, and that no part of your body is in the firing line.

Always ensure cleanliness of all equipment in use during the cutting operations.

16.19 Inspection of Equipment and Tools

All tools must be inspected by the user before, during and after use. If any faults are identified, the tool must be taken out of service and not used until repaired. Faulty tools that are not able to be repaired must be tagged "out of service" and removed from site.

16.20 Manual Handling and Vibration

Any handling or lifting task that can only be done manually must be planned and rehearsed before the task is done.

If more than one person is involved in a task a communication procedure must be agreed in advance. Lowering the load must be done in a controlled manner. Dropping a load is dangerous and must be avoided.

As a guideline 25 kg is considered to be the limit of what a person can safely handle. Where there are loads exceeding 25 kg the risk of handling the load must be mitigated to assure minimal potential for any injury. When mechanical lifting aids are provided, they should be used. Extra care should be taken when lifting awkwardly shaped objects.

Position the feet correctly. The feet should be placed hip-width apart to provide a large base. One foot should be put forward and to the side of the object, which gives better balance. Bend or 'unlock' the knees and crouch to the load. The weight will then be safely taken down the spine and the strong leg muscles will do the work.

Get a firm grip. The roots of the fingers and the palm of the hand should grip the load. This keeps the load under control and permits it to be distributed more evenly.

Risk Assessment with regards Manual Handling must be conducted and also take into consideration the task factors, physical demands and tools involved in the task.

As far as possible, exposure to vibration must be eliminated. However, if this is not possible, short-term solutions to decrease exposure include:

- Reducing the vibration levels;
- Removing the person from the vibrating equipment / tools;
- Reducing the period of time that the person works with the vibrating equipment / tools (at least 40 minutes break after 20 minutes working with a machine that vibrates excessively).

In order to reduce exposure to vibration:

- Consider buying equipment that operates effectively at lower speeds;
- Buy equipment with built-in damping materials;
- Buy lighter tools if they are available - they require less of a grip;
- Maintain the equipment;
- Make sure equipment is balanced and there are no worn parts;
- Use remote controls when they are available;
- Reduce your grip on the equipment when it is safe. The less time you actually have your hands on the equipment the better. Relax your hands during these brief breaks;
- Take scheduled breaks; and
- Do other tasks that allow you to move away from vibrating tools and equipment.

The workplace must be assessed by a competent person for compliance with good design, layout and practice, to avoid or minimise adverse health consequences due to manual handling and vibration issues.

Quantitative evaluations of vibration produced by specific equipment must include the following measurement parameters: direction of movement, frequency, intensity, and variation with time and duration, as per documented methods.

Employees and contractors must be informed of the results of assessments and instructed in appropriate manual handling techniques, where the risk assessment indicates a need.

Workplace vibration sources that could contribute to the exceedance of an Occupational Exposure Limit (hence potential for impact on worker Musculo-skeletal fitness) must be identified and adequately characterised.

Manual handling tasks assessed as having the potential to cause a Lost Time Injury (i.e. with potential for impact on worker Musculo-skeletal fitness) must be identified and adequately characterised.

Workplace manual / materials handling tasks risk rated as "significant" must be assessed and recorded to include biomechanical factors (e.g. posture, bending, twisting, repetitive motions, working overhead, and exerting force away from the body).

16.21 Personal Protective Equipment

PPE requirements for a particular job or for a particular area must be determined through a risk assessment for that job or area. Each contractor must provide each of his employees with all required PPE (at no cost to the employee). The specific PPE that is provided to a particular employee must be based on the nature of that employee's work and the location in which the work is performed (i.e. must be based on the hazards to which the employee is exposed). All applicable legislation concerning Personal Protective Equipment (PPE) must be complied with at all times.

As a minimum, the following PPE must be worn by all persons (including visitors) at all times whilst on site:

- Safety footwear with steel toe protection;
- Safety helmet (hard hat); and
- High visibility protective clothing with reflective taping (long trousers and long-sleeved shirts with collars and cuffs).
- Additional PPE requirements must be determined through hazard identification and risk assessment. This hazard-specific PPE (such as hand protection, hearing protection, hard hat, safety goggles, safety glass, face shield and respiratory protection) must be worn as required (e.g. when in a certain area, when performing a certain task, or when working with a certain substance);
- The correct PPE must always be worn:
- In accordance with site requirements (as indicated at the entrances to a site and at the entrances to buildings and / or designated areas on the premises);
- In zoned areas (e.g. noise zones and respirator zones); or
- As required by a Safe Work Procedure, or a Material Safety Data Sheet (MSDS).

Any employee who refuses to wear PPE or does not have all of the required PPE to perform his duties safely, will not be permitted to work.

Each employee must care for his PPE, maintain it in good condition, and inspect it on a daily basis. If an item of PPE has worn out, has become damaged, or is found to be defective in any way, it must be replaced by the contractor.

PPE must be stored in accordance with the manufacturer's requirements and / or recommendations.

Each employee must receive training in the use, maintenance and limitations of the PPE that is provided to him, and must be made aware of why the PPE is necessary as well as the consequences of not wearing it as instructed (i.e. the potential for injury and / or disciplinary action). Training records must be retained.

Symbolic signs indicating mandatory PPE requirements must be prominently displayed at the entrances to the work site and at the entrances to buildings and / or designated areas on the premises where additional PPE is required. These signs must comply with the applicable national standard (if one exists).

Each contractor must appoint an employee to control the issuing and replacement of PPE, keep an up-to-date register as proof of PPE issued (an employee must sign for the items that he receives, maintain PPE stock levels on site and carry out regular inspections to ensure that PPE is being used correctly and maintained in a good, serviceable and hygienic state, and is not being shared between employees.

16.21.1 Head Protection

A safety helmet (or hard hat) worn correctly will help protect the head in the event of:

- An employee being struck on the head by a falling or flying object;
- An employee striking his head against a fixed or protruding object; or
- Accidental head contact being made with an electrical hazard.

A safety helmet must be worn in accordance with the manufacturer's requirements. A safety helmet must be worn directly on the head. The wearing of a cap or other headgear beneath a safety helmet is prohibited unless the items have been specifically designed to be used in combination (i.e. the arrangement is approved by the safety helmet manufacturer).

The suspension system inside a safety helmet (that acts as a shock absorber) may not be removed.

The painting of safety helmets is prohibited.

Safety helmets may only be cleaned using a mild detergent and water. No solvents may be used.

16.21.2 Eye Protection

If an employee is carrying out, assisting with, or working adjacent to any activity where sparks or projectile particles are being generated, where chemical mists or fumes are being generated, where liquids may splash or spray, where harmful electromagnetic radiation (heat or light) is being generated, or where there is a risk of wind-blown particles entering the eyes, then suitable protective eyewear must be worn at all times (i.e. safety glasses, safety goggles, a face shield, a welding helmet, or a combination of these).

Such activities include:

- Working with rotating equipment (e.g. grinders, drills, mills, lathes, and saws);
- Welding and cutting;
- Chipping, chiselling or caulking;
- Using explosive powered tools;
- Abrasive blasting;
- Sanding; and
- Working with chemical substances (e.g. drilling fluids, acids, solvents, paints, pesticides, etc.).

For certain activities, special eye protection is required (e.g. a heat-resistant face shield is required when working near molten metal).

Double eye protection is required for activities such as:

- Grinding, cutting, chipping, chasing and reaming (employees must wear both a full-face shield and safety glasses or goggles); and
- Arc welding (welders must wear both safety glasses and a welding helmet).

16.21.3 Hearing Protection

Regulations concerning occupational exposure to noise and the use of hearing protection must be complied with as a minimum. "Low noise" tools and machinery must be used wherever possible to reduce noise levels.

Where noise cannot be reduced to an acceptable level through engineering and work practice controls, measures must be put in place to minimise the exposure of employees to the noise (i.e. administrative controls and personal hearing protection).

Areas where it is likely that the 95% upper confidence limit of an eight-hour L_{eq} mean exceeds 85dB(A), or areas where impulse noise exceeds 140dB(C), must be designated as noise zones. These noise zones must be clearly demarcated and mapped, signs must be posted, and all employees must be made aware of the requirements for working in such an area.

Suitable hearing protection must be worn in all designated noise zones and when carrying out (or working in the vicinity of) any activity where the noise level exceeds 85dB(A).

Where hearing protection is required, a hearing conservation programme (applicable to all personnel and visitors) must be implemented. The programme must include training in the correct use and proper storage of hearing protection devices as well as replacement requirements. Training must be provided when hearing protection is first issued to an employee and refresher training must be carried out at least annually thereafter. Training records must be retained.

At least two types of personal hearing protection must be made available to employees. The hearing protection devices provided must have adequate noise reduction ratings (i.e. must be able to attenuate the noise level to below 85dB(A)).

Personal hearing protection must be issued on an individual basis and must not be shared. In addition to personally issued hearing protection, suitable disposable hearing protection must be made available at the entrances to all noise zones.

All Hearing Protection Devices (except for disposable hearing protection) must be properly inspected and cleaned on a regular basis.

16.21.4 Respiratory Protection

Designated areas (respirator zones) must be established where:

- It is likely that the 95% upper confidence limit of a Similar Exposure Group's mean exposure concentration exceeds the relevant Occupational Exposure Limit (OEL) for agents resulting in chronic effects, such as total inhalable dust, respirable dust, respirable crystalline silica, PAH, fluorides, lead, mercury, asbestos or non-asbestos fibrous materials; or
- The concentration of an agent (particulate, vapour or gas) with an acute effect exceeds 50% of the relevant OEL.

Note: For a particular hazardous agent, the OEL to be adopted must be either the client's OEL or the OEL specified in legislation, whichever is the most stringent.

These areas must be clearly demarcated and mapped, signs must be posted, and all employees must be made aware of the requirements for working in such an area.

Suitable Respiratory Protection Devices (RPDs) must be worn in all designated respirator zones and when carrying out (or working in the vicinity of) any activity where the risk assessment has identified the need for respiratory protection.

Compatibility with the work tasks and other PPE, comfort (as it affects wear-time), and the ability to communicate adequately, must also be considered.

The risk assessment and method statement for the work to be performed, the information contained in the relevant Material Safety Data Sheets (MSDSs), and the results of any air monitoring associated with the substances to be worked with or activities to be carried out, must be used to ensure that the most suitable RPD is selected.

Only RPDs certified to a recognised standard and approved by the Transnet Contract Manager may be used.

Where respiratory protection is required, a respiratory protection programme (applicable to all personnel and visitors) must be implemented.

The respiratory protection programme must include:

- Periodic inspection of RPDs, including before each use;
- Periodic evaluation (by competent persons) of cleaning, sanitising, maintenance and storage practices;
- Performance of positive pressure and negative pressure fit checks by RPD wearers before each use to ensure that the respirator is functioning properly; and
- Training at first issue of a RPD and regular refresher training thereafter in accordance with regulatory requirements or at least once every two years (the training must cover fit testing, use, cleaning, maintenance, filter cartridge replacement, and storage). Training records must be retained.

RPDs must be used, maintained, and stored in compliance with the manufacturer's requirements as well as the respiratory protection programme.

Suitable facilities must be provided for the cleaning and sanitary storage of RPD's.

As a minimum, qualitative and documented fit testing must be carried out (although quantitative fit testing is preferred) to ensure that the use of negative pressure RPDs (including disposable RPDs) is effective. Fit testing must be performed by a competent person when an RPD is first issued and must be repeated periodically in accordance with legal requirements or every two years as a minimum. A policy must be in place requiring a clean-shaven face when using a negative or neutral pressure RPD for routine tasks (otherwise a positive pressure RPD must be used). A medical evaluation including a pulmonary function test may be required to determine whether or not an individual is medically fit to wear a respirator.

For air supplied RPDs, breathing air must be effectively filtered and / or isolated from plant and instrument air, and isolated from sources of potential contaminants. The supplied air must be tested to determine if the air quality complies with the requirements of applicable standards for breathing air.

For nuisance dust, dust masks with a protection level of at least FFP2 must be worn.

16.21.5 Hand and Arm Protection

Gloves must be worn when handling or working with equipment, materials or substances with the potential to cause injury or illness.

Suitable gloves must be selected based on the task to be performed and the specific hazard against which the employee requires protection, such as:

- Sharp edges;
- Sharp points and splinters;
- Abrasive surfaces;
- Hazardous chemical substances (toxic, corrosive, sensitising, etc.);
- Extreme temperatures; and • Viruses, bacteria and parasites.

16.21.6 Foot Protection

Safety boots must be worn at all times whilst on site, with the exception of offices and office or administration buildings in which closed athletic, business or similar shoes may be worn. Sandals, slaps, slippers, open-toed and high-heeled shoes are not permitted on any work premises.

Safety boots must provide the following protection:

- Steel toe cap to protect against crushing (impact and compression forces);
- Leather uppers that provide resistance against water penetration and water absorption;
- Slip resistant soles;

And where a risk assessment identifies the need:

- Puncture resistant soles (i.e. steel midsoles) for protection against sharp objects;
- Chemical resistant soles for protection against spilt chemical substances (such as solvents, hydrocarbons, acids, and alkalis);
- Heat resistant soles for protection against hot surfaces or molten metal; or
- Electrical shock resistant soles for protection (insulation) against live electrical conductors.
- Gumboots with steel toe caps must be worn when working in water or very wet conditions.

16.21.7 Clothing

All employees working on a work site must wear high visibility protective clothing with reflective taping. Trousers must be long, and shirts must be long-sleeved. Shirts must be buttoned at the neck and wrists.

Protective clothing must preferably be made of natural fibres.

Short pants, short-sleeved shirts, sleeveless shirts, and vests are prohibited as outer garments (with the exception of a high visibility vest worn over a long-sleeved shirt). Loose clothing may not be worn where it may become caught in moving machinery or equipment.

For hot work (e.g. welding, cutting, etc.), work in the vicinity of molten metal, and any work carried out in the vicinity of an open flame, the protective clothing worn (shirt and trousers) must be made of a suitable fire retardant fabric. Underwear and socks must be made of natural fibres (preferably wool) or fire-retardant fabric.

No employee may tuck his trousers into his boots when working in the vicinity of molten metal.

16.21.8 Body Protection

Suitable body protection must be provided as required to protect employees against specific hazards. A range of work activities require body protection in one form or another, including but not limited to:

- Working in extremes of temperature, such as firefighting, attending to a heating furnace, working with molten metal, working in refrigerated environments, etc.;
- Hot work (e.g. welding, burning, cutting and grinding);
- Working with hazardous chemical substances (e.g. acids, solvents, pesticides, etc.); and
- Clean up and disposal of hazardous materials and wastes (e.g. asbestos, hydrocarbons, etc.).

A wide variety of protective garments are available, such as firefighting suits, furnace suits, freezer jackets, leather aprons, leather spats, laboratory coats, chemical resistant aprons, chemical resistant (or hazmat) suits, and disposable coveralls.

16.21.9 Electrical Protective Equipment

To reduce the risk of electric shock, electrical insulating equipment appropriate for the voltage that may be encountered must be worn when working on energised electrical installations and when working within two metres of exposed energised conductors.

All rubber electrical insulating equipment (including gloves, sleeves, matting, covers, blankets, and line hoses) must be inspected for damage prior to and after each use, and immediately following any incident that can reasonably be suspected of having caused damage.

Rubber insulating equipment with defects and / or damage may not be used.

Rubber insulating gloves must be electrically tested before first issue and every 12 months thereafter as a minimum. Insulating gloves must also be given an air test along with the daily inspection. Essentially, this involves filling a glove with air and checking for any holes or leakage.

Insulating equipment that fails an inspection or electrical test may be repaired only as follows:

- Rubber insulating line hose may be used in shorter lengths with the defective portion(s) cut off;
- A rubber insulating blanket may be repaired using a compatible patch that results in the patched area having electrical and physical properties equal to those of the blanket;
- A rubber insulating blanket may be salvaged by cutting the defective area off the undamaged portion of the blanket;
- Rubber insulating gloves and sleeves with minor physical defects, such as small cuts, tears, or punctures, may be repaired by applying compatible patches. The patched areas must have electrical and physical properties equal to those of the surrounding material.

Repairs to gloves are permitted only in the area between the wrist and the reinforced edge of the opening.

Repaired insulating equipment must be retested before it is put back into use.

Insulating equipment must be cleaned as required to remove foreign substances (using a mild detergent).

Insulating equipment must be stored in such a location and in such a manner so as to protect it from light, temperature extremes, excessive humidity, ozone, and other damaging substances and conditions.

Leather protective gloves must be worn over rubber insulating gloves to provide mechanical protection against cuts, abrasions, and punctures.

Suitable arc flash PPE (e.g. voltage rated gloves, fire retardant clothing, arc rated face shield, arc flash hood, arc flash suit, etc.) must be worn whenever an employee is potentially exposed to an arc flash hazard. The appropriate level of PPE must be worn depending on the task and the potential energy exposure. These PPE requirements must be clearly specified as part of arc flash protection programme (refer to the Electrical Safety Standard).

16.21.10 Jewellery

Necklaces, dangling earrings, and bracelets may not be worn on a work site. No ring or watch may be worn where there is a risk that it may become caught in machinery or equipment. No jewellery or other conductive apparel (such as a key chain or watch) may be worn when carrying out energised electrical work.

16.21.11 Hair

Scalp hair that is longer than the top of the shoulders must be tied up and restrained within the person's safety helmet or within the collar of his or her overalls, shirt or jacket.

For negative or neutral pressure Respiratory Protection Devices, facial hair must not cause the seal between the respirator and facial skin to be broken (or prevent a seal from being formed in the first place).

16.21.12 Task-Specific PPE

In addition to the standard PPE required for a work site (including a safety helmet, safety glasses, safety boots, and high visibility protective clothing), the following task-specific PPE must be used as a minimum by any person carrying out or assisting with such a task:

- Grinding – safety glasses or goggles and full-face shield (i.e. double eye protection), hearing protection, respiratory protection where dust or fumes may be generated, leather gloves, leather apron, and leather spats;
- Spray Painting – respiratory protection (air-supplied hood for confined spaces), safety goggles (if the respirator design does not provide this protection), hearing protection (where air compressors are used), chemical resistant gloves, and chemical resistant disposable coveralls.

16.22 Sun Protection

The contractor must ensure that all personnel are protected in sunlight through the use of long sleeve shirts, long trousers, brims, helmets and UV factored sunscreen. Shade structures must also be made available to all employees.

The contractor must conduct training and awareness sessions with his employees, advising on the risks associated with working in the heat (including dehydration) and the precautions to be taken (e.g. ensuring adequate fluid intake).

16.23 Fuel / Flammable Liquid Storage and Refuelling

No fuel (diesel, petrol, paraffin, etc.) or any other flammable liquid (paints, solvents, etc.) may be stored on site unless approved in writing by the Transnet Contract Manager.

If the on-site storage of a fuel or a flammable liquid is approved, the contractor must ensure the following:

- The quantity of fuel / flammable liquid to be stored on site must be kept to the minimum that is required;
- The storage area must be located in a well-ventilated area at least 10 metres away from any building, drain, boundary or any combustible material;
- If more than 200 litres of fuel / flammable liquid is to be stored, the tank must be installed / the containers must be positioned within a bund (see Definitions);
- If the fuel / flammable liquid are to be stored in bulk tanks / vessels, then the minimum capacity of the bund must be 110% of the volume of the largest tank / vessel. If many small containers (e.g. 210 litre drums) are to be stored, the bund must be able to contain 25% of the total volume of the stored products;
- The bund must be impermeable. It must have a solid concrete floor and the walls must be constructed out of brick and must be plastered on the inside;
- The bund must be fitted with a lockable drain valve (for draining away rainwater), which must remain locked in the closed position. The valve may only be opened under supervision and in accordance with a written procedure;
- The fuel / flammable liquid storage area may not be used for the storage of any other materials / equipment, and must be kept completely free of all combustible materials (including rubbish, brush and long grass) at all times;
- Access to the storage area must be controlled (wire mesh fencing and gate);
- Appropriate warning signage (i.e. "Flammable Liquid", "No Smoking" and "No Naked Flames") must be prominently displayed at the storage area. The contents and volume of each tank must be indicated;
- In order to contain spillages, the offloading / refuelling bay at the fuel / flammable liquid storage area must have a solid concrete base surrounded by bund walls, ramps or humps and / or spill trenches (covered with steel grating) that lead into a sump;
- Fuel dispensing pumps must be protected against impact damage;
All fuel / flammable liquid storage tanks and dispensing equipment must be electrically bonded and properly earthed;
- All electrical installations and fittings must be of an approved intrinsically safe type;
- Two 9kg dry chemical powder fire extinguishers must be mounted in an easily accessible position near the entrance gate to the fuel / flammable liquid storage area. Depending on the size of the storage area, additional fire extinguishers may be required to ensure that an extinguisher is no further than 15 metres away from any point on the perimeter of the storage area;
- A fire extinguisher must be at hand wherever refuelling is carried out;
- Smoking or open flames within 10 metres of a fuel / flammable liquid storage / refuelling area is strictly prohibited;
- No petrol- or diesel-powered vehicle or equipment may be refuelled while the engine / motor is running;
- Cellular phones must be switched off in fuel / flammable liquid storage / refuelling areas;
- Spill clean-up kits (containing a suitable absorbent fibre product) must be provided;

- Any spillages must be cleaned up immediately and all contaminated cleaning materials must be disposed of in accordance with the applicable legislation;
- If a flammable liquid is spilt or is leaking from a container / vessel, the area must be cordoned off and appropriate warning signage must be displayed to keep unauthorised personnel away from the affected area. Every effort must be made to contain the spillage. All hot work in the vicinity must be stopped immediately. If the spilt product is volatile and the possibility exists that a vapour cloud may form, or if the leak or spillage cannot be contained or stopped, then appropriate emergency response procedures must be activated (refer to Section 14) including the evacuation of all persons in the vicinity. Suitable firefighting equipment must be positioned ready for use should the spilt product ignite;
- The manual decanting of fuel or a flammable liquid from a large container should only be done using a stirrup pump (or similar) or a purpose-made frame which allows the container / drum to tilt for decanting and then return to the upright position;
- Drip trays must be used wherever required;
- All tanks, drums, cans, etc. containing flammable liquids must be tightly closed and properly sealed except for when a container is being filled or when a product is being decanted;
- The transport or storage of corrosive or flammable liquids in open containers is strictly prohibited
- Daily-use quantities of fuel (up to a maximum of 20 litres) must be handled in an approved safety can with a flash arresting screen, spring closing lid and spout cover that will safely relieve internal pressure if the can is exposed to fire;
- Where safety cans may be impracticable, only approved metal containers with screw caps may be used. Each container must be clearly labelled to indicate its contents;
- Only small quantities of flammable liquids (paints, solvents, etc.) may be stored within a building. Each product must be kept either in its original container or in an approved container which must be properly sealed. Each container must be clearly labelled to indicate its contents. When not in use, all such containers must be stored in a well-ventilated steel cabinet which must be kept locked to prevent unauthorised access;
- Not even small quantities of flammable liquids may be stored or dispensed in buildings or places of public assembly, in general warehouses, or in buildings containing sources of ignition such as space heaters, cooking devices, open electric motors, motor vehicles, or where welding, cutting, or grinding activities are being carried out;
- Safe Work Procedures must be compiled for the transportation (including delivery), offloading, storage, handling and use of any fuel / flammable liquid on site;
- All personnel that will be required to work with or may come into contact with a flammable liquid must be made aware of the hazards associated with the product and must be thoroughly trained in the safe transportation, use, handling and storage thereof.

16.24 Fire Protection and Prevention

The contractor must compile a Fire Protection and Prevention Plan for the work that will be carried out on site.

The contractor must assess / survey his area of responsibility and identify locations where the risk of fire is high. Cognisance must be taken of the fact that certain locations may need to be designated as high risk due to the presence of large quantities of flammable or combustible materials / substances. For all high risk areas, the contractor must ensure that additional precautions are taken to prevent fires and strict control is exercised over any hot work (i.e. welding, cutting, grinding, etc.) that is carried out.

The contractor must supply and maintain all required firefighting equipment. The type, capacity, positioning, and number of firefighting appliances must be to the satisfaction of the Transnet Contract Manager and must meet the requirements of the applicable legislation. Fire mains,

hydrants and hose reels will rarely be available on site, so use must primarily be made of portable fire extinguishers.

Firefighting equipment, fixed and portable, must be strategically located with a view to being able to rapidly deploy the equipment in order to bring potentially dangerous and destructive fires under control while still in their infancy.

All fire extinguishers (and any other firefighting equipment) placed on site must be:

- Conspicuously numbered;
- Recorded in a register;
- Visually inspected by a competent person on a monthly basis (the results of each inspection must be recorded in the register and the competent person must sign off on the entries made); and
- Inspected and serviced by an accredited service provider every six months (the Transnet Contract Manager may require that this frequency be increased depending on the environmental conditions (e.g. high dust levels, water, heat, etc.) to which the fire extinguishers are exposed).

Any fire extinguisher that has a broken seal, has depressurised, or shows any sign of damage must be sent to an accredited service provider for repair and / or recharging. Details must be recorded in the register.

Firefighting equipment may not be used for any purpose other than fighting fires. Disciplinary action must be taken against any person who misuses or wilfully damages any firefighting equipment.

Access to firefighting equipment, fixed or portable, must be kept unobstructed at all times.

Approved signage must be in place to clearly indicate the location of each permanently mounted fire extinguisher, fire hose reel, etc.

The contractor must ensure that all persons working in / entering his area of responsibility are made aware of where all firefighting appliances and alarm points are located.

The contractor must ensure that his employees (and those of any appointed subcontractors) are trained in firefighting procedures and the use of firefighting equipment.

The contractor must compile an emergency response procedure detailing the actions that must be taken in the event of a fire or a fire / evacuation alarm (see Section 14). All personnel working within the contractor's area of responsibility must be trained, and all visitors must be instructed, on this procedure. Copies of the procedure must be prominently displayed in the workplace in all languages commonly used on the site.

A person discovering a fire must extinguish the fire if he can do so safely, and then immediately report the incident to his supervisor. If the person cannot extinguish the fire, he must raise the nearest alarm and then report the fire as quickly as possible to his supervisor, the person responsible for the area, and / or Security.

On hearing a fire / evacuation alarm, all persons must make any operational plant or equipment safe, and then proceed to the nearest emergency assembly point and await instructions.

All incidents of fire (including the use or misuse of any firefighting equipment) must be reported to the Transnet Contract Manager immediately. Used fire extinguishers must be replaced by the contractor without delay.

No hot work (i.e. welding, cutting, grinding, etc.) or any other activity that could give rise to a fire may be performed outside of a designated workshop without a Permit to Work having been issued.

Wherever hot work is being carried out, a fire extinguisher must be at hand. Where the risk assessment determines that it is necessary, a fire watch must be stationed.

Supervisors must carry out workplace inspections regularly to ensure adherence to fire prevention measures and procedures.

At the end of every working period (i.e. before each tea / lunch break and at the end of every shift / day), the workplace must be thoroughly inspected to ensure that no material is left smouldering and no condition / situation exists that could give rise to a fire.

The contractor must ensure that all supervisors and all employees carrying out or assisting with any hot work or any other activity that could give rise to a fire have been trained in firefighting procedures and the use of firefighting equipment. The training must be conducted by an accredited training provider.

When using electrical equipment, all cables must be in good condition and the nearest convenient socket must be used.

No power socket may be loaded beyond its rated capacity through the use of adaptors, etc.

Makeshift electrical connections are not permitted under any circumstances.

Water-based firefighting equipment must not be used on electrical equipment or burning liquids. Each vehicle used on site for work purposes and each item of mobile equipment with a diesel or petrol engine must be fitted with a permanently mounted fire extinguisher.

Smoking is only permitted in designated smoking areas. Cigarette ends / butts must be properly stubbed out in the ashtrays provided and never thrown into waste bins.

The contractor must ensure that good housekeeping practices are enforced, as this is crucial to the prevention of fires.

All combustible waste materials must be removed from the workplace on a daily basis (at the end of each shift) and placed in waste receptacles located at least 5 metres away from any structure.

The accumulation of waste materials in out-of-the-way places is prohibited. Offices, desks, cabinets, etc. must always be kept tidy and uncluttered. Wastepaper bins must be emptied regularly.

The storage of combustible materials under stairways or in attics is prohibited. The storage of any materials against the exterior of a building or any other structure is prohibited.

All walkways, passages and stairways must be kept clear (i.e. must be unobstructed) at all times, as they may need to be used as a means of escape. The areas around and the routes to all exits, fire escape doors, fire hydrants, fire hose reels and fire extinguishers must be kept clear (i.e. must be unobstructed) at all times.

"No Smoking" signs must be conspicuously displayed in and around all storage areas / rooms.

Waste may not be burned under any circumstances.

No flammable liquid (such as petrol, acetone, alcohol, benzene, etc.) may be used for starting fires or as a solvent for cleaning clothes, tools, equipment, etc. Only solvents approved by the Transnet Contract Manager may be used for cleaning purposes.

Whenever any work is carried out involving the use of a flammable substance / material, the area must be cordoned off and appropriate warning signage (i.e. "No Unauthorised Entry", "No Smoking" and "No Naked Flames") must be displayed.

16.25 Smoking

The contractor must not permit smoking on site except within designated smoking areas selected in accordance with the applicable legislation. Such an area must be clearly demarcated, and the required signage must be displayed.

Any person found smoking or discarding a cigarette butt outside of a designated smoking area may be removed (temporarily or permanently) from site. In all designated smoking areas, adequate non-combustible commercial ashtrays and / or cigarette butt receptacles (butt cans) must be provided.

Ashtrays and other receptacles provided for the disposal of smoking materials must not be emptied into rubbish bins or any other container holding combustible materials.

"No Smoking" signs must be strictly observed.

16.26 Housekeeping

The contractor must maintain all work areas in a tidy state, free of debris and rubbish. Unless directed otherwise, the contractor must dispose of all debris, rubbish, spoil and hazardous waste off site in a designated and authorised area or facility. The contractor must familiarise himself with the waste management plan for the site including collection and disposal arrangements and must align his waste management activities accordingly.

In cases where an inadequate standard of housekeeping has developed and compromised safety and cleanliness, a Transnet Contract Manager may instruct the contractor to cease work until the area has been tidied up and made safe.

Neither additional costs nor contract deadline extensions will be allowed as a result of such a stoppage. Failure to comply will result in a clean-up being arranged through another service provider at the cost of the non-complying contractor.

The contractor must carry out housekeeping inspections on a weekly basis to ensure maintenance of satisfactory standards. The contractor must document the results of each inspection. These records must be maintained and must be made available to the Transnet Contract Manager on request.

The contractor must implement a housekeeping plan for the duration of the contract ensuring that the site housekeeping is maintained. Furthermore, at the end of every shift, the contractor must ensure that all work areas are cleaned, all tools and equipment are properly stored, and construction rubble is removed.

Where the contractor fails to maintain housekeeping standards, the Transnet Contract Manager may instruct the contractor to appoint a dedicated housekeeping team at the contractor's expense. Littering is prohibited.

16.27 Waste Management

Waste may not be disposed of unless the disposal of that waste is authorised by law. The contractor must therefore ensure that all waste that is generated is handled, stored, transported and disposed of in accordance with the requirements of the applicable legislation / local authority.

No waste may be removed from the site to a waste storage or disposal facility unless that facility has been approved or licenced waste facility. Approved/licensed waste disposal service providers must be used for any waste removed from site. These service providers must be audited on a two-yearly basis (or more frequently if deemed necessary based on risk) in order to ensure compliance with legislation and to help ensure that no liabilities accrue to the contract.

An adequate number of waste bins and skips must be provided by the contractor and suitable arrangements must be made to ensure that these bins and skis are emptied regularly. Hazardous wastes must be kept separate from general wastes.

16.28 Stacking and Storage

All irregular shaped items will be stacked at floor / ground level in designated stacking areas on a level, firm base capable of withstanding the weight of the commodities being stacked and stacked in such a manner that the items do not topple over or change position due to subsidence or weight transfer when being moved.

Where these commodities are stacked on shelves or racks, the shelves or racks must be designed to carry the weight of the commodity being stacked.

All racks or shelves where heavy material or commodities are stacked will have a weight carrying limitation clearly marked on the structure and have a safety factor of at least +10% of maximum total carrying capacity.

All materials, commodities or articles, which could be damaged due to inclement weather, must be stored under cover.

Waste material that is combustible must not be allowed to accumulate in sufficient quantities to create a hazard.

No commodities or equipment may be stacked or stored within 500mm of rolling stock tracks or where mobile equipment travels.

The storage of material, small equipment, tools, files and general items in cupboards and on shelves must be neat and controlled at all times. Incompatible substances must not be stored in or on the same cupboard or shelf.

No equipment, tools, files or documents may be stored or stacked on top of cupboards which are higher than 1.5 metres in height.

16.29 Demarcation

Temporary demarcation in the form of hazard tape (red and white) may be used to demarcate areas where there is, for relatively simple reasons, restricted access.

Where hazards exist and entry must be specifically excluded for safety or health reasons, hazard tape in any form must not be used in isolation. A robust and substantial barrier of timber, rope or other material must be used in conjunction with barrier tape, to prevent entry to unauthorised persons.

Outside storage areas where it is impractical to use floor demarcation, demarcation may take the form of creosote poles and wire rope or similar. Spans between uprights should be painted yellow.

16.30 Facilities

The Contractor must in addition to Facilities Regulations 2004, provide at or within reasonable access of every site, clean, hygienic and maintained facilities.

Sanitary conveniences must be provided and maintained at a rate of at least one shower facility for every 15 workers, at least one sanitary facility for each sex and for every 30 workers, separate male and female changing facilities and sheltered eating areas. (Check SANS 10400 Part F).

Where chemical toilets are provided, one toilet for every twenty-five employees must be allocated.

All toilets must be cleaned daily, disinfected and provided with toilet paper. All employees making use of these facilities have the responsibility to help keep the facilities neat, clean and hygienic.

Washing facilities, including soap and towels, must be made available for use by the contractor's employees.

Drainage from all washing / toilet facilities must be properly designed and constructed to prevent employee exposure to wastewater (and the associated biological hazards). Wastewater may not accumulate or stand in pools at any location on the project site.

Change rooms must be provided and must be kept clean and free from odours at all times.

No chemicals or equipment or items (other than those normally associated with for cleaning of these hygiene facilities) may be stored in the facilities.

All entrances must be constructed in a way to afford privacy to users.

Drinking water must be provided.

A sheltered (covered) area must be set aside on site to be used as a dining facility (eating area). Adequate seating must be provided for the maximum number of employees. The facility must be kept clean and tidy. Food may only be consumed in authorised sheltered areas.

A suitably sized, impervious receptacle (bin) must be provided for the disposal of waste food and other refuse generated at the dining facility. This bin must be emptied and cleaned regularly (i.e. promptly after meal times).

Adequate storage must be provided to the contractor's employees for the storage of food and drinks. Where fridges are provided, they must not be overstocked and must maintain sufficiently low temperatures.

16.31 Occupational Hygiene

The contractor must ensure that the exposure or potential exposure of his employees to any of the following stressors is assessed and measured to determine the effectiveness of control measures as well as compliance with legal and other requirements, particularly Occupational Exposure Limits.

- Noise;
- Thermal stress (heat and cold);

- Particulates (dust);
- Silica (free crystalline silica);
- Asbestos;
- Gases or vapours;
- Lead;
- Chemicals;
- Ionising radiation;
- Non-ionising radiation;
- Vibration (hand / arm vibration and whole-body vibration); • Ergonomics; and
- Illumination.

A baseline survey must be carried out by an Approved Inspection Authority: A plan for measuring and monitoring occupational exposure must be developed by the contractor.

All monitoring results obtained must be analysed on a regular basis to:

- Identify trends and potential exceedances of legal or other requirements (such as Occupational Exposure Limits);
- Identify inconsistent or unusual results;
- Evaluate the effectiveness of existing control measures;
- Measure performance against stated objectives; and identify continual improvement opportunities.

Each exceedance of a specified requirement or limit must be recorded, investigated and reported. Appropriate corrective actions must be identified and implemented.

16.32 Lighting

For all work areas and access ways, if the natural lighting available is inadequate it must be supplemented by artificial lighting to meet the minimum levels required.

A lighting survey to determine luminance must be conducted for all work areas, at least once every two years and prior to work commencing for the first time in any area.

Measurements do not need to be conducted by an Approved Inspection Authority for Occupational Hygiene

Emergency lighting must be provided in all indoor workplaces that do have adequate natural lighting or in which persons work at night. The emergency sources of lighting that are provided must be such that, when activated, an illuminance of not less than 0.3 lux is obtained at floor level, to enable employees to evacuate safely.

Where it is necessary to stop machinery or shut down plant or processes before evacuating the workplace, or where dangerous materials are present or dangerous processes are carried out, the illuminance must be not less than 20 lux.

Windows and translucent sheeting must be kept adequately clean and clear of obstructions as far as reasonably practicable. Light fittings, i.e. lenses and reflectors must be kept clean.

If a light intensity meter is used, a valid calibration certificate must be available.

Neon lights must not be installed in areas where moving parts of machinery or equipment cannot be fully guarded, i.e. lathes, bench grinders, etc. in order to eliminate the stroboscopic effect.

No person may use a portable electrical light where the operating voltage exceeds 50 volts, unless:

- It is fitted with a non-hydroscopic, non-conducting handle;

- All metal parts which may become live are protected against accidental contact; • The lamp is protected by means of a guard firmly attached to the handle; and
- The cable can withstand rough use.

No person may use a portable electric light in damp or wet conditions or in closely confined spaces, inside metal vessels or when in contact with large masses of metal, unless: • The lamp is connected to a source incorporating an earth leakage; and • The operating voltage of the lamp does not exceed 50 volts.

16.33 Hearing Conservation

A hearing conservation program must be implemented and protection against the effects of noise exposure must be provided when the noise exposures equal or exceed an 8-hour time-weighted average sound level of 85 decibels measured on the A-weighted scale of a standard sound level meter at slow response.

For the hearing conservation program to be effective it must include as a minimum:

- Monitoring of the workplace to determine the representative exposure of employees to excessive noise levels;
- An audiometric testing program for employees, which must include:
 - ♦ A baseline audiogram for all employees exposed to noise levels equal to or in excess of the standard;
 - ♦ Annual audiograms for each overexposed employee;
 - ♦ Analysis of audiogram results with retesting and/or referral to an otolaryngologist or qualified physician when a significant threshold shift (STS) occurs; and • Written employee notification of the STS.
- A training program for all employees exposed to noise;
- Provision of personal protective equipment to all affected employees when administrative or engineering controls fail to reduce sound levels to within the levels of the standards.

Monitoring of employee exposures to noise shall be conducted by an Approved inspection Authority. The monitoring requirement may be met by either area monitoring or personal monitoring that is representative of employee exposures. Personal monitoring is preferred and may be required based on the type(s) of noise sources.

For purposes of the hearing conservation program, employee noise exposures shall be computed in accordance with legislation.

A person-task specification shall be available for every job category and shall be submitted with an employee for audiometric testing.

Audiometric testing and an annual audiogram shall be conducted by a competent person and provided as part of the regular medical examinations. Audiometric test results obtained from the pre-employment medical examination for a new employee shall be used as the baseline audiogram. Testing to establish a baseline audiogram shall be preceded by at least 14 hours without exposure to workplace noise.

Hearing protectors shall not be used as a substitute for the requirement that baseline audiograms be preceded by 14 hours without exposure to workplace noise. Employees shall be notified of the need to avoid high levels of non-occupational noise exposure during this 14-hour period.

Record-keeping for the audiogram shall include:

- Name and job classification of the employee;

- Date of the audiogram;
- The examiner's name;
- Date of the last acoustic or exhaustive calibration of the audiometer;
- Employee's most recent noise exposure assessment.

Audiometric test results shall be maintained in the employee's medical file.

Personal protective equipment shall be provided and replaced as necessary at no cost to employees. Supervisors shall ensure that hearing protective devices are worn by all employees who are exposed to a time-weighted average of 85 decibels or greater and who have experienced a significant threshold shift. Employees shall be given the opportunity to select their hearing protectors from a variety of suitable protectors.

Noise zones shall be indicated by means of signs at every entrance to such zones. When noise levels exceed 100 dB(A), a combination of earplug and earmuff may be required to achieve protection of the worker. Hearing Protection Devices should be worn for the full noise exposure period.

16.34 Particulate and Gas / Vapour Exposures

The concentration of an HCS in the air is, or maybe, such that the exposure of employees working in that workplace exceeds the recommended limit without the wearing of respiratory protective equipment, is zoned as a respirator zone.

Designated areas must be created where:

- It is likely that the 95 per cent upper confidence limit of a Specific Exposure Group's (SEG) mean exposure concentration for agents resulting in chronic effects (such as total inhalable dust, respirable dust, respirable crystalline silica, PAH, fluorides, lead, mercury, asbestos or non-asbestos fibrous materials) exceeds the relevant OEL; and
- Agents with an acute effect, such as particulate hazards, or gases (e.g. CO, SO₂, NH₃, HF, etc.), or vapours exceed 50 per cent of the relevant OEL.

Designated areas must:

- Be identified and mapped, signposted or otherwise clearly communicated to employees working in the area. Signposting, where necessary, must use appropriate wording or symbols on signs to identify the hazard;
- Have a documented respiratory protection programme based on suitable risk assessment and standards, which is applied to employees, contractors and visitors;
- Have regular monitoring of SEGs working in the area; and
- Have a formal review of the practicality of engineering controls at least every two years, or less where it is a critical control for a significant risk.

Particulate and gas / vapour monitoring must be appropriate to the exposure conditions and toxicants and based on the use of equipment approved by local regulatory authorities, as per documented methods.

Where risk assessment indicates the possible presence of levels of gas or vapour sufficient to cause health effects in less than one shift (e.g. confined space entry), continuous monitoring is required as long as the potential for harm exists.

Employees and contractors must be covered by a medical surveillance programme when:

- Their Specific Exposure Group TWA mean exposure to respirable crystalline silica, total inhalable dust, respirable dust, lead or asbestos is greater than 50 per cent of the relevant OEL;

- The medical adviser considers that it is advisable; or
- There is a legal requirement for medical monitoring.

Where risk assessment indicates a risk of a respiratory condition, assessment programmes must include chest x-rays and / or lung function tests. The test or tests chosen must enable the earliest detection of adverse effects from the exposure of concern. Where indicated, they must meet the following standards:

- High quality chest x-rays will be taken every five years, unless local legislation requires these to be more frequent;
- All chest x-rays for pneumoconiosis surveillance will be read to International Labour Organisation (ILO) standards by an ILO B reader, wherever possible, and if not, by a competent radiologist using verifiable quality criteria;
- Any progression of more than one step on the ILO extended scheme to a reading above 1/0 will be reviewed by a physician;
- Any reading suggesting active lung disease will be reviewed by a physician; and
- All spirometry will be performed by trained staff following the American Thoracic Society guidelines or equivalent and be offered at a frequency determined by the likely rate of detectable change in lung function.

Controls must be of an adequate standard such that surfaces are adequately cleaned to avoid:

- Dust generation due to material dislodgment (e.g. windblown), where practicable; or
- Fume generation from accumulated dust during welding / heating or cutting operations.

Where risk assessment indicates the need to reduce exposures to toxic substances for employees or their families, good personal hygiene must be enforced. The programme must include:

- No smoking, eating or drinking in designated hazard areas;
- Washing of hands and face prior to drinking, eating or smoking; • Showering at work post shift or after exposure to 'dirty' conditions; and
- Laundering of contaminated clothing by the contractor.

Abrasive blast cleaning must be conducted so as to protect worker health and minimise dust emissions. Substitutes must be used whenever practicable for abrasives containing crystalline silica. However, if such abrasives are used, workers must be aware of the hazards and exposure monitoring conducted. The hazardous properties of alternative materials must be considered before use.

Where required, training in the recognition of signs and symptoms of hazardous particulate and gas / vapour exposure, emergency procedures and preventative measures must be provided.

16.34.1 Respiratory Protection Devices

The selection of Respiratory Protection Devices (RPD's) must be based on:

- The potential particulate size distribution, gas / vapour types, substance toxicity and likely concentrations;
- Compatibility with the work tasks and other PPE; and
- Comfort (as it affects wear-time) and allowance for adequate communication.
- The type(s) of airborne contaminants that are present (gases, vapours, and particulates and aerosols including dusts, fumes, sprays, mists, and smoke);

Only RPD's approved by the Transnet Contract Manager may be used. Suitable facilities must be available for cleaning and sanitary storage of RPD's.

Half-mask and full-face air-purifying respirators must NOT be used where:

- The atmosphere is oxygen deficient (< 19.5 per cent);

- The atmosphere is immediately dangerous to life or health (e.g. in areas where CO concentrations are > 1500 ppm, HF > 30 ppm or NH₄ > 300 ppm);
- Gases and vapours are more than ten times their OEL or greater than 1000 ppm for half-mask respirators, or more than 100 times their OEL for full-face respirators; or
- Particulates are more than five times their OEL for half-mask respirators, or more than 50 times their OEL for full-face respirators.

For atmospheres that are oxygen deficient, or contain unknown hazards, or have concentrations of gases and vapours that are unknown or could potentially exceed levels that are immediately dangerous to life or health, an air-supplied type respirator must be worn.

For effective use of negative pressure RPD's (including disposable RPD's), fit testing must be qualitative and documented as a minimum, although quantitative fit testing is preferred. Fit testing must be performed by a competent person when RPD's are first issued and must be repeated periodically according to legal requirements or two-yearly as a minimum frequency. There must be a policy requiring a clean-shaven face when using a negative or neutral pressure RPD for routine tasks, or the use of a positive pressure RPD will be required. A pulmonary function test and medical evaluation may be required to determine whether or not an individual is medically fit to wear a respirator.

For air supplied RPD's, breathing air must be effectively filtered and / or isolated from plant and instrument air, and isolated from sources of potential contaminants. The quality of the breathing air must be checked for conformance with applicable standards.

The respiratory protection programme must include:

- Periodic inspection of RPD's, including before each use;
- Periodic evaluation of cleaning, sanitising, maintenance and storage practices by competent persons;
- Performance of positive and negative fit checks before each use by RPD wearers to ensure that the respirator is functioning properly; and
- Training at first issue of a RPD and regular refresher training thereafter in accordance with regulatory requirements or at least once every two years.

16.34.2 Asbestos and Non-asbestos Fibrous Silicates

This section applies to asbestos and bio-persistent non-asbestos fibrous silicates that may display asbestos-like toxicity, related to fibre diameter and length. Local regulations must be followed as a minimum. The following requirements must be met:

- A management program must be in place and actively pursued;

- No new products containing these materials may be purchased;
- Installed materials of this type must be identified and assessed annually for current safety. Where 'safe in place', it should not be removed, unless there is an opportunity for removal during renovation or construction of buildings or equipment;
- Work areas must be barricaded off and signposted to restrict entry; and
- Contaminated material must be promptly placed in appropriate marked plastic disposal bags or covered containers for disposal to an approved landfill.

All workers exposed to these materials must be on a register. "Exposed" means working on or near such material that has been disturbed, abraded or cut. The register must contain details of their annual medical examination and the results of occupational hygiene monitoring.

Asbestos contractors must be competent, registered and have adequate equipment, procedures and monitoring.

Where required, the asbestos / bio-persistent non-asbestos fibrous silicates management programme must cover work practices, training, monitoring, medical surveillance, and waste handling and disposal.

Maintenance operations must be made aware of potential cristobalite exposure hazards when disturbing non-asbestos fibrous silicates that have undergone high temperature conditions.

The potential for occurrence of naturally occurring asbestos materials in exploration or mining production activities must be assessed, the risk of exposure determined, and appropriate control measures implemented where required.

16.35 Hazardous Chemical Substances

No chemical substance may be brought onto site unless it appears on the Chemical Substances Register which will be developed and kept by the contractor.

The register will contain the following information:

- Trade name / product name of substance;
- Manufacturer / supplier of substance;
- Maximum inventory;
- Storage requirements and precautions;
- Inventory of special emergency items held for handling spillages, fires, etc. (e.g. reagents to neutralise spillages, firefighting foam, etc.); and
- Approved disposal methods.

The contractor must ensure that a Material Safety Data Sheet (MSDS) is obtained for each chemical substance brought onto site. A file, or files, containing all of the MSDS's must be maintained and must be readily available to all personnel on site (particularly first aiders) as well as other potentially affected parties (e.g. emergency services personnel, persons from the local community, etc.). The MSDS's must be in the language(s) commonly used on site.

The contractor must appoint a trained and competent Hazardous Chemical Substances Coordinator who understands and is able to evaluate the risks associated with a wide variety of substances. This person shall be responsible for:

- Assessing the hazardous properties and risks associated with all chemical substances brought onto site by the contractor and appointed sub-contractors (using the MSDS's);
- Determining precautions and safe practices for transportation, use, handling, storage and disposal (including PPE requirements) (using the MSDS's);
- Determining first aid and emergency response requirements / procedures (using the MSDS's);
- Maintaining the MSDS file;
- Managing and monitoring the consumption of inventory; and
- Providing an "as needed" service to site personnel and suppliers.

The risks associated with the transportation, use, handling, storage and disposal of all hazardous chemical substances brought onto site must be assessed and managed by the contractor through a process that incorporates risk reduction using the hierarchy of controls. The contractor must provide Safe Work Procedures for the transportation, use, handling, storage and disposal of all hazardous chemical substances to be used on site.

Whenever a task-based risk assessment is carried out, consideration must be given to the use of chemical substances (e.g. greases, solvents, etc.).

The contractor must provide his employees with all of the Personal Protective Equipment that is necessary to prevent exposure / injury while handling / using the hazardous chemical substances

that they will be required to work with. Appropriate PPE must be selected with consideration given to the potential hazards, permeability, penetration, resistance to damage and compatibility with the work tasks.

The contractor's employees must be trained in the safe transportation, use, handling, storage and disposal of the hazardous chemical substances that they will be required to work with or may come into contact with. The training must specifically address PPE requirements (including the correct selection, fitment and use thereof).

All personnel must be trained to understand the potential health effects associated with exposure to hazardous chemical substances and therefore the importance of Safe Work Procedures and PPE. All personnel must be trained on emergency response procedures and first aid measures.

Behaviour-based observations and coaching must include the use / handling of hazardous chemical substances.

An appropriate occupational exposure monitoring and medical surveillance programme must be in place for all personnel potentially exposed to hazardous chemical substances which have the potential to cause immediate or long-term harm.

Emergency showers and eyewash stations must be provided where required by law, or where a risk assessment indicates a need. The emergency showers and eyewash stations must be appropriately located, signposted, and regularly tested and maintained. Employees must receive training on the location and use of the showers / eyewash stations.

An emergency response plan for incidents involving hazardous chemical substances must be in place. Regular and appropriately staged emergency drills (possibly involving external spill response and ambulance support services) must be held and lessons learnt must be incorporated into the emergency response plan.

The contractor must provide appropriate storage facilities for all hazardous chemical substances to be used on site. The storage facilities must be secure and protected from damage. They must also be designed for easy access for firefighting purposes. Where applicable, the storage facility must protect chemical containers from physical damage due to temperature extremes, moisture, corrosive mists or vapours, and vehicles.

The inventory of hazardous chemical substances stored on site must be kept to a minimum. The quantity of each chemical stored must be justifiable.

Storage and segregation requirements for all hazardous chemical substances to be used on site must be based on:

- The quantities of the substances stored;
- The physical state of the substances (solid, liquid or gas);
- The degree of incompatibility; and
- The known behaviour of the substances.

Access to areas where hazardous chemical substances are stored and handled must be limited and controlled.

Every chemical substance container must be adequately and clearly labelled to identify its contents, to indicate precautionary requirements for the substance, and to indicate the date of expiry (if applicable). Pipes used to transfer / convey / distribute chemical substances must be clearly identified (e.g. colour coding). Directional flow must be indicated where practical.

Before any item, equipment or empty container containing a chemical residue is disposed of as general waste, it must be properly decontaminated (where applicable). Before being disposed of, empty chemical containers must also be rendered unusable for carrying water (by puncturing, cutting or crushing them).

Hazardous chemical substance waste (i.e. redundant / expired hazardous chemical substances, containers containing residues, contaminated items / materials, etc.) must be disposed of in accordance with the applicable legislation.

Maintenance, inspection and testing schedules and procedures must be in place for critical equipment associated with hazardous chemical substances. A system must be in place to ensure that the risks are assessed before any changes are made to equipment and / or processes for the transportation, storage, handling, use or disposal of a hazardous chemical substance.

A programme must be in place to continually investigate possibilities / opportunities for replacing hazardous substances with safer alternatives.

16.36 Radiation

The risks associated with ionising (from naturally occurring radioactive minerals (NORM), radon, and man-made sources), ultraviolet (UV) and electromagnetic field (EMF) radiation exposure must be assessed by a competent person.

There must be an inventory of all radiation sources that have the potential to cause adverse health effects. For each radiation source, the type of radiation (e.g. radioisotope, radon, x-ray, EMF, laser, etc.), the strength of the radiation, and the location must be recorded.

Where risk assessment indicates the need, a documented radiation management programme must be developed such that:

- All types of radiation sources are adequately characterised and described;
- Exposures are eliminated or reduced to as low as reasonably practicable (ALARP);
- A clearly defined chain of responsibility (with duties) is provided; and
- Education is provided for employees regarding radiation safety, including the radiation management programme elements.

The ionising radiation management programme must meet all applicable regulatory requirements, and as a minimum must include the following elements (as applicable): • Surveyed radiation areas and quantification of exposure sources / levels;

- Exposure and medical monitoring programmes based on established investigation levels;
- Transport of radioactive materials in compliance with international radiation transport regulations, when no local regulations are in place;
- Waste monitoring and disposal programmes;
- Feedstock and equipment checks for naturally occurring ionising radiation;
- Clearance and control procedures for all contaminated materials and equipment leaving or arriving at site (including scrap);
- Leak (wipe) tests on sealed radioactive containment equipment;
- Lock-out procedures for vessels and equipment containing radioactive sources and radon decay product measurement prior to entry;
- Emergency procedures;
- Environmental impact risk assessment (air, water, waste, foods, etc.);
- Product / waste life cycle control; and
- Dose assessment for employees and critical exposure groups, according to documented methods and by a competent person.

Areas with ionising radiation with annual doses greater than 5 milli Sieverts (mSv) must be designated as restricted access or controlled areas. These areas must be identified and mapped, signposted or otherwise clearly communicated to employees working in the area.

Each person whose potential exposure exceeds 5 mSv per annum or who is a designated radiation worker must undergo periodic personal radiation monitoring and medical surveillance designed to show continued fitness for radiation work.

All sources of ionising radiation must be managed in use and when they are either disposed of or securely stored in accordance with local regulations. Each operation where individual worker's exposures could exceed 5 mSv per annum must have a trained radiation protection adviser or ready access to a trained protection consultant.

There must be documented procedures for the inspection, assessment and maintenance of the controls, and emergency procedures to deal with incidents involving ionising radiation sources (including fire and explosions). All controls must be reassessed annually to ensure their continued effectiveness and that operating practices are in accordance with written procedures.

16.37 Thermal Stress

Hot areas or activities where employees have experienced or could experience excessive fatigue, muscle cramp, dehydration, dizziness and other symptoms of heat stress must be identified and described.

Where a risk of thermal stress is determined, a competent person must conduct monitoring surveys on site, in consultation with workers.

For defined extreme thermal conditions and job activities, medical examinations must include information about the operator's physiological and biomedical aspects, and an assessment of fitness for the working conditions.

Cold areas or activities where employees have experienced or could experience pain or loss of feeling in extremities, frostbite, severe shivering, excessive fatigue and other symptoms of cold stress must be identified and described.

Workplace thermal stress levels (temperature, air movement, humidity, etc.), activities (work level, etc.) and conditions (clothing, health, etc.) that have the potential to exacerbate thermal stress effects must be adequately characterised and described. Workplace exposure assessment must be repeated according to regulatory requirements or whenever there is a change in production, work organisation, process or equipment which may impact thermal stress levels.

Detailed heat stress assessment of identified tasks or jobs must be tiered to:

- Commence with the use of a simple heat stress index as a screening tool; then, if necessary;
- Use rational heat stress indices in an iterative manner to determine the 'best' control methods for alleviating potential heat stress; and
- Undertake physiological monitoring when exposure times are calculated to be less than 30 minutes, or where high-level PPE that limits heat loss must be worn.

Detailed cold stress assessment of identified tasks or jobs must be conducted according to current appropriate guidelines that incorporate a cold stress index, to determine the 'best' control methods for alleviating potential cold stress.

When a risk of thermal stress is identified, the following exposure controls must be implemented:

- An acclimatisation period for new workers and those returning from extended leave or sickness;
- Training in the recognition of signs and symptoms of heat or cold stress, emergency procedures and preventative measures;
- Protective observation (buddy system or supervision); and
- A requirement for self-paced working.

The following exposure controls must be considered by a competent person:

- Work / rest regimes and job rotation based on measurements conducted;
- Suitable rest areas with a provision of cool drinking water and cool conditions for high temperatures, or provision of warm drinks and warm conditions for cold temperatures;
- Selection of appropriate clothing or other PPE for extreme temperature conditions;
- The use of engineering controls; and
- Undertake hot / cold tasks during a cooler / warmer time of the day.

Where thermal stress is assessed to be a risk, the operation must develop a suitable emergency response plan.

16.38 Fitness for Work and Fatigue Management

The contractor must develop and implement a programme to manage employee fitness for work. All employees working on site for whom the contractor is responsible (i.e. direct employees of the contractor as well as the employees of any appointed sub-contractors) must be subject to this programme.

All safety critical jobs (i.e. roles where fatigue or other causes of reduced fitness for work could lead to serious injury, illness or death to employees, significant equipment / plant damage, or significant environmental impact) must be identified and the risks associated with reduced fitness for work in these roles must be assessed.

A programme to manage these risks must be implemented, and it must include:

- Mechanisms for managing fatigue, stress and lack of fitness;
- An alcohol and other (including prescription, pharmaceutical or illicit) drugs policy that includes testing;
- An Employee Assistance Programme providing confidential access to resources and counsellors; and
- Training and awareness programmes.

Each employee has an obligation to present himself fit for work at the start of the day / shift, and to remain fit for work throughout the work period. Reporting for work under the influence of alcohol or any other intoxicating substance will not be tolerated. Any transgression concerning the alcohol and other drugs policy applicable to the project may result in the offending employee's access to the project premises being temporarily or permanently withdrawn.

Alcohol and drug testing on the project premises will be carried out randomly (as employees report for duty and during the course of the day / shift), following significant incidents (all persons involved), and whenever there is reasonable suspicion. Alcohol and drug testing may also be carried out as part of a Pre-Employment Medical Examination.

The Contractor must ensure that it complies to the requirements of RSR 00-4-1.2016 Edition 1, Part 4-1 Human Factors Management-Fatigue Management standard, Transnet Fatigue Risk Management Plan (FRMP) and Fatigue Risk Management System (FRMS).

The Contractor shall document, implement and maintain processes and procedures to identify, assess and mitigate the risks associated with fatigue's contributory factors.

The Contractor shall collect data and report on their management of fatigue as outlined in Clause 8.3 of Part 4-1 Human Factors Management-Fatigue Management standard.

Sleep deprivation during shift work or from excessive working hours is a known cause of fatigue. Fatigued employees are at increased risk of accidents. Shift system design must consider:

- The effect on worker fatigue;
- The effects of activities carried out during scheduled and overtime hours; • The impact on sleep cycles of activities such as commuting to and from site; and
- The monitoring and control of working hours.

The contractor is responsible for the administration of the working hours of his employees and of any appointed sub-contractors. The maximum working hours per day and the minimum rest times between shifts must be specified in the contractor's Health and Safety Management Plan and must comply with all applicable legislation.

All employees engaged in safety critical jobs must undergo fitness assessments (medical examinations) which must be carried out prior to the commencement of employment on the contract, prior to a change in role, periodically based on an employee's individual risk profile, and on termination of employment on the contract:

Note: The results of an Exit Medical Examination from previous employment will not be accepted as a Pre-Employment Medical Examination.

Note: The medical examinations described above may only be carried out by an occupational health practitioner.

A detailed job (role) description and an exposure profile (noise, dust, heat, fumes, vapours, etc.) must be provided for each employee or group of employees. The medical examinations that an employee undergoes must be based on (i.e. the employee's fitness must be assessed against) the information contained in these documents as well as the baseline risk assessment for the work. This information must be made available to the occupational health practitioner performing the medical examination.

For each role, the medical criteria for fitness must be documented and these must be based on an evaluation of the physical and medical requirements for the role.

Depending on the circumstances, certain vaccinations may need to be provided to employees.

The medical examinations carried out for all drivers and operators must include testing / assessment for medical conditions that could affect the safe operation of vehicles or equipment.

Specific testing / questioning must be carried out to determine if an individual:

- Suffers from epilepsy or any other medical condition deemed to be a risk by the occupational health practitioner;
- Makes use of chronic medication that could affect performance;
- Is colour-blind; or
- Has poor day or night vision.

The medical examinations carried out for employees that are required to work at height must include testing / questioning to determine if an individual suffers from epilepsy, hypertension (high

blood pressure) or any other medical condition deemed to be a risk (with regard to working at height) by the occupational health practitioner. Electricians must be tested for colour-blindness.

With regard to the placement of new employees:

- Prospective employees must be referred to a suitable occupational medical practitioner (doctor) for a "Pre-Employment Medical Examination";
- If an individual is found to be medically "unfit for placement", the doctor will indicate which work activities cannot be performed by the person;
- The individual may still be employed on the project if his medical restrictions can be accommodated and provided that no legislation is transgressed.

A process must be established to manage medical restrictions that may be placed on an employee. For every employee with a medical restriction, regular follow up visits with the occupational health practitioner must be arranged to ensure that each case is proactively managed.

An employee in a safety critical job must report (to his supervisor) any condition that might impair his ability to safely perform the duties associated with his role. A mechanism must be in place for such reports to be referred to an occupational health practitioner to determine if the employee is fit to continue with his work.

Proof of all medical examinations (i.e. certificates of fitness signed by an occupational health practitioner) must be kept on site and these records must be readily available for inspection by the Transnet Contract Manager. An employee's certificates of fitness must be included in his Personal Profile (dossier). If an Employee Personal Profile (dossier) hasn't already been compiled for a particular employee, then this must be done without delay following the employee's Pre-Employment Medical Examination. No employee in a safety critical role may commence work on site without proof that he has undergone a Pre-Employment Medical Examination.

Occupational medical examinations and data interpretation may only be carried out by medical practitioners that are appropriately qualified and certified to do so. Occupational medical data contained in reports to management must be grouped and summarised to ensure that the confidentiality rights of each individual employee are maintained. All occupational medical data and records must be retained for at least 40 years.

16.39 Legionnaires Disease

All equipment with the potential for generating Legionella (such as cooling towers and associated equipment, air-handling systems, hot water services and showers) must be identified and the risks of contamination and aerosol generation assessed.

Where there is an assessed risk that Legionella could grow in the system and cause harm, a programme must be in place such that:

- All such equipment is identified on a register. The register must contain details of the regular maintenance, cleaning and checking programmes;
- Control measures are in place to minimise aerosol emissions;
- There must be a documented water treatment programme, including procedures for inspection, assessment and maintenance of the controls; and
- New or retrofitted equipment is designed and constructed to minimise the risk of Legionella growth.

Where available, the Legionella plate count test should be used if more effective methods are not available.

Good maintenance procedures must be followed to minimise the risk of significant contamination of equipment with other bacteria and microbial organisms.

Adequate procedures must be available for disinfecting systems if significant concentrations of Legionella bacteria are present. Once disinfected, systems must be retested to confirm effectiveness of treatment.

16.40 HIV / AIDS

The contractor must assess the risks posed by HIV. Appropriate mitigation strategies must be implemented as required.

Discrimination towards employees on the basis of actual or perceived HIV status is forbidden.

All information on the HIV status and condition of employees and community members, including that relating to counselling, care and treatment and receipt of benefits, must be maintained in medical confidence.

HIV / AIDS screening may not be a requirement for recruitment or a condition of employment.

16.41 Ballast Screeners

The contractor must assess the risks posed by the activities associated with ballast screening. Appropriate mitigation strategies must be implemented as required, including the control of silica dust.

The contractor shall ensure that the ballast screening is undertaken in such a manner that it does not pose a risk to the health and safety of employees, members of the public or damage to property.

All employees involved in the ballast screening are trained on the risks to their health and safety, appropriate mitigation strategies to be implemented.

The contractor shall ensure that the operator of any equipment/machine used during the ballast screening is trained to operate such an equipment.

The contractor shall ensure that any equipment/machine used during the ballast screening are properly maintained and inspected at appropriate intervals. General machine safety checks including brake tests shall be done once a month and reports shall be available on the contractor compliance file/safety file.

The contractor shall ensure that technical and safety audits of the machinery and equipment must be done at least twice a year and a report of such an audit is available in the contractor's compliance file. Appropriate mitigation strategies must be implemented as required.

The contractor shall ensure that the welding activities in connection with the ballast screening are undertaken in such a manner that it does not pose a risk to the health and safety of employees, members of the public or damage to property.

17. COVID-19 Compliance

The contractor shall complete and submit to the TFR Contract Manager a declaration stating that the contractor is permitted to operate in terms of the provisions of the Disaster Management Act 2002 (Act No 57 of 2002) and Regulations, Transnet COVID-19 Guidelines and COVID-19 Occupational Health and Safety Measures in Workplaces, COVID-19 (C19 OHS), 2020 and have

prepared a COVID-19 Workplace Readiness Plan and shall operate within the regulated permissions and restrictions of applicable lockdown level.

The contractor must ensure that all its employees are trained on the health risks and hazards associated with COVID-19 and what precautionary measures they must follow for the protection of their health, including the proper use and maintenance of PPE. They are prepared and informed regarding updated rules, hygiene and behavioural practices, complete a "return to work interview" with their line manager and sign commitment to maintain social distancing.

The contractor shall ensure that every employee reporting for duty is screened to ascertain whether they have any observable symptoms associated with COVID-19 and require such employee to immediately inform the contractor if he/she experiences such symptoms.

Non-essential physical work that requires close contact between workers should be avoided where it is possible to do so.

Where it is practicable, every employee must be issued with own tool for use for the duration of the shift. Tools and equipment in stores should be sanitised before issued and on return to the stores.

Washing hands facilities must be provided on site, and where it is not available, employees should be provided with hand sanitisers. Employees should be encouraged to regularly wash their hands. Alcohol testing on site should be managed in such a way that no employee is exposed to the virus and contractors must promote personal hygiene. Breathalyzer equipped with disposable mouthpieces shall be used and shall be cleaned and/or disinfected after every use.

All non-essential visitors to site are not allowed, only suppliers are allowed. Suppliers must be advised in advance of the COVID-19 site screening tests and required COVID-19 PPE requirements for the site.

Where site meetings are held, only absolutely necessary meeting participants should attend. Social distancing should be maintained.

The contractor shall when transporting his employees to TFR premises comply with the regulations which outlines that 70% of the vehicle capacity can be utilised.

The contractor shall inform the TFR Contract Manager when any of its employees working on TFR premises has been diagnosed with COVID-19. The contractor shall investigate the cause and control failure and review its risk assessment to ensure that the necessary controls and PPE requirements are in place.

18. Structure

The contractor must ensure that,

- all reasonably practicable steps are taken to prevent the uncontrolled collapse of any new or existing structure or any part thereof, which may become unstable or is in a temporary state of weakness or instability due to the carrying out of construction work;
- No structure or part of a structure is loaded in a manner which would render it unsafe; and
- all drawings pertaining to the design of the relevant structure are kept on site and are available on request to an inspector, other contractors, the client and the client's agent or employee.

19. Emergency Preparedness and Response

The contractor must develop, implement, test and maintain an Emergency Response Plan (incorporating emergency evacuation procedures) that focuses specifically on the contractor's team and work activities. The plan must be risk-based and must detail the procedures that must be

followed when responding to all potential emergency scenarios such as a medical emergency (including first aid response), a fire, an explosion, a hazardous substance spill, flooding, rescue from height, rescue from a confined space, etc.

The contractor's Emergency Response Plan must be aligned with the Emergency Response Plan developed by Transnet.

Potential off-site emergency scenarios must be included (e.g. emergency scenarios related to the transport of personnel, the transport of hazardous materials, and personnel performing work in remote locations).

Consideration must be given to neighbours, and to the availability and capability of local emergency services. Details of any arrangements with external emergency response service providers must be included.

The Emergency Response Plan must satisfy and comply with all applicable legal requirements. The plan must be adequately resourced to ensure effective implementation. These resources must include appropriate personnel, external emergency response service providers, emergency response equipment, and warning devices. All equipment and warning devices must be identified, maintained and tested to ensure availability at all times.

Accountability for the Emergency Response Plan must be clearly defined. An Emergency Response Team (ERT) responsible for the implementation, management and execution of the Emergency Response Plan must be established. The roles and responsibilities of each team member must be clearly defined in the plan. Each team member must receive appropriate training to ensure that each role is performed competently.

The process for managing incident communication, notification, and reporting must be incorporated into the Emergency Response Plan. The responsible person(s) must be clearly identified, and the protocols for communicating with internal and external stakeholders must be defined.

Emergency evacuation procedures must be developed and included in the Emergency Response Plan. A copy of the plan must be provided to the Transnet Contract Manager for approval prior to site establishment.

The Emergency Response Plan must be formally reviewed (and amended if necessary) on at least an annual basis, and following any emergency situation, to ensure that it remains appropriate and effective.

At each work site:

- A suitable evacuation alarm (siren) must be provided. If work is to be carried out in proximity to an existing operational plant, the alarm provided by the contractor must be distinctly different (in terms of the sound that it generates) to any alarm installed in the operational plant. All persons working in an area where an evacuation alarm is sounded must respond to it immediately.
- Suitable fire-fighting equipment must be provided and maintained, and personnel must be trained in fire-fighting procedures and the use of fire-fighting equipment.
- Suitable first aid equipment and supplies must be provided and maintained, and an adequate number of appropriately trained First Aiders must be in place (refer to Section 14.2).
- Emergency assembly points positioned in safe locations away from buildings, plant and equipment must be designated (and conspicuously signposted). In the event of an evacuation, all persons (i.e. personnel and visitors) must assemble and be accounted for at these emergency assembly points.
- All personnel must receive awareness training on the applicable emergency response procedures, and all visitors entering the site must be properly instructed in these procedures.

- The emergency response procedures must be displayed on each notice board.
- A diagram (site plan) indicating evacuation routes, emergency assembly point locations, and the positioning of emergency equipment (fire extinguishers, first aid boxes, etc.) must be prominently displayed in all buildings and plants, in all offices, on all notice boards, and in other locations on the site as may be required.
- An up-to-date list of emergency telephone numbers must be compiled and maintained. A copy of this list must be posted at each site entrance, in each office, near each telephone, and on every notice board.
- Emergency response drills must be conducted to test the effectiveness of the emergency procedures and equipment, as well as the knowledge and proficiency of the response personnel. Where appropriate, drills must include liaison with and the involvement of external emergency response service providers. A variety of emergency scenarios must be tested including, but not limited to, medical emergencies, fires, rescues, and hazardous substance spills. A drill must be carried out one month after site establishment and six-monthly thereafter.

Each drill must be monitored, and the outcomes (highlights and shortcomings) must be documented. Corrective actions must be identified and implemented to address the shortcomings, and the Emergency Response Plan and associated procedures must be amended as required.

19.1 First Aid Kits

A suitable first aid kit (i.e. appropriate to the level of training) must be readily available to each First Aider. All kits must be provided and maintained by the contractor.

Taking into account the type of injuries that are likely to occur in the workplace, each first aid kit must contain suitable equipment and supplies. First aid equipment and supplies required by applicable legislation must be provided as a minimum. Additional items / supplies may need to be provided depending on the nature of the workplace (specific hazards) and the level of training of the first aider in position of the kit.

The contents of each first aid kit must be kept clean and dry. Access to first aid equipment / supplies must be limited to train First Aiders only. Access to portable kit bags must be controlled and steel first aid boxes in the workplace must be kept locked.

Approved signage must be in place to indicate the locations of the first aid boxes / bags.

A record of each treatment administered must be kept in a suitable register.

20. Management Review

A review of the contractor's Health and Safety Management System must be completed annually to ensure that the system continues to be effective in managing health and safety performance and meeting project requirements.

The review must evaluate if there is any need for change and must identify actions to improve the system. The review must be led by senior management and the following must be considered:

- The suitability of the policy adopted for the project;
- The impact of changing legislation;
- The management of risk;
- Health and safety objectives and performance indicators;
- Changing expectations and requirements of relevant stakeholders;
- Changes to the contractor's scope, schedule, designs, etc.;
- Changes to the contractor's organisational structure;

- Communication and feedback (particularly from employees, Project representatives, and client representatives);
- The effectiveness of the management of change process;
- Workplace exposure monitoring and medical surveillance;
- The status of corrective actions;
- Performance statistics, including an annual summary of safety statistics, and occupational hygiene monitoring and medical surveillance results;
- Non-conformances (findings) from completed audits;
- Follow up on actions from previous management reviews; and
- Recommendations and opportunities for improving the effectiveness of the management system.

A record of each completed management review must be retained, and it must include all decisions and identified actions concerning alterations, modifications or improvements to the management system that demonstrate a commitment to continual improvement.

21. Management of Change

To ensure that proposed changes do not give rise to unacceptable health or safety risk, the contractor must develop and implement a process for identifying and managing change in the workplace (e.g. changes to scope, schedule, procedures, work methods, site conditions, designs, plans, plant and equipment, materials, processes, etc.) that may impact on health or safety performance.

The management of change process must take into consideration that changes may be planned or unplanned, sudden or gradual, temporary or permanent.

The process must aim to ensure that:

- Changes are identified and assessed before they are implemented;
- Careful consideration is given to managing the risks associated with any change;
- Due diligence can be shown to have taken place;
- The number of unsatisfactory or unnecessary changes is minimised; • The right people are involved in the change process; and • All statutory requirements are met.

All risks associated with a proposed change must be evaluated and ranked. The risks that are ranked as moderate or higher must be managed to prevent serious injury or illness.

It must not simply be assumed that a change will not result in significant risks. All proposed changes must be formally evaluated. The evaluation or review must include:

- An appropriate level of technical expertise;
- The involvement of the workforce potentially affected by the proposed change; and
- Approval of the change by a person with at least the same level of authority as those who control the existing process or item being changed.

22. Sub-contractor Alignment / Stakeholder management

Processes must be in place to ensure that the health and safety risks associated with the procurement of materials, equipment, services, and labour are identified, evaluated and effectively managed.

A process for evaluating a sub-contractor's (or supplier's) ability to provide materials, equipment, services, and labour that meet defined specifications must be in place. A prospective sub-contractor's health and safety management expertise, experience, and capability (including

previous health and safety performance) must be formally assessed prior to any contract or purchase order being awarded.

Each appointed sub-contractor must develop and implement a detailed Health and Safety Management Plan based on the requirements of the contractor's Health and Safety Management Plan and the Health and Safety Specification for the contract. This plan must be reviewed and approved by the contractor prior to the commencement of any work.

The properties of all materials provided to the project must be adequately understood, documented, and integrated into operating procedures where exposure to these materials presents a significant health or safety risk.

Procedures, commensurate with the evaluated risk, must be in place for the receiving, storing, dispatching and transporting of all equipment and materials.

Before work commences on any contract, all sub-contractor personnel must receive comprehensive orientation and induction training

All work carried out by a sub-contractor must be managed (activity supervised) throughout the contract period and performance must be reviewed (audited) on a monthly basis.

23. Section 37(2) Mandatory Agreement

Transnet and the Contractor shall enter into an agreement in terms of section 37(2) of the Occupational Health and Safety Act to the arrangements and procedures between them to ensure compliance by the contractor with the provisions of the OHS Act.

The agreement shall be completed and signed by the contractor mandated representative as soon as possible and returned to the relevant Transnet Contract Manager for his/her signature on behalf of Transnet.

The contractor shall enter into a Section 37(2) Agreement with their respective subcontractors. Signed copy of such agreement must be kept on the contractor's compliance file.

24. Incident Reporting and Investigation

All incidents referred to in Regulation 9 of General Administration Regulations of the OHS Act and in terms of National Railway Safety Act 6 of 2002 (and applicable SANS Codes) involving the contractor and his subcontractor on TFR premises, shall be reported to the TFR Contract Manager and Department of Labour as prescribed by the OHS Act

The contractor must establish a procedure for the management of all health and safety incidents. This procedure must define the responsibilities, methodologies and processes that must be followed for:

- Reporting an incident;
- Investigating an incident;
- Analysing an incident to determine the root cause;
- Identifying and implementing corrective actions to prevent a recurrence; and
- Communicating information concerning an incident to relevant persons and / or groups.

An incident may have multiple impacts. For each impact, the Actual Consequence and the Maximum Reasonable Outcome must be evaluated. Each impact must be evaluated independently, with the most significant classification forming the primary rating of the incident.

A Near Hit is an incident. All Near Hits must be reported.

An incident must be reported on the same workday or shift on which it occurs and preliminary details must be recorded. Depending on the Actual Consequence and Maximum Reasonable

Potential Outcome of the impact(s), the relevant internal and external parties must be notified in accordance with specified protocols and timeframes, and legislative requirements.

In the event of a significant incident (i.e. an incident with an Actual Consequence of Moderate, Major or Catastrophic, or a Maximum Reasonable Potential Outcome of High or Extreme, work must cease and must only resume once the necessary actions (including the re-evaluation of any relevant risk assessments) have been taken to eliminate or reduce the risk of recurrence.

Work must only be permitted to recommence once formal authorisation has been granted by the Transnet Contract Manager. In the case of incidents with an Actual Consequence of Major or Catastrophic, work must not be permitted to recommence until authorisation has been granted by the relevant government authorities (i.e. the South African Police, the Department of Labour or the Department of Mineral Resources).

The Construction Manager must ensure that an investigation is completed within 7 calendar days for each incident that occurs, and that appropriately senior personnel participate in, and authorise the outcomes of, each investigation. Incident investigations must be facilitated by competent and experienced persons who have been trained in the appropriate methodology.

Each incident (including Near Hits) must be investigated to a level of detail that is appropriate for the Maximum Reasonable Potential Outcome of the incident. Each incident must be analysed to determine the root cause, and corrective actions must be identified and prioritised for implementation to eliminate or reduce the risk(s) in order to prevent recurrence of the incident.

For each corrective action, a responsible person must be designated and an appropriate timeframe (target date) for completion of the corrective action must be specified. Progress on implementing corrective actions (i.e. closing incidents) must be monitored and reported on. The implementation of corrective actions must be verified during monthly audits by the Health and Safety Officers but also no later than 30 calendar days after the conclusion of the incident investigation.

The contractor must document the results of each investigation and a report must be submitted to the Transnet Contract Manager within five working days of the incident occurring.

As a minimum, each incident report must include:

- The date, time and location of the incident;
- A detailed description of the incident, including photographs;
- The names of any injured persons;
- Injury details (if applicable);
- A summary of the first aid and / or medical treatment provided (if applicable);
- The current status of any injured persons;
- The root causes of the incident; and
- Detailed corrective actions, including responsible persons and target dates for implementation.

Each significant incident must be summarised for its lessons learnt following the investigation. This information must be reviewed by the contractor's Construction Manager to assure completeness, accuracy and relevance before it is shared with (communicated to) all project personnel.

25. Non-conformance and Action Management

The contractor must establish a process for identifying and recording corrective actions arising from:

- Incident investigations;
- Hazard identification and risk assessment;

- Measurement and monitoring;
- Improvement plans and suggestions;
- Managing change;
- Audits and inspections; and
- Safety observations and coaching (safety interactions).

The contractor must establish a procedure for managing actions that addresses:

- Identification, categorisation and prioritisation of actions;
- Formal evaluation and approval of actions (management of change process);
- Assignment of responsibilities, resources and schedules for implementation;
- Implementation of actions;
- Tracking and reporting on implementation status; and
- Monitoring and verifying the effectiveness of the actions.

26. Performance Assessment and Auditing

The contractor must establish and maintain programmes for measuring and monitoring HEALTH AND SAFETY performance on a regular basis. Metrics must include leading and lagging indicators and be based on qualitative and quantitative data.

26.1 Reporting on Performance

Reports summarising the contractor's health and safety performance on the contract must be compiled and reported to the Transnet Contract Manager on a monthly basis.

The contractor must be prepared to discuss the content of these reports at scheduled health and safety meetings.

The reports must contain the following information:

- Number of contractor and sub-contractor employees on site;
- Total hours worked on site by contractor and sub-contractor employees (by company);
- Number of incidents by category (i.e. Near Hit, FAI, MTI and LTI);
- Lost Time Injury Frequency Rate (LTIFR) (project to date and 12-month rolling);
- Details of all new incidents for the reporting period and the corrective actions taken or to be taken;
- Feedback (progress updates) on all open incidents and outstanding corrective actions;
- Status and feedback on any employee that may have been injured and has not yet returned to work;
- Details of all health and safety training carried out during the reporting period;
- Number of SOC's (Safety Observations and Coaching) carried out during the reporting period;
- SOC trends identified and proposed action for the coming week or month to maintain positive trends and / or address negative trends;
- Details of all audits, inspections and site visits carried out during the reporting period, and the corrective actions taken (or to be taken) to address all non-conformances;
- Feedback (progress updates) on all open non-conformances and outstanding corrective actions;
- Number of Toolbox Talks conducted during the reporting period (monthly);
- Number of Planned Task Observations (PTO's) carried out during the reporting period (monthly);
- Details of all active risk assessments and Safe Work Procedures highlighting those that are due for review in the coming month (monthly);

- A look ahead (to the coming week, month or quarter) to ensure that appropriate health and safety planning and preparation is done for upcoming work;
- Challenges faced with regard to health and safety; and
- Any other health and safety related information specific to the project that may be required.

Leading indicators (e.g. audit findings, observations, etc.) must be analysed, and any negative trends identified with regard to unsafe behaviour or conditions must be appropriately addressed to prevent incidents.

Lagging indicators (e.g. injuries, illnesses, near hits, etc.) must be investigated in detail to determine the root causes. Corrective actions must be identified, implemented and integrated into Safe Work Procedures to prevent recurrences.

26.2 Audits and Inspections

On a monthly basis, the health and safety management system and workplace activities of the contractor will be audited by the Transnet Contract Manager, any person delegated by him or Transnet Health and Safety Specialist to assess compliance with the project health and safety requirements. Any deviation from these requirements (i.e. nonconformance) that places the health or safety of any person in immediate danger will result in the specific activity being stopped until the non-conformance is corrected.

For each non-conformance determined during any audit, the contractor must identify and implement appropriate corrective actions.

For each corrective action, a responsible person must be designated and an appropriate timeframe (target date) for completion of the corrective action must be specified. Progress on implementing corrective actions (i.e. closing non-conformances) must be monitored and reported on. The implementation of corrective actions will be verified during the monthly audits.

Should it be determined that the contractor's level of compliance is unsatisfactory, all work being performed by the contractor on the project site may be stopped (at the contractor's expense) until an investigation into the reasons for the poor performance has been carried out, a corrective action plan has been developed, and corrective actions have been implemented.

In addition to the audit carried out by the Transnet Contract Manager or Health and Safety Specialist, the contractor must carry out an internal audit on a monthly basis to assess compliance with the project health and safety requirements (including the requirements of this specification and the contractor's Health and Safety Management Plan). Furthermore, the contractor must ensure that each appointed sub-contractor is audited and measured to the same standard. Copies of these audit reports must be submitted to the Transnet Contract Manager on a monthly basis.

The contractor must carry out internal health and safety inspections as follows:

- General site health and safety inspections on a daily basis; and
- Inspections of plant, tools and equipment prior to establishment or use on site, and at least monthly thereafter.

All audits and inspections must be carried out by competent persons who have been appointed in writing.

A schedule of planned audits and inspections must be compiled and maintained ensuring that:

- All work areas and all activities are covered at regular intervals;
- All applicable legal requirements are complied with; and

- Areas or activities with significant associated hazards or risks receive greater attention.

Mandatory Agreement

OCCUPATIONAL HEALTH AND SAFETY ACT 85 of 1993 (AS AMENDED)

AGREEMENT WITH MANDATORY

In terms of Section 37(1) & (2)

WRITTEN AGREEMENT ENTERED INTO AND BETWEEN

Transnet SOC Ltd

(Hereinafter referred to as the Employer)

AND

(Hereinafter referred to as Mandatory (Principal Contractor))

Compensation Fund Number :

Project Name :

TABLE OF CONTENTS

- 1. DEFINITIONS**
- 2. INTERPRETATION**
- 3. REPORTING**
- 4. WARRANTY OF COMPLIANCE**
- 5. APPOINTMENTS AND TRAINING**
- 6. SUPERVISION, DISCIPLINE AND REPORTING**
- 7. ACCESS TO THE OHS ACT**
- 8. COOPERATION**
- 9. WORK PROCEDURES**
- 10. HEALTH AND SAFETY MEETINGS**
- 11. COMPENSATION REGISTRATION**
- 12. MEDICAL EXAMINATIONS**
- 13. INCIDENT REPORTING AND INVESTIGATION**
- 14. SUBCONTRACTORS**
- 15. SECURITY AND ACCESS**
- 16. FIRE PRECAUTIONS AND FACILITIES**
- 17. ABLUTION FACILITIES**
- 18. HYGIENE AND CLEANLINESS**
- 19. NO NUISANCE**
- 20. INTOXICATION NOT ALLOWED**
- 21. PERSONAL PROTECTIVE EQUIPMENT**
- 22. PLANT, MACHINERY AND EQUIPMENT**
- 23. NO USAGE OF EMPLOYER'S EQUIPMENT**
- 24. TRANSPORT**
- 25. CLARIFICATION**
- 26. DURATION OF AGREEMENT**
- 27. NON COMPLINCE**

28. HEADING

PREAMBLE

WHEREAS section 37(1) & (2) of the Occupational Health and Safety Act No 85 of 1993 ("the Act") requires that parties have an agreement in writing to ensure compliance by a mandatory in line with the provisions of the Act.

AND WHEREAS Transnet SOC Ltd requires the services of the Contractors to execute certain projects within its workshops.

AND WHEREAS TRANSNET SOC LTD can be better served by Contractors who have the infrastructure, specialist employees and expertise to execute such projects at the highest level of efficiency on short notice.

NOW THEREFORE the parties agree as follows;

1. DEFINITIONS

For the purpose of this agreement, unless the context indicates otherwise, the following definitions are set out for the terms indicated:

- 1.1 "Act" means the Occupational Health and Safety Act No 85 of 1993;
- 1.2 "Agreement" means this Mandatory agreement;
- 1.3 "Contractor " means the Mandatory;
- 1.4 "COID Act" means the Compensation for Occupational Injuries and Diseases Act No 130 of 1993.
- 1.5 "Effective Date" means the date of signature of this Agreement by the last party signing hereto;
- 1.6 "Employer" refers to TRANSNET SOC LTD;
- 1.7 "Mandatory" means an agent, Contractor or sub-contractor for work, but without derogating from the status in his own right as an employer or user;
- 1.8 "Parties" means TRANSNET SOC LTD and the Contractor, and "Party" shall mean either one of them, as the context indicates;
- 1.9 "Principal Contract" means the appointed contractor whereby such contractor has to provide goods and or services to TRANSNET SOC LTD.
- 1.10 "Regulations" means regulations promulgated in terms of the relevant legislation.
- 1.11 "Section" means the relevant section of the Occupational Health and Safety Act No 85 of 1993
- 1.12 "Services" means the services to be provided by the Contractor to TRANSNET SOC LTD.
- 1.13 "TRANSNET SOC LTD" means Transnet Group and all its operating divisions and Specialist units with (Registration No. **1990/000900/06**), a public company incorporated in accordance with the company laws of the Republic of South Africa;

2. INTERPRETATION

- 2.1 Clause headings in this Agreement are included for ease of reference only and do not form part of this Agreement for the purposes of interpretation or for any other purpose. No provision shall be construed against or interpreted to the disadvantage of either Party hereto by reason of such Party having or being deemed to have structured or drafted such provision.
- 2.2 Any term, word or phrase used in this Agreement, other than those defined under the clause heading "Definitions" shall be given its plain English meaning, and those terms, words, acronyms, and phrases used in this Agreement will be interpreted in accordance with the generally accepted meanings accorded thereto.
- 2.3 A reference to the singular incorporates a reference to the plural and vice versa.
- 2.4 A reference to natural persons incorporates a reference to legal persons and vice versa.
- 2.5 A reference to a particular gender incorporates a reference to the other gender.

3. REPORTING

- 3.1 The Mandatary and/or his designated person appointed in terms of Section 16(2) of the Occupational Health and Safety Act 85 of 1993 ("the OHS Act") shall report to the Risk Manager and/or a Project Manager and/or a representative designated by the Employer prior to commencing the work at the premises of the Employer.

4. WARRANTY OF COMPLIANCE

- 4.1 In terms of this Agreement the Mandatary warrants that he agrees to any of the arrangements and procedures as prescribed by the Employer and as provided for in terms of Section 37(2) of the OHS Act for the purposes of compliance with the OHS Act.
- 4.2 The Mandatary further warrants that he and/or his employees undertake to maintain such compliance with the OHS Act. Without derogating from the generality of the above, nor from the provisions of the said Agreement, the Mandatary shall ensure that the clauses as hereunder described are at all times adhered to by himself and his employees.
- 4.3 The Mandatary hereby undertakes to ensure that the health and safety of any other person on the premises is not endangered by the conduct of his activities and that of his employees.

5. APPOINTMENTS AND TRAINING

- 5.1 The Mandatary shall appoint competent persons as per Section 16(2) of the OHS Act. Any such appointed person shall be trained on any occupational health and safety matter and the OHS Act provisions pertinent to the work is to be performed under his responsibility. Copies of any appointments made by the Mandatary shall immediately be provided to the Employer.
- 5.2 The Mandatary shall further ensure that all his employees are trained on the health and safety aspects relating to the work to be done on the premises of the Employer and that they understand the hazards associated with such work being carried out on the premises. Without derogating from the foregoing, the Mandatary shall, in particular, ensure that all his users or operators of any materials, machinery or equipment are properly trained in the use of such materials, machinery or equipment.
- 5.3 Notwithstanding the provisions of the above, the Mandatary shall ensure that he, his appointed responsible persons and his employees are at all times familiar with the provisions of the OHS Act, and that they comply with the provisions of the Act.

6. SUPERVISION, DISCIPLINE AND REPORTING

- 6.1 The Mandatary shall ensure that all work performed on the Employer's a premise is done under strict supervision and that no unsafe or unhealthy work practices are permitted. Discipline regarding health and safety matters shall be strictly enforced against any of his employees regarding non-compliance by such employee with any health and safety matters.
- 6.2 The Mandatary shall further ensure that his employees report to him all unsafe or unhealthy work situations immediately after they become aware of such conditions and that he in turn immediately reports these to the Employer and/or his representative.

7. ACCESS TO THE OHS ACT

- 7.1 The Mandatary shall ensure that he has an updated copy of the OHS Act on site at all times and that this is accessible to his appointed responsible persons and employees, save that the parties may make arrangements for the Mandatary and his appointed responsible persons and employees to have access to the Employer's updated copy/copies of the Act.

8. COOPERATION

- 8.1 The Mandatary and/or his responsible persons and employees shall provide full co-operation and information if and when the Employer or his representative inquires into any occupational health and safety issues concerning the Mandatary. It is hereby recorded that the Employer and his representative shall at all times be entitled to make such inquiry.
- 8.2 Without derogating from the generality of the above, the Mandatary and his responsible persons shall make available to the Employer and his representative, on request, all and/or any checklists and inspection registers required to be kept by him in respect of any of his materials, machinery or equipment.

9. WORK PROCEDURES

- 9.1 The Mandatary shall, after having established the dangers associated with the work performed, develop and implement mitigation measures to minimize or eliminate such dangers for the purpose of ensuring a healthy and safe working environment. The Mandatary shall then ensure that his responsible persons and employees are familiar with such mitigation measures.
- 9.2 The Mandatary shall implement any other safe work practices as prescribed by the Employer and shall ensure that his responsible persons and employees are made conversant with such other safe work practices as prescribed by the Employer and that his responsible persons and employees adhere to such safe work practices.
- 9.3 The Mandatary shall ensure that work for which any permit is required by the Employer is not performed by his employees prior to the Employer obtaining such permit from the Mandatary.

10. HEALTH AND SAFETY MEETINGS

- 10.1 If required in terms of the OHS Act, the Mandatary shall establish his own health and safety committee(s) and ensure that his employees, being the committee members, provide health and safety representatives to attend the Employer's health and safety committee meetings.

11. COMPENSATION REGISTRATION

- 11.1 The Mandatary shall ensure that he has a valid proof of registration with the Compensation Commissioner, as required in terms of **COID Act**, and that all payments owing to the Commissioner are discharged. The Mandatary shall further ensure that the cover remain in force while any such employee is present on the premises.

12. MEDICAL EXAMINATIONS

- 12.1 The Mandatary shall ensure that all his employees undergo routine medical examinations and that they are medically fit for the purposes of the work they are to perform.

13. INCIDENT REPORTING AND INVESTIGATION

- 13.1 All incidents referred to in Section 24 of the OHS Act shall be reported by the Mandatary to the Department of Labour and to the Employer. The Employer shall further be provided with copies of any written documentation relating to any incident.
- 13.2 The Employer retains an interest in the reporting of any incident as described above as well as in any formal investigation and/or inquiry conducted in terms of section 32 of the OHS-Act into such incident.

14. SUBCONTRACTORS

- 14.1 The Mandatary shall notify the Employer of any subcontractor he may wish to perform work on his behalf on the Employer's premises. It is hereby recorded that all the terms and provisions contained in this clause shall be equally binding upon the subcontractor prior to the subcontractor commencing with the work. Without derogating from the generality of this paragraph:
- 14.1.1 The Mandatary shall ensure that training as discussed under appointments and training, is provided prior to the subcontractor commencing work on the Employer's premises.
- 14.1.2 The Mandatary shall ensure that work performed by the subcontractor is done under his strict supervision, discipline and reporting.
- 14.1.3 The Mandatary shall inform the Employer of any health and safety hazards and/or issue that the subcontractor may have brought to his attention.
- 14.1.4 The Mandatary shall inform the Employer of any difficulty encountered regarding compliance by the subcontractor with any health and safety instruction, procedure and/or legal provision applicable to the work the subcontractor performs on the Employer's premises.

15. SECURITY AND ACCESS

- 15.1 The Mandatary and his employees shall enter and leave the premises only through the main gate(s) and/or checkpoint(s) designated by the Employer. The Mandatary shall ensure that employees observe the security rules of the Employer at all times and shall not permit any person who is not directly associated with the work from entering the premises.
- 15.2 The Mandatary and his employees shall not enter any area of the premises that is not directly associated with their work.
- 15.3 The Mandatary shall ensure that all materials, machinery or equipment brought by him onto the premises are recorded at the main gate(s) and/or checkpoint(s). Failure to do this may result in a refusal by the Employer to allow the materials, machinery or equipment to be removed from the Employer's premises.

16. FIRE PRECAUTIONS AND FACILITIES

- 16.1 The Mandatary shall ensure that an adequate supply of fire-protection and first-aid facilities are provided for the work to be performed on the Employer's premises, save that the Parties may mutually make arrangements for the provision of such facilities.

- 16.2 The Mandatary shall further ensure that all his employees are familiar with fire precautions at the premises, which includes fire-alarm signals and emergency exits, and that such precautions are adhered to.

17. ABLUTION FACILITIES

- 17.1 The Mandatary shall ensure that an adequate supply of ablution facilities are provided for his employees performing work on the Employer's premises, save that the parties may mutually make arrangements for the provision of such facilities.

18. HYGIENE AND CLEANLINESS

- 18.1 The Mandatary shall ensure that the work site and surround area is at all times maintained to the reasonably practicable level of hygiene and cleanliness. In this regard, no loose materials shall be left lying about unnecessarily and the work site shall be cleared of waste material regularly and on completion of the work.

19. NO NUISANCE

- 19.1 The Mandatary shall ensure that neither he nor his employees undertake any activity that may cause environmental impairment or constitute any form of nuisance to the Employer and/or his surroundings.
- 19.2 The Mandatary shall ensure that no hindrance, hazard, annoyance or inconvenience is inflicted on the Employer, another Mandatary or any tenants. Where such situations are unavoidable, the Mandatary shall give prior notice to the Employer.

20. INTOXICATION NOT ALLOWED

- 20.1 No intoxicating substance of any form shall be allowed on site. Any person suspected of being intoxicated shall not be allowed on the site. Any person required to take medication shall notify the relevant responsible person thereof, as well as the potential side effects of the medication.

21. PERSONAL PROTECTIVE EQUIPMENT

- 21.1 The Mandatary shall ensure that his responsible persons and employees are provided with adequate personal protective equipment (PPE) for the work they may perform and in accordance with the requirements of General Safety Regulation 2 (1) of the OHS Act. The Mandatary shall further ensure that his responsible persons and employees wear the PPE issued to them at all material times.

22. PLANT, MACHINERY AND EQUIPMENT

- 22.1 The Mandatary shall ensure that all the plant, machinery, equipment and/or vehicles he may wish to utilize on the Employer's premises is/are at all times of sound order and fit for the purpose for which it/they is/are attended to, and that it/they complies/comply with the requirements of Section 10 of the OHS Act.
- 22.2 In accordance with the provisions of Section 10(4) of the OHS Act, the Mandatary hereby assumes the liability for taking the necessary steps to ensure that any article or substance that it erects or installs at the premises, or manufactures, sells or supplies to or for the Employer, complies with all the prescribed requirements and will be safe and without risks in terms of health and safety when properly used.

23. NO USAGE OF THE EMPLOYER'S EQUIPMENT

- 23.1 The Mandatary hereby acknowledges that his employees are not permitted to use any materials, machinery or equipment of the Employer unless the prior written consent of the Employer has been obtained, in which case the Mandatary shall ensure that only those persons authorized to make use of such materials, machinery or equipment, have access thereto.

24. TRANSPORT

- 24.1 The Mandatary shall ensure that all road vehicles used on the premises are in a roadworthy condition and are licensed and insured. The Mandatary shall ensure that all drivers shall have relevant and valid driving licenses and the Mandatary shall ensure that no vehicle/s shall carry passengers unless it is specifically designed to do and that all drivers shall adhere to the speed limits and road signs on the premises at all times.
- 24.2 In the event that any hazardous substances are to be transported on the premises, the Mandatary shall ensure that the requirements of the Hazardous Substances Act 15 of 1973 are complied with fully all times.

25. CLARIFICATION

- 25.1 In the event that the Mandatary requires clarification of any of the terms or provisions of this Agreement, he should take the necessary steps to contact the Risk Manager of the Employer to obtain such clarification.

26. DURATION OF AGREEMENT

- 26.1 This Agreement shall remain in force for the duration of the work to be performed by the Mandatary and/or while any of the Mandatary's employees are present on the Employer's premises.

27. NON COMPLIANCE WITH THE AGREEMENT

- 27.1 If the Mandatary fails to comply with any provisions of this Agreement, the Employer shall be entitled to give the mandatory 7 (seven) days written notice to remedy such non-compliance and if the Mandatary fails to comply with such notice, then the Employer shall forthwith be entitled but not obliged, without prejudice to any other rights or remedies which the mandatory may have in law,
- 271.1 to suspend the main Agreement; or
- 27.1.2 To claim immediate performance and/or payment of such obligations.
- 27.2 Should mandatory continue to breach the contract on three occasions, then the Employer is authorised to suspend the main contract without complying with the condition stated in the clause above.

28. HEADINGS

The headings as contained in this Agreement are for reference purposes only and shall not be construed as having any interpretative value in them or as giving any indication as to the meaning of the contents of the paragraphs contained in this Agreement.

Thus done and signed

at _____ on the _____ day of _____ 201__

For and on behalf of the Employer

Witnesses:

1. _____

2. _____

at _____ on the _____ day of _____ 201__

for and on behalf of the Mandatary

Witnesses:

3. _____

4. _____



Transnet SOC Limited Registration Number 1990/00900/06

TRANSNET SPECIFICATION

E7/1 - SPECIFICATION FOR GENERAL WORK AND WORKS ON, OVER, UNDER OR ADJACENT TO RAILWAY LINES AND NEAR HIGH VOLTAGE EQUIPMENT



(This specification shall be used in network operator contracts)

Circulation Not Restricted

© This document as a whole is protected by copyright. The information herein is the sole property of Transnet SOC Ltd. It may not be used, disclosed or reproduced in part or in whole in any manner whatsoever, except with the written permission of and in a manner permitted by the proprietors.

(This page not to be issued with contract)

SPECIFICATION FOR GENERAL WORK AND WORKS ON, OVER, UNDER OR ADJACENT TO RAILWAY LINES AND NEAR HIGH VOLTAGE EQUIPMENT

Author:	Project Manager Capital Program (Electrical)	G. Maposa	
Approved:	Senior Engineer Infra Engineering (Train Authorisation Systems)	J. van den Berg	
"	Principal Engineer Infra Engineering (Track)	M. Marutla	
"	Principal Engineer Infra Engineering (Structures)	J. Homan	
"	Principal Engineer Infra Engineering (Electrical)	J. Vosloo	
"	Principal Engineer Technology Management (Electrical)	W. Coetzee	
"	Chief Engineer Transport Telecoms	D. Botha	 17 June 11
Authorised:	Chief Engineer Infrastructure Engineering	J. van Aardt	 2011/06/30

Date: May 2011

(This page not to be issued with contract)



Transnet SOC Limited Registration Number 1990/00900/06

TRANSNET SPECIFICATION

E7/1 - SPECIFICATION FOR GENERAL WORK AND WORKS ON, OVER, UNDER OR ADJACENT TO RAILWAY LINES AND NEAR HIGH VOLTAGE EQUIPMENT

(This specification shall be used in network operator contracts)

Circulation Not Restricted

© This document as a whole is protected by copyright. The information herein is the sole property of Transnet SOC Ltd. It may not be used, disclosed or reproduced in part or in whole in any manner whatsoever, except with the written permission of and in a manner permitted by the proprietors.

CONTENTS

<u>CLAUSE</u>	<u>HEADING</u>	<u>PAGE</u>
1.0	SCOPE	3
2.0	DEFINITIONS	3
PART A - GENERAL SPECIFICATION		
3.0	AUTHORITY OF OFFICERS OF TRANSNET	4
4.0	CONTRACTOR'S REPRESENTATIVES AND STAFF	4
5.0	OCCUPATIONS AND WORK PERMITS	4
6.0	SPEED RESTRICTIONS AND PROTECTION	5
7.0	ROADS ON THE NETWORK OPERATOR'S PROPERTY	5
8.0	CLEARANCES	5
9.0	STACKING OF MATERIAL	5
10.0	EXCAVATION, SHORING, DEWATERING AND DRAINAGE	5
11.0	FALSEWORK FOR STRUCTURES	6
12.0	PILING	6
13.0	UNDERGROUND SERVICES	6
14.0	BLASTING AND USE OF EXPLOSIVES	6
15.0	RAIL TROLLEYS	7
16.0	SIGNAL TRACK CIRCUITS	7
17.0	PENALTY FOR DELAYS TO TRAINS	7
18.0	SURVEY BEACONS AND PEGS	7
19.0	TEMPORARY LEVEL CROSSINGS	8
20.0	COMPLETION OF THE WORKS	8
21.0	PROTECTION OF PERSONS AND PROPERTY	9
22.0	INTERFERENCE WITH THE NETWORK OPERATOR'S ASSETS AND WORK ON OPEN LINES	10
23.0	ACCESS, RIGHTS-OF-WAY AND CAMPSITES	10
24.0	SUPERVISION	10
25.0	HOUSING OF EMPLOYEES	10
26.0	OPTICAL FIBRE CABLE ROUTES	10
PART B - ADDITIONAL SPECIFICATION FOR WORK NEAR HIGH-VOLTAGE ELECTRICAL EQUIPMENT		
27.0	GENERAL	11
28.0	WORK ON BUILDINGS OR FIXED STRUCTURES	11
29.0	WORK DONE ON OR OUTSIDE OF ROLLING STOCK, INCLUDING LOADING AND UNLOADING	11
30.0	USE OF EQUIPMENT	12
31.0	CARRYING AND HANDLING MATERIAL AND EQUIPMENT	12
32.0	PRECAUTIONS TO BE TAKEN WHEN ERECTING OR REMOVING POLES, ANTENNAE AND TREES ETC.	12
33.0	USE OF WATER	13
34.0	USE OF CONSTRUCTION PLANT	13
35.0	WORK PERFORMED UNDER DEAD CONDITIONS UNDER COVER OF A WORK PERMIT	13
36.0	TRACTION RETURN CIRCUITS IN RAILS	13
37.0	HIGH-VOLTAGE ELECTRICAL EQUIPMENT NOT MAINTAINED AND/OR OPERATED BY THE NETWORK OPERATOR	14

1.0 SCOPE

- 1.1 This specification covers the network operator's requirements for general work and works on, over, under or adjacent to railway lines and near high voltage equipment.

2.0 DEFINITIONS

The following definitions shall apply:

"Authorised Person" - A person whether an employee of the network operator or not, who has been specially authorised to undertake specific duties in terms of Transnet' publication Electrical Safety Instructions, and who holds a certificate or letter of authority to that effect.

"Barrier" Any device designed to restrict access to "live" high-voltage electrical equipment.

"Bond" - A short conductor installed to provide electrical continuity.

"Contractor" - Any person or organisation appointed by the network operator to carry out work on its behalf.

"Contract Supervisor" - The person or juristic person appointed by the network operator from time to time as the Contract Supervisor, to administer the Contractor's performance and execution of the Works according to the powers and rights held by and obligations placed upon the Contract Supervisor in terms of the Contract.

"Dead" - Isolated and earthed.

"Electrical Officer (Contracts)" - The person appointed in writing by the Project Manager in terms of this specification as the person who shall be consulted by the Contractor in all electrical matters to ensure that adequate safety precautions are taken by the Contractor.

"Executive Officer" - The person appointed by the network operator from time to time as the Executive Officer to act according to the rights and powers held by and obligations placed upon him in terms of the Contract.

"High-Voltage" - A voltage normally exceeding 1000 volts.

"Live" - A conductor is said to be "live" when it is at a potential different from that of the earth or any other conductor of the system of which it forms a part.

"Near" - To be in such a position that a person's body or the tools he is using or any equipment he is handling may come within 3 metres of "live" exposed high-voltage electrical equipment.

"Occupation" - An authorisation granted by the network operator for work to be carried out under specified conditions on, over, under or adjacent to railway lines.

"Occupation Between Trains" - An occupation during an interval between successive trains.

"Optical Fibre Cable" - Buried or suspended composite cable containing optical fibres used in:

- telecommunication networks for transmission of digital information and
- safety sensitive train operations systems.

"Project Manager" – As defined in the special conditions of the contract. The person or juristic person appointed by the network operator from time to time as the Project Manager, to administer the Contract according to the powers and rights held by and obligations placed upon him in terms of the Contract.

"Responsible Representative" - The responsible person in charge, appointed by a contractor, who has undergone specific training (and holds a certificate) to supervise (general or direct) staff under his control who perform general work or to work on, over, under or adjacent to railway lines and in the vicinity of high-voltage electrical equipment.

"Total Occupation" - An occupation for a period when trains are not to traverse the section of line covered by the occupation.

"Work on" - Work undertaken on or so close to the equipment that the specified working clearances to the "live" equipment cannot be maintained.

"Work Permit" - A combined written application and authority to proceed with work on or near dead electrical equipment.

"Works" – The contractual intent for the work to be done as defined in the contract at a defined work site.

PART A - GENERAL SPECIFICATION

3.0 AUTHORITY OF OFFICERS OF TRANSNET

- 3.1 The Contractor shall co-operate with the officers of the network operator and shall comply with all instructions issued and restrictions imposed with respect to the Works which bear on the existence and operation of the network operator's railway lines and high-voltage equipment.
- 3.2 Without limiting the generality of the provisions of clause 3.1, any duly authorised representative of the network operator, having identified himself, may stop the work if, in his opinion, the safe passage of trains or the safety of the network operator's assets or any person is affected. **CONSIDERATIONS OF SAFETY SHALL TAKE PRECEDENCE OVER ALL OTHER CONSIDERATIONS.**

4.0 CONTRACTOR'S REPRESENTATIVES AND STAFF

- 4.1 The Contractor shall nominate Responsible Representatives of whom at least one shall be available at any hour for call-out in cases of emergency. The Contractor shall provide the Contract Supervisor with the names, addresses and telephone numbers of the representatives.
- 4.2 The Contractor guarantees that he has satisfied himself that the Responsible Representative is fully conversant with this specification and that he shall comply with all his obligations in respect thereof.
- 4.3 The Contractor shall ensure that all contractor staff receives relevant awareness, educational and competence training regarding safety as prescribed.

5.0 OCCUPATIONS AND WORK PERMITS

- 5.1 Work to be done during total occupation or during an occupation between trains or under a work permit shall be done in a manner decided by the Contract Supervisor and at times to suit the network operator requirements.
- 5.2 The Contractor shall organise the Works in a manner which will minimise the number and duration of occupations and work permits required.
- 5.3 The network operator will not be liable for any financial or other loss suffered by the Contractor arising from his failure to complete any work scheduled during the period of an occupation or work permit.
- 5.4 The Contractor shall submit to the Contract Supervisor, in writing, requests for occupations or work permits together with details of the work to be undertaken, at least 21 days before they are required. The network operator does not undertake to grant an occupation or work permit for any particular date, time or duration.
- 5.5 The network operator reserves the right to cancel any occupation or work permit at any time before or during the period of occupation or work permit. If, due to cancellation or change in date or time, the Contractor is not permitted to start work under conditions of total occupation or work permit at the time arranged, all costs caused by the cancellation shall be born by the Contractor except as provided for in clauses 5.6 to 5.8.
- 5.6 When the Contractor is notified less than 2 hours before the scheduled starting time that the occupation or work permit is cancelled, he may claim reimbursement of his direct financial losses caused by the loss of working time up to the time his labour and plant are employed on other work, but not exceeding the period of the cancelled occupation or work permit.
- 5.7 When the Contractor is notified less than 2 hours before the scheduled starting time, or during an occupation or work permit, that the duration of the occupation or work permit is reduced, he may claim reimbursement of his direct financial losses caused by the loss of working time due to the reduced duration of the occupation or work permit.
- 5.8 Reimbursement of the Contractor for any loss of working time in terms of clause 5.6 and 5.7, shall be subject to his claims being submitted within 14 days of the event with full details of labour and plant involved, and provided that the Contract Supervisor certifies that no other work on which the labour and plant could be employed was immediately available.
- 5.9 Before starting any work for which an occupation has been arranged, the Contractor shall obtain from the Contract Supervisor written confirmation of the date, time and duration of the occupation.
- 5.10 Before starting any work for which a work permit has been arranged, the Responsible Representative shall read and sign portion C of the Work Permit, signifying that he is aware of the work boundaries within which work may be undertaken. After the work for which the permit was granted has been completed, or when the

work permit is due to be terminated, or if the permit is cancelled after the start, the same person who signed portion C shall sign portion D of the Work Permit, thereby acknowledging that he is aware that the electrical equipment is to be made "live". The Contractor shall advise all his workmen accordingly.

6.0 SPEED RESTRICTIONS AND PROTECTION

- 6.1 When speed restrictions are imposed by the network operator because of the Contractor's activities, the Contractor shall organise and carry out his work so as to permit the removal of the restrictions as soon as possible.
- 6.2 When the Contract Supervisor considers protection to be necessary the Contractor shall, unless otherwise agreed, provide all protection including flagmen, other personnel and all equipment for the protection of the network operator's and the Contractor's personnel and assets, the public and including trains.
- 6.2.1 The network operator will provide training free of charge of the Contractor's flagmen and other personnel performing protection duties. The Contractor shall consult with the Contract Supervisor, whenever he considers that protection will be necessary, taking into account the minimum permissible clearances set out in the Manual for Track Maintenance (Document no. BBB0481):
- Drawing no. BE-97 Sheet 1: Horizontal Clearances: 1065mm gauge (Annexure 1 sheet 1)
 - Drawing no. BE-97 Sheet 2: Vertical Clearances: 1065mm gauge (Annexure 1 sheet 2)
 - Drawing no. BE-97 Sheet 3: Clearances: Platform (Annexure 1 sheet 3)
 - Drawing no. BE-97 Sheet 5: Clearances: 610mm Gauge (Annexure 1 sheet 5)
- 6.3 The Contractor shall appoint a Responsible Representative to receive and transmit any instruction which may be given by the network operator personnel providing protection.

7.0 ROADS AND ROADS ON THE NETWORK OPERATOR'S PROPERTY

- 7.1 The Contractor shall take every reasonable precaution to prevent damage to any roads or bridges used to obtain access to the site, and shall select routes, use vehicles, and restrict loads so that any extraordinary traffic as may arise from the moving of plant or material to or from the site shall be limited as far as is reasonably possible.
- 7.2 The Contractor shall not occupy or interfere in any way with the free use of any public or private road, right-of-way, path or street unless the Contract Supervisor has obtained the approval of the road authority concerned.

8.0 CLEARANCES

- 8.1 No temporary works shall encroach on the appropriate minimum clearances set out in the Manual for Track Maintenance (Document no. BBB0481):
- Drawing no. BE-97 Sheet 1: Horizontal Clearances: 1065mm gauge (Annexure 1 sheet 1)
 - Drawing no. BE-97 Sheet 2: Vertical Clearances: 1065mm gauge (Annexure 1 sheet 2)
 - Drawing no. BE-97 Sheet 3: Clearances: Platform (Annexure 1 sheet 3)
 - Drawing no. BE-97 Sheet 5: Clearances: 610mm Gauge (Annexure 1 sheet 5)

9.0 STACKING OF MATERIAL

- 9.1 The Contractor shall not stack any material closer than 3m from the centre line of any railway line without prior approval of the Contract Supervisor.

10.0 EXCAVATION, SHORING, DEWATERING AND DRAINAGE

- 10.1 Unless otherwise approved by the Contract Supervisor any excavation adjacent to a railway line shall not encroach on the hatched area shown in Figure 1.

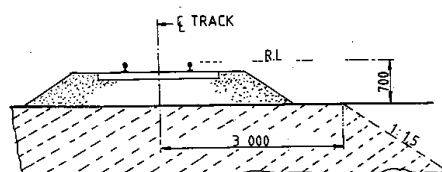


Fig. 1.

- 10.2 The Contractor shall provide, at his own cost any shoring, dewatering or drainage of any excavation unless otherwise stipulated elsewhere in the Contract.
- 10.3 Where required by the Contract Supervisor, drawings of shoring for any excavation under or adjacent to a railway line shall be submitted and permission to proceed, obtained before the excavation is commenced.
- 10.4 The Contractor shall prevent ingress of water to the excavation but where water does enter, he shall dispose of it as directed by the Contract Supervisor.
- 10.5 The Contractor shall not block, obstruct or damage any existing drains either above or below ground level unless he has made adequate prior arrangements to deal with drainage.

11.0 FALSEWORK FOR STRUCTURES

- 11.1 Drawings of falsework for the construction of any structure over, under or adjacent to any railway line shall be submitted to the Contract Supervisor and his permission to proceed obtained before the falsework is erected. Each drawing shall be given a title and a distinguishing number and shall be signed by a registered professional engineer certifying that he has checked the design of the falsework and that the drawings are correct and in accordance with the design.
- 11.2 After the falsework has been erected and before any load is applied, the Contractor shall submit to the Contract Supervisor a certificate signed by a registered professional engineer certifying that he has checked the falsework and that it has been erected in accordance with the drawings. Titles and numbers of the drawings shall be stated in the certificate. Notwithstanding permission given by the Contract Supervisor to proceed, the Contractor shall be entirely responsible for the safety and adequacy of the falsework.

12.0 PILING

- 12.1 The Contract Supervisor will specify the conditions under which piles may be installed on the network operator's property.

13.0 UNDERGROUND SERVICES

- 13.1 No pegs or stakes shall be driven or any excavation made before the Contractor has established that there are no underground services which may be damaged thereby.
- 13.2 Any damage shall be reported immediately to the Contract Supervisor, or to the official in charge at the nearest station, or to the traffic controller in the case of centralised traffic control.

14.0 BLASTING AND USE OF EXPLOSIVES

- 14.1 When blasting within 500m of a railway line, the Contractor shall observe the requirements stipulated in this specification.
- 14.2 No blasting shall be carried out except with the prior written permission of the Contract Supervisor and under such conditions as he may impose.
- 14.3 On electrified lines the Contractor shall also obtain the permission of the Electrical Officer (Contracts) before blasting, and shall give at least 21 days notice of his intention to blast. No blasting shall be done in the vicinity of electrified lines unless a member of the network operator's electrical personnel is present.
- 14.4 The Contractor shall arrange for the supply, transport storage and use of explosives.
- 14.5 The Contractor shall have labour, tools and plant, to the satisfaction of the Contract Supervisor, available on the site to clear immediately any stones or debris deposited on the track or formation by blasting, and to repair any damage to the track or formation immediately after blasting. Repairs to the track shall be carried out only under the supervision of a duly authorised representative of the network operator.
- 14.6 The Contractor shall notify the Contract Supervisor of his intention to blast at least 21 days before the commencement of any blasting operations.
- 14.7 Before any blasting is undertaken, the Contractor and the Contract Supervisor shall jointly examine and measure up any buildings, houses or structures in the vicinity of the proposed blasting to establish the extent of any existing cracking or damage to such structures, etc. The Contractor, shall, subject to the provisions stipulated in the Contract Insurance Policy, make good any deterioration of such buildings, houses, or structures, which, in the opinion of the Contract Supervisor, was directly caused by the blasting.
- 14.8 After completion of the blasting the Contractor shall obtain a written clearance from each landowner in

the vicinity of the blasting operations to the effect that all claims for compensation in respect of damage caused by the blasting operations to their respective properties, have been settled.

- 14.9 The Contractor shall provide proof that he has complied with the provisions of clauses 10.17.1 to 10.17.4 of the Explosives Regulations (Act 26 of 1956 as amended).
- 14.10 Blasting within 500m of a railway line will only be permitted during intervals between trains. A person appointed by the Contract Supervisor, assisted by flagmen with the necessary protective equipment, will be in communication with the controlling railway station.
- Only this person will be authorised to give the Contractor permission to blast, and the Contractor shall obey his instructions implicitly regarding the time during which blasting may take place.
- 14.11 The flagmen described in clause 14.10, where provided by the network operator, are for the protection of trains and the network operator's property only, and their presence does not relieve the Contractor in any manner of his responsibilities in terms of Explosives Act or Regulations, or any obligation in terms of this Contract.
- 14.12 The person described in clause 14.10 will record in a book provided and retained by the network operator, the dates and times:-
- (i) when each request is made by him to the controlling station for permission to blast;
 - (ii) when blasting may take place;
 - (iii) when blasting actually takes place; and
 - (iv) when he advises the controlling station that the line is safe for the passage of trains.
- 14.13 Before each blast the Contractor shall record in the same book, the details of the blast to be carried out. The person appointed by the Contract Supervisor and the person who will do the blasting shall both sign the book whenever an entry described in clause 14.12 is made.

15.0 RAIL TROLLEYS

- 15.1 The use of rail trolleys or trestle trolleys on a railway line for working on high voltage equipment will be permitted only if approved by the Contract Supervisor and under the conditions stipulated by him.
- 15.2 All costs in connection with trolley working and any train protection services requested by the Contractor shall, be borne by the Contractor, unless otherwise agreed.

16.0 SIGNAL TRACK CIRCUITS

- 16.1 Where signal track circuits are installed, the Contractor shall ensure that no material capable of conducting an electrical current makes contact between rails of railway line/lines.
- 16.2 No signal connections on track-circuited tracks shall be severed without the Contract Supervisor's knowledge and consent.

17.0 PENALTY FOR DELAYS TO TRAINS

- 17.1 If any trains are delayed by the Contractor and the Contract Supervisor is satisfied that the delay was avoidable, a penalty will be imposed on the Contractor as stipulated in the contract, for the period and number of trains delayed.

18.0 SURVEY BEACONS AND PEGS

- 18.1 The Contractor shall not on any account move or damage any beacon, bench mark, reference mark, signal or trigonometrical station in the execution of the Works without the written approval of the Contract Supervisor.

Should the Contractor be responsible for any such occurrence, he shall report the circumstances to the Contract Supervisor who will arrange with the Director-General of Surveys for replacement of the beacon or mark at the cost of the Contractor.

- 18.2 The Contractor shall not move or damage any cadastral or mining beacon without the written approval of the Contract Supervisor and before it has been referenced by a registered land surveyor. Any old boundary beacon, which becomes an internal beacon on creation of new boundaries, shall not be moved without the written approval of the Contract Supervisor.

Should the Contractor move or damage any cadastral or mining beacon without authority, he shall be responsible for having it replaced, at his cost, by a land surveyor.

- 18.3 The Contractor shall preserve all pegs and bench marks. Such survey points shall not be removed without the written approval of the Contract Supervisor. Should any peg or benchmark be removed without authority, the Contract Supervisor will arrange for its replacement and the cost will be recovered from the Contractor. No claim will be considered for delay in replacing any such peg or bench mark. Each peg replaced shall be checked by the Contractor.

- 18.4 Where a new boundary has been established, beacons on the fence line shall not be disturbed, and fence posts or anchors may not be placed or excavations made within 0,6 m of any beacon without the prior written approval of the Contract Supervisor.

19.0 TEMPORARY LEVEL CROSSINGS

- 19.1 The Contract Supervisor may, on request of the Contractor, and if necessary for the purpose of execution of the Works, permit the construction of a temporary level crossing over a railway a line at a position approved by the Contract Supervisor and at the Contractor's cost. The period for which the temporary level crossing is permitted will be at the discretion of the Contract Supervisor.

- 19.2 The Contractor will provide protection and supervise the construction of the road over the track(s) and within the railway servitude at the level crossing, as well as the erection of all road signs and height gauges. All cost to be borne by the applicant.

The Contractor shall exercise extreme caution in carrying out this work, especially in respect of damage to tracks, services, overhead power and communications routes and prevent contact with "live" overhead electrical equipment.

Unless otherwise agreed, the Contractor will provide the service deviations or alterations to the network operator's track-, structure-, drainage-, electrical-, telecommunications- and train authorisation systems to accommodate the level crossing.

- 19.3 The Contractor shall take all necessary steps including the provision of gates, locks and, where necessary, watchmen to restrict the use of the temporary level crossing to himself and his employees, his subcontractors and their employees, the staff of the network operator and to such other persons as the Contract Supervisor may permit and of whose identity the Contractor will be advised. If so ordered by the Contract Supervisor, the Contractor shall provide persons to control road traffic using the temporary level crossing. Such persons shall stop all road traffic when any approaching train is within seven hundred and fifty (750) metres of the temporary level crossing, and shall not allow road traffic to proceed over it until the lines are clear.

- 19.4 The Contractor shall maintain the temporary level crossing within the railway servitude in good condition for the period it is in use. A temporary agreement with the road authority to be concluded for the maintenance of the level crossing outside the railway servitude.

- 19.5 When the temporary level crossing is no longer required by the Contractor, or permitted by the network operator, the Contractor shall at his own cost remove it and restore the site and the network operator's track-, structure-, drainage-, electrical-, telecommunications- and train authorisation systems to its original condition. Work over the tracks and within the railway servitude will be supervised by the network operator.

20.0 COMPLETION OF THE WORKS

- 20.1 On completion of the works, the Contractor shall remove all the remaining construction plant and material from the site, other than material which is the property of the network operator, and leave the site in a clean, neat and tidy condition. If material and plant is required for the liability and maintenance period the Contract supervisor must authorise it's retention on site.

21.0 PROTECTION OF PERSONS AND PROPERTY

- 21.1 The Contractor shall provide and maintain all lights, guards, barriers, fencing and watchmen when and where necessary or as required by the Contract Supervisor or by any statutory authority, for the protection of the Works and for the safety and convenience of the public.

Red, yellow, green or blue lights may not be used by the Contractor as they can be mistaken for signals. Red, yellow, green or white flags shall only be used for protection by the Contractor. Within the precincts of a port the Contractor shall obtain the permission of the Port Captain before installing any light.

- 21.2 The Contractor shall take all the requisite measures and precautions during the course of the Works to:
- (i) protect the public and property of the public,
 - (ii) protect the property and workmen of both the network operator and the Contractor,
 - (iii) avoid damage to and prevent trespass on adjoining properties, and
 - (iv) ensure compliance with any instruction issued by the Contract Supervisor or other authorised person, and with any stipulation embodied in the contract documents which affects the safety of any person or thing.
- 21.3 The network operator will provide, at its own cost, protection for the safe working of trains during such operations as the Contract Supervisor may consider necessary. Protection by the network operator for any purpose whatsoever, does not absolve the Contractor of his responsibilities in terms of the Contract.
- 21.4 The Contractor shall take all precautions and appoint guards, watchmen and compound managers for prevention of disorder among and misconduct by the persons employed on the Works and by any other persons, whether employees or not, on the work site and for the preservation of the peace and protection of persons and property in the direct neighbourhood. Any relocation of camps because of disorder shall be at the Contractor's expense.
- 21.5 All operations necessary for the execution of the Works, including the provision of any temporary work and camping sites, shall be carried out so as not to cause veldt fires, ground and environmental pollution, soil erosion or restriction of or interference with streams, furrows, drains and water supplies.
- If the original surface of the ground is disturbed in connection with the Works, it shall be made good by the Contractor to the satisfaction of the land owner, occupier or responsible authority.
- 21.6 The Contractor shall take all reasonable steps to minimise noise and disturbance when carrying out the Works, including work permitted outside normal working hours.
- 21.7 Dumping of waste or excess materials by the Contractor shall, in urban areas, be done under the direction and control of, and at sites made available by the local authority. Dumping outside local authority boundaries shall be done only with the express permission and under the direction and control of the Contract Supervisor.
- 21.8 The Contractor shall comply with environmental protection measures and specifications stipulated by the Contract Supervisor and/or local and environmental authorities.
- 22.0 INTERFERENCE WITH THE NETWORK OPERATOR'S ASSETS AND WORK ON OPEN LINES**
- 22.1 The Contractor shall not interfere in any manner whatsoever with an open line, nor shall he carry out any work or perform any act which affects the security, use or safety of an open line except with the authority of the Contract Supervisor and in the presence of a duly authorised representative of the network operator.
- 22.2 The Contractor shall not carry out any work or operate any plant, or place any material whatsoever nearer than three metres from the centre line of any open line except with the written permission of the Contract Supervisor and subject to such conditions as he may impose.
- 22.3 Care must be taken not to interfere with or damage any services such as overhead wire routes, cables or pipes and optical fibre cable, except as provided for the work specified. The Contractor will be held responsible for any damage to or interruption of such services arising from any act or omission on his part or of any of his employees, or persons engaged by him on the Works. The cost of repairing, replacing or restoring the services, as well as all other costs arising from any damage to services, shall be borne by, and will be recovered from the Contractor.
- 22.4 Authority granted by the Contract Supervisor and the presence of an authorised representative of the network operator in terms hereof, shall not relieve the Contractor of his duty to comply with this specification.
- 23.0 ACCESS, RIGHTS-OF-WAY AND CAMPSITES**
- 23.1 Where entry onto the network operator's property is restricted, permission to enter will be given only for the purpose of carrying out the Works and will be subject to the terms and conditions laid down by the network operator.
- 23.2 The Contractor shall arrange for campsites, workplaces and access thereto as well as for any right-of-

way over private property to the site of the Works, and for access within the boundaries of the network operator's property. The owners of private property to be traversed shall be approached and treated with tact and courtesy by the Contractor, who shall, if necessary, obtain a letter of introduction to such property owners from the Contract Supervisor.

The Contractor shall be responsible for the closing of all gates on roads and tracks used by him or his employees. Except with the prior approval of the Contract Supervisor and the owner or occupier of any private land to be traversed, the Contractor shall not cut, lower, damage, remove or otherwise interfere with any fence or gate which is either on the network operator's property or on private property and which restricts access to the Works. Where such approval has been given, the Contractor shall prevent entry of animals or unauthorised persons onto the network operator's or private property, and shall make the fences safe against trespass at the close of each day's work.

23.3 The Contractor shall take all reasonable steps to confine the movement of vehicles and plant to the approved right-of-way to minimise damage to property, crops and natural vegetation.

23.4 When access is no longer required, and before completion of the Works, the Contractor shall repair, restore or replace any fence or gate damaged during execution of the Works to the satisfaction of the Contract Supervisor and shall furnish the Contract Supervisor with a certificate signed by the owner and occupier of land over which he has gained access to a campsite, workplace and the Works, certifying that the owner and occupier have no claim against the Contractor or the network operator arising from the Contractor's use of the land. Should the Contractor be unable to obtain the required certificate, he shall report the circumstances to the Contract Supervisor.

24.0 SUPERVISION

24.1 The Contract Supervisor will provide overall technical superintendence of the Works, and may direct the Contractor in terms of the provisions of the Contract or in respect of any measures which the Contract Supervisor may require for the operations of the network operator, the safety of trains, property and workmen of the network operator, and for the safety of other property and persons. The Contractor shall carry out the directions of the Contract Supervisor. The superintendence exercised by the Contract Supervisor, including any agreement, approval, refusal or withdrawal of any approval given, shall not relieve the Contractor of any of his duties and liabilities under the Contract, and shall not imply any assumption by the network operator or by the Contract Supervisor of the legal and other responsibilities of the Contractor in carrying out the Works.

24.2 The Contract Supervisor may delegate to any deputy or other person, any of his duties or functions under the Contract. On receiving notice in writing of such delegation, the Contractor shall recognise and obey the deputy or person to whom any such duties or functions have been delegated as if he were the Contract Supervisor.

24.3 The Contractor shall exercise supervision over the Works at all times when work is performed or shall be represented by an agent having full power and authority to act on behalf of the Contractor. Such agent shall be competent and responsible, and have adequate experience in carrying out work of a similar nature to the Works, and shall exercise personal supervision on behalf of the Contractor. The Contract Supervisor shall be notified in writing of such appointment which will be subject to his approval.

24.4 The Contractor or his duly authorised agent shall be available on the site at all times while the Works are in progress to receive the orders and directions of the Contract Supervisor.

25.0 HOUSING OF EMPLOYEES

25.1 The Contractor shall, where necessary, make his own arrangements for suitable housing of his employees. Where temporary housing is permitted by the Contract Supervisor on any part of the site, the Contractor shall provide suitable sanitation, lighting and potable water supplies in terms of the requirements of the local authority or the current network operator's specification; Minimum Communal Health Requirements in Areas outside the Jurisdiction of a Local Authority - E.4B, as applicable.

25.2 Fouling the area inside or outside the network operator's boundaries shall be prevented. The Contractor will be called upon by the Contract Supervisor to dispose of any foul or waste matter generated by the Contractor.

26.0 OPTICAL FIBRE CABLE ROUTES

26.1 The Contractor shall not handle, impact, move or deviate any optical fibre cable without prior approval.

26.2 Works that in any way affect the optical fibre cable requires prior approval from the Contract Supervisor

who will determine the work method and procedures to be followed.

PART B - SPECIFICATION FOR WORK NEAR HIGH-VOLTAGE ELECTRICAL EQUIPMENT
27.0 GENERAL

- 27.1 This specification is based on the contents of Transnet's publication ELECTRICAL SAFETY INSTRUCTIONS, as amended, a copy of which will be made available on loan to the Contractor for the duration of the contract.

These instructions apply to all work near "live" high-voltage equipment maintained and/or operated by the network operator, and the onus rests on the Contractor to ensure that he obtains a copy.

- 27.2 This specification must be read in conjunction with and not in lieu of the Electrical Safety Instructions.
- 27.3 The Contractor's attention is drawn in particular to the contents of Part I, Sections 1 and 2 of the Electrical Safety Instructions.
- 27.4 The Electrical Safety Instructions cover the minimum safety precautions which must be taken to ensure safe working on or near high-voltage electrical equipment, and must be observed at all times. Should additional safety measures be considered necessary because of peculiar local conditions, these may be ordered by and at the discretion of the Electrical Officer (Contracts).
- 27.5 The Contractor shall obtain the approval of the Electrical Officer (Contracts) before any work is done which causes or could cause any portion of a person's body or the tools he is using or any equipment he is handling, to come within 3 metres of any "live" high-voltage equipment.
- 27.6 The Contractor shall regard all high-voltage equipment as "live" unless a work permit is in force.
- 27.7 Safety precautions taken or barriers erected shall comply with the requirements of the Electrical Officer (Contracts), and shall be approved by him before the work to be protected is undertaken by the Contractor. The Contractor shall unless otherwise agreed, bear the cost of the provision of the barriers and other safety precautions required, including the attendance of the network operator's staff where this is necessary.
- 27.8 No barrier shall be removed unless authorised by the Electrical Officer (Contracts).

28.0 WORK ON BUILDINGS OR FIXED STRUCTURES

- 28.1 Before any work is carried out or measurements are taken on any part of a building, fixed structure or earthworks of any kind above ground level situated within 3 metres of "live" high-voltage equipment, the Electrical Officer (Contracts) shall be consulted to ascertain the conditions under which the work may be carried out.
- 28.2 No barrier erected to comply with the requirements of the Electrical Officer (Contracts) shall be used as temporary staging or shuttering for any part of the Works.
- 28.3 The shuttering for bridge piers, abutments, retaining walls or parapets adjacent to or over any track may be permitted to serve as a barrier, provided that it extends at least 2,5 metres above any working level in the case of piers, abutments and retaining walls and 1,5 metres above any working level in the case of parapets.

29.0 WORK DONE ON OR OUTSIDE OF ROLLING STOCK, INCLUDING LOADING OR UNLOADING

- 29.1 No person may stand, climb or work, whilst on any platform, surface or foothold:
- 29.1.1 higher than the normal unrestricted access way, namely -
 - 29.1.1.1 external walkways on diesel, steam and electric locomotives, steam heat vans, etc. and
 - 29.1.1.2 walkways between coaches and locomotives.
 - 29.1.2 of restricted access ways in terms of the Electrical Safety Instructions namely -
 - 29.1.2.1 the floor level of open wagons
 - 29.1.2.2 external walkways or decks of road-rail vehicles, on-track maintenance machines and material trains.
 - 29.1.3 Unauthorised staff working on these platforms must be directly supervised by duly authorised persons in terms of clause 607.1.3 of the Electrical Safety Instructions. These persons must attend the relevant electrical safety module training. A letter of training must then be issued by an accredited training authority. A Category C Certificate of Authority must be obtained from the

local depot examining officer.

- 29.2 When in the above positions no person may raise his hands or any equipment he is handling above his head.
- 29.3 In cases where the Contractor operates his own rail mounted equipment, he shall arrange for the walkways on this plant to be inspected by the Electrical Officer (Contracts) and approved, before commencement of work.
- 29.4 The handling of long lengths of material such as metal pipes, reinforcing bars, etc should be avoided, but if essential they shall be handled as nearly as possible in a horizontal position below head height.
- 29.5 The Responsible Representative shall warn all persons under his control of the danger of being near "live" high-voltage equipment, and shall ensure that the warning is fully understood.
- 29.6 Where the conditions in clauses 30.1 to 30.4 cannot be observed the Electrical Officer (Contracts), shall be notified. He will arrange for suitable Safety measures to be taken. The Electrical Officer (Contracts), may in his discretion and in appropriate circumstances, arrange for a suitable employee of the Contractor to be specially trained by the network operator and at the Contractor's cost, as an Authorised Person to work closer than 3 metres from "live" overhead conductors and under such conditions as may be imposed by the senior responsible electrical engineer of the network operator.

30.0 USE OF EQUIPMENT

30.1 Measuring Tapes and Devices

- 30.1.1 Measuring tapes may be used near "live" high-voltage equipment provided that no part of any tape or a person's body comes within 3 metres of the "live" equipment.
- 30.1.2 In windy conditions the distance shall be increased to ensure that if the tape should fall it will not be blown nearer than 3 metres from the "live" high-voltage equipment.
- 30.1.3 Special measuring devices longer than 2 metres such as survey sticks and rods may be used if these are of non-conducting material and approved by the responsible Electrical Engineer of the network operator, but these devices must not be used within 3 metres of "live" high-voltage equipment in rainy or wet conditions.
- 30.1.4 The assistance of the Electrical Officer (Contracts) shall be requested when measurements within the limits defined in clauses 31.1.1 to 31.1.3 are required.
- 30.1.5 The restrictions described in 31.1.1 to 31.1.3 do not apply on a bridge deck between permanent parapets nor in other situations where a barrier effectively prevents contact with the "live" high-voltage equipment.

30.2 Portable Ladders

- 30.2.1 Any type of portable ladder longer than 2 metres may only be used near "live" high-voltage equipment under the direct supervision of the Responsible Representative. He shall ensure that the ladder is always used in such a manner that the distance from the base of the ladder to any "live" high-voltage equipment is greater than the fully extended length of the ladder plus 3 metres. Where these conditions cannot be observed, the Electrical Officer (Contracts) shall be advised, and he will arrange for suitable safety measures to be taken.

31.0 CARRYING AND HANDLING MATERIAL AND EQUIPMENT

- 31.1 Pipes, scaffolding, iron sheets, reinforcing bars and other material which exceeds 2 metres in length shall be carried completely below head height near "live" high-voltage equipment. For maximum safety such material should be carried by two or more persons so as to maintain it as nearly as possible in a horizontal position. The utmost care must be taken to ensure that no part of the material comes within 3 metres of any "live" high-voltage equipment.
- 31.2 Long lengths of wire or cable shall never be run out in conditions where a part of a wire or cable can come within 3 metres of any "live" high-voltage equipment unless the Electrical Officer (Contracts) has been advised and has approved appropriate safety precautions.
- 31.3 The presence of overhead power lines shall always be taken account of especially when communications lines or cables or aerial cables, stay wires, etc. are being erected above ground level.

32.0 PRECAUTIONS TO BE TAKEN WHEN ERECTING OR REMOVING POLES, ANTENNAE, TREES ETC.

- 32.1 A pole may be handled for the purpose of erection or removal near high-voltage equipment under the following conditions:

(i) If the distance between the point at which the pole is to be erected or removed and the nearest "live" high-voltage equipment is more than the length of the pole plus 3 metres, the work shall be supervised by the Responsible Representative.

(ii) If the distance described in (i) is less than the length of the pole plus 3 metres, the Electrical Officer (Contracts) shall be consulted to arrange for an Authorised Person to supervise the work and to ensure that the pole is earthed where possible. The pole shall be kept in contact with the point of erection, and adequate precautions shall be taken to prevent contact with "live" high-voltage equipment.

32.2 The cost of supervision by an Authorised Person and the provision of earthing shall, unless otherwise agreed, be borne by the Contractor.

32.3 The provisions of clauses 33.1 and 33.2 shall also apply to the erection or removal of columns, antennae, trees, posts, etc.

33.0 USE OF WATER

33.1 No water shall be used in the form of a jet if it can make contact with any "live" high-voltage equipment or with any person working on such equipment.

34.0 USE OF CONSTRUCTION PLANT

34.1 "Construction plant" entails all types of plant including cranes, piling frames, boring machines, excavators, draglines, dewatering equipment and road vehicles with or without lifting equipment.

34.2 When work is being undertaken in such a position that it is possible for construction plant or its load to come within 3 metres of "live" high-voltage equipment, the Electrical Officer (Contracts) shall be consulted. He will arrange for an Authorised Person to supervise the work and to ensure that the plant is adequately earthed. The Electrical Officer (Contracts) will decide whether further safety measures are necessary.

34.3 The cost of any supervision by an Authorised Person and the provision of earthing shall, unless otherwise agreed, be borne by the Contractor.

34.4 When loads are handled by cranes, non-metallic rope hand lines shall be used, affixed to such loads so as to prevent their swinging and coming within 3 metres of "live" high-voltage equipment.

34.5 Clauses 35.1 to 35.4 shall apply *mutatis mutandis* to the use of maintenance machines of any nature.

35.0 WORK PERFORMED UNDER DEAD CONDITIONS UNDER COVER OF A WORK PERMIT

35.1 If the Responsible Representative finds that the work cannot be done in safety with the high-voltage electrical equipment "live", he shall consult the Electrical Officer (Contracts) who will decide on the action to be taken.

35.2 If a work permit is issued the Responsible Representative shall-

(i) before commencement of work ensure that the limits within which work may be carried out have been explained to him by the Authorised Person who issued the permit to him, and that he fully understands these limits.

(ii) sign portion C of the permit before commencement of work;

(iii) explain to all persons under his control the limits within which work may be carried out, and ensure that they fully understand these limits;

(iv) care for the safety of all persons under his control whilst work is in progress; and

(v) withdraw all personnel under his control from the equipment on completion of the work before he signs portion D of the work permit.

36.0 TRACTION RETURN CIRCUITS IN RAILS

36.1 DANGEROUS CONDITIONS CAN BE CREATED BY REMOVING OR SEVERING ANY BOND.

36.2 Broken rails with an air gap between the ends, and joints at which fishplates are removed under "broken bond" conditions, are potentially lethal. The rails on either side of an air gap between rail ends on electrified lines shall not be touched simultaneously until rendered safe by the network operator personnel.

36.3 The Contractor shall not break any permanent bonds between rails or between rails and any structure. He shall give the Contract Supervisor at least 7 days written notice when removal of such bonds is necessary.

36.4 No work on the track which involves interference with the traction return rail circuit either by cutting or removing the rails, or by removal of bonds shall be done unless the Electrical Officer (Contracts) is consulted. He will take such precautions as may be necessary to ensure continuity of the return circuit before permitting the work to be commenced.

37.0 HIGH-VOLTAGE ELECTRICAL EQUIPMENT NOT MAINTAINED AND/OR OPERATED BY THE NETWORK OPERATOR

Where the work is undertaken on or near high-voltage electrical equipment which is not maintained and/or operated by the network operator, the Occupational Health and Safety Act No. 85 of 1993, and Regulations and Instructions, or the Mines Health and Safety Act (Act 29 of 1996), shall apply.

Such equipment includes:-

- (i) Eskom and municipal equipment;
- (ii) The Contractor's own power supplies; and
- (iii) Electrical equipment being installed but not yet taken over from the Contractor.

END

T2.2-02: Assessment Schedule: Environmental Management Plan

The tenderer must provide an environmental management plan describing:-

- Key environmental aspects and impacts that need to be avoided, managed and mitigated (impact management actions).
- The method and frequency of monitoring the implementation of the impact management actions
- An indication of the roles and responsibilities in the implementation of the impact management actions
- A description of how the environmental incidents will be managed on site.
- Monitoring techniques and reporting (types of records) of both accidents and incidents.
- Details of induction and other forms of awareness or training (if any).
- How non-conformance/non-compliance will be dealt with

The following documents are key -

1.0 Transnet SOC Limited – Integrated Management Systems (IMS) Policy,

1.1 By signing this Tender Schedule, the tenderer confirms that they will comply with the above policy statement and environmental commitments therein.

1.2 Tender to provide a signed declaration of understanding as part of the returnable acknowledging understanding thereof and the budget provision for the implementation of environmental management requirements.

By signing this Tender Schedule, the tenderer confirms that they will **comply** with the above requirements and in particular Transnet Freight Rail IMS policy statement and environmental commitments therein.

The assessment of the Tenderer's Environmental Management Plan will be as follows:

Key Environmental Impacts and Possible Mitigation Measures (60%) <i>(Potential effects that project activities may have on the environment and measures to reduce the impact)</i>	
	Assessment Feedback
The EMP is not submitted by the bidder.	
EMP with zero/no key impacts and mitigation measures specific to the project	
EMP contains 1-3 key impacts and mitigation measures specific to the project.	

EMP contains 4-6 key impacts and mitigation measures specific to the project.	
EMP contains 7-9 key reasonable and relevant impacts and mitigation measures specific to the project.	
EMP contains 10 and more key reasonable and relevant impacts and mitigation measures specific to the project, which meet and exceed tender requirements.	
Key Roles and Responsibilities (20%) <i>(Assignment of impact management actions within the organisation)</i>	
	Assessment Feedback
The EMP is not submitted by the bidder.	
EMP with zero/no key roles and responsibilities specific to the project.	
EMP contains 1-3 key reasonable and relevant roles and responsibilities specific to the project.	
EMP contains 4-6 key reasonable and relevant roles and responsibilities specific to the project.	
EMP contains 7-9 key reasonable and relevant roles and responsibilities specific to the project.	
EMP contains 10 and more key reasonable and relevant roles and responsibilities specific to the project, which meet and exceed tender expectations.	

Environmental Monitoring, Training and Reporting (20%) <i>(communication methods, monitoring methods and types of reports to be produced for monitoring)</i>	
	Assessment Feedback
The EMP is not submitted by the bidder.	
EMP with zero/no monitoring techniques, no training and no form of reporting.	
Tenderer did not demonstrate understanding of the project scope and provided irrelevant information on monitoring techniques, training methods and types of reports.	
Tenderer understood the project scope but provided relevant but less detailed information on monitoring techniques, training methods and types of reports.	
Tenderer understood the project scope and identified relevant monitoring techniques, relevant training methods and relevant reports.	

Tenderer understood the project scope and addresses critical aspects with regards to monitoring, training and reporting which meets and exceeds tender requirements.	
---	--

Attached submissions to this schedule:

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

Signed	Date
Name	Position
Tenderer	

T2.2-03: Authority to submit a Tender

Indicate the status of the tenderer by ticking the appropriate box hereunder. The tenderer must complete the certificate set out below for his category of organisation or alternatively attach a certified copy of a company / organisation document which provides the same information for the relevant category as requested here.

A - COMPANY	B - PARTNERSHIP	C - JOINT VENTURE	D - SOLE PROPRIETOR

A. Certificate for Company

I, _____ chairperson of the board of directors _____
_____, hereby confirm that by resolution of the
board taken on _____ (date), Mr/Ms _____,
acting in the capacity of _____, was authorised to sign all
documents in connection with this tender offer and any contract resulting from it on behalf of
the company.

Signed

Date

Name

Position

Chairman of the Board of Directors

B. Certificate for Partnership

We, the undersigned, being the **key partners** in the business trading as _____

_____ hereby authorise Mr/Ms _____

acting in the capacity of _____, to sign all documents in connection with the tender offer for Contract _____ and any contract resulting from it on our behalf.

Name	Address	Signature	Date

NOTE: This certificate is to be completed and signed by the full number of Partners necessary to commit the Partnership. Attach additional pages if more space is required.

C. Certificate for Joint Venture

We, the undersigned, are submitting this tender offer in Joint Venture and hereby authorise Mr/Ms _____, an authorised signatory of the company _____, acting in the capacity of lead partner, to sign all documents in connection with the tender offer for Contract _____ and any contract resulting from it on our behalf.

This authorisation is evidenced by the attached power of attorney signed by legally authorised signatories of all the partners to the Joint Venture.

Furthermore we attach to this Schedule a copy of the joint venture agreement which incorporates a statement that all partners are liable jointly and severally for the execution of the contract and that the lead partner is authorised to incur liabilities, receive instructions and payments and be responsible for the entire execution of the contract for and on behalf of any and all the partners.

Name of firm	Address	Authorising signature, name (in caps) and capacity



D. Certificate for Sole Proprietor

I, _____, hereby confirm that I am the sole owner of the
business trading as _____.

Signed

Date

Name

Position

Sole Proprietor

T2.2-04: Record of Addenda to Tender Documents

This schedule as submitted confirms that the following communications received from the *Employer* before the submission of this tender offer, amending the tender documents, have been taken into account in this specific tender offer:

	Date	Title or Details
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		

Attach additional pages if more space is required.

T2.2-05 Letter/s of Good Standing with the Workmen's Compensation Fund

Attached to this schedule is the Letter/s of Good Standing.

- 1.
- 2.
- 3.
- 4.

Name of Company/Members of Joint Venture:

.....
.....
.....
.....
.....
.....
.....
.....
.....
.....

Enterprise Risk Management Elements

T2.2-06: Essential Returnable: Enterprise Risk Management and Business Continuity Management Requirements (Evaluation Criteria for RFP)

Tenderers to identify and evaluate the potential risk elements associated with the Works/ Services etc. and possible mitigation thereof for the relevant Procurement Phase. The risk elements and the mitigation as identified thereof by the Tenderers are to be submitted with other returnable documents in separate file.

If no risks are identified "No Risk" must be stated on this schedule.

Tenderers to demonstrate their understand of potential Business Continuity threats, through a relevant Business Impact Analysis process and measures to be implemented to recover associated Works/ Services within pre-defined recovery times, to ensure Business Continuity.

NB: Tenderers are required to methodically prepare comprehensive documentation that addresses the elements of Risk Management and Business Continuity Management to be assessed. These documents should be organized into a separate 'Risk Management' folder. This segregation is crucial to guarantee that the assessment process for Risk Management and Business Continuity Management Elements is conducted with objectivity, fairness, and transparency, and is solely based on the merit of the tenderers' respective tender document submitted in response to RFP tender.

Attached submissions:

.....
.....
.....
.....
.....
.....
.....
.....

The Evaluation Criteria Guideline for the specific Tenderer's Risk Elements will be as follows:

1. Assessment Elements: Risk Management and Business Continuity Management (BCM)	
Tender Number:	
Tender Description:	
1.1. Business Continuity Management (BCM)	Evaluation
Detailed Business Continuity Management Document prepared and based on Business Continuity Management best practices and relevant Standard must cover the BIA and Business Continuity Plan (BCP). This structured approach in assessing BCM submissions will help to ensure a comprehensive assessment of each bidder's ability to manage and respond to business disruptions effectively. The assessment will consider how well these elements integrate with the project or service specifics or proposed RFI solution, reflecting the bidder's understanding of the unique requirements of the project and preparedness and resilience when faced with potential unforeseen disruptions during piloting or execution of the project or service or associated solution proposed in RFI. The BCM will be assessed based on the following key elements: 1.1.1. BCM Policy and Framework for the Tenderer: - Bidder's Policy Statement Alignment with industry standards and best practices; and Clarity and comprehensiveness of the BCM policy and framework. 1.1.2. BCM Risk Assessment and Mitigation: - Thoroughness in identifying business continuity related potential business continuity risks; Effectiveness of proposed BCM mitigation strategies; and BCM relevance to pilot site or project-specific risks. 1.1.3. Incident Management and Response Plan: - Detailed incident management procedures; Clarity in response roles and responsibilities; and Practicality and speed of response in emergency situations (Experience in incident management or BCP or IT Disaster Recovery Plans simulation scenario). 1.1.4. Business Continuity Plans for Critical Functions Process: - Specific plans for each critical business function process relevant to project or service to be rendered post tender award; Depth in detailing continuity strategies; and Consistency with overall business objectives and project or service goals. 1.1.5. Communication Plan during Disruption: - Clarity and effectiveness of communication strategies; and Identification of key stakeholders and methods of communication. 1.1.6. BCM Training and Awareness Programs: - Scope and frequency of training programs; and BCM Strategies to enhance staff awareness and preparedness.	The 10 listed critical elements for the BCM are required. All elements will be evaluated as per the guide provided, for adequacy and relevance to the project / pilot service offering etc. A Risk Management and Business Continuity Management Evaluation Report to be generated covering BCP Elements and to be shared with respective bidders at RFP Phase.

1.1.7. Testing and Maintenance of Business Continuity Plans: - Regularity of BCP testing; Documented revisions and updates to the plans; and Ability to adapt and improve plans based on test or simulation outcomes. 1.1.8. Third-party Supplier and Vendor BCM Compliance: - Assurance of BCM compliance among Tenderers suppliers and vendors; Strategies to manage third-party risks; Integration of vendor risks into overall BCM strategy. 1.1.9. Crisis Leadership and Decision-making Structure: - Clearly defined crisis leadership roles; Decision-making processes during crisis; and Capability to maintain control and direction under crisis conditions. 1.1.10. Common Data: Provision of Common Data for critical Resources required during disruption or disaster events and required to relocate to recovery site or expected to work from home if workplace is not accessible during disaster, flooding, heat wave or labour unrest.	
1.2. Business Continuity Management - Business Impact Analysis (BIA)	Evaluation
Detailed Business Continuity Management Document prepared and based on Business Continuity Management best practices and relevant Standard must cover the BIA and Business Continuity Plan (BCP). The BIA will be assessed based on the following key elements: 1.2.1. Business Continuity Management and Identification of critical processes within the project / service: - Demonstration of Business Resilience, Agility and that the critical activities and/ or processes are identified. These are activities and/ or processes if disrupted prevent project or pilot completion / service delivery. 1.2.2. Recovery Time Objective (RTO) in case of any interruption that may arise: -Detail for each of the above critical activities and/ or processes what is the determined acceptable recovery time objective for re-instatement of the activity/ process (consider all applicable SLA or regulatory requirements). 1.2.3. Recovery Strategy: - How will the service provider/ supplier recover - Detail the step-by-step process as to how the critical activities and/ or processes will be recovered? In which order? Whom is to undertake the recovery etc. 1.2.4. Operational dependencies: - Note all internal and external dependencies for the recovery of the listed critical activities and/ or processes e.g.: Operational equipment, telephones; facilities; etc. needed to ensure continuity. 1.2.5. Alternative supply of equipment and/ or supply of extra staff: - Provide adequate information on how alternate equipment or additional experienced staff will be secured if a BCM incident negatively impacting these resources as originally allocated for completion of a project/pilot/ delivery of a service.	The 6 listed critical elements for the BIA are required. All elements will be evaluated as per the guide provided, for adequacy and relevance to the project / Pilot / service offering etc. A Risk Management and Business Continuity Management Evaluation Report to be generated covering BIA Elements and to be shared with respective bidders at RFP Phase.

1.2.6. Battle Box:- Provide details on whether a battle box is established and what it entails/ contains. This may be either a physical collection or an electronic repository of recovery plans, other necessary documentation, templates, memo's, letter heads etc. required for re-instatement of business-critical systems. In some instance this can also include off-site stores of certain equipment or electronic devices etc.	
1.3. Business Continuity Management - Business Continuity Plan (BCP)	Evaluation
The detailed BCP or related annexures to the plan must contain: 1.3.1. Emergency operating procedure: - Must detail the steps to be followed following an emergency/ incident at the site / location of impact. 1.3.2. Business Continuity Invocation Action: - Once the incident is under control and its impact determined and assessed, this details the when, the how and by whom the BCP will be invoked. 1.3.3. Project Recovery Resources: - Identify and list the recovery resources. These maybe additional resources or re-arrangement of existing resources as required to support the recovery of critical activities and/ or processes as detailed in the BCP, within the RTO. 1.3.4. Business/ Supplier Contact List: - Demonstrate that these have been identified and means to easily contact them is in place. 1.3.5. Emergency Contacts: - inclusive as per item 1 to initially deal with the incident (emergency services etc), then thereafter must also include the BCM recovery team members, names, and contact details.	The 5 listed elements for the BCP are required. All elements will be evaluated as per the guide provided, for adequacy and relevance to the project / service offering etc. A Risk Management and Business Continuity Management Evaluation to be generated covering BCP Elements and to be shared with respective bidders at RFP Phase.
1.4. Risk Management - Risk Management Plan (RMP) - Project/ Operational Risks be based on the scope of works/ services etc.	Evaluation

The detailed RMP based risk management best practices or applicable standards and on the scope of works, must contain the following: 1.4.1. Submitted Risk Management Policy and Framework for the Tenderer: - Policy Statement Alignment with industry standards and best practices; and Clarity and comprehensiveness of the Risk Management Policy and Signed by the employee or owner. 1.4.2. Identification of Risks of Project / P Service Interruption during the project execution/Service Devility: - A risk register that contains the identified risks of service interruption and / or non-delivery of services etc. during the project/pilot execution. Demonstrate an understanding of the internal and external threats to effective service delivery within scope and to quality. 1.4.3. Risk Analysis Methodology: - Demonstrate for risk identified, the causes, risk consequence/ impact and risk likelihood/ probability rating and how the risk rating is calculated. The methodology may also provide a view on the effectiveness of controls and the residual risk after application of controls. 1.4.4. Ranking of the Risks: - Once the risk register is completed a risk heat map and listing of the risks by name/ risk description from highest to lowest ranked risk provided in the RFI Response document. 1.4.5. Risk Mitigation Measures for the identified risks and Responsible Person: - Provided in the risk register for each assessed risk the controls in place to manage the risk along with additional risk tasks to further mitigate the risk; and Responsible person: Ensure the risks have assigned risk owners, assigned control owners for the checking on controls and any other person assigned a risk action to complete under the risk register.	The 5 listed elements for the RMP are required. All elements will be evaluated as per the guide provided, for adequacy and relevance to the project / service offering etc. A Risk Management and Business Continuity Management Evaluation Report to be generated covering RMP Elements and to be shared with respective bidders at RFP Phase.
---	---

T2.2-07: ANNEX G Compulsory Enterprise Questionnaire

The following particulars hereunder must be furnished.

In the case of a Joint Venture, separate enterprise questionnaires in respect of each partner/member must be completed and submitted.

Section 1: Name of enterprise: _____

Section 2: VAT registration number, if any: _____

Section 3: CIDB registration number, if any: _____

Section 4: CSD number: _____

Section 5: Particulars of sole proprietors and partners in partnerships

Name	Identity number	Personal income tax number

* Complete only if sole proprietor or partnership and attach separate page if more than 3 partners

Section 6: Particulars of companies and close corporations

Company registration number _____

Close corporation number _____

Tax reference number: _____

Section 7: The attached SBD4 must be completed for each tender and be attached as a tender requirement.

Section 8: The attached SBD 6 must be completed for each tender and be attached as a requirement.

The undersigned, who warrants that he / she is duly authorised to do so on behalf of the enterprise:

- i) authorizes the Employer to obtain a tax clearance certificate from the South African Revenue Services that my / our tax matters are in order;
- ii) confirms that the neither the name of the enterprise or the name of any partner, manager, director or other person, who wholly or partly exercises, or may exercise, control over the enterprise appears on the Register of Tender Defaulters established in terms of the Prevention and Combating of Corrupt Activities Act of 2004;
- iii) confirms that no partner, member, director or other person, who wholly or partly exercises, or may exercise, control over the enterprise appears, has within the last five years been convicted of fraud or corruption;
- iv) confirms that I / we are not associated, linked or involved with any other tendering entities submitting tender offers and have no other relationship with any of the tenderers or those responsible for compiling the scope of work that could cause or be interpreted as a conflict of interest; and
- v) confirms that the contents of this questionnaire are within my personal knowledge and are to the best of my belief both true and correct.

Signed	_____	Date	_____
Name	_____	Position	_____
Enterprise name	_____		

SBD 6.1

PREFERENCE POINTS CLAIM FORM

This preference form must form part of all bids invited. It contains general information and serves as a claim for preference points for Specific Goals contribution. Transnet will award preference points to companies who provide valid proof of evidence as per the table of evidence in paragraph 4.1 below.

1. GENERAL CONDITIONS

- 1.1 The following preference point systems are applicable to all bids:
- the 90/10 system for requirements with a Rand value above R50 000 000 (all applicable taxes included).
- 1.2 The value of this bid is estimated to exceed R50 000 000 (all applicable taxes included) and therefore the 90/10 preference point system shall be applicable. Despite the stipulated preference point system, Transnet shall use the lowest acceptable bid to determine the applicable preference point system in a situation where all received acceptable bids are received outside the stated preference point system.
- 1.3 Preference points for this bid shall be awarded for:
- (a) Price;
 - (b) B-BBEE Status Level of Contribution; and
 - (c) Any other specific goal determined in the Transnet preferential procurement policy
- 1.4 The maximum points for this bid are allocated as follows:

	POINTS
PRICE	90
B-BBEE Level of contributor (1 or 2)	5
Creation of new jobs and labour intensification	5
Total points for Price and B-BBEE must not exceed	100

- 1.5 Failure on the part of a bidder to submit proof of evidence required for any of the specific goals together with the bid will be interpreted to mean that preference points for that specific goal are not claimed.
- 1.6 The purchaser reserves the right to require of a bidder, either before a bid is adjudicated or at any time subsequently, to substantiate any claim in regard to preferences, in any manner required by the purchaser.

2. DEFINITIONS

- (a) **"all applicable taxes"** includes value-added tax, pay as you earn, income tax, unemployment insurance fund contributions and skills development levies;
- (b) **"B-BBEE"** means broad-based black economic empowerment as defined in section 1 of the Broad-Based Black Economic Empowerment Act;
- (c) **"B-BBEE status level of contributor"** means the B-BBEE status received by a measured entity based on its overall performance using the relevant scorecard contained in the Codes of Good Practice on Black Economic Empowerment, issued in terms of section 9(1) of the Broad-Based Black Economic Empowerment Act;
- (d) **"bid"** means a written offer in a prescribed or stipulated form in response to an invitation by an organ of state for the supply/provision of services, works or goods, through price quotations, advertised competitive bidding processes or proposals;
- (e) **"Broad-Based Black Economic Empowerment Act"** means the Broad-Based Black Economic Empowerment Act, 2003 (Act No. 53 of 2003);
- (f) **"EME"** means an Exempted Micro Enterprise as defines by Codes of Good Practice under section 9 (1) of the Broad-Based Black Economic Empowerment Act, 2003 (Act No. 53 of 2003);
- (g) **"functionality"** means the ability of a bidder to provide goods or services in accordance with specification as set out in the bid documents
- (h) **"Price"** includes all applicable taxes less all unconditional discounts.
- (i) **"Proof of B-BBEE Status Level of Contributor"**
 - i) the B-BBBEE status level certificate issued by an authorised body or person;
 - ii) a sworn affidavit as prescribed by the B-BBEE Codes of Good Practice; or
 - iii) any other requirement prescribed in terms of the B-BBEE Act.
- (j) **"QSE"** means a Qualifying Small Enterprise as defines by Codes of Good Practice under section 9 (1) of the Broad-Based Black Economic Empowerment Act, 2003 (Act No. 53 of 2003);
- (k) **"rand value"** means the total estimated value of a contract in South African currency, calculated at the time of bid invitations, and includes all applicable taxes and excise duties.
- (l) **"Specific goals"** means targeted advancement areas or categories of persons or groups either previously disadvantaged or falling within the scope of the Reconstruction and Development Programme identified by Transnet to be given preference in allocation of procurement contracts in line with section 2(1) of the PPPFA.

3. POINTS AWARDED FOR PRICE

3.1 THE 90/10 PREFERENCE POINT SYSTEMS

A maximum of 90 points is allocated for price on the following basis:

90/10

$$P_s = 80 \left(1 - \frac{P_t - P_{\min}}{P_{\min}} \right) \quad \text{or} \quad P_s = 90 \left(1 - \frac{P_t - P_{\min}}{P_{\min}} \right)$$

Where

P_s = Points scored for comparative price of bid under consideration

P_t = Comparative price of bid under consideration

$P_{\min}$ = Comparative price of lowest acceptable bid

4. EVIDENCE REQUIRED FOR CLAIMING SPECIFIC GOALS

- 4.1 In terms of Transnet Preferential Procurement Policy (TPPP) and Procurement Manuals, preference points must be awarded to a bidder for providing evidence in accordance with the table below:

Specific Goals	Acceptable Evidence
B-BBEE Status contributor	B-BBEE Certificate / Sworn- Affidavit / B-BBEE CIPC Certificate (in case of JV, a consolidated scorecard will be accepted) as per DTIC guideline
Creation of new jobs and labour intensification	T2.2-08 Job Creation Schedule Returnable documents

- 4.2 The table below indicates the required proof of B-BBEE status depending on the category of enterprises:

Enterprise	B-BBEE Certificate & Sworn Affidavit
Large	Certificate issued by SANAS accredited verification agency
QSE	Certificate issued by SANAS accredited verification agency Sworn Affidavit signed by the authorised QSE representative and attested by a Commissioner of Oaths confirming annual turnover and black ownership (only black-owned QSEs - 51% to 100% Black owned) [Sworn affidavits must substantially comply with the format that can be obtained on the DTI's website at www.dti.gov.za/economic_empowerment/bee_codes.jsp .]
EME	Sworn Affidavit signed by the authorised EME representative and attested by a Commissioner of Oaths confirming annual turnover and black ownership Certificate issued by CIPC (formerly CIPRO) confirming annual turnover and black ownership Certificate issued by SANAS accredited verification agency only if the EME is being measured on the QSE scorecard

- 4.3 A trust, consortium or joint venture (including unincorporated consortia and joint ventures) must submit a consolidated B-BBEE Status Level verification certificate for every separate bid.

- 4.4 Tertiary Institutions and Public Entities will be required to submit their B-BBEE status level certificates in terms of the specialized scorecard contained in the B-BBEE Codes of Good Practice.
- 4.5 A person will not be awarded points for B-BBEE status level if it is indicated in the bid documents that such a bidder intends sub-contracting more than 25% of the value of the contract to any other enterprise that does not qualify for at least the points that such a bidder qualifies for, unless the intended sub-contractor is an EME that has the capability and ability to execute the sub-contract.
- 4.6 A person awarded a contract may not sub-contract more than 25% of the value of the contract to any other enterprise that does not have an equal or higher B-BBEE status level than the person concerned, unless the contract is sub-contracted to an EME that has the capability and ability to execute the sub-contract.
- 4.7 Bidders are to note that the rules pertaining to B-BBEE verification and other B-BBEE requirements may be changed from time to time by regulatory bodies such as National Treasury or the DTI. It is the Bidder's responsibility to ensure that his/her bid complies fully with all B-BBEE requirements at the time of the submission of the bid.

5. BID DECLARATION

- 5.1 Bidders who claim points in respect of B-BBEE Status Level of Contribution must complete the following:

6. B-BBEE STATUS LEVEL OF CONTRIBUTION CLAIMED IN TERMS OF PARAGRAPHS 1.4 AND 6.1

- 6.1 B-BBEE Status Level of Contribution: . =(maximum of 10 points)
(Points claimed in respect of paragraph 6.1 must be in accordance with the table reflected in paragraph 4.1 and must be substantiated by relevant proof of B-BBEE status level of contributor.

7. SUB-CONTRACTING

- 7.1 Will any portion of the contract be sub-contracted?

(***Tick applicable box***)

YES		NO	
-----	--	----	--

- 7.1.1 If yes, indicate:

- i) What percentage of the contract will be subcontracted.....%
- ii) The name of the sub-contractor.....
- iii) The B-BBEE status level of the sub-contractor.....
- iv) Whether the sub-contractor is an EME or QSE.

(***Tick applicable box***)

YES		NO	
-----	--	----	--

8. DECLARATION WITH REGARD TO COMPANY/FIRM

8.1 Name of company/firm:.....

8.2 VAT registration number:.....

8.3 Company registration number:.....

8.4 TYPE OF COMPANY/ FIRM

- ☐ Partnership/Joint Venture / Consortium
- ☐ One person business/sole propriety
- ☐ Close corporation
- ☐ Company
- ☐ (Pty) Limited

[TICK APPLICABLE BOX]

8.5 DESCRIBE PRINCIPAL BUSINESS ACTIVITIES

.....
.....
.....

8.6 COMPANY CLASSIFICATION

- ☐ Manufacturer
- ☐ Supplier
- ☐ Professional Service provider
- ☐ Other Suppliers/Service providers, e.g. transporter, etc.

[TICK APPLICABLE BOX]

8.7 Total number of years the company/firm has been in business:.....

8.8 I/we, the undersigned, who is / are duly authorised to do so on behalf of the company/firm, certify that the points claimed, based on the B-BBE status level of contribution indicated in paragraphs 1.4 and 6.1 of the foregoing certificate, qualifies the company/ firm for the preference(s) shown and I / we acknowledge that:

- i) The information furnished is true and correct;

- ii) The preference points claimed are in accordance with the General Conditions as indicated in paragraph 1 of this form;
- iii) In the event of a contract being awarded as a result of points claimed as shown in paragraph 1.4 and 6.1, the contractor may be required to furnish documentary proof to the satisfaction of the purchaser that the claims are correct;
- iv) If a bidder submitted false information regarding its B-BBEE status level of contributor,, which will affect or has affected the evaluation of a bid, or where a bidder has failed to declare any subcontracting arrangements or any of the conditions of contract have not been fulfilled, the purchaser may, in addition to any other remedy it may have
 - (a) disqualify the person from the bidding process;
 - (b) recover costs, losses or damages it has incurred or suffered as a result of that person's conduct;
 - (c) cancel the contract and claim any damages which it has suffered as a result of having to make less favourable arrangements due to such cancellation;
 - (d) if the successful bidder subcontracted a portion of the bid to another person without disclosing it, Transnet reserves the right to penalise the bidder up to 10 percent of the value of the contract;
 - (e) recommend that the bidder or contractor, its shareholders and directors, or only the shareholders and directors who acted on a fraudulent basis, be restricted by the National Treasury from obtaining business from any organ of state for a period not exceeding 10 years, after the audi alteram partem (hear the other side) rule has been applied; and
 - (f) forward the matter for criminal prosecution.

WITNESSES

1.

2.

.....

SIGNATURE(S) OF BIDDERS(S)

DATE:

BIDDER'S DISCLOSURE

1. PURPOSE OF THE FORM

Any person (natural or juristic) may make an offer or offers in terms of this invitation to bid. In line with the principles of transparency, accountability, impartiality, and ethics as enshrined in the Constitution of the Republic of South Africa and further expressed in various pieces of legislation, it is required for the bidder to make this declaration in respect of the details required hereunder.

Where a person/s are listed in the Register for Tender Defaulters and / or the List

of Restricted Suppliers, that person will automatically be disqualified from the bid process.

2. Bidder's declaration

2.1 Is the bidder, or any of its directors / trustees / shareholders / members / partners or any person having a controlling interest¹ in the enterprise, employed by the state? **YES/NO**

2.1.1 If so, furnish particulars of the names, individual identity numbers, and, if applicable, state employee numbers of sole proprietor/ directors / trustees / shareholders / members/ partners or any person having a controlling interest in the enterprise, in table below.

Full Name	Identity Number	Name of State institution

2.2 Do you, or any person connected with the bidder, have a relationship with any person who is employed by the procuring institution? **YES/NO**

2.2.1 If so, furnish particulars:

.....
.....

2.3 Does the bidder or any of its directors / trustees / shareholders / members / partners or any person having a controlling interest in the enterprise have any interest in any other related enterprise whether or not they are bidding for this contract? **YES/NO**

2.3.1 If so, furnish particulars:

¹ the power, by one person or a group of persons holding the majority of the equity of an enterprise, alternatively, the person/s having the deciding vote or power to influence or to direct the course and decisions of the enterprise.

3 DECLARATION

.....
.....
I, the undersigned,
(name)..... in submitting
the accompanying bid, do hereby make the following statements that I certify to
be true and complete in every respect:

- 3.1 I have read and I understand the contents of this disclosure;
- 3.2 I understand that the accompanying bid will be disqualified if this disclosure is found not to be true and complete in every respect;
- 3.3 The bidder has arrived at the accompanying bid independently from, and without consultation, communication, agreement or arrangement with any competitor. However, communication between partners in a joint venture or consortium² will not be construed as collusive bidding.
- 3.4 In addition, there have been no consultations, communications, agreements or arrangements with any competitor regarding the quality, quantity, specifications, prices, including methods, factors or formulas used to calculate prices, market allocation, the intention or decision to submit or not to submit the bid, bidding with the intention not to win the bid and conditions or delivery particulars of the products or services to which this bid invitation relates.
- 3.4 The terms of the accompanying bid have not been, and will not be, disclosed by the bidder, directly or indirectly, to any competitor, prior to the date and time of the official bid opening or of the awarding of the contract.
- 3.5 There have been no consultations, communications, agreements or arrangements made by the bidder with any official of the procuring institution in relation to this procurement process prior to and during the bidding process except to provide clarification on the bid submitted where so required by the institution; and the bidder was not involved in the drafting of the specifications or terms of reference for this bid.
- 3.6 I am aware that, in addition and without prejudice to any other remedy provided to combat any restrictive practices related to bids and contracts, bids that are suspicious will be reported to the Competition Commission for investigation and possible imposition of administrative penalties in terms of section 59 of the Competition Act No 89 of 1998 and or may be reported to the National Prosecuting Authority (NPA) for criminal investigation and or may be restricted from conducting business with the public sector for a period not exceeding ten (10) years in terms of the Prevention and Combating of Corrupt Activities Act No 12 of 2004 or any other applicable legislation.

I CERTIFY THAT THE INFORMATION FURNISHED IN PARAGRAPHS 1, 2 and 3 ABOVE IS CORRECT.

² Joint venture or Consortium means an association of persons for the purpose of combining their expertise, property, capital, efforts, skill and knowledge in an activity for the execution of a contract.

I ACCEPT THAT THE STATE MAY REJECT THE BID OR ACT AGAINST ME IN TERMS OF PARAGRAPH 6 OF PFMA SCM INSTRUCTION 03 OF 2021/22 ON PREVENTING AND COMBATING ABUSE IN THE SUPPLY CHAIN MANAGEMENT SYSTEM SHOULD THIS DECLARATION PROVE TO BE FALSE.

.....	
Signature	Date
.....	
Position	Name of bidder

T2.2-08: JOB-CREATION SCHEDULE

The Government has identified State Owned Enterprises sourcing activities as a key enabler to achieve the National Development Plan (NDP) objective of reducing unemployment from the current baseline of 28% to 6%.

In order to give effect to these job creation objectives, Tenderers are required to provide the following undertaking of new jobs that will be created (either by them or by their subcontractors) should they be awarded this tender.

Tenderers to note, that if successful, any deviations from the Job creation Schedule in the contract phase will be subject to acceptance by the *Project Manager* in terms of the Conditions of Contract. Please also note the applicable Z clauses in Contract Data by *Employer*.

- (a) Please indicate total number of new jobs that will be created over the term of the contract:

Total number and value of new jobs created	Total number of new jobs	Total rand value of new jobs created

- (b) Of the total number of new jobs created, please indicate the number and value of new jobs to be created for the following designated groups:

	Total number of new jobs	Total rand value of new jobs
Black men		
Black women		
Black Youth		
Black people living in rural or underdeveloped areas or townships		
Black People with Disabilities		

- (c) Of the total number of new jobs created, please indicate the number of skilled, semi-skilled and unskilled new jobs that will be created over the term of the contract:

	Total number of Skilled jobs	Total number of Semi-skilled jobs	Total number of Unskilled jobs
Black men			
Black women			
Black Youth			
Black people living in rural or underdeveloped areas or townships			
Black People with Disabilities			
Other			

(d) Please indicate the number of new jobs to be created, broken down per quarter over the term of the contract.

Year 1	Q1	Q2	Q3	Q4
Total number of new jobs				
Number of new jobs for Black men				
Number of new jobs for black women				
Number of new jobs for black youth				
Number of new jobs for black people living in rural or underdeveloped areas or townships				
Number of new jobs for black People with Disabilities				
Number of new jobs for other categories				
Number of new skilled jobs				
Number of new semi-skilled jobs				
Number of new unskilled jobs				

Year 2	Q1	Q2	Q3	Q4
Total number of new jobs				
Number of new jobs for Black men				
Number of new jobs for black women				
Number of new jobs for black youth				
Number of new jobs for black people living in rural or underdeveloped areas or townships				
Number of new jobs for black People with Disabilities				
Number of new jobs for other categories				
Number of new skilled jobs				
Number of new semi-skilled jobs				
Number of new unskilled jobs				

T2.2-09 NON-DISCLOSURE AGREEMENT

[..... 2020]

Note to tenderers: This Non-Disclosure Agreement is to be completed and signed by an authorised signatory:

THIS AGREEMENT is made effective as of day of 20..... by and between:

TRANSNET SOC LTD

(Registration No. 1990/000900/30), a company incorporated and existing under the laws of South Africa, having its principal place of business at Transnet Corporate Centre 138 Eloff Street , Braamfontein , Johannesburg 2000

and

.....

(Registration No.), a private company incorporated and existing under the laws of South Africa having its principal place of business at

.....

.....

WHEREAS

Transnet and the Company wish to exchange Information [as defined below] and it is envisaged that each party may from time to time receive Information relating to the other in respect thereof. In consideration of each party making available to the other such Information, the parties jointly agree that any dealings between them shall be subject to the terms and conditions of this Agreement which themselves will be subject to the parameters of the Tender Document.

IT IS HEREBY AGREED

1. INTERPRETATION

In this Agreement:

- 1.1 **Agents** mean directors, officers, employees, agents, professional advisers, contractors or sub-contractors, or any Group member;
- 1.2 **Bid or Bid Document** (hereinafter Tender) means Transnet's Request for Information [**RFI**] Request for Proposal [**RFP**] or Request for Quotation [**RFQ**], as the case may be;
- 1.3 **Confidential Information** means any information or other data relating to one party [the **Disclosing Party**] and/or the business carried on or proposed or intended to be carried on by that party and which is made available for the purposes of the Bid to the other party [the **Receiving Party**] or its Agents by the Disclosing Party or its Agents or recorded in agreed minutes following oral disclosure and any other information otherwise made available by the Disclosing Party or its Agents to the Receiving Party or its Agents, whether before, on or after the date of this Agreement, and whether in writing or otherwise, including any information, analysis or specifications derived from, containing or reflecting such information but excluding information which:

- 1.3.1 is publicly available at the time of its disclosure or becomes publicly available [other than as a result of disclosure by the Receiving Party or any of its Agents contrary to the terms of this Agreement]; or
- 1.3.2 was lawfully in the possession of the Receiving Party or its Agents [as can be demonstrated by its written records or other reasonable evidence] free of any restriction as to its use or disclosure prior to its being so disclosed; or
- 1.3.3 following such disclosure, becomes available to the Receiving Party or its Agents [as can be demonstrated by its written records or other reasonable evidence] from a source other than the Disclosing Party or its Agents, which source is not bound by any duty of confidentiality owed, directly or indirectly, to the Disclosing Party in relation to such information;
- 1.4 **Group** means any subsidiary, any holding company and any subsidiary of any holding company of either party; and
- 1.5 **Information** means all information in whatever form including, without limitation, any information relating to systems, operations, plans, intentions, market opportunities, know-how, trade secrets and business affairs whether in writing, conveyed orally or by machine-readable medium.

2. CONFIDENTIAL INFORMATION

- 2.1 All Confidential Information given by one party to this Agreement [the **Disclosing Party**] to the other party [the **Receiving Party**] will be treated by the Receiving Party as secret and confidential and will not, without the Disclosing Party's written consent, directly or indirectly communicate or disclose [whether in writing or orally or in any other manner] Confidential Information to any other person other than in accordance with the terms of this Agreement.
- 2.2 The Receiving Party will only use the Confidential Information for the sole purpose of technical and commercial discussions between the parties in relation to the Tender or for the subsequent performance of any contract between the parties in relation to the Tender.
- 2.3 Notwithstanding clause 2.1 above, the Receiving Party may disclose Confidential Information:
- 2.3.1 to those of its Agents who strictly need to know the Confidential Information for the sole purpose set out in clause 2.2 above, provided that the Receiving Party shall ensure that such Agents are made aware prior to the disclosure of any part of the Confidential Information that the same is confidential and that they owe a duty of confidence to the Disclosing Party. The Receiving Party shall at all times remain liable for any actions of such Agents that would constitute a breach of this Agreement; or
- 2.3.2 to the extent required by law or the rules of any applicable regulatory authority, subject to clause 2.4 below.
- 2.4 In the event that the Receiving Party is required to disclose any Confidential Information in accordance with clause 2.3.2 above, it shall promptly notify the Disclosing Party and cooperate with the Disclosing Party regarding the form, nature, content and purpose of such disclosure or any action which the Disclosing Party may reasonably take to challenge the validity of such requirement.

- 2.5 In the event that any Confidential Information shall be copied, disclosed or used otherwise than as permitted under this Agreement then, upon becoming aware of the same, without prejudice to any rights or remedies of the Disclosing Party, the Receiving Party shall as soon as practicable notify the Disclosing Party of such event and if requested take such steps [including the institution of legal proceedings] as shall be necessary to remedy [if capable of remedy] the default and/or to prevent further unauthorised copying, disclosure or use.
- 2.6 All Confidential Information shall remain the property of the Disclosing Party and its disclosure shall not confer on the Receiving Party any rights, including intellectual property rights over the Confidential Information whatsoever, beyond those contained in this Agreement.

3. RECORDS AND RETURN OF INFORMATION

- 3.1 The Receiving Party agrees to ensure proper and secure storage of all Information and any copies thereof.
- 3.2 The Receiving Party shall keep a written record, to be supplied to the Disclosing Party upon request, of the Confidential Information provided and any copies made thereof and, so far as is reasonably practicable, of the location of such Confidential Information and any copies thereof.
- 3.3 The Company shall, within 7 [seven] days of receipt of a written demand from Transnet:
- 3.3.1 return all written Confidential Information [including all copies]; and
- 3.3.2 expunge or destroy any Confidential Information from any computer, word processor or other device whatsoever into which it was copied, read or programmed by the Company or on its behalf.
- 3.4 The Company shall on request supply a certificate signed by a director as to its full compliance with the requirements of clause 3.3.2 above.

4. ANNOUNCEMENTS

- 4.1 Neither party will make or permit to be made any announcement or disclosure of its prospective interest in the Tender without the prior written consent of the other party.
- 4.2 Neither party shall make use of the other party's name or any information acquired through its dealings with the other party for publicity or marketing purposes without the prior written consent of the other party.

5. DURATION

The obligations of each party and its Agents under this Agreement shall survive the termination of any discussions or negotiations between the parties regarding the Tender and continue thereafter for a period of 5 [five] years.

6. PRINCIPAL

Each party confirms that it is acting as principal and not as nominee, agent or broker for any other person and that it will be responsible for any costs incurred by it or its advisers in considering or pursuing the Tender and in complying with the terms of this Agreement.

7. ADEQUACY OF DAMAGES

Nothing contained in this Agreement shall be construed as prohibiting the Disclosing Party from pursuing any other remedies available to it, either at law or in equity, for any such threatened or actual breach of this Agreement, including specific performance, recovery of damages or otherwise.

8. PRIVACY AND DATA PROTECTION

8.1 The Receiving Party undertakes to comply with South Africa's general privacy protection in terms Section 14 of the Bill of Rights in connection with this Tender and shall procure that its personnel shall observe the provisions of such Act [as applicable] or any amendments and re-enactments thereof and any regulations made pursuant thereto.

8.2 The Receiving Party warrants that it and its Agents have the appropriate technical and organisational measures in place against unauthorised or unlawful processing of data relating to the Tender and against accidental loss or destruction of, or damage to such data held or processed by them.

9. GENERAL

9.1 Neither party may assign the benefit of this Agreement, or any interest hereunder, except with the prior written consent of the other, save that Transnet may assign this Agreement at any time to any member of the Transnet Group.

9.2 No failure or delay in exercising any right, power or privilege under this Agreement will operate as a waiver of it, nor will any single or partial exercise of it preclude any further exercise or the exercise of any right, power or privilege under this Agreement or otherwise.

9.3 The provisions of this Agreement shall be severable in the event that any of its provisions are held by a court of competent jurisdiction or other applicable authority to be invalid, void or otherwise unenforceable, and the remaining provisions shall remain enforceable to the fullest extent permitted by law.

9.4 This Agreement may only be modified by a written agreement duly signed by persons authorised on behalf of each party.

9.5 Nothing in this Agreement shall constitute the creation of a partnership, joint venture or agency between the parties.

9.6 This Agreement will be governed by and construed in accordance with South African law and the parties irrevocably submit to the exclusive jurisdiction of the South African courts.

Signed

Date

Name

Position

Tenderer

T2.2-10: RFP DECLARATION FORM

NAME OF COMPANY:

We _____ do hereby
certify that:

- Transnet has supplied and we have received appropriate tender offers to any/all questions (as applicable) which were submitted by ourselves for tender clarification purposes;
- we have received all information we deemed necessary for the completion of this Tender;
- at no stage have we received additional information relating to the subject matter of this tender from Transnet sources, other than information formally received from the designated Transnet contact(s) as nominated in the tender documents;
- we are satisfied, insofar as our company is concerned, that the processes and procedures adopted by Transnet in issuing this tender and the requirements requested from tenderers in responding to this tender have been conducted in a fair and transparent manner; and
- furthermore, we acknowledge that a direct relationship exists between a family member and/or an owner / member / director / partner / shareholder (unlisted companies) of our company and an employee or board member of the Transnet Group as indicated below: *[Respondent to indicate if this section is not applicable]*

FULL NAME OF OWNER/MEMBER/DIRECTOR/

PARTNER/SHAREHOLDER:

ADDRESS:

Indicate nature of relationship with Transnet:

[Failure to furnish complete and accurate information in this regard may lead to the disqualification of your response and may preclude a Respondent from doing future business with Transnet]

We declare, to the extent that we are aware or become aware of any relationship between ourselves and Transnet (other than any existing and appropriate business relationship with Transnet) which could unfairly advantage our company in the forthcoming adjudication process, we shall notify Transnet immediately in writing of such circumstances.

6. We accept that any dispute pertaining to this tender will be resolved through the Ombudsman process and will be subject to the Terms of Reference of the Ombudsman. The Ombudsman process must first be exhausted before judicial review of a decision is sought. (Refer "Important Notice to respondents" below).
7. We further accept that Transnet reserves the right to reverse a tender award or decision based on the recommendations of the Ombudsman without having to follow a formal court process to have such award or decision set aside.
8. We have acquainted ourselves and agree with the content of T2.2-13 "Service Provider Integrity Pact".

For and on behalf of

.....
.....

duly authorised thereto

Name:
Signature:
Date:

IMPORTANT NOTICE TO TENDERERS

- Transnet has appointed a Procurement Ombudsman to investigate any material complaint in respect of tenders exceeding R5,000,000.00 (five million S.A. Rand) in value. Should a Tenderer have any material concern regarding an tender process which meets this value threshold, a complaint may be lodged with Transnet's Procurement Ombudsman for further investigation.
- It is incumbent on the Tenderer to familiarise himself/herself with the Terms of Reference for the Transnet Procurement Ombudsman, details of which are available for review at Transnet's website www.transnet.net.
- An official complaint form may be downloaded from this website and submitted, together with any supporting documentation, within the prescribed period, to procurement.ombud@transnet.net
- For transactions below the R5,000,000.00 (five million S.A. Rand) threshold, a complaint may be lodged with the Chief Procurement Officer of the relevant Transnet Operating Division.
- All Tenderers should note that a complaint must be made in good faith. If a complaint is made in bad faith, Transnet reserves the right to place such a tenderer on its List of Excluded Bidders.

T2.2-11: REQUEST FOR PROPOSAL – BREACH OF LAW

NAME OF COMPANY:

I / We _____ do hereby certify that ***I/we have/have not been*** found guilty during the preceding 5 (five) years of a serious breach of law, including but not limited to a breach of the Competition Act, 89 of 1998, by a court of law, tribunal or other administrative body. The type of breach that the Tenderer is required to disclose excludes relatively minor offences or misdemeanours, e.g. traffic offences.

Where found guilty of such a serious breach, please disclose:

NATURE OF BREACH:

DATE OF BREACH:

Furthermore, I/we acknowledge that Transnet SOC Ltd reserves the right to exclude any Tenderer from the tendering process, should that person or company have been found guilty of a serious breach of law, tribunal or regulatory obligation.

Signed on this _____ day of _____ 20____

SIGNATURE OF TENDER

T2.2-12 Certificate of Acquaintance with Tender Documents

NAME OF TENDERING ENTITY:

1. By signing this certificate I/we acknowledge that I/we have made myself/ourselves thoroughly familiar with, and agree with all the conditions governing this RFP. This includes those terms and conditions of the Contract, the Supplier Integrity Pact, Non-Disclosure Agreement etc. contained in any printed form stated to form part of the documents thereof, but not limited to those listed in this clause.
2. I/we furthermore agree that Transnet SOC Ltd shall recognise no claim from me/us for relief based on an allegation that I/we overlooked any tender/contract condition or failed to take it into account for the purpose of calculating my/our offered prices or otherwise.
3. I/we understand that the accompanying Tender will be disqualified if this Certificate is found not to be true and complete in every respect.
4. For the purposes of this Certificate and the accompanying Tender, I/we understand that the word "competitor" shall include any individual or organisation, other than the Tenderer, whether or not affiliated with the Tenderer, who:
 - a) has been requested to submit a Tender in response to this Tender invitation;
 - b) could potentially submit a Tender in response to this Tender invitation, based on their qualifications, abilities or experience; and
 - c) provides the same Services as the Tenderer and/or is in the same line of business as the Tenderer
5. The Tenderer has arrived at the accompanying Tender independently from, and without consultation, communication, agreement or arrangement with any competitor. However communication between partners in a joint venture or consortium will not be construed as collusive Tendering.
6. In particular, without limiting the generality of paragraph 5 above, there has been no consultation, communication, agreement or arrangement with any competitor regarding:
 - a) prices;

-
- b) geographical area where Services will be rendered [market allocation]
 - c) methods, factors or formulas used to calculate prices;
 - d) the intention or decision to submit or not to submit, a Tender;
 - e) the submission of a tender which does not meet the specifications and conditions of the tender; or
 - f) Tendering with the intention not winning the tender.
7. In addition, there have been no consultations, communications, agreements or arrangements with any competitor regarding the quality, quantity, specifications and conditions or delivery particulars of the Services to which this tender relates.
8. The terms of the accompanying tender have not been, and will not be, disclosed by the Tenderer, directly or indirectly, to any competitor, prior to the date and time of the official tender opening or of the awarding of the contract.
9. I/We am/are aware that, in addition and without prejudice to any other remedy provided to combat any restrictive practices related to tenders and contracts, tenders that are suspicious will be reported to the Competition Commission for investigation and possible imposition of administrative penalties in terms of section 59 of the Competition Act No 89 of 1998 and/or may be reported to the National Prosecuting Authority [NPA] for criminal investigation. In addition, Tenderers that submit suspicious tenders may be restricted from conducting business with the public sector for a period not exceeding 10 [ten] years in terms of the Prevention and Combating of Corrupt Activities Act No 12 of 2004 or any other applicable legislation.

Signed on this _____ day of _____ 20____

SIGNATURE OF TENDERER

T2.2-13 Service Provider Integrity Pact

Important Note: All potential tenderers must read this document and certify in the RFP Declaration Form that that have acquainted themselves with, and agree with the content.

The contract with the successful tenderer will automatically incorporate this Integrity Pact and shall be deemed as part of the final concluded contract.

INTEGRITY PACT

Between

TRANSNET SOC LTD

Registration Number: 1990/000900/30

("Transnet")

and

The Contractor (hereinafter referred to as the "Tenderer/Service Providers/Contractor")

PREAMBLE

Transnet values full compliance with all relevant laws and regulations, ethical standards and the principles of economical use of resources, fairness and transparency in its relations with its Tenderers/Service Providers/Contractors.

In order to achieve these goals, Transnet and the Tenderer/Service Provider/Contractor hereby enter into this agreement hereinafter referred to as the "Integrity Pact" which will form part of the Tenderer's/Service Provider's/Contractor's application for registration with Transnet as a vendor.

The general purpose of this Integrity Pact is to agree on avoiding all forms of dishonesty, fraud and corruption by following a system that is fair, transparent and free from any undue influence prior to, during and subsequent to the currency of any procurement and/or reverse logistics event and any further contract to be entered into between the Parties, relating to such event.

All Tenderers/Service Providers/Contractor's will be required to sign and comply with undertakings contained in this Integrity Pact, should they want to be registered as a Transnet vendor.

1 OBJECTIVES

- 1.1 Transnet and the Tenderer/Service Provider/Contractor agree to enter into this Integrity Pact, to avoid all forms of dishonesty, fraud and corruption including practices that are anti-competitive in nature, negotiations made in bad faith and under-pricing by following a system that is fair, transparent and free from any influence/unprejudiced dealings prior to, during and subsequent to the currency of the contract to be entered into with a view to:
 - a) Enable Transnet to obtain the desired contract at a reasonable and competitive price in conformity to the defined specifications of the works, goods and services; and
 - b) Enable Tenderers/Service Providers/Contractors to abstain from bribing or participating in any corrupt practice in order to secure the contract.

2 COMMITMENTS OF TRANSNET

Transnet commits to take all measures necessary to prevent dishonesty, fraud and corruption and to observe the following principles:

- 2.1 Transnet hereby undertakes that no employee of Transnet connected directly or indirectly with the sourcing event and ensuing contract, will demand, take a promise for or accept directly or through intermediaries any bribe, consideration, gift, reward, favour or any material or immaterial benefit or any other advantage from the Tenderer, either for themselves or for any person, organisation or third

party related to the contract in exchange for an advantage in the tendering process, Tender evaluation, contracting or implementation process related to any contract.

- 2.2 Transnet will, during the registration and tendering process treat all Tenderers/ Service Providers/Contractor with equity, transparency and fairness. Transnet will in particular, before and during the registration process, provide to all Tenderers/ Service Providers/Contractors the same information and will not provide to any Tenderers/Service Providers/Contractors confidential/additional information through which the Tenderers/Service Providers/Contractors could obtain an advantage in relation to any tendering process.
- 2.3 Transnet further confirms that its employees will not favour any prospective Tenderers/Service Providers/Contractors in any form that could afford an undue advantage to a particular Tenderer during the tendering stage, and will further treat all Tenderers/Service Providers/Contractors participating in the tendering process in a fair manner.
- 2.4 Transnet will exclude from the tender process such employees who have any personal interest in the Tenderers/Service Providers/Contractors participating in the tendering process.

3 OBLIGATIONS OF THE TENDERER / SERVICE PROVIDER

- 3.1 Transnet has a '**Zero Gifts**' Policy. No employee is allowed to accept gifts, favours or benefits.
 - a) Transnet officials and employees **shall not** solicit, give or accept, or from agreeing to solicit, give, accept or receive directly or indirectly, any gift, gratuity, favour, entertainment, loan, or anything of monetary value, from any person or juridical entities in the course of official duties or in connection with any operation being managed by, or any transaction which may be affected by the functions of their office.
 - b) Transnet officials and employees **shall not** solicit or accept gifts of any kind, from vendors, suppliers, customers, potential employees, potential vendors, and suppliers, or any other individual or organisation irrespective of the value.
 - c) Under **no circumstances** should gifts, business courtesies or hospitality packages be accepted from or given to prospective suppliers participating in a tender process at the respective employee's Operating Division, regardless of retail value.
 - d) Gratuities, bribes or kickbacks of any kind must never be solicited, accepted or offered, either directly or indirectly. This includes money, loans, equity, special privileges, personal favours, benefit or services. Such favours will be considered to constitute corruption.

- 3.2 The Tenderer/Service Provider/Contractor commits itself to take all measures necessary to prevent corrupt practices, unfair means and illegal activities during any stage of its Tender or during any ensuing contract stage in order to secure the contract or in furtherance to secure it and in particular the Tenderer/Service Provider/Contractor commits to the following:
- a) The Tenderer/Service Provider/Contractor will not, directly or through any other person or firm, offer, promise or give to Transnet or to any of Transnet's employees involved in the tendering process or to any third person any material or other benefit or payment, in order to obtain in exchange an advantage during the tendering process; and
 - b) The Tenderer/Service Provider/Contractor will not offer, directly or through intermediaries, any bribe, gift, consideration, reward, favour, any material or immaterial benefit or other advantage, commission, fees, brokerage or inducement to any employee of Transnet, connected directly or indirectly with the tendering process, or to any person, organisation or third party related to the contract in exchange for any advantage in the tendering, evaluation, contracting and implementation of the contract.
- 3.3 The Tenderer/Service Provider/Contractor will not collude with other parties interested in the contract to preclude a competitive Tender price, impair the transparency, fairness and progress of the tendering process, Tender evaluation, contracting and implementation of the contract. The Tenderer / Service Provider further commits itself to delivering against all agreed upon conditions as stipulated within the contract.
- 3.4 The Tenderer/Service Provider/Contractor will not enter into any illegal or dishonest agreement or understanding, whether formal or informal with other Tenderers/Service Providers/Contractors. This applies in particular to certifications, submissions or non-submission of documents or actions that are restrictive or to introduce cartels into the tendering process.
- 3.5 The Tenderer/Service Provider/Contractor will not commit any criminal offence under the relevant anti-corruption laws of South Africa or any other country. Furthermore, the Tenderer/Service Provider/Contractor will not use for illegitimate purposes or for restrictive purposes or personal gain, or pass on to others, any information provided by Transnet as part of the business relationship, regarding plans, technical proposals and business details, including information contained or transmitted electronically.
- 3.6 A Tenderer/Service Provider/Contractor of foreign origin shall disclose the name and address of its agents or representatives in South Africa, if any, involved directly or indirectly in the registration or tendering process. Similarly, the Tenderer / Service Provider / Contractor of South African nationality shall furnish

the name and address of the foreign principals, if any, involved directly or indirectly in the registration or tendering process.

- 3.7 The Tenderer/Service Provider/Contractor will not misrepresent facts or furnish false or forged documents or information in order to influence the tendering process to the advantage of the Tenderer/Service Provider/Contractor or detriment of Transnet or other competitors.
- 3.8 Transnet may require the Tenderer/Service Provider/Contractor to furnish Transnet with a copy of its code of conduct. Such code of conduct must address the compliance programme for the implementation of the code of conduct and reject the use of bribes and other dishonest and unethical conduct.
- 3.9 The Tenderer/Service Provider/Contractor will not instigate third persons to commit offences outlined above or be an accessory to such offences.
- 3.10 The Tenderer/Service Provider/Contractor confirms that they will uphold the ten principles of the United Nations Global Compact (UNGC) in the fields of Human Rights, Labour, Anti-Corruption and the Environment when undertaking business with Transnet as follows:

a) Human Rights

- Principle 1: Businesses should support and respect the protection of internationally proclaimed human rights; and
- Principle 2: make sure that they are not complicit in human rights abuses.

b) Labour

- Principle 3: Businesses should uphold the freedom of association and the effective recognition of the right to collective bargaining;
- Principle 4: the elimination of all forms of forced and compulsory labour;
- Principle 5: the effective abolition of child labour; and
- Principle 6: the elimination of discrimination in respect of employment and occupation.

c) Environment

- Principle 7: Businesses should support a precautionary approach to environmental challenges;

- Principle 8: undertake initiatives to promote greater environmental responsibility; and
 - Principle 9: encourage the development and diffusion of environmentally friendly technologies.
- d) Anti-Corruption
- Principle 10: Businesses should work against corruption in all its forms, including extortion and bribery.

4 INDEPENDENT TENDERING

- 4.1 For the purposes of that Certificate in relation to any submitted Tender, the Tenderer declares to fully understand that the word "competitor" shall include any individual or organisation, other than the Tenderer, whether or not affiliated with the Tenderer, who:
- a) has been requested to submit a Tender in response to this Tender invitation;
 - b) could potentially submit a Tender in response to this Tender invitation, based on their qualifications, abilities or experience; and
 - c) provides the same Goods and Services as the Tenderer and/or is in the same line of business as the Tenderer.
- 4.2 The Tenderer has arrived at his submitted Tender independently from, and without consultation, communication, agreement or arrangement with any competitor. However communication between partners in a joint venture or consortium will not be construed as collusive tendering.
- 4.3 In particular, without limiting the generality of paragraph 5 above, there has been no consultation, communication, agreement or arrangement with any competitor regarding:
- a) prices;
 - b) geographical area where Goods or Services will be rendered [market allocation];
 - c) methods, factors or formulas used to calculate prices;
 - d) the intention or decision to submit or not to submit, a Tender;
 - e) the submission of a Tender which does not meet the specifications and conditions of the RFP; or
 - f) tendering with the intention of not winning the Tender.
- 4.4 In addition, there have been no consultations, communications, agreements or arrangements with any competitor regarding the quality, quantity, specifications

and conditions or delivery particulars of the Goods or Services to which his/her tender relates.

- 4.5 The terms of the Tender as submitted have not been, and will not be, disclosed by the Tenderer, directly or indirectly, to any competitor, prior to the date and time of the official Tender opening or of the awarding of the contract.
- 4.6 Tenderers are aware that, in addition and without prejudice to any other remedy provided to combat any restrictive practices related to Tenders and contracts, Tenders that are suspicious will be reported to the Competition Commission for investigation and possible imposition of administrative penalties in terms of section 59 of the Competition Act No 89 of 1998 and/or may be reported to the National Prosecuting Authority [**NPA**] for criminal investigation and/or may be restricted from conducting business with the public sector for a period not exceeding 10 [ten] years in terms of the Prevention and Combating of Corrupt Activities Act No 12 of 2004 or any other applicable legislation.
- 4.7 Should the Tenderer find any terms or conditions stipulated in any of the relevant documents quoted in the Tender unacceptable, it should indicate which conditions are unacceptable and offer alternatives by written submission on its company letterhead, attached to its submitted Tender. Any such submission shall be subject to review by Transnet's Legal Counsel who shall determine whether the proposed alternative(s) are acceptable or otherwise, as the case may be.

5 DISQUALIFICATION FROM TENDERING PROCESS

- 5.1 If the Tenderer/Service Provider/Contractor has committed a transgression through a violation of section 3 of this Integrity Pact or in any other form such as to put its reliability or credibility as a Tenderer/Service Provider/Contractor into question, Transnet may reject the Tenderer's / Service Provider's / Contractor's application from the registration or tendering process and remove the Tenderer/Service Provider/Contractor from its database, if already registered.
- 5.2 If the Tenderer/Service Provider/Contractor has committed a transgression through a violation of section 3, or any material violation, such as to put its reliability or credibility into question. Transnet may after following due procedures and at its own discretion also exclude the Tenderer/Service Provider /Contractor from future tendering processes. The imposition and duration of the exclusion will be determined by the severity of the transgression. The severity will be determined by the circumstances of the case, which will include amongst others the number of transgressions, the position of the transgressors within the company hierarchy of the Tenderer/Service Provider/Contractor and the amount

of the damage. The exclusion will be imposed for up to a maximum of 10 (ten) years. However, Transnet reserves the right to impose a longer period of exclusion, depending on the gravity of the misconduct.

- 5.3 If the Tenderer/Service Provider/Contractor can prove that it has restored the damage caused by it and has installed a suitable corruption prevention system, or taken other remedial measures as the circumstances of the case may require, Transnet may at its own discretion revoke the exclusion or suspend the imposed penalty.

6 TRANSNET'S LIST OF EXCLUDED TENDERERS (BLACKLIST)

- 6.1 The process of restriction is used to exclude a company/person from conducting future business with Transnet and other organs of state for a specified period. No Tender shall be awarded to a Tenderer whose name (or any of its members, directors, partners or trustees) appear on the Register of Tender Defaulters kept by National Treasury, or who have been placed on National Treasury's List of Restricted Suppliers. Transnet reserves the right to withdraw an award, or cancel a contract concluded with a Tenderer should it be established, at any time, that a tenderer has been restricted with National Treasury by another government institution.
- 6.2 All the stipulations on Transnet's restriction process as laid down in Transnet's Supply Chain Policy and Procurement Procedures Manual (CPM included) are included herein by way of reference. Below follows a condensed summary of this restriction procedure.
- 6.3 On completion of the restriction procedure, Transnet will submit the restricted entity's details (including the identity number of the individuals and registration number of the entity) to National Treasury for placement on National Treasury's Database of Restricted Suppliers for the specified period of exclusion. National Treasury will make the final decision on whether to restrict an entity from doing business with any organ of state for a period not exceeding 10 years and place the entity concerned on the Database of Restricted Suppliers published on its official website.
- 6.4 The decision to restrict is based on one of the grounds for restriction. The standard of proof to commence the restriction process is whether a "*prima facie*" (i.e. on the face of it) case has been established.
- 6.5 Depending on the seriousness of the misconduct and the strategic importance of the Goods/Services, in addition to restricting a company/person from future business, Transnet may decide to terminate some or all existing contracts with the company/person as well.

- 6.6 A Service Provider or Contractor to Transnet may not subcontract any portion of the contract to a blacklisted company.
- 6.7 Grounds for blacklisting include: If any person/Enterprise which has submitted a Tender, concluded a contract, or, in the capacity of agent or subcontractor, has been associated with such Tender or contract:
- a) Has, in bad faith, withdrawn such Tender after the advertised closing date and time for the receipt of Tenders;
 - b) has, after being notified of the acceptance of his Tender, failed or refused to sign a contract when called upon to do so in terms of any condition forming part of the Tender documents;
 - c) has carried out any contract resulting from such Tender in an unsatisfactory manner or has breached any condition of the contract;
 - d) has offered, promised or given a bribe in relation to the obtaining or execution of the contract;
 - e) has acted in a fraudulent or improper manner or in bad faith towards Transnet or any Government Department or towards any public body, Enterprise or person;
 - f) has made any incorrect statement in a certificate or other communication with regard to the Local Content of his Goods or his B-BBEE status and is unable to prove to the satisfaction of Transnet that:
 - (i) he made the statement in good faith honestly believing it to be correct; and
 - (ii) before making such statement he took all reasonable steps to satisfy himself of its correctness;
 - g) caused Transnet damage, or to incur costs in order to meet the contractor's requirements and which could not be recovered from the contractor;
 - h) has litigated against Transnet in bad faith.
- 6.8 Grounds for blacklisting include a company/person recorded as being a company or person prohibited from doing business with the public sector on National Treasury's database of Restricted Service Providers or Register of Tender Defaulters.

- 6.9 Companies associated with the person/s guilty of misconduct (i.e. entities owned, controlled or managed by such persons), any companies subsequently formed by the person(s) guilty of the misconduct and/or an existing company where such person(s) acquires a controlling stake may be considered for blacklisting. The decision to extend the blacklist to associated companies will be at the sole discretion of Transnet.

7 PREVIOUS TRANSGRESSIONS

- 7.1 The Tenderer/Service Provider/Contractor hereby declares that no previous transgressions resulting in a serious breach of any law, including but not limited to, corruption, fraud, theft, extortion and contraventions of the Competition Act 89 of 1998, which occurred in the last 5 (five) years with any other public sector undertaking, government department or private sector company that could justify its exclusion from its registration on the Tenderer's/Service Provider's/Contractor's database or any tendering process.
- 7.2 If it is found to be that the Tenderer/Service Provider/Contractor made an incorrect statement on this subject, the Tenderer/Service Provider/Contractor can be rejected from the registration process or removed from the Tenderer/Service Provider/Contractor database, if already registered, for such reason (refer to the Breach of Law Returnable Form contained in the document.)

8 SANCTIONS FOR VIOLATIONS

- 8.1 Transnet shall also take all or any one of the following actions, wherever required to:
- a) Immediately exclude the Tenderer/Service Provider/Contractor from the tendering process or call off the pre-contract negotiations without giving any compensation the Tenderer/Service Provider/Contractor. However, the proceedings with the other Tenderer/Service Provider/Contractor may continue;
 - b) Immediately cancel the contract, if already awarded or signed, without giving any compensation to the Tenderer/Service Provider/Contractor;
 - c) Recover all sums already paid by Transnet;
 - d) Encash the advance bank guarantee and performance bond or warranty bond, if furnished by the Tenderer/Service Provider/Contractor, in order to recover the payments, already made by Transnet, along with interest;
 - e) Cancel all or any other contracts with the Tenderer/Service Provider/Contractor; and
 - f) Exclude the Tenderer/Service Provider/Contractor from entering into any Tender with Transnet in future.

9 CONFLICTS OF INTEREST

9.1 A conflict of interest includes, inter alia, a situation in which:

- a) A Transnet employee has a personal financial interest in a tendering / supplying entity; and
- b) A Transnet employee has private interests or personal considerations or has an affiliation or a relationship which affects, or may affect, or may be perceived to affect his / her judgment in action in the best interest of Transnet, or could affect the employee's motivations for acting in a particular manner, or which could result in, or be perceived as favouritism or nepotism.

9.2 A Transnet employee uses his / her position, or privileges or information obtained while acting in the capacity as an employee for:

- a) Private gain or advancement; or
- b) The expectation of private gain, or advancement, or any other advantage accruing to the employee must be declared in a prescribed form.

Thus, conflicts of interest of any Tender committee member or any person involved in the sourcing process must be declared in a prescribed form.

9.3 If a Tenderer/Service Provider/Contractor has or becomes aware of a conflict of interest i.e. a family, business and / or social relationship between its owner(s)/ member(s)/director(s)/partner(s)/shareholder(s) and a Transnet employee/ member of Transnet's Board of Directors in respect of a Tender which will be considered for the Tender process, the Tenderer/Service Provider/ Contractor:

- a) must disclose the interest and its general nature, in the Request for Proposal ("RFX") declaration form; or
- b) must notify Transnet immediately in writing once the circumstances has arisen.

9.4 The Tenderer/Service Provider/Contractor shall not lend to or borrow any money from or enter into any monetary dealings or transactions, directly or indirectly, with any committee member or any person involved in the sourcing process, where this is done, Transnet shall be entitled forthwith to rescind the contract and all other contracts with the Tenderer/Service Provider/Contractor.

10 DISPUTE RESOLUTION

10.1 Transnet recognises that trust and good faith are pivotal to its relationship with its Tenderer / Service Provider / Contractor. When a dispute arises between Transnet and its Tenderer / Service Provider / Contractor, the parties should use their best endeavours to resolve the dispute in an amicable manner, whenever possible. Litigation in bad faith negates the principles of trust and good faith on which commercial relationships are based. Accordingly, following a blacklisting process as mentioned in paragraph 6 above, Transnet will not do business with a company that litigates against it in bad faith or is involved in any action that

reflects bad faith on its part. Litigation in bad faith includes, but is not limited to the following instances:

- a) **Vexatious proceedings:** these are frivolous proceedings which have been instituted without proper grounds;
- b) **Perjury:** where a Tenderer / Service Provider / Contractor make a false statement either in giving evidence or on an affidavit;
- c) **Scurrilous allegations:** where a Tenderer / Service Provider / Contractor makes allegations regarding a senior Transnet employee which are without proper foundation, scandalous, abusive or defamatory; and
- d) **Abuse of court process:** when a Tenderer / Service Provider / Contractor abuses the court process in order to gain a competitive advantage during a Tender process.

11 GENERAL

- 11.1 This Integrity Pact is governed by and interpreted in accordance with the laws of the Republic of South Africa.
- 11.2 The actions stipulated in this Integrity Pact are without prejudice to any other legal action that may follow in accordance with the provisions of the law relating to any civil or criminal proceedings.
- 11.3 The validity of this Integrity Pact shall cover all the tendering processes and will be valid for an indefinite period unless cancelled by either Party.
- 11.4 Should one or several provisions of this Integrity Pact turn out to be invalid the remainder of this Integrity Pact remains valid.
- 11.5 Should a Tenderer/Service Provider/Contractor be confronted with dishonest, fraudulent or corruptive behaviour of one or more Transnet employees, Transnet expects its Tenderer/Service Provider/Contractor to report this behaviour directly to a senior Transnet official/employee or alternatively by using Transnet's "Tip-Off Anonymous" hotline number 0800 003 056, whereby your confidentiality is guaranteed.

The Parties hereby declare that each of them has read and understood the clauses of this Integrity Pact and shall abide by it. To the best of the Parties' knowledge and belief, the information provided in this Integrity Pact is true and correct.

I duly authorised by the tendering entity, hereby certify that the tendering entity are **fully acquainted** with the contents of the Integrity Pact and further **agree to abide by it** in full.

Transnet Freight Rail

Tender Number: SIC24023CIDB (HOAC VAR 52802)

Description of the Service: For the Maintenance of Railway Track with an on-track High Production Screening machine on all lines owned and maintained by Transnet.

Signature

Date

T2.2-14 : Supplier Code of Conduct

Transnet SOC Limited aims to achieve the best value for money when buying or selling goods and obtaining services. This however must be done in an open and fair manner that supports and drives a competitive economy. Underpinning our process are several acts and policies that any supplier dealing with Transnet must understand and support. These are:

- The Transnet Procurement Policy – A guide for Tenderers.
- Section 217 of the Constitution - the five pillars of Public PSCM (Procurement and Supply Chain Management): fair, equitable, transparent, competitive and cost effective;
- The Public Finance Management Act (PFMA);
- The Broad Based Black Economic Empowerment Act (BBBEE)
- The Prevention and Combating of Corrupt Activities Act (PRECCA); and
- The Construction Industry Development Board Act (CIDB Act).

This code of conduct has been included in this contract to formally appraise Transnet Suppliers of Transnet's expectations regarding behaviour and conduct of its Suppliers.

Prohibition of Bribes, Kickbacks, Unlawful Payments, and Other Corrupt Practices

Transnet is in the process of transforming itself into a self-sustaining State Owned Enterprise, actively competing in the logistics industry. Our aim is to become a world class, profitable, logistics organisation. As such, our transformation is focused on adopting a performance culture and to adopt behaviours that will enable this transformation.

1. Transnet SOC Limited will not participate in corrupt practices. Therefore, it expects its suppliers to act in a similar manner.

- Transnet and its employees will follow the laws of this country and keep accurate business records that reflect actual transactions with, and payments to, our suppliers.
- Employees must not accept or request money or anything of value, directly or indirectly, from suppliers.
- Employees may not receive anything that is calculated to:
 - Illegally influence their judgement or conduct or to ensure the desired outcome of a sourcing activity;

-
- Win or retain business or to influence any act or decision of any person involved in sourcing decisions; or
 - Gain an improper advantage.

- There may be times when a supplier is confronted with fraudulent or corrupt behaviour of Transnet employees. We expect our Suppliers to use our “Tip-offs Anonymous” Hot line to report these acts. (0800 003 056).

2. *Transnet SOC Limited is firmly committed to the ideas of free and competitive enterprise.*

- Suppliers are expected to comply with all applicable laws and regulations regarding fair competition and antitrust practices.
- Transnet does not engage with non-value adding agents or representatives solely for the purpose of increasing BBBEE spend (fronting).

3. *Transnet’s relationship with suppliers requires us to clearly define requirements, to exchange information and share mutual benefits.*

- Generally, suppliers have their own business standards and regulations. Although Transnet cannot control the actions of our suppliers, we will not tolerate any illegal activities. These include, but are not limited to:
 - Misrepresentation of their product (origin of manufacture, specifications, intellectual property rights, etc);
 - Collusion;
 - Failure to disclose accurate information required during the sourcing activity (ownership, financial situation, BBBEE status, etc.);
 - Corrupt activities listed above; and
 - Harassment, intimidation or other aggressive actions towards Transnet employees.
- Suppliers must be evaluated and approved before any materials, components, products or services are purchased from them. Rigorous due diligence is conducted and the supplier is expected to participate in an honest and straight forward manner.
- Suppliers must record and report facts accurately, honestly and objectively. Financial records must be accurate in all material respects.

Conflicts of Interest

A conflict of interest arises when personal interests or activities influence (or appear to influence) the ability to act in the best interests of Transnet SOC Limited.

- Doing business with family members.
- Having a financial interest in another company in our industry

Where possible, contracts will be negotiated to include the above in the terms of such contracts. To the extent such terms are not included in contractual obligations and any of the above code is breached, then Transnet reserves its right to review doing business with these suppliers.

I, _____ of _____
(insert name of Director or as per Authority Resolution from Board of Directors) *(insert name of Company)*

hereby acknowledge having read, understood and agree to the terms and conditions set out in the "Transnet Supplier Code of Conduct."

Signed this on day _____ at _____

Signature

T2.2-15 Agreement in terms of Protection of Personal Information Act, 4 of 2013 ("POPIA")

1. PREAMBLE AND INTRODUCTION

- 1.1. The rights and obligation of the Parties in terms of the Protection of Personal Information Act, 4 of 2013 ("POPIA") are included as forming part of the terms and conditions of this contract.

2. PROTECTION OF PERSONAL INFORMATION

- 2.1. The following terms shall bear the same meaning as contemplated in Section 1 of the Protection of Person information act, No. of 2013 "(POPIA)":
- consent; data subject; electronic communication; information officer; operator; person; personal information; processing; record; Regulator; responsible party; special information; as well as any terms derived from these terms.
- 2.2. The Operator will process all information by the Transnet in terms of the requirements contemplated in Section 4(1) of the POPIA:
- Accountability; Processing limitation; Purpose specification; Further processing limitation; Information quality; Openness; Security safeguards and Data subject participation.
- 2.3. The Parties acknowledge and agree that, in relation to personal information of Transnet and the information of a third party that will be processed pursuant to this Agreement , the Operator is (..... hereinafter Operator and the Data subject is "Transnet". Operator will process personal information only with the knowledge and authorisation of Transnet and will treat personal information and the information of a third party which comes to its knowledge as confidential and will not disclose it, unless so required by law or subject to the exceptions contained in the POPIA.
- 2.4. Transnet reserves all the rights afforded to it by the POPIA in the processing of any of its information as contained in this Agreement and the Operator is required to comply with all prescripts as detailed in the POPIA relating to all information concerning Transnet.
- 2.5. In terms of this Agreement, the Operator acknowledges that it will obtain and have access to personal information of Transnet and the information of a third party and agrees that it shall only process the information disclosed by Transnet in terms of this Agreement and only for the purposes as detailed in this Agreement and in accordance with any applicable law.
- 2.6. Should there be a need for the Operator to process the personal information and the information of a third party in a way that is not agreed to in this Agreement, the Operator must request consent

from Transnet to the processing of its personal information or and the information of a third party in a manner other than that it was collected for, which consent cannot be unreasonably withheld.

- 2.7. Furthermore, the Operator will not otherwise modify, amend or alter any personal information and the information of a third party submitted by Transnet or disclose or permit the disclosure of any personal information and the information of a third party to any third party without prior written consent from Transnet.
- 2.8. The Operator shall, at all times, ensure compliance with any applicable laws put in place and maintain sufficient measures, policies and systems to manage and secure against all forms of risks to any information that may be shared or accessed pursuant to the services offered to Transnet in terms of this Agreement (physically, through a computer or any other form of electronic communication).
- 2.9. The Operator shall notify Transnet in writing of any unauthorised access to personal information and the information of a third party , cybercrimes or suspected cybercrimes, in its knowledge and report such crimes or suspected crimes to the relevant authorities in accordance with applicable laws, after becoming aware of such crimes or suspected crime. The Operator must inform Transnet of the breach as soon as it has occurred to allow Transnet to take all necessary remedial steps to mitigate the extent of the loss or compromise of personal information and the information of a third party and to restore the integrity of the affected personal information as quickly as is possible.
- 2.10. Transnet may, in writing, request the Operator to confirm and/or make available any personal information and the information of a third party in its possession in relation to Transnet and if such personal information has been accessed by third parties and the identity thereof in terms of the POPIA.
- 2.11. Transnet may further request that the Operator correct, delete, destroy, withdraw consent or object to the processing of any personal information and the information of a third party relating to the Transnet or a third party in the Operator's possession in terms of the provision of the POPIA and utilizing Form 2 of the POPIA Regulations .
- 2.12. In signing this addendum that is in terms of the POPIA, the Operator hereby agrees that it has adequate measures in place to provide protection of the personal information and the information of a third party given to it by Transnet in line with the 8 conditions of the POPIA and that it will provide to Transnet satisfactory evidence of these measures whenever called upon to do so by Transnet.

The Operator is required to provide confirmation that all measures in terms of the POPIA are in place when processing personal information and the information of a third party received from Transnet:

YES	
------------	--

NO	
-----------	--

2.13. Further, the Operator acknowledges that it will be held liable by Transnet should it fail to process personal information in line with the requirements of the POPIA. The Operator will be subject to any civil or criminal action, administrative fines or other penalty or loss that may arise as a result of the processing of any personal information that Transnet submitted to it.

2.14. Should a Tenderer have any complaints or objections to processing of its personal information, by Transnet, the Tenderer can submit a complaint to the Information Regulator on <https://www.justice.gov.za/infoereg/>, click on contact us, click on complaints.IR@justice.gov.za

3. **SOLE AGREEMENT**

3.1. The Agreement, constitute the sole agreement between the parties relating to the subject matter referred to in paragraph 1.1 of this and no amendment/variation/change shall be of any force and effect unless reduced to writing and signed by or on behalf of both parties.

Signed at _____ on this _____ day of _____ 2021

Name: _____

Title: _____

Signature: _____

_____**(Name of the Company)** (Operator)

Authorised signatory for and on behalf of _____ (Name of Company) who warrants that he/she is duly authorised to sign this Agreement.

AS WITNESSES:

1. Name: _____ Signature: _____

2. Name: _____ Signature: _____

T2.2-16: Insurance provided by the *Contractor*

Clause 83.1 in NEC3 Term Service Contract (June 2005)(amended June 2006 and April 2013) requires that the *Contractor* provides the insurance stated in the insurance table except any insurance which the *Employer* is to provide as stated in the Contract Data.

Please provide the following details for insurance which the *Contractor* is still to provide. Notwithstanding this information all costs related to insurance are deemed included in the tenderer's rates and prices.

Insurance against (See clause 83.1 of the TSC)	Name of Insurance Company	Cover	Premium
Liability for death of or bodily injury to employees of the <i>Contractor</i> arising out of and in the course of their employment in connection with this contract			
Motor Vehicle Liability Insurance comprising (as a minimum) "Balance of Third Party" Risks including Passenger and Unauthorised Passenger Liability indemnity with a minimum indemnity limit of R5 000 000.			
Insurance in respect of loss of or damage to own property and equipment.			
(Other)			

T2.2-17: Three (3) years audited financial statements

Attached to this schedule is the last three (3) years audited financial statements of the single tenderer/members of the Joint Venture.

NAME OF COMPANY/IES and INDEX OF ATTACHMENTS:

.....

.....

.....

.....

.....

.....

.....

T2.2-19 SUPPLIER DECLARATION FORM

Transnet Vendor Management has received a request to load / change your company details onto the Transnet vendor master database. Please return the completed Supplier Declaration Form (SDF) together with the required supporting documents as per Appendix A to the Transnet Official who is intending to procure your company's services / products, to enable us to process this request. Please only submit the documentation relevant to your request.

Please Note: all organisations, institutions and individuals who wish to provide goods and/or services to organs of the State must be registered on the National Treasury's Central Supplier Database (CSD). This needs to be done via their portal at <https://secure.csd.gov.za/> **before applying to Transnet.**

General Terms and Conditions:

Please Note: Failure to submit the relevant documentation will delay the vendor creation / change process.

Where applicable, the respective Transnet Operating Division processing your application may request further or additional information from your company.

The Service Provider warrants that the details of its bank account ("the nominated account") provided herein, are correct and acknowledges that payments due to the Supplier will be made into the nominated account. If details of the nominated account should change, the Service Provider must notify Transnet in writing of such change, failing which any payments made by Transnet into the nominated account will constitute a full discharge of the indebtedness of Transnet to the Supplier in respect of the payment so made. Transnet will incur no liability for any payments made to the incorrect account or any costs associated therewith. In such an event, the Service Provider indemnifies and holds Transnet harmless in respect of any payments made to an incorrect bank account and will, on demand, pay Transnet any costs associated herewith.

Transnet expects its suppliers to timeously renew their Tax Clearance and B-BBEE certificates (Large Enterprises and QSEs less than 51% black owned) as well as sworn affidavits in the case of EMEs and QSEs with more than 51% black ownership as per Appendices C and D.

In addition, please take note of the following very important information:

1. If your annual turnover is R10 million or less, then in terms of the DTI Generic Codes of Good Practice, you are classified as an Exempted Micro Enterprise (EME). If your company is classified as an EME, please include in your submission a sworn affidavit confirming your company's most recent annual turnover is less than R10 million and percentage of black ownership and black female ownership in the company (Appendix C) OR B-BBEE certificate issued by a verification agency accredited by SANAS in terms of the EME scorecard should you feel you will be able to attain a better B-BBEE score. It is only in this context that an EME may submit a B-BBEE verification certificate. These EME sworn affidavits must be accepted by the . Government introduced this mechanism specifically to reduce the cost of doing business and regulatory burden for these entities and the template for the sworn affidavit is available at no cost on the website www.thedti.gov.za or EME certificates at CIPC from www.cipic.co.za.

The B-BBEE Commission said "that only time an EME can be verified by a SANAS accredited verification professional is when it wishes to maximise its B-BBEE points and move to a higher B-BBEE recognition level, and that must be done use the QSE Scorecard".

2. If your annual turnover is between R10 million and R50 million, then in terms of the DTI codes, you are classified as a Qualifying Small Enterprise (QSE). A QSE which is at least 51% black owned, is required to submit a sworn affidavit confirming their annual total revenue of between R10 million and R50 million and level of black ownership (Appendix D). QSE that does not qualify for 51% of black ownership, are required to submit a B-BBEE verification certificate issued by a verification agency accredited by SANAS their QSEs are required to submit a B-BBEE verification certificate issued by a verification agency accredited by SANAS.

Please Note: B-BBEE certificate and detailed scorecard should be obtained from an accredited rating agency (e.g. SANAS Member).

3. If your annual turnover exceeds R50 million, then in terms of the DTI codes, you are classified as a Large Enterprise. Large Enterprises are required to submit a B-BBEE level verification certificate issued by a verification agency accredited by SANAS.

Please Note: B-BBEE certificate and detailed scorecard should be obtained from an accredited rating agency (e.g. SANAS Member).

4. The supplier to furnish proof to the procurement department as required in the Fourth Schedule of the Income Tax Act. 58 of 1962 whether a supplier of service is to be classified as an "employee", "personal service provider" or "labour broker". Failure to do so will result in the supplier being subject to employee's tax.

5. No payments can be made to a vendor until the vendor has been registered / updated, and no vendor can be registered / updated until the vendor application form, together with its supporting documentation, has been received and processed. No payments can be made to a vendor until the vendor has met / comply with the procurement requirements.

6. It is in line with PPPFA Regulations, only valid B-BBEE status level certificate issued by an unauthorised body or person OR a sworn affidavit as prescribed by the B-BBEE Codes of Good Practice, OR any other requirement prescribed in terms of the Broad- Based Black Economic Empowerment Act.

7. The B-BBEE Commission advises entities and organs of state to reject B-BBEE certificates that have been issued by verification agencies or professionals who are not accredited by South African National Accreditation Systems ("SANAS) as such B-BBEE certificates are invalid for lack of authority and mandate to issue them. A list of SANAS Accredited agencies is available on the SANAS website at www.sanas.co.za.

8. Presenting banking details. Please note: Banks have decided to enable the customers and provide the ability for customers to generate Account Confirmation/Bank Account letters via their online platform; this is a digital approach to the authentication of banking details.

SUPPLIER DECLARATION FORM

Supplier Declaration Form

Important Notice: all organisations, institutions and individuals who wish to provide goods and/or services to organs of the State must be registered on the National Treasury Central Supplier Database (CSD). This needs to be done via their portal at <https://secure.csd.gov.za/> **before applying to Transnet.**

CSD Number (MAAA xxxxxx):

Company Trading Name						
Company Registered Name						
Company Registration No Or ID No If a Sole Proprietor						
Company Income Tax Number						
Form of Entity	CC	Trust	Pty Ltd	Limited	Partnership	Sole Proprietor
	Non-profit (NPO's or NPC)	Personal Liability Co	State Owned Co	National Govt	Provincial Govt	Local Govt
	Education al Institution	Specialise d Profession	Financial Institution	Joint Venture	Foreign International	Foreign Branch Office

Did your company previously operate under another name?					Yes	No
If YES state the previous details below:						
Trading Name						
Registered Name						
Company Registration No Or ID No If a Sole Proprietor						
Form of Entity	CC	Trust	Pty Ltd	Limited	Partnership	Sole Proprietor
	Non-profit (NPO's or NPC)	Personal Liability Co	State Owned Co	National Govt	Provincial Govt	Local Govt
	Education al Institution	Specialise d Profession	Financial Institution	Joint Venture	Foreign International	Foreign Branch Office

Your Current Company's VAT Registration Status	
VAT Registration Number	
If Exempted from VAT registration , state reason and submit proof from SARS in confirming the exemption status	

If your business entity is not VAT Registered, please submit a current original sworn affidavit (see example in Appendix I). Your Non VAT Registration must be confirmed annually.

Company Banking Details	Bank Name	
Universal Branch Code	Bank Account Number	

Company Physical Address		Code	
Company Postal Address		Code	
Company Telephone number			
Company Fax Number			
Company E-Mail Address			
Company Website Address			

Company Contact Person Name	
Designation	
Telephone	
Email	

Is your company a Labour Broker?	Yes	No
Main Product / Service Supplied e.g. Stationery / Consulting / Labour etc.		
How many personnel does the business employ?	Full Time	Part Time
Please Note: Should your business employ more than 2 full time employees who are not connected persons as defined in the Income Tax Act, please submit a sworn affidavit, as per Appendix II.		

Most recent Financial Year's Annual Turnover	<R10Million EME	>R10Million <R50Million QSE	>R50Million Large Enterprise
--	---------------------------	--	--

Does your company have a valid proof of B-BBEE status?							Yes		No			
Please indicate your Broad Based BEE status (Level 1 to 9)				1	2	3	4	5	6	7	8	9
Majority Race of Ownership												
% Black Ownership		% Black Women Ownership		% Black Disabled person(s) Ownership			% Black Youth Ownership					
% Black Unemployed		% Black People Living in Rural Areas		% Black Military Veterans								
Please Note: Please provide proof of B-BBEE status as per Appendix C and D:												

- Large Enterprise and QSEs with less than 51% black ownership need to obtain a B-BBEE certificate and detailed scorecard from an accredited rating agency;
- EMEs and QSEs with at least 51% black ownership may provide an affidavit using the templates provided in Appendix C and D respectively;
- Black Disabled person(s) ownership will only be accepted if accompanied with a certified letter signed by a physician on the physician's letterhead confirming the disability;
- A certified South African identification document will be required for all Black Youth Ownership.

Supplier Development Information Required	
EMPOWERING SUPPLIER An Empowering Supplier is a B-BBEE compliant Entity which complies with at least three criteria if it is a large Entity, or one criterion if it is a Qualifying Small Enterprise ("QSE"), as detailed in Statement 400 of the New Codes. In terms of the requirements of an Empowering Supplier, numerous companies found it challenging to meet the target of 25% transformation of raw materials or beneficiation including local manufacturing, particularly so, if these companies imported goods or products from offshore. The matter was further compounded by the requirement for 25% of Cost of Sales, excluding labour cost and depreciation, to be procured from local producers or suppliers.	YES ☐ NO ☐
FIRST TIME SUPPLIER A supplier that we haven't as yet Traded within Transnet and will be registered via our database for the 1 st time.	YES ☐ NO ☐
SUPPLIER DEVELOPMENT PLAN Supplier Development Plan is a plan that when we as Transnet award a supplier a long term contract depending on the complexity of the Transaction. We will negotiate supplier development obligations that they must meet throughout the contract duration. e.g. we might request that they (create jobs or do skills development or encourage procurement from designated groups. (BWO, BYO & BDO etc.).	YES ☐ NO ☐
DEVELOPMENT PLAN DOCUMENT Agreed plan that will be crafted with the supplier in regards to their development (It could be for ED OR SD in terms of their developmental needs they may require with the company.	YES ☐ NO ☐ *If Yes- Attach supporting documents
ENTERPRISE DEVELOPMENT BENEFICIARY	YES ☐ NO ☐

A supplier that is not as yet in our value chain that we are assisting in their developmental area.	
SUPPLIER DEVELOPMENT BENEFICIARY A supplier that we are already doing business with or transacting with and we are also assisting them in their developmental area e.g. (They might require training or financial assistance etc.)	YES ☐ NO ☐
GRADUATION FROM ED TO SD BENEFICIARY When a supplier that we assisted with as an ED beneficiary then gets awarded a business and we start Transacting with.	YES ☐ NO ☐
ENTERPRISE DEVELOPMENT RECIPIENT A supplier that isn't in our value chain as yet but we have assisted them with an ED intervention	YES ☐ NO ☐

By signing below, I hereby verify that I am duly authorised to sign for and on behalf of firm / organisation and that all information contained herein and attached herewith are true and correct			
Name and Surname		Designation	
Signature		Date	

APPENDIX B

Affidavit or Solemn Declaration as to VAT registration status

Affidavit or Solemn Declaration

I, _____ solemnly swear/declare
that _____ is not a registered VAT
vendor and is not required to register as a VAT vendor because the combined value of taxable supplies
made by the provider in any 12 month period has not exceeded or is not expected to exceed R1million
threshold, as required in terms of the Value Added Tax Act.

Signature: _____

Designation: _____

Date: _____

Commissioner of Oaths

Thus signed and sworn to before me at _____ on this the _____
day of _____ 20_____,

the Deponent having knowledge that he/she knows and understands the contents of this Affidavit,
and that he/she has no objection to taking the prescribed oath, which he/she regards binding on
his/her conscience and that the allegations herein contained are all true and correct.

Commissioner of Oaths

APPENDIX C

SWORN AFFIDAVIT – B-BBEE QUALIFYING SMALL ENTERPRISE – GENERAL

I, the undersigned,

Full name & Surname	
Identity number	

Hereby declare under oath as follows:

1. The contents of this statement are to the best of my knowledge a true reflection of the facts.

2. I am a Member / Director / Owner of the following enterprise and am duly authorised to act on its behalf:

Enterprise Name:	
Trading Name (If Applicable):	
Registration Number:	
Enterprise Physical Address:	
Type of Entity (CC, (Pty) Ltd, Sole Prop etc.):	
Nature of Business:	
Definition of "Black People"	As per the Broad-Based Black Economic Empowerment Act 53 of 2003 as Amended by Act No 46 of 2013 "Black People" is a generic term which means Africans, Coloureds and Indians – (a) who are citizens of the Republic of South Africa by birth or descent; or (b) who became citizens of the Republic of South Africa by naturalisation- i. before 27 April 1994; or ii. on or after 27 April 1994 and who would have been entitled to acquire citizenship by naturalization prior to that date;"

Definition of "Black Designated Groups"	Black Designated Groups means: (a) unemployed black people not attending and not required by law to attend an educational institution and not awaiting admission to an educational institution; (b) Black people who are youth as defined in the National Youth Commission Act of 1996; (c) Black people who are persons with disabilities as defined in the Code of Good Practice on employment of people with disabilities issued under the Employment Equity Act; (d) Black people living in rural and under developed areas; (e) Black military veterans who qualifies to be called a military veteran in terms of the Military Veterans Act 18 of 2011;"
--	--

3. I hereby declare under Oath that:

- The Enterprise is _____% Black Owned as per Amended Code Series 100 of the Amended Codes of Good Practice issued under section 9 (1) of B-BBEE Act No 53 of 2003 as Amended by Act No 46 of 2013,
- The Enterprise is _____% Black Female Owned as per Amended Code Series 100 of the Amended Codes of Good Practice issued under section 9 (1) of B-BBEE Act No 53 of 2003 as Amended by Act No 46 of 2013,
- The Enterprise is _____% Black Designated Group Owned as per Amended Code Series 100 of the Amended Codes of Good Practice issued under section 9 (1) of B-BBEE Act No 53 of 2003 as Amended by Act No 46 of 2013,
- Black Designated Group Owned % Breakdown as per the definition stated above:
- Black Youth % = _____%
- Black Disabled % = _____%
- Black Unemployed % = _____%
- Black People living in Rural areas % = _____%
- Black Military Veterans % = _____%
- Based on the Financial Statements/Management Accounts and other information available on

the latest financial year-end of _____, the annual Total Revenue was between

R10,000,000.00 (Ten Million Rands) and R50,000,000.00 (Fifty Million Rands),

- Please confirm on the table below the B-BBEE level contributor, **by ticking the applicable box.**

100% Black Owned	Level One (135% B-BBEE procurement recognition level)	
At Least 51% black owned	Level Two (125% B-BBEE procurement recognition level)	

4. I know and understand the contents of this affidavit and I have no objection to take the prescribed oath and consider the oath binding on my conscience and on the owners of the enterprise which I represent in this matter.

5. The sworn affidavit will be valid for a period of 12 months from the date signed by commissioner.

Deponent Signature

.....

Date

.....

Commissioner of Oaths

Signature & stamp

APPENDIX D

SWORN AFFIDAVIT – B-BBEE EXEMPTED MICRO ENTERPRISE – GENERAL

I, the undersigned,

Full name & Surname	
Identity number	

Hereby declare under oath as follows:

1. The contents of this statement are to the best of my knowledge a true reflection of the facts.
2. I am a Member / Director / Owner of the following enterprise and am duly authorised to act on its behalf:

Enterprise Name:	
Trading Name (If Applicable):	
Registration Number:	
Enterprise Physical Address:	
Type of Entity (CC, (Pty) Ltd, Sole Prop etc.):	
Nature of Business:	

Definition of "Black People"	As per the Broad-Based Black Economic Empowerment Act 53 of 2003 as Amended by Act No 46 of 2013 "Black People" is a generic term which means Africans, Coloureds and Indians – (a) who are citizens of the Republic of South Africa by birth or descent; or (b) who became citizens of the Republic of South Africa by naturalisation- i. before 27 April 1994; or ii. on or after 27 April 1994 and who would have been entitled to acquire citizenship by naturalization prior to that date;"
Definition of "Black Designated Groups"	"Black Designated Groups means: (a) unemployed black people not attending and not required by law to attend an educational institution and not awaiting admission to an educational institution; (b) Black people who are youth as defined in the National Youth Commission Act of 1996; (c) Black people who are persons with disabilities as defined in the Code of Good Practice on employment of people with disabilities issued under the Employment Equity Act; (d) Black people living in rural and under developed areas; (e) Black military veterans who qualifies to be called a military veteran in terms of the Military Veterans Act 18 of 2011;"

3. I hereby declare under Oath that:

- The Enterprise is _____% Black Owned as per Amended Code Series 100 of the Amended Codes of Good Practice issued under section 9 (1) of B-BBEE Act No 53 of 2003 as Amended by Act No 46 of 2013,
- The Enterprise is _____% Black Female Owned as per Amended Code Series 100 of the Amended Codes of Good Practice issued under section 9 (1) of B-BBEE Act No 53 of 2003 as Amended by Act No 46 of 2013,
- The Enterprise is _____% Black Designated Group Owned as per Amended Code Series 100 of the Amended Codes of Good Practice issued under section 9 (1) of B-BBEE Act No 53 of 2003 as Amended by Act No 46 of 2013,

- Black Designated Group Owned % Breakdown as per the definition stated above:
- Black Youth % = _____ %
- Black Disabled % = _____ %
- Black Unemployed % = _____ %
- Black People living in Rural areas % = _____ %
- Black Military Veterans % = _____ %
- Based on the Financial Statements/Management Accounts and other information available on the latest financial year-end of _____, the annual Total Revenue was R10,000,000.00 (Ten Million Rands) or less
- Please Confirm on the below table the B-BBEE Level Contributor, **by ticking the applicable box.**

100% Black Owned	Level One (135% B-BBEE procurement recognition)	
At least 51% Black Owned	Level Two (125% B-BBEE procurement recognition level)	
Less than 51% Black Owned	Level Four (100% B-BBEE procurement recognition level)	

4. I know and understand the contents of this affidavit and I have no objection to take the prescribed oath and consider the oath binding on my conscience and on the Owners of the Enterprise which I represent in this matter.

5. The sworn affidavit will be valid for a period of 12 months from the date signed by commissioner.

Deponent Signature

.....

Date

.....

Commissioner of Oaths

Signature & stamp

VENDOR REGISTRATION DOCUMENTS CHECKLIST

Please note that you will have to provide the first two documents on the list (highlighted in red) and the rest will be provided by the supplier:

	Yes	No
1. Complete the "Supplier Declaration Form" (SDF) (commissioned). See attachment.		
2. Complete the "Supplier Code of Conduct" (SCC). See attachment.		
3. Copy of cancelled cheque OR letter from the bank verifying banking details (with bank stamp not older than 3 Months & sign by Bank Teller).		
4. Certified (Not Older than 3 Months) copy of Identity document of Shareholders/Directors/Members (where applicable).		
5. Certified copy of certificate of incorporation, CM29 / CM9 (name change).		
6. Certified copy of share Certificates of Shareholders, CK1 / CK2 (if CC).		
7. A letter with the company's letterhead confirming both Physical and Postal address.		
8. Original or certified copy of SARS Tax Clearance certificate and Vat registration certificate.		
9. BBBEE certificate and detailed scorecard from a SANAS Accredited Verification Agency and/or Sworn Certified Affidavit.		
10. Central Supplier Database (CSD) Summary Registration Report.		

C1.1 Form of Offer & Acceptance

Offer

The Employer, identified in the Acceptance signature block, has solicited offers to enter into a contract for the procurement of:

For the Maintenance of Railway Track with an on-track High Production Screening machine on all lines owned and maintained by Transnet for a period of 24 months.

By the representative of the tenderer, deemed to be duly authorised, signing this part of this Form of Offer and Acceptance the tenderer offers to perform all of the obligations and liabilities of the *Contractor* under the contract including compliance with all its terms and conditions according to their true intent and meaning for an amount to be determined in accordance with the *conditions of contract* identified in the Contract Data.

The offered total of the Prices exclusive of VAT is	R
Value Added Tax @ 15% is	R
The offered total of the Prices inclusive of VAT is	R
(in words)	

This Offer may be accepted by the Employer by signing the Acceptance part of this Form of Offer and Acceptance and returning one copy of this document including the Schedule of Deviations (if any) to the tenderer before the end of the period of validity stated in the Tender Data, or other period as agreed, whereupon the tenderer becomes the party named as the *Contractor* in the *conditions of contract* identified in the Contract Data.

Signature(s)

Name(s)

Capacity

**For the
tenderer:**

(Insert name and address of organisation)

Name &
signature of
witness

Date

Tenderer's CIDB registration number:

Acceptance

By signing this part of this Form of Offer and Acceptance, the Employer identified below accepts the tenderer's Offer. In consideration thereof, the Employer shall pay the Contractor the amount due in accordance with the *conditions of contract* identified in the Contract Data. Acceptance of the tenderer's Offer shall form an agreement between the Employer and the tenderer upon the terms and conditions contained in this agreement and in the contract that is the subject of this agreement.

The terms of the contract, are contained in:

Part C1	Agreements and Contract Data, (which includes this Form of Offer and Acceptance)
Part C2	Pricing Data
Part C3	Scope of Work: Service Information

and drawings and documents (or parts thereof), which may be incorporated by reference into the above listed Parts.

Deviations from and amendments to the documents listed in the Tender Data and any addenda thereto listed in the Returnable Schedules as well as any changes to the terms of the Offer agreed by the tenderer and the Employer during this process of offer and acceptance, are contained in the Schedule of Deviations attached to and forming part of this Form of Offer and Acceptance. No amendments to or deviations from said documents are valid unless contained in this Schedule.

The tenderer shall within two weeks of receiving a completed copy of this agreement, including the Schedule of Deviations (if any), contact the Employer's agent (whose details are given in the Contract Data) to arrange the delivery of any securities, bonds, guarantees, proof of insurance and any other documentation to be provided in terms of the *conditions of contract* identified in the Contract Data at, or just after, the date this agreement comes into effect. Failure to fulfil any of these obligations in accordance with those terms shall constitute a repudiation of this agreement.

Notwithstanding anything contained herein, this agreement comes into effect on the date of award.

Unless the tenderer (now *Contractor*) within five working days of the date of such receipt notifies the Employer in writing of any reason why he cannot accept the contents of this agreement, this agreement shall constitute a binding contract between the Parties.

Signature(s)

Name(s)

Capacity

**for the
Employer**

(Insert name and address of organisation)

Name &
signature of
witness

Date

Schedule of Deviations

Note:

1. To be completed by the Employer prior to award of contract. This part of the Offer & Acceptance would not be required if the contract has been developed by negotiation between the Parties and is not the result of a process of competitive tendering.
2. The extent of deviations from the tender documents issued by the Employer prior to the tender closing date is limited to those permitted in terms of the Conditions of Tender.
3. A tenderer's covering letter must not be included in the final contract document. Should any matter in such letter, which constitutes a deviation as aforesaid be the subject of agreement reached during the process of Offer and Acceptance, the outcome of such agreement shall be recorded here and the final draft of the contract documents shall be revised to incorporate the effect of it.

No.	Subject	Details
1		
2		
3		
4		
5		
6		
7		

By the duly authorised representatives signing this Schedule of Deviations below, the Employer and the tenderer agree to and accept this Schedule of Deviations as the only deviations from and amendments to the documents listed in the Tender Data and any addenda thereto listed in the Tender Schedules, as well as any confirmation, clarification or changes to the terms of the Offer agreed by the tenderer and the Employer during this process of Offer and Acceptance.

It is expressly agreed that no other matter whether in writing, oral communication or implied during the period between the issue of the tender documents and the receipt by the tenderer of a completed signed copy of this Form shall have any meaning or effect in the contract between the parties arising from this Agreement.

For the tenderer:

For the Employer

Signature

Name

Capacity

On behalf
of

(Insert name and address of organisation)

(Insert name and address of organisation)

Name &
signature
of witness

Date

C1.2 Contract Data

Part one - Data provided by the *Employer*

Clause	Statement	Data
1	General	
	The <i>conditions of contract</i> are the core clauses and the clauses for main Option:	
	dispute resolution Option	A: Priced contract with price list W1: Dispute resolution procedure
	and secondary Options	X1: Price adjustment for inflation X2: Changes in the law X4: Parent company guarantee X17: Low service damages X18: Limitation of liability X19: Task Order Z: Additional conditions of contract
	of the NEC3 Term Service Contract (June 2005) (and amended June 2006 and April 2013)	
10.1	The <i>Employer</i> is (name):	Transnet SOC Ltd
	Address	Registered address: Transnet Corporate Centre 138 Eloff Street Braamfontein Johannesburg 2000
	Having elected its Contractual Address for the purposes of this contract as:	Transnet Freight Rail 150 Commissioner Street Johannesburg South Africa, 2001
	Tel No.	011 584 0590
10.1	The <i>Service Manager</i> is (name):	Silas Muravha

TRANSNET RAIL INFRASTRUCTURE MANAGER
 CONTRACT NUMBER: SIC24023CIDB (HOAC VAR 52802)
 DESCRIPTION OF THE SERVICE: FOR THE MAINTENANCE OF RAILWAY TRACK WITH AN ON-TRACK HIGH
 PRODUCTION SCREENING MACHINE ON ALL LINES OWNED AND MAINTAINED BY TRANSNET.

	Address	Inyanda House, 21 Wellington Road
	Tel	(011) 544 9550
	e-mail	Silas.Muravha@transnet.net
11.2(2)	The Affected Property is	22 TFR and RNC Projects nationwide
11.2(13)	The <i>service</i> is	Maintenance of Track with On-Track Machinery: High Production Ballast Screening Package – 22 TFR Depots and RNC
11.2(14)	The following matters will be included in the Risk Register	(a) Cancellation of track occupations at short notice. (b) The shortage of pilots to move machines between depots. (c) Work on railway track near live OHTE electrical equipment holds a danger of electrocution for workers. (d) Working on a railway line adjacent to lines on which rail traffic continue to run holds the risk of injury or death to workers. (e) Dry vegetation at or near most worksites is a fire hazard.
11.2(15)	The Service Information is in	The Scope of Services
12.2	The <i>law of the contract</i> is the law of	the Republic of South Africa subject to the jurisdiction of the Courts of South Africa.
13.1	The <i>language of this contract</i> is	English
13.3	The <i>period for reply</i> is	2 weeks
2	The <i>Contractor's</i> main responsibilities	No additional data is required for this section of the <i>conditions of contract</i>.
21.1	The <i>Contractor</i> submits a first plan for acceptance within	2 weeks of the Contract Date
3	Time	
30.1	The <i>starting date</i> is.	1 week after Contract Date
30.1	The <i>service period</i> is	24 months
4	Testing and defects	No additional data is required for this section of the <i>conditions of contract</i>.
5	Payment	
50.1	The <i>assessment interval</i> is	25th (twenty fifth) day of each successive month.

51.1	The <i>currency of this contract</i> is the	South African Rand.
51.2	The period within which payments are made is	Payment will be effected on or before the last day of the month following the month during which a valid Tax Invoice and Statement were received.
51.4	The <i>interest rate</i> is	The prime lending rate of the Standard Bank South Africa.

6 Compensation events

These are additional compensation events:

1. A weather measurement is determined by a suitable weather station most conveniently located in the Affected area
2. The *weather data* is the weather data issued with the Task Order or within [5 days] thereof, covering the area in which the Affected Property is situated, or if not so issued the national weather data available from the South African Weather Services

7	Use of Equipment Plant and Materials	No additional data is required for this section of the <i>conditions of contract</i>.
----------	---	--

8 Risks and insurance

80.1	These are additional <i>Employer's</i> risks	None
83.1	The minimum limit of indemnity for insurance in respect of loss and damage to property (except goods, plant and materials and equipment) and liability for bodily injury or death of a person (not an employee of the <i>Contractor</i>) caused by activity in connection with this contract for any one event is:	Whatever <i>Contractor</i> deems necessary as the <i>Employer</i> is not carrying this indemnity.
83.1	The minimum limit of indemnity for insurance in respect of death of or bodily injury to employees of the <i>Contractor</i> arising out of and in the course of their employment in connection with this contract for any one event is:	As prescribed by the Compensation for Occupational Injuries and Diseases Act No. 130 of 1993 and the <i>Contractor's</i> common law liability for people falling outside the scope of the Act.

83.1	Motor Vehicle Liability Insurance comprising (as a minimum) "Balance of Third Party" Risks including Passenger and Unauthorised Passenger Liability indemnity with a minimum indemnity limit of R 10 000 000	
83.1	The <i>Contractor</i> liability to the <i>Employer</i> for indirect or consequential loss including loss of profit, revenue and goodwill, is limited to:	The total of the prices.
83.1	For any one event, the <i>Contractor</i> liability to the <i>Employer</i> for loss of or damage to the <i>Employers</i> property is limited to:	The total of the prices.
83.1	The <i>Contractor</i> total liability to the <i>Employer</i> for all matters arising under or in connection with this contract, other than the excluded matters, is limited to:	The total of the prices.
9	Termination	There is no Contract Data required for this section of the conditions of contract.
10	Data for main Option clause	
A	Priced contract with price list	
20.5	The <i>Contractor</i> prepares forecasts of the final total of the Prices for the whole of the <i>service</i> at intervals no longer than	4 weeks.
11	Data for Option W1	
W1.1	The <i>Adjudicator</i> is (Name)	Both parties will agree as and when a dispute arises. If the parties cannot reach an agreement on the <i>Adjudicator</i>, the chairman of the Association of Arbitrators will appoint an <i>Adjudicator</i>.
W1.2(3)	The <i>Adjudicator</i> nominating body is: If no <i>Adjudicator</i> nominating body is entered, it is	The Association of Arbitrators (Southern Africa)
W1.4(2)	The <i>tribunal</i> is:	Arbitration

W1.4(5)	The <i>arbitration procedure</i> is The place where arbitration is to be held is The person or organisation who will choose an arbitrator - if the Parties cannot agree a choice or - if the arbitration procedure does not state who selects an arbitrator, is	The Rules for the Conduct of Arbitrations of the Association of Arbitrators (Southern Africa) Johannesburg, South Africa The Chairman of the Association of Arbitrators (Southern Africa)
---------	---	---

12 Data for secondary Option clauses

X1 Price adjustment for inflation

X1.1 The base date for indices is 31 May 2025

The proportions used to calculate the Price Adjustment Factor are:

proportion	linked to index for	Index prepared by
0.35	Labour (People)	The Consumer Price Index (CPI) for "All Items" in Table 1 (Consumer price indices for the total country) of the Statistical Release P0141 "Consumer Price Index - Additional Tables" published by Statistics South Africa.
0.40	Plant (Equipment)	The "Plant and Equipment" index in Table 4 (Mining and construction plant and equipment price index) of the Statistical Release P0151.1 "Construction Materials Price Indices" published by Statistics South Africa.
0.13	Material (Civil)	The "Civil Engineering Material - Total" index in Table 6 (Civil engineering material price indices) of the Statistical Release P0151.1 "Construction Materials Price Indices" published by Statistics South Africa.

0.12

Fuel

The "Diesel" index in Table 1 (PPI for final manufactured goods) of the Statistical Release P0142.1 "Producer Price Index" published by Statistics South Africa.

1.00

0.15

Non-adjustable

X2 **Changes in the law** **No additional data is required for this Option**

X4 **Parent company guarantee** **No additional data is required for this Option**

X17 **Low service damages**

X17.1 The *service level table* is in

Performance level	% Achieved of performance against Tw for each Task Order	Low service damages for each task order
Rate of production of machine (as per <i>Employer's</i> Service Information)	99-100% performance achieved	R0 (nil)
	95 - 98% performance achieved	-2,5% of the Price for Services Planned in terms of the Task Order (Item 2.1 of Price List)
	90 – 94% performance achieved	-5% of the Price for Services Planned to Date in terms of the Task Order (Item 2.1 of Price List)
	88-89% performance achieved	-7,5% of the Price for Services Planned to Date in terms of the Task Order (Item 2.1 of Price List)
	86-87% performance achieved	-10% of the Price for Services Planned he Task Order (Item 2.1 of Price List)
	84-85% performance achieved	-12,5% of the Price for Services Planned to Date in terms of the Task Order (Item 2.1 of Price List)
	<84% performance achieved	-15% of the Price for Services Planned to Date in terms of the Task Order (Item 2.1 of Price List)

X18 **Limitation of liability**

X18.1 The *Contractor's* liability to the *Employer* for indirect or consequential loss is limited to

In respect of each Task Order 10% of the total of the Prices for the Task Order or R1,000,000.00 (One million Rand), whichever is the higher amount.

X18.2 For any one event, the *Contractor's* liability to the *Employer* for loss of or damage to the *Employer's* property is limited to

The deductible in terms of the *Employer's* arranged insurance.

X18.3	The <i>Contractor's</i> liability for Defects due to his design of an item of Equipment is limited to	In respect of each Task Order, the total of the Prices for the Task Order other than for the additional excluded matters.
X18.4	The <i>Contractor's</i> total liability to the <i>Employer</i> , for all matters arising under or in connection with this contract, other than the excluded matters, is limited to	In respect of each Task Order, the total of the Prices for the Task Order other than for the additional excluded matters. • The <i>Contractor's</i> total liability for the additional excluded matters is not limited. • The additional excluded matters are amounts for which the <i>Contractor</i> is liable under this contract for • Defects due to his design, plan and specification, • Defects due to manufacture and fabrication outside the Affected Property, • loss of or damage to property (other than the <i>Employer's</i> property, Plant and Materials), • death of or injury to a person and • infringement of an intellectual property right.
X18.5	The <i>end of liability date</i> is	6 (Six) months after the completion of the <i>services</i> at a specific Affected Property or the completion of a Task Order (whichever is applicable).
X19	Task Order	
X19.3	Amount of delay damages for every day that elapses between the Task Order Completion Date and the Task Order Completion is	2.5% of the total of the Prices of the Task Order as at the date of issue thereof subject to a maximum of 15% of the total of the Prices at such date
X19.5	The <i>Contractor</i> submits a Task Order programme to the <i>Service Manager</i> within	5 (five) days of receiving the Task Order.

Z1 Obligations in respect of Termination

Z1.1	The following will be included under core clause 91.1: In the second main bullet, after the word 'partnership' add 'joint venture whether incorporated or otherwise (including any constituent of the joint venture)'; and Under the second main bullet, insert the following additional bullets after the last sub-bullet: • commenced business rescue proceedings (R22) • repudiated this Contract (R23)
Z1.2	Termination Table The following will be included under core clause 90.2 Termination Table as follows: Amend "A reason other than R1 – R21" to "A reason other than R1 – R23"
Z1.3	Amend "R1 – R15 or R18" to "R1 – R15, R18, R22 or R23."

Z2 Right Reserved by Transnet to Conduct Vetting through SSA

Z2.1	Transnet reserves the right to conduct vetting through State Security Agency (SSA) for security clearances of any Contractor who has access to National Key Points for the following without limitations: 1. Confidential – this clearance is based on any information which may be used by malicious, opposing or hostile elements to harm the objectives and functions of an organ of state. 2. Secret – clearance is based on any information which may be used by malicious, opposing or hostile elements to disrupt the objectives and functions of an organ of state. 3. Top Secret – this clearance is based on information which may be used by malicious, opposing or hostile elements to neutralise the objectives and functions of an organ of state.
------	---

Z3 Additional clause relating to Collusion in the Construction Industry

Z3.1	The contract award is made without prejudice to any rights Transnet may have to take appropriate action later with regard to any declared bid rigging including blacklisting.
------	---

Z4 Protection of Personal Information Act

Z4.1	The <i>Employer</i> and the <i>Contractor</i> are required to process information obtained for the duration of the Agreement in a manner that is aligned to the Protection of Personal Information Act
------	--

C1.2 Contract Data

Part two - Data provided by the *Contractor*

The tendering *contractor* is advised to read both the NEC3 Term Service Contract (June 2005) and the relevant parts of its Guidance Notes (TSC3-GN) in order to understand the implications of this Data which the tenderer is required to complete.

Completion of the data in full, according to Options chosen, is essential to create a complete contract.

Clause	Statement	Data
10.1	The <i>Contractor</i> is (Name):	
	Address	
	Tel No.	
	Fax No.	
11.2(8)	The <i>direct fee percentage</i> is	%
	The <i>subcontracted fee percentage</i> is	%
11.2(14)	The following matters will be included in the Risk Register	
11.2(15)	The Service Information for the <i>Contractor's</i> plan is in:	
21.1	The plan identified in the Contract Data is contained in:	
24.1	The <i>Contractor's</i> key persons are:	
	1 Name:	
	Job:	
	Responsibilities:	
	Qualifications:	
	Experience:	
	2 Name:	
	Job	
	Responsibilities:	
	Qualifications:	
	Experience:	
	CV's (and further key persons data including CVs) are appended to Tender Schedule entitled.	
A	Priced contract with price list	
11.2(12)	The <i>price list</i> is in	

TRANSNET RAIL INFRASTRUCTURE MANAGER

CONTRACT NUMBER: SIC24023CIDB (HOAC VAR 52802)

DESCRIPTION OF THE SERVICE: FOR THE MAINTENANCE OF RAILWAY TRACK WITH AN ON-TRACK HIGH PRODUCTION SCREENING MACHINE ON ALL LINES OWNED AND MAINTAINED BY TRANSNET.

11.2(19)	The tendered total of the Prices is	(in figures) (in words), excluding VAT
----------	-------------------------------------	---

PART C2: PRICING DATA

Document reference	Title	No of pages
C2.1	Pricing instructions: Option A	1
C2.2	Price List	5

C2.1 Pricing instructions: Option A

1.1 The *conditions of contract*

1.2 How the contract prices work and assesses it for progress payments

Clause 11 in NEC3 Term Services Contract (TSC), June 2005 (with amendments June 2006 and April 2013) Option A states:

**Identified 11
and defined
terms**

- 11.2 (17) The Price for Services Provided to Date is the total of
- the Price for each lump sum item in the Price List which the *Contractor* has completed and
 - where a quantity is stated for an item in the Price List, an amount calculated by multiplying the quantity which the *Contractor* has completed by the rate.
- (19) The Prices are the amounts stated in the Price column of the Price List, where a quantity is stated for an item in the Price List, the Price is calculated by multiplying the quantity by the rate.

1.3 Measurement and Payment

- 1.3.1 The Price List provides the basis of all valuations of the Price for Services Provided to Date, payments in multiple currencies and general progress monitoring.
- 1.3.2 The amount due at each assessment date is based on activities and/or milestones completed as indicated on the Price List.
- 1.3.3 The Price List work breakdown structure provided by the *Contractor* is based on the activity/milestone provided by the Employer. The activities listed by the *Employer* are the minimum activities acceptable and identify the specific activities which are required to achieve Completion. **The Price List work breakdown structure is compiled to the satisfaction of the Employer with any additions and/or amendments deemed necessary.**
- 1.3.4 The *Contractor's* detailed Price List summates back to the activity/milestone provided by the *Employer* and is sufficient detail to monitor completion of activities related to the operations on the Accepted Plan in order that payment of completed activities may be assessed.
- 1.3.5 The Prices are obtained from the Price List. The Prices includes for all direct and indirect costs, overheads, profits, risks, liabilities, obligations, etc. relative to the contract.

C2.2 Price List

Item no	Description	Unit	Quantity	Rate	Price
1	Establishment	Monthly	0		
2.1	Screening of Open Track - excluding tunnels				
2.1.1	Cut depth < 350 mm	m	156 275		
2.1.2	Standing time rate for task order deficit (80% max of item 2.1.1)	m	Rate only		
2.1.3	350 mm cut depth to 450 mm	m	41 386		
2.1.4	Standing time rate for task order deficit (80% max of item 2.1.3)	m	Rate only		
2.1.5	Cut depth > 450 mm	m	36 482		
2.1.6	Standing time rate for task order deficit (80% max of item 2.1.5)	m	Rate only		
2.2	Tunnel Screening	m	346		
2.3	Platforms				
2.3.1	Cut depth < 350 mm	m	444		
2.4	Bridges				

2.4.1	Cut depth < 350 mm	m	530		
2.4.2	350 mm cut depth to 450 mm	m	526		
2.4.3	Cut depth > 450 mm	m	884		
2.5	Drain cleaning gang (10 + transport)	day	76		
2.5.1	Overtime, after hours and Sat	hour	896		
2.5.2	Overtime, Sundays and PPH	hour	72		
2.5.3	Shift Saturdays	hour	64		
2.5.4	Shift Sundays	hour	64		
2.5.5	Night Shift, between 18h00 and 06h00	hour	188		
2.6	Supply of lighting at work-site	hour	400		
2.7	Working in wet conditions (Tww)	hour	Rate only		
2.8	Total Rejection				
2.8.1	Cut depth < 350 mm	m	Rate only		

2.8.2	350 mm cut depth to 450 mm	m	Rate only		
2.8.3	Cut depth > 450 mm	m	Rate only		
3a	OVERTIME - Total Screener Package				
3.1a	Overtime outside Tom of 8 Hours per day	hour	2 432		
3.2a	Overtime (Sat.in excess of 5 out 7 & 10 out 4)	hour	421		
3.3a	Overtime (Sun. & PPH in excess of 5 out 7 & 10 out 4)	hour	312		
4a	SHIFT - Total Screener Package				
4.1a	Payment for Saturdays working 10 out of 14	hour	450		
4.2a	Sundays & PPH working 10 out of 14	hour	488		
4.3a	NIGHT SHIFT between 18h00 and 06h00	hour	616		
3b	OVERTIME - Tamper Only				
3.1b	Overtime outside Tom of 8 Hours per day	hour	48		
3.2b	Overtime (Sat.in excess of 5 out 7 & 10 out 4)	hour	104		
3.3b	Overtime (Sun. & PPH in excess	hour	104		

	of 5 out 7 & 10 out 4)				
5	DAY LABOUR (Provisional)				
5.1	Labourer	man/hour	3 282		
6	Provisional Hire of TLB Machine (9hours per day)				
6.1.1	TLB machine including operator (9h/day)	hour	144		
6.1.2	E/O Overtime	hour	63		
6.1.3	E/O Overtime Sundays and PPH	hour	45		
7	Truck to transport additional labour	day	158		
8	Moving machines - total package	km	14 868		
	Sub Total Part A				
	Spoil wagons				
9	Machine Hire Spoil wagon				
9.1	Spoil system incl off-loading (working with this contract)	day	47		
10	Overtime for Spoil System				
10.1	Overtime outside Tom of 8 Hours per day	hour	184		

10.2	Overtime (Sat.in excess of 5 out 7 & 10 out 4)	hour	104		
10.3	Overtime (Sun. & PPH in excess of 5 out 7 & 10 out 4)	hour	36		
11	Shift payment for Spoil System				
11.1	SHIFT (Saturdays working 10 out of 14)	hour	40		
11.2	SHIFT (Sundays & PPH working 10 out of 14)	hour	24		
11.3	NIGHT SHIFT between 18h00 and 06h00	hour	105		
	Sub Total Part B				
	Total Part A + B				
	Contract Skills Development Goal (CSDG) (0,25% x Tender/Contract Value)				
	VAT (15%)				
	GRAND TOTAL INCLUDING VAT				

The total of the Prices

Transnet Freight Rail

Tender Number: SIC24023CIDB (HOAC VAR 52802)

Description of the Service: For the Maintenance of Railway Track with an on-track High Production Screening machine on all lines owned and maintained by Transnet.

PART C 2.2

SCHEDULE OF MACHINES

TENDER NO: SIC24023CIDB (HOAC VAR 52802) Screener Package

(1 x Screener, 2 x Tampers, 2 x Regulator, 1 x Stabiliser, 7 x Self-discharging spoil removal system, TLB & 1 x Fan wagon)

1. Highl Screener Package: 1 x BALLAST SCREENER

1.1 MAKE: _____

1.2 MODEL (YEAR): _____

1.3 NOMINAL PRODUCTION RATE (m³/h): _____

1.4 ADJUSTABLE CUTTERBAR WIDTH _____

1.4.1 MAX (m): _____

1.4.2 MIN (m): _____

1.5 AUTOMATIC CONTROLLABLE CUTDEPTH _____

1.5.1 MAX (mm): _____

1.5.2 MIN (mm): _____

1.6 Cutter bar size: (Thickness (mm)) _____

1.6.1: Standard _____

1.6.3: Restricted / Tunnel: _____

1.7: Minimum ballast depth machine can cut without pr-lifting (mm) _____

1.8: Pre-lifting: Describe with what & how) _____

1.9: Working Time (Tw) – Cutter bar time: _____

1.10 _____

DESCRIPTION	UNIT	SCHEDULED SCREENING RATE	CUTTER CHAIN COUPLE TIME (Tc)	CUTTER CHAIN UN-COUPLE TIME (Tuc)
-------------	------	--------------------------------	--	--

SCREENING OPEN TRACK, SINGLE LINE		See 1.3	____ minutes	____ minutes
SCREENING RESTRICTED TRACK, SINGLE LINE. This includes working in turnouts. working around obstructions (i.e. on bridges in tunnels, next to platforms), and/or lowering track greater than 150mm.	m ³ /hr	Rr =	____ minutes	____ minutes
SCREENING DOUBLE TRACK. This includes working in turnouts. working around obstructions, and/or lowering track greater than 150mm.	m ³ /hr	Rd=	____ minutes	____ minutes

1.11 FITTED WITH RAILWAY BUFFERS BOTH ENDS, IF NOT CLARIFY: _____

1.12 NOMINAL TRAVELLING SPEED (km/h)

: 1:60 gradient (minimum = 45km/h): _____

: Zero gradient (minimum = 60km/h): _____

: When travelling as part of and coupled to a train: _____

(Minimum = 60km/h)

2. Screen Package: 2 x TAMPER(S)

2.1 MAKE: _____

2.2 MODEL (YEAR): _____

Transnet Freight Rail

Tender Number: SIC24023CIDB (HOAC VAR 52802)

Description of the Service: For the Maintenance of Railway Track with an on-track High Production Screening machine on all lines owned and maintained by Transnet.

2.3 NOMINAL PRODUCTION RATE (sleepers/min): _____

2.4 MAXIMUM LIFT (mm): _____

2.5 NOMINAL TRAVELLING SPEED (km/h)

: 1:60 gradient (minimum = 45km/h): _____

: Zero gradient (minimum = 60km/h): _____

: When travelling as part of and coupled to a train: _____
(Minimum = 60km/h)

2.6 FITTED WITH RAILWAY BUFFERS BOTH ENDS, IF NOT CLARIFY: _____

2.7 Travel: If cannot travel as part of train, Qualify how machine will move from one work area to next and what limitations shall apply:

2.8 TAMPING FREQUENCY: _____

2.9

TYPE OF TAMPING IN TURNOUTS	UNIT	LIMITS	SCHEDULED RATE/TIME
Restricted set - all types	Minutes Each	All sets directly behind set screening or set replacement, where normal tamping cannot take place.	
1:20 turnouts - all types	Minutes Each	SRJ to end of standard turnout sleepers.	
1:12 turnouts - all types	Minutes Each	SRJ to end of standard turnout sleepers.	
1:9 turnouts - all types	Minutes Each	SRJ to end of standard turnout sleepers.	

All scheduled rates must include the machine preparation time for turnout tamping.

3. Screen Package: 2 x REGULATOR

3.1 MAKE: _____

3.2 MODEL (YEAR): _____

3.3 HOPPER CAPACITY (m³/h): _____

3.4 NOMINAL PROFILING RATES: Shoulders only (m/Tw hr.): _____

3.5 NOMINAL PROFILING RATES: Shoulders to centre (m/Tw hr.): _____

3.6 NOMINAL PROFILING RATES: Shoulders to shoulder (m/Tw hr.): _____

3.7 FITTED WITH RAILWAY BUFFERS BOTH ENDS, IF NOT CLARIFY: _____

3.8 NOMINAL TRAVELLING SPEED (km/h)

: 1:60 gradient (minimum = 45km/h): _____

: Zero gradient (minimum = 60km/h): _____

: When travelling as part of and coupled to a train: _____
(Minimum = 60km/h)

3.9 TRAVEL: If cannot travel as part of train, Qualify how machine will move from one work area to next and what limitations shall apply

4. Screen Package: 1 x STABILISER

4.1 MAKE: _____

4.2 MODEL (YEAR): _____

4.3 MAXIMUM WORKING SPEED (m/h): _____

4.4 AXLE LOAD (Tons) (Maximum 23 tonnes): _____

4.5 FITTED WITH RAILWAY BUFFERS BOTH ENDS, IF NOT CLARIFY: _____

4.6 NOMINAL TRAVELLING SPEED (km/h)

: 1:60 gradient (minimum = 45km/h): _____

: Zero gradient (minimum = 60km/h): _____

: When travelling as part of and coupled to a train: _____
(Minimum = 60km/h)

4.7 TRAVEL: If cannot travel as part of train, Qualify how machine will move from one work area to next and what limitations shall apply

Transnet Freight Rail

Tender Number: SIC24023CIDB (HOAC VAR 52802)

Description of the Service: For the Maintenance of Railway Track with an on-track High Production Screening machine on all lines owned and maintained by Transnet.

5. Screener Package: 7 x SPOIL WAGONS SYSTEM & Spoil levelling machine / Loader / TLB (Required full time)

Spoil removal Wagon system:

5.1 MAKE: _____

5.2 MODEL (YEAR): _____

5.3 NUMBER OF SPOIL WAGONS AND CAPACITY OF EACH (m³): _____

5.4 Other Spoil linked wagons (E.g. Match wagon) (Qualify) _____

5.5 NOMINAL PRODUCTION RATE ACCEPTING SPOIL (m³/h): _____

5.6 Spoil Discharge & Transfer rates:

5.6.1 High production rapid spoils removal wagons:

a) NOMINAL DISCHARGE TIME (including preparation) (maximum 10 minutes): _____

b) NOMINAL TRANSFER TIME, FULL TO EMPTY WAGON (including preparation) : _____

5.6.2 Convention Spoil conveyor wagons: No of wagons and capacity before removal for off-loading:

.....

5.7 AXLE LOAD (Tons) (Maximum 23 tonnes loaded): _____

5.8 Break system of wagons (Air break, Vacuum or both) _____

5.9 FITTED WITH RAILWAY BUFFERS BOTH ENDS, IF NOT CLARIFY: _____

5.10 NOMINAL TRAVELLING SPEED (km/h)

: When travelling as part of and coupled to a train (Loaded): _____

: When travelling as part of and coupled to a train (Empty): _____

(Minimum = 60km/h)

5.11 Loader / TLB provided: (To be provided with each screener package whether spoil wagons or not)

a) Type and size of machine provided: _____.

b) Travel of machine site to site: describe (Rail wagon with ramps or Low bed): _____

5.12 Other information: _____

6. Screener Package: 1 x Fan or Blower for removal of foul air in tunnels.

Transnet Freight Rail

Tender Number: SIC24023CIDB (HOAC VAR 52802)

Description of the Service: For the Maintenance of Railway Track with an on-track High Production Screening machine on all lines owned and maintained by Transnet.

Part C 3.1

Service Information by the Employer

Maintenance of Railway Track with Ballast Screener: Open Line (High) Countrywide For A Period Of 24 Months

CONTENTS

	Page No.
1. Definitions	2 - 3
2. Description of the Works	3 - 6
3. Procurement	6 - 6
4. Engineering	6 - 7
5. Construction	7 - 11
6. Management	11 - 21
7. Health and Safety	21 - 23
8. Training	23 - 25

1. DEFINITIONS

The following definitions shall apply in addition to those of any specifications attached.

- 1.1 **Final screened km:** Kilometre of track section finalised (i.e. ballast screening plus all other necessary activities to restore track to the A-Standard) to the *Employer's* required specification.
- 1.2 **Free- on- rail:** Free on rail implies allowing the *Contractor* to move an On Track machine from one track destination to another with no track usage cost levied on the *Contractor*. The *Employer* provides the right of passage and the pilot required, without cost and at times whereby such a passage and pilot can be made available by the *Employer*. Free-on-rail passage will normally be allowed for at the start of a contract to deliver a machine to the starting place of work and at the end of the contract to return a machine to the *Contractors* depot if required by the *Contractor*. Free-on-Rail movement of a machine during a contract for major workshop repairs required of a machine may only occur if specifically agreed to by the *Service Manager*. Such a move shall then occur during the *Contractors* time.
- 1.3 **E7/1:** Specification for General Work and Works On, Over, Under, Or Adjacent to Railway Lines and Near High Voltage Equipment
- 1.4 **OEM** refers to the Original Equipment Manufacturer of the Machinery
- 1.5 **Ballast Screener:** Also referred to as the Machinery: All on-track machinery provided by the *Contractor* for executing the Work, i.e. the entire on-track machine package, complete with all fittings, accessories and all ancillary equipment, as may be required to comply with the Contract specifications.
- 1.6 **Service Manager.** The person or juristic person appointed by the *Employer* from time to time to administer the contract according to the NEC3 Term Services Contract (TSC3) and in terms of this contract.
- 1.7 **Service Manager.** Any person appointed by the *Employer* to administer the performance and quality of the services according to the NEC3 Term Services Contract (TSC3) and in terms of this contract.
- 1.8 **Normal Working Hours (NWH).** A continuous shift of 8 hours out of every 24 hours for 5 consecutive days out of every 7 days or for 10 consecutive days out of every 14 days. The Service Manager will determine the starting times, which may vary to suit seasonal changes or train time tables.
- 1.9 **Maximum Occupation Time (TOM)** means the total occupation time granted by the *Employer* to the *Contractor* to execute the *services* as per the contract agreement.
- 1.10 **Working time.** The time between the actual start and end times of an occupation, excluding time on the critical path of the day's relay operations lost which may be attributed by the Employer.
- 1.11 **Overtime.** Means any time worked in excess of the hours of a normal working day and any time worked on Saturdays, Sundays and statutory public holidays in excess of 5 consecutive days out of 7-day period or in excess of 10 consecutive days out of 14-day period, all on the written instruction of, or as approved by the Service Manager.
- 1.12 **Normal Shift Working** (not exceeding Normal Working Hours): Shifts (8 hours) worked on Saturdays, Sunday, or on Public Paid Holidays, up to Normal Working Hours.
- 1.13 **Night Shift Working** (Occupation time between 18h00 to 06h00): Night Shift Working will apply to any part of any shift for which occupation time has been approved and happens to fall between 18h00 and 06h00 on any day of the week inclusive of Public Paid Holidays.
- 1.14 **Double Shift Working:** A second shift of 8 hours within one particular 24 hour day. Double Shift Working may be used by the *Employer* as and when required.
- 1.15 **Occupation:** The formal closure of the line to normal rail traffic for a specified period of time arranged in accordance with Infrastructure Occupation Management System (IOMS) or any other system and

implemented in accordance with the Protection Manual.

- 1.16 **Total Occupation Time (To):** shall be the total of the time from when the first on-track machine arrives on site until the last machine leaves the site. **Train Crossing Time (Tx):** means the time for the machine to wait for train crossings.
- 1.17 **Travelling Time (Tt):** means the time for the machine to travel on track between work site and the staging site (or vice-versa), or between work sites, or to clear the section.
- 1.18 **Movement Time (Tm):** Time allowed to move from one staging area to another when machine is required to move to new depot or area.
- 1.19 **Breakdown time (Tb):** means all periods during which any machine or any part of a machine is non-available.
- 1.20 **Standing Time (Ts):** means the loss of Working Time (Tw) incurred by the Contractor due to reasons attributed to the Employer.
- 1.21 **Shutdown:** Closure of a specific line, for example the Iron Ore line once a year for limited period of time (e.g. 10 days) to perform a large volume of service. Shutdowns on various lines may be to varying degrees i.e. it may range from total shutdown perhaps requiring Double Shift Working where all normal train traffic on a line is suspended for the duration of the shutdown to a situation utilizing extended occupations with normal train operation windows in between. Some Shutdowns will be partial in the sense that while work is performed on one line and on one section of the line, normal train operations will proceed on adjacent line/s and adjacent sections of the same line.
- 1.22 **Standing Time:** means the loss of Working Time (Tw) incurred by the Contractor due to reasons attributed to the Employer
- 1.23 **Standing Time Allowance** is the time that the Employer allows for unforeseen disruption in the Working Time. Standing Time Allowance should be included in the tendered rates.
- 1.24 **Emergency work** means unplanned work that may be requested by the Employer as and when an incident or risk arises. The Employer will make all the necessary arrangements to move the machine to and from the emergency work side.

2. DESCRIPTION OF THE SERVICES

2.1. Overview

This contract includes the maintenance of existing railway track, with an On -Track Ballast Screening machine. The work shall consist of the provision of all on track machines required for screening of ballast and related output, the operation and maintenance of all equipment, the provision of all associated labour, supervision, road vehicles, ancillary tools and equipment, fuels, lubricants, spare parts and consumables and support required to achieve the output.

2.2. Machine Requirements

2.2.1. The minimum requirements for this ballast screening contract shall include:

- (A) **High Production Ballast Screener:** High production mechanised ballast screening machine, plus 2 Ballast Regulators, 2 Heavy Ballast Tampers, Ballast Stabiliser, TLB, 7 self-discharging spoil wagons and a fan wagon for working in the tunnel.

2.2.2. Ballast screening shall entail the screening of ballasted track on open track, tunnels, bridges and culverts,

and adjacent to turnouts.

- 2.2.3. The Services include open track screening (including screening in wet conditions or total rejection of ballast): Screening of ballast in track using an on-track ballast screening machine capable of delivering at least the minimum screening rate as specified.
- 2.2.4. The ballast screener, tampers, regulators and stabilisers shall be able to operate completely independently and be self-propelled.
- 2.2.5. The ballast screener package will be required to service individually.
- 2.2.6. Resources offered in this screener package may be required to service separately should the Employer require. This implies that contracted tampers, regulators and stabilisers and self-discharging spoil wagons may work individually or separately from the ballast screener.
- 2.2.7. The following types of ballast screener capacity is required:

Machine and/or Type of Machine output required	Planned depot or area where machine is required to service	Estimated Workload: Number per year per machine*	Estimated Total Workload over 24 months per machine*
High production ballast screening machine capable of screening ballast at a rate of at least 650 m ³ per hour and or 240 meters per hour.	All depots country wide including neighbouring countries and Prasa lines.	Approximately 240 final track km per year.	Approximately 480 final track km over 24 months per machine

** Length of track to be screened is not guaranteed production, i.e. the above workload is estimated for tender purposes only and is therefore not guaranteed by Transnet.*

- 2.2.8. Bidders may offer different machine combinations other than the minimum requirement to optimise the track occupation time. Track occupation time and technical capability shall however be an important consideration in the award of the contract. The rate of service i.e. rates of screening, regulating, tamping, stabilisation capability and rate of spoil removal are factors which shall be considered for the award of the contract. Any machine combination offered shall however meet the minimum requirements outlined above and shall have the capacity to work at rates defined above.
- 2.2.9. The machines are required to complete and finalise all ballast screening, including all ballast work, lifting/aligning, tamping and ballast stabilising i.e. all service associated with the ballast screening project in an 8 hour occupation.
- 2.2.10. The *Contractor* shall give clear details of production rates (in m³ per hour) offered in his tender referenced to all factors e.g. track curvature, gradient, length of occupation time, weather (raining, cold and hot), rail temperature, ballast fouling, tunnels, platform and level crossing that might have an influence on his production rates.
- 2.2.11. Any factors that affect the Machinery's production shall be made known. These factors should be coupled by a scientific rationale/formula and values. Production rates for these factors should be supplied as well.
- 2.2.12. All machines shall be designed and able to work under the following conditions:

- All on-track machines shall fit within the vehicle gauge given in Annexure 2 of the Manual for Track Maintenance. Should any Machinery exceed the vehicle gauge in any respect, this shall be clearly indicated by the Tenderer by means of suitable drawings.
- Travel and work within the structure gauge given in Annexure 1 of the Manual for Track Maintenance, including open lines, lines in tunnels and along platforms.
- Track gauge: 1065 mm.
- The Equipment shall be limited to a maximum of 22 tonnes per axle when fully loaded for high production ballast screening machines, and a maximum of 20 tonnes per axle when fully loaded for low production ballast screening machines.
- Single lines or multiple lines with a minimum distance between track centre lines of 3,8m.
- Meet or exceed the minimum specified production rates while working self-propelled on uphill track gradient of 1 in 50, or flatter
- All on-track machines shall be capable of travelling self-propelled on a maximum uphill track gradient of 1 in 40
- All on-track machines shall be capable of travelling self-propelled on curves of minimum radius of 90 m
- All on-track machines shall be self-propelled and be capable of travelling free on level track at a minimum speed of 60 km/h
- Work during ballast screening on curves of a minimum radius of 350 m for high production ballast screening machines, and a minimum radius of 125m for low production ballast screening machines.
- Work on rail sizes from 40 kg/m to 60 kg/m (inclusive)
- Work on all types of sleepers in track: steel, wood or monolithic concrete
- Sleeper spacing of 500 mm to 800 mm.
- Work site altitude range: 0 to 2000m above sea level.
- Work within rail temperature range: -10°C to + 60°C.
- All machines shall have power service brakes with independent operation to each axle capable of providing a minimum retardation on dry rail of 12.5% of gravitational acceleration at travelling speed.
- All machines shall be equipped with emergency brakes which function independent of the service brakes and which shall operate on at least one wheel-set and be capable of providing a minimum retardation on dry rail of 6.5% of gravitational acceleration at travelling speed.
- All machines shall be able to reliably and consistently actuate all colour light signals working on the principle of either track circuits or axle counters.
- All machines shall have an adequate lighting system for operation at night and working in the tunnel.
- All machines shall be fitted with two electric headlamps of at least 100W each and two red warning lights at each end of each machine.
- All machines must be fitted with tracking device to be able to locate the machine when in movement from one depot to another.
- The Screener machine must be fitted with dust suppression.
- The Contractor must provide the armed security in all the machines while in transit and when camping for working in all sites.
- The Contractor must provide water and ablution facilities in all sites.

2.2.13. The contract shall include the provision of, and management of a suitable number of basic crew of qualified operators as well as all skilled and unskilled labour to operate the machine safely in line with tendered production rates and within available occupation times.

2.2.14. Spoil removal is required for this ballast screening contract. Screening therefore includes the requirement for spoil removal by self-discharging spoil wagons. Spoil removal shall be done by one of the following means:

- a) A High spoil removal rate is required for those sections of line where the screening may be severely restricted because of the requirement to remove all spoil. No spoil may be dumped directly next to the track on any *TFR* line unless approved by the Project Manager. Spoiling next to the track may only be done temporarily on the condition that the spoil is moved by the Contractor to a designated spoil *Site* within 72 hours. This will apply Countrywide.

- b) Bidders shall clearly indicate capability and capacity offered together with all the rates of spoil disposal,

labour and machine work required to support spoil disposal. The spoil removal restriction on potential screening output will be considered for the award of the contracts.

- c) *TFR* workload shall also require splitting spoil removal wagons to work with separate screeners where this is required and possible. Bidders shall therefore also clearly indicate capacity to split spoil wagons and qualify any requirements such as additional match or runner wagons.
- d) Bidders shall also clearly indicate the traction requirements for the spoil removal system.

2.3. Location of the Services

- 2.3.1. The contract area will be all track owned, or maintained, by Transnet Freight Rail country wide, in addition to neighbouring countries and Prasa lines.
- 2.3.2. The Contractor may be required to service in areas where varying degrees and types of security situations are prevailing such as may occur in remote rural areas through to densely populated metropolitan areas.
- 2.3.3. TFR will make available to the *Contractor* lines where the machine may be commissioned and tested. Service done during the commissioning or testing period is not eligible for payment under the Contract unless provided the standards as per Contract specification are met.

2.4. Commencement and Duration of Contract

- 2.4.1. The commencement date will only be finalised after acceptance of tenders. The Contract will therefore commence on the date stipulated in the acceptance letter. The Contractor shall be able to commence with the service within one week of contract award.
- 2.4.2. Bidders shall also qualify their offers stating how soon after the award of the contract they will be able to start with the service. This shall include the provision and operation of any other on-track machines or support equipment. Where equipment offered may only be available at a later date, the date at which this will be available shall be indicated clearly upon submission of tender.
- 2.4.3. The duration of this screener contract is twenty four (24) months. The expiry date will therefore depend on the starting date of each part. The work output required shall depend on *Site* conditions and is expected to be carried out over the full duration of the contract period of twenty four (24) months. The Contractor shall Supply, Operate and Maintain the machine.

3. PROCUREMENT

3.1. Subcontracting

No part of the contract may be sub-contracted in any way without written approval from *Transnet Freight Rail (TFR)*.

4. ENGINEERING

4.1. Design Procedures

- 4.1.1. It is a specific requirement of this Contract that all wagons for use with the machine, including any

modifications, shall be pre-approved at the design stage by TFR Train Design Department.

- 4.1.2. During commissioning and before putting any wagons into service, these shall be finally approved by TFR Train Design Department as being "Rail Worthy".
- 4.1.3. It is also a specific requirement that all wagons for use with the machine, including any modifications, shall comply with the requirements of the Rail Safety Regulator (RSR).
- 4.1.4. The *Employer* will test all on-track machines regularly for rail-worthiness before being permitted onto operational tracks. The *Employer's* approval in this regard shall under no circumstances mean to imply that the *Contractor* is released from his liability and/or responsibility for ensuring that all machinery is operationally safe and rail-worthy. The *Contractor* shall remain ultimately responsible for the safety and condition of his machines and equipment. These tests will include:
 - Regular testing of braking efficiency. The minimum required braking is measured by Tarpley meter, for the service and emergency brakes respectively. Brake testing shall also include for checking for pressure loss on brake cylinders and circuits, wear and setting of brake shoes;
 - Maximum wheel-tread and rim wear, distance between wheel-flanges and ultrasonic testing for flaws in running axles all measured for compliance with the standards of the Employer;
 - Speedometer, sirens, drawbars and mechanical locks on hydraulic components to function properly.
- 4.1.5. Should a joint inspection of the Machinery by representatives of the *Employer* and the *Contractor* reveal that any on-track machine or wagon is not in a safe working condition, the Service Manager may order the temporary withdrawal of the machine from the service.

5. CONSTRUCTION

5.1. Service Specifications

The following additional specifications shall apply:

- TFR Trains Working Rules
- TFR Protection Manual
- TFR Electrical Safety Instructions
- TFR Infrastructure Safety Guidelines.
- TFR S410 Specification for Earthworks
- E10: Specification for Railway Trackwork.
- E10/1: Specification for laying of rails.
- E10/2: Laying of sleepers.
- E10/4: Ballasting and tamping.
- E10/5: Destressing of rails.
- E10/6: Building and Replacement of sets.
- E10/7: Field welding of rail joints.
- E10/9: Slewing and Alignment.
- E10/11: Surveying and setting out of track alignment and referencing.
- E10/12: Installation of insulated rail joints
- E4B (November 1996): Minimum Communal Health Requirements in areas outside the jurisdiction of Local Authority
- E4E SHE Specification for Contractors
- Addendum No 1 to Specification E7/1 (May 2011)
- Specification E7/1 (May 2011): Specification for works on, over, under or adjacent to railway lines and near high voltage
- Manual for Track Maintenance
- Track Welding Manual
- SANS 1921-1-2004 Part 1

5.2. Plant and Materials

- 5.2.1. The *Employer* will make available to the *Contractor* on specific request a limited number of rail freight wagons for transporting his Plant, Equipment and Materials from the Employer's Infrastructure Depot to Infrastructure Depot during execution of the work.
- 5.2.2. These wagons will be moved "free on rail" together with the relevant on-track machines in accordance with the requirements and processes applicable to normal train traffic.
- 5.2.3. The *Contractor* shall specify how many wagons and what type does he want for the usage of moving his Machinery and equipment as well for accommodating his employees during the course of the contract. The *Contractor* to return the *Employer* wagons at the end of the contracting period. These shall be in the similar condition as when the *Employer* gave them away to the *Contractor*.
- 5.2.4. Arrival of these wagons at destinations during movement from depot to depot on *Employer's* network could be problematic and erratic in terms of predictability and no claims regarding delays or standing time resulting from the use of these wagons will be entertained by the *Employer*.
- 5.2.5. The *Contractor* will be allowed to effect modifications to these trucks to suit his requirements for work under the contract. Such modifications will be the *Contractor's* responsibility and for the *Contractors* account.
- 5.2.6. The *Contractor*, at his own cost shall have the trucks re-instated to their original condition and shall remove the modifications at the end of the contract.
- 5.2.7. Before the *Contractor* commences to carry out any alterations to the trucks, he shall provide the *Service Manager* with sufficient information of the alterations to enable him to approve that dimensional and structural tolerance will not be exceeded.
- 5.2.8. The *Contractor* shall clearly state in his tender the types and number of rail trucks required for the contract as well as the modifications he intend doing to the rail trucks
- 5.2.9. The Employer shall supply and control all flags and detonators for protection of the work sites.
- 5.2.10. The Employer will supply all permanent way materials required for the execution of the works. Materials will be provided in railway wagons.
- 5.2.11. The following items of Plant will be provided on loan for the duration of the Contract at no cost to the Contractor:
- One set of locomotives will be allocated for shunting and for movement purposes. It will be advantageous should the process be able to move by itself without assistance of locomotives.
 - The locomotive set will be available (inclusive of fuel and driver crews and shunt crew) for the duration of the shunting work required.
- 5.2.12. Care of Plant Supplied by the *Employer*: The *Contractor* may have full use of the rail trucks associated with this contract, provided that he adheres to the structural, mechanical and safety limitations laid down by the Project Manager. The *Contractor* shall take all reasonable care to prevent damage to Plant supplied by the *Employer*. Any damage through neglect shall be made good, in accordance with the instructions of the *Project Manager*, to the cost of the *Contractor*.
- 5.2.13. Care of material Supplied by the *Employer*: Should lost or damaged material be replaced by the *Employer*, the value of the material plus the cost of transport, including re-railing at the normal tariffs applicable to the public, will be deducted from any moneys payable to the *Contractor*.

5.3. Construction Equipment

The Contractor shall in addition to what is stipulated in Maintenance of Track with On Track Machinery, provide the following additional facilities and support for a screening project:

- 5.3.1. The Contractor shall provide lighting to all workplaces in tunnels and other work places where service is to be taking place during the hours between 18:00 and 06:00. Transnet Freight Rail will notify the Contractor prior of lighting arrangements to be made. The lighting shall be of intensity and spread to satisfy the Service Manager that work can proceed efficiently and safely.
- 5.3.2. All tools/equipment, perway, small plant, earthworks plant, cranes, lifting equipment and vehicles of every description necessary for the execution of the services shall be supplied by the Contractor complete with fuel, spares, maintenance, competent operators and legally compliant with all applicable safety legislation. All ancillary and associated equipment together with all transport, accommodations, fuel, lubricants, spare parts for maintenance and repairs and consumables and any other resources necessary for the complete and effective and safe functioning of all Machinery shall be included in this contract to consistently and sustainably operate the machine safely in line with tendered production rates and within available occupation times.
- 5.3.3. The Contractor shall supply all wagons that are considered to be being part of a work train and essential for the execution of the contract. Examples of such wagons:
- Wagons forming part of the basic machine such as spoil removal wagons or material wagons as part of the machine process and a fan wagon to work inside the tunnel.
 - Match wagon with Spoil removal wagons
 - Wagons to move support machines with e.g. Wagon to load tampers for moves with screener package
 - Wagons for Water/fuel tanks (water tankers not included)
 - Any other critically required wagon specifically being part of a machine package. (Tenderers to clearly specify what wagon and for what critical process used as well as consequence if wagon is not available.)
- 5.3.4. The Contractor shall supply all wagons that may be critically important for the execution of the contract but can be replaced by road transport. Any such wagons, if provided or allowed as part of the contract, shall under all circumstances be limited to a number, together with the essential wagons of the work group, which can be hauled as one train by one 37 class diesel locomotive or equivalent loco when moving camp. Examples of such wagons are:
- Fuel bowser wagon.
 - Storage wagons for machine parts such as screener cutter bar, and parts of large contracts.
 - Wagon or caboose for guards with train to ensure security of machine group when moving, stopping and when staged.
 - Any other critically required wagon specifically being part of a machine package. (Bidders to clearly specify what wagon and for what critical process used as well as consequence if wagon is not available.
- 5.3.5. Should Transnet Freight Rail require any ballast tamper or regulator or stabiliser for other work (eg. emergency work), arrangements for payment will be made by utilising the relevant item in the schedule of prices of this contract relevant to each individual machine.

5.4. Existing Services

- 5.4.1. The *Contractor* shall take note of all OHE equipment, red and other electrical bonds on the work Site and shall not interfere, damage or service on them unless under direct supervision of a designated and competent Transnet Freight Rail (TFR) Electrical Officer.
- 5.4.2. The *Contractor* shall take note of all signalling equipment on the service Site e.g. signals, signal cables, block joints, signal bonds, axle counters, hotbox detectors etc and shall not interfere, damage or work on them unless under direct supervision of designated and competent Transnet Freight Rail (TFR) signal technicians.
- 5.4.3. All bonds shall be supplied by the *Employer*, but the *Contractor* has to install bonds under supervision of the *Employer*. The *Contractor* shall have the necessary tools to install the bonds. The *Contractor* shall be aware that where maintenance of the signalling and electrical equipment machines or assets change, he shall keep up with the latest technologies.
- 5.4.4. Before doing excavation service anywhere on a service site the *Contractor* shall be sure to consult on the presence of existing electrical/signal/telecom cables, water pipes or other services with the *Employer's* Maintenance Manager (Track). Only on his specific and written authorization shall any excavation service be carried out.
- 5.4.5. In the event of contact or damage to any overhead or underground cable on the service Site, service shall be stopped and the work Site evacuated. The Electrical Officer Contracts shall be notified immediately. Only subject to him or other competent Transnet Freight Rail (TFR) Electrical Officer certifying the work Site safe, shall work be allowed to proceed again.
- 5.4.6. Where existing water supply is available within the railway reserve and is deemed sufficient by the *Employer's* Depot Engineering Manager to also supply the construction process, this supply may be made available to the *Contractor* for use in the construction process. If not allowed by the *Employer's* Depot Engineering Manager or where not available the *Contractor* shall make his own arrangements to obtain suitable supplies.
- 5.4.7. It is the responsibility of the *Contractor* to provide water to his staff and machine. It shall be noted that it is not the responsibility of the *Employer* to stage the machines in areas where water is available; it will be an advantage if such places are available but it is not a requirement.

5.5. Site Access

- 5.5.1. All *Contractor's* personnel shall be inducted before any services commence. Site access certificates will only be issued after all inductions have taken place.
- 5.5.2. Site access will be denied to the *Contractor* should the site access certificate not be issued.

5.6. Site Establishment

- 5.6.1. Subject only to the discretion of the Depot Engineering Manager responsible for the area, yard lines within the railway reserve may be made available to the *Contractor* for staging the wagons making up the consist of the machine.
- 5.6.2. Subject only to the discretion of the *Employer's* Depot Engineering Manager, areas within the railway reserve may be made available to the *Contractor* for accommodation, offices/workshops or stores. Where not allowed, the *Contractor* shall make his own arrangements elsewhere, at the expense of the *Contractor*.
- 5.6.3. If the *Contractor* is allowed by the *Employer's* Depot Engineering Manager to utilize areas within railway reserve for his purposes of whatever nature, it shall be noted that normally electrical, water supply and sanitation will not be available. The *Contractor* shall be required to make his own provisions for electrical,

water supply and sanitation. Additionally, the *Contractor* shall comply with Environmental Health and Safety legislation when utilizing areas within railway reserve. On vacating the site, the site shall be cleared up and re-instated to the acceptance of the Employer's Depot Engineering Manager.

- 5.6.4. Security (armed) of the *Contractor's* property, equipment, materials, vehicles and workforce shall at all times during the course of the contract be his sole responsibility. No claims will be entertained to Transnet in this regard.
- 5.6.5. The *Contractor* shall be required for each work Site to have available for his work force suitable sanitation including mobile toilets in accordance with the Act 85 Regulations. No claims will be entertained to Transnet in this regard.
- 5.6.6. On some lines or for some yards of *Transnet Freight Rail (TFR)*, the *Contractor's* staff will be required to obtain security permits from *Transnet Freight Rail (TFR)* before being allowed to work there. These permits will be issued free of charge.
- 5.6.7. The *Contractor* shall note that not all the sites will be accessible via a service road in some instances. The *Contractor* shall have a plan to make the sites accessible to him/her in order to do the work at his own cost.

6. MANAGEMENT

6.1. Planning

- 6.1.1. Monthly Project Meetings will be conducted to monitor progress and discuss contractual issues. These meetings shall be attended by *Contractor*, Project Manager and the Service Manager. A register will be kept of attendance and a minute of the proceedings will be recorded and distributed afterwards.
- 6.1.2. A concise maintenance programme showing the *Contractor's* planned programme for the following month and the order in which he intends to execute the daily screening operations shall be provided by the *Contractor* based on the work area required by *Transnet Freight Rail*. The detail program will be agreed upon between the *Project Manager* and the *Contractor*.
- 6.1.3. TFR will provide the plan of service sites to be covered. Furthermore, it is a specific requirement of this contract that the *Contractor* pre-plan the production of each month ahead. Monthly production shall be pre-planned directly with the *Project Manager* and be conducted on-site.
- 6.1.4. The *Contractor* is required to do inspection of each service site and must bring his/her own team of personnel to assist to box out (dig) ballast prior to the project starting and when task orders are issued to execute appropriate preparation for the service focused on ensuring maximum production during occupation time by minimizing delays. Any issues requiring the Employer's inputs to avoid delays during the occupation time shall be brought timeously to the attention of the Project Manager. This include amongst other things volume of ballast in track, gradient, radius, length of track segments, level crossings, negative returns, tunnels. The *Contractor* and Service Manager shall do all the required measurements of the above mentioned and draw up programme to meet the planned targets.
- 6.1.5. All sections requiring screening are to be fully evaluated/inspected (by *Project Manager* or representative and the *Contractor*) in terms of estimating screening requirements and costs, including drain cleaning,

ballast required, spoil conveyors etc. Information such as fouling indices, ballast depth, spoil *Sites* etc. may be provided by the depot if already available.

- 6.1.6. When screening around or over cross-over's in double track, a proposed flow chart detailing all activities for screening and finalising of cross-over's (when applicable) is also to be handed to the *Project Manager* for discussion at this meeting.
- 6.1.7. Sections of bad drainage are to be identified. Where cleaning of drains are required before screening, the *Contractor* shall agree on work to be done with the *Project Manager* beforehand and arrange for this work to be done in one of the following ways :
- As part of the actual screening, during the screening process, with spoil from drain placed on the formation, or
 - Before screening to allow formation time to dry out, with spoil placed on the formation; or
 - By separate means such as earthmoving and/or drain cleaning equipment, or drain cleaning gangs.
- 6.1.8. All restricted screening sections where an anticipated production rate of less than that specified, per day of tendered Tw, is expected, shall be identified. The conditions not allowing the required production rate shall be recorded and the target shall be agreed by both the *Project Manager* and the *Contractor*.
- 6.1.9. An ongoing report is to be provided on the screen sizes and the effect on the required level of ballast quality.
- 6.1.10. The maximising of the use of the spoil conveyors on *Site* and the economic viability of the recovery of ballast shall also be continually considered and be discussed with the *Project Manager*.
- 6.1.11. The logistics surrounding the maximising of the use of new ballast supplied shall be discussed.

6.2. Site Records

- 6.2.1. A *Site Instruction Book* with triplicate pages shall be provided by the *Contractor*. The format for written communication on *Site* shall be the *Site Instruction Book*. A new page shall be used for each *Site Instruction*. *Site Instructions* shall be deemed to have been noted by the other party at the end of each work day. For this purpose the *Site Instruction Book* shall be checked and new *Site Instructions* signed-off by both *Transnet Freight Rail (TFR)* and the *Contractor* at the end of each service day.
- 6.2.2. A *Site Diary* with triplicate pages shall be provided by the *Contractor* and be available on site at all times. The number of staff and plant on site for every day shall be recorded. The hours of actual work and the accurate amount of work measured per item as in the *Schedule of Quantities* completed for each day shall also be recorded and signed off by both by the *Employer* and the *Contractor* at the end of each day. The *Contractor* shall record following in the *Site diary*:
- Occupation and Working time
 - Details of performance of the machines as well as the final length of track screened per day per track category (Track categories as in the *Schedule of quantities and prices*).
 - An accurate recording of all material received or purchased.
 - Details of plant, machinery and labour on *Site*, clearly indicating the staff used to perform various different functions.
 - Minutes of the *Site* meetings.
 - The *Site diary* shall be signed on a daily basis by both parties.
 - Information shall be reported as per the daily report, emailed electronically including train crossing numbers and minutes delayed, the following day before 08h00.

- 6.2.3. The information in the Site Diary shall be identical to the report generated by the machine. The Employer shall provide a template and it shall be the source document for monthly payment certificates.
- 6.2.4. The daily report e.g. travel to site, cut in, screening, cut out, finalizing and travel return to staging sites times as well as production figures shall always be recorded and submitted to the Project Manager and Service Manager daily every morning for the previous day's occupation by email at 08:00.
- 6.2.5. A *Transnet Freight Rail (TFR)* Track Inspector shall on completion of each project inspect and measure for purposes of verifying quality for payment purposes. A formal handing over of the completed project shall be signed off by the Depot *Project Manager*, for the project to be eligible for payment.

6.3. Occupations

- 6.3.1. Although not guaranteed, the *Employer* will realistically arrange occupations according to the approved programme of typically 8 hours for any one occupation.
- 6.3.2. It may be possible to arrange extended occupations and even double shifts on some sections of the line, on certain days, during which the ballast screener and all other machines may remain in the section. It is a strict requirement for the ballast screener and all other machines to work double shifts as and when required by the *Employer*, therefore the *Contractor* shall allow in his rates for double shift working during shutdowns or during normal occupations as and when required. In these cases occupation time will be calculated as the total period that all or any of the on-track machines actually worked.
- 6.3.3. Travel time from the staging site to the work site and back to staging site will be included in the Occupation Time (To) and will not be paid for to the *Contractor* if less than 50 km radius.
- 6.3.4. During the occupation the line will be closed to normal rail traffic over the section on which the *Contractor* is working. Protection of the site shall be as per the protection manual under direct control and managing of the *Employer* Platelayer/Track Inspector.
- 6.3.5. The *Contractor* shall control and be responsible for the movements of all plant including that of the *Employer*, within the confines of the area of the occupation of the loading and off-loading operation and during its duration. At all times, the movement of plant will be undertaken as laid down by the *Project Manager*.
- 6.3.6. The *Contractor* shall however allow that:
- Before midday during any shift the commencement time and duration of the following occupation will be advised in writing.
 - Occupations may commence at any hour of the day or night and on any day of the week. The *Employer* requires that all the on-track machines may work double shifts and therefore the *Contractor* is expected to price his tender based on similar requirement. The double shift will be paid against the tendered items.
- 6.3.7. Any adjacent track will run normal train services at normal section speed. The *Contractor* will be required to apply his Safety Procedure in order to safeguard his employees against the danger of normal rail traffic passing close by on the adjacent line.
- 6.3.8. Occupations shall be called for on any day of the week or month of the year. The Contract shall allow in his tender for the normal builder's break from middle December to 2nd week in January every year with the specific provision that in the case of an emergency the process may be called from leave during the builder's break to do ballast screening.
- 6.3.9. The *Contractor's* Track Master/Track Inspector shall take full charge of the *Contractor's* resources on the service Site. An employee/agent appointed by the *Contractor*, will not act as, or be allowed to take on any responsibility of *TFR Track Master/ Track Inspector*. The function of the *TFR Track Master/ Track Inspector* is restricted to competent *Transnet Freight Rail (TFR)* employees only

Transnet Freight Rail

Tender Number: SIC24023CIDB (HOAC VAR 52802)

Description of the Service: For the Maintenance of Railway Track with an on-track High Production Screening machine on all lines owned and maintained by Transnet.

6.3.10. The *TFR Track Master/ Track Inspector* shall be a competent *Transnet Freight Rail (TFR)* employee, reporting to the *Transnet Freight Rail (TFR)* Depot Engineering Manager. This *TFR Track Master/ Track Inspector* shall be responsible for the following on a service *Site*:

- Taking occupations
- Placing and controlling the flagmen
- Declaring the track safe for the passage of trains
- Cancelling the occupation and recalling the flagmen
- Communication with train traffic control with regard to occupation matters.
- The issue and control of all flags and detonators

6.3.11. All on-track machines shall be required to service on the finalising day to meet the target. The Contractor shall have a relief crew to carry on finalising and moving the machines to their staging points. The relief crew shall be deemed to be included in the tendered rates; no separate payment shall be submitted by the Contractor.

6.3.12. The *Contractor* shall provide a cell phone to the service site for the exclusive use of Transnet Freight Rail (TFR) for logistical and operational arrangements.

6.4. Protection

6.4.1. The method of service shall be such that work may proceed either under “total occupation” or “between trains occupation” and shall at all times comply with *Transnet Freight Rail (TFR)* Specification E7/1.

6.4.2. Normal protection measures in accordance with the *Transnet Freight Rail (TFR)* Train Working Rules shall apply.

6.4.3. All protection arrangements shall at all times remain under the supervision and responsibility of a *Transnet Freight Rail (TFR)* Track Master/ Track Inspector.

6.4.4. The *Contractor* shall supply at least two flagmen per service *Site* for protection duties. The cost for these flagmen will be deemed included in the rates tendered and no separate payment shall be made.

6.4.5. The *Contractor* will be required to supply six of his employees to be trained and certificated in performance of protection duties. The *Contractor* shall appoint at each work *Site* a person whose sole task shall be to be on the lookout for approaching rail traffic. This employee shall operate an audible warning device to timeously warn all people on the service *Site* of approaching rail traffic.

6.4.6. The *Contractor* shall not allow any persons on the service *Site* to venture within the structure gauge when this warning procedure is not operating effectively.

6.4.7. The warning device shall be such that its sound can be clearly and effectively heard above the noise on the service *Site* by all personnel within a radius of 100m around the centre of each service *Site*. The cost to the *Contractor* of providing the lookout as well as the warning device shall be deemed to be included in the rates tendered and no separate payment shall be made.

6.4.8. An effective safety procedure to be followed by all personnel on any service *Site* in the case of approaching rail traffic on adjacent lines shall be compiled by the *Contractor* and implemented before any service commences. This procedure shall be updated whenever the need arises and any changes shall be communicated to all employees on a *works Site* before work proceeds.

6.4.9. *Transnet Freight Rail (TFR)* shall make available a Track Master to be in charge of the protection arrangements on *Site* and to declare the track safe for the passage of trains during the service and on completion of service. He may use flagmen provided either by *Transnet Freight Rail (TFR)* or the *Contractor*.

6.5. Machine Movement

- 6.5.1. A free on rail facility will be made available to the *Contractor* for the conveyance of plant, equipment or material of the *Contractor*. This will apply to *Contractor's* items coupled to a train or loaded onto railway trucks. This arrangement will be valid for the duration of the Contract and apply to all items for use under the contract.
- 6.5.2. The *Contractor* may make use of this facility for transport from the *Contractor's* workshop or depot to the area of operation or vice versa, or from one area of operation to another, or, in the case of plant imported specifically for use on this contract, from the port of off-loading to the service-site. Prior approval for the movement of any machines shall be obtained from the *Service Manager* in writing.
- 6.5.3. The initial move of the Machinery from the *Contractor's* premises to the first RTD as well as the final move on completion of the contract from the last RTD back to the *Contractor's* premises shall not be paid for. A free on rail facility will however be available for this purpose.
- 6.5.4. Should the *Contractor* elect to transport any Machinery and equipment by road the *Contractor* shall not be entitled to separate payment. The cost of such road transport shall be deemed to be included in the rates tendered
- 6.5.5. The *Contractor* will make all the arrangements directly with the National Command Centre (NCC) to move the Machinery by rail based on the programme agreed with the *Service Manager*. Movements inside a depot area will be arranged by the *Project Manager* for the particular depot. Each application shall reflect all relevant and specific details of special conditions for the handling of the machine consist by *TFR* during each move. It is the responsibility of the *Contractor* to make sure that his machines are shunted and prepared for movement.
- 6.5.6. When required for productivity reasons, it will be necessary to move machines over an off-period. The *Contractor* will then be required to arrange for security and supervision to have the machines moved by rail over this off-period. The *Contractor* will be required as part of his tender to have an additional team available to facilitate the movement of the machines during the off-periods. No overtime or additional move cost shall apply for such a move.
- 6.5.7. Included in the application for the move the *Contractor* shall provide name, identity number and grade of all employees travelling on the train. Specific details shall be given separately of the person in charge as well as staff required, to travel on machines.
- 6.5.8. Should the *Contractor* delay a move, the full occupation times thus not utilised will be counted as servicing time for the purpose of calculating required production.
- 6.5.9. Should *TFR* delay a move of the Machinery from one Depot to the next by not starting the move on the scheduled day, no payment of standing time shall apply.
- 6.5.10. The distance of moving the machine from the *Contractor's* premises at the commencement date to the first Depot will not be paid for, although the free on rail facility will be available to the *Contractor*. No payment will be made to *Contractor* for the movement of machinery hauled by the locomotives.
- 6.5.11. The distance of moving the machine from the last Depot to the *Contractor's* premises on completion of the Contract will not be paid for, although the free on rail facility will be available to the *Contractor*. No payment will be made to the *Contractor* for the movement of machinery hauled by the Locomotives.
- 6.5.12 No payment will be made to the *Contractor* for the distance moved less than 50 km radius.
- 6.5.13 All the damages of the machinery during the works execution and in transit/movement from one depot to another, the Contractor must claim them from their Insurer, Transnet will not pay the cost for the damages.

6.6. Stoppages

- 6.6.1. Temporary stoppage, which may result from a non-continuous flow of the service, as and when required and shall be allowed for in the tendered rate.
- 6.6.2. TFR will advise the *Contractor* of any temporary stoppage in the service, 30 days' notice will be given of such an impending stoppage. Thirty days (30 days) notice will also be given to commence service when the Machinery was standing due to a temporary stoppage.
- 6.6.3. No Payment for De-establishing from *Site* when temporary stoppage begin as well as Re-establishment on commencing of the work after a temporary stoppage will be made.
- 6.6.4. The *Contractor* shall allow that weather conditions may adversely affect his rate of progress and plan his progress as well as plant and labour capacity accordingly.
- 6.6.5. Should rain or snow falling during the period of occupation, make it impossible for the *Contractor* to make use of such occupation no claims for Standing Time will be entertained by *TFR*.
- 6.6.6. The *Contractor* shall not claim any Standing Time against *Employer* for any force majeure and no penalties shall be imposed by the *Employer* to the *Contractor* for the same.
- 6.6.7. The *Contractor* shall be reimbursed due to Standing Time against *Employer* for task order deficit (80% max of item 2.1.1, 2.1.3 or 2.1.5) on the pricing data of the depth of the track screened.
- 6.6.8. The *Employer* shall impose penalties against *Contractor* for task order deficit on item 2.1.1, 2.1.3 or 2.1.5 of the pricing data due to Time breaking (Tb) of the machine or unavailability of it.

6.7. Level Crossings and Obstacles

- 6.7.1. Concrete blocks and ballasted level crossings shall be opened and prepared by the Contractor prior to the occupation starting to ensure maximum production during service across the level crossing. Bitumen/tar level crossings are to be opened and repaired by the Employer's depot staff.
- 6.7.2. Arrangements with the road authorities for temporary closure of the level crossing shall be the Employer's Depot Engineering Manager/ Depot Engineer responsibility but shall be done according to and with the timeous direct inputs from the *Contractor*. For purpose of calculating the productivity factor, work across level crossings shall be expected to comply with the minimum production rate requirements.
- 6.7.3. When hidden obstacles e.g. pieces of rail, concrete, large rocks or other large foreign objects are encountered in the ballast during the service process the actual time taken to normalize the situation and return to normal production shall be recorded and for purposes of calculating productivity, the time shall be converted to the theoretical production that would have been possible in that time should normal production rate have been possible. The same shall apply to when rail breaks occur.

6.8. Recording of Activity Times

- 6.8.1. The mutually agreed time the machine shall be available at its staging point, shall be the start of the occupation time (To) for the task order, therefore arriving late shall be deemed as breakdown time (Tb).
- 6.8.2. During the service activity the productivity, availability and utilization of the machine shall be recorded.
- 6.8.3. The time shall continuously be recorded for all work performed. The following types of time activity shall continuously be recorded so as to clearly define what time is available for working.

To = Total Occupation time for the day.

Ts = Standing time because of *Employer* reasons, not related to any fault of the *Contractor*.

Tx = Standing time due to Train crossing time

Tt = Travel time from staging site to work site and back to staging site or to clear the section.

Tm = Time allowed to move from one staging area to another when machine is required to move to new depot or area.

Tp = Time required to for preparation of track to allow working. (Only preparation that is purely related to machine on site that could not be phased apart from machine can be recorded for this purpose. This item may not be used for any problem related to the machine or staff inefficiency)

Tb = Breakdown of machine

Daily production report shall be e-mailed to the *Service Manager* at 08:00 am in the morning of the next day after each shift, and shall be in excel format.

Tw = Working time (As specified below)

6.8.4. Monitoring of machine availability will be calculated as: $\text{Availability (A)} = \frac{To - Tb}{To}$

6.8.5. Monitoring of machine utilization will be calculated as: $\text{Utilization (U)} = \frac{Tw}{To}$

6.8.6. A productivity factor, P shall be calculated every month to continuously monitor whether the machine consistently produces at the rates of production tendered.

Monitoring of machine productivity will be calculated as: $\text{Productivity (P)} = \frac{AR}{TR}$

AR = Actual Rate (screened metres/hour)

TR = Tendered Rate (screened metres/hour)

The productivity factor will always be limited to a factor of 1.

6.8.7. The tendered nominal production rate in screened metres/hour shall be maintained over a calendar month.

6.9. Quality

6.9.1. Standards for acceptance of track shall be in accordance with the Manual for Track Maintenance:

6.9.1.1. "Sc" Means the minimum track standard to allow the track to be opened to traffic under a speed restriction of at least 30km/h, when a track stabiliser is not used.

6.9.1.2. "Sf" Means the standards, to which the track shall be finally handed-over after full completion of the *works*, when a track stabiliser is not used.

6.9.1.3. "Sa" Means the A-standard to which the track shall be finally handed over after full completion of the *works*, when a track stabiliser is used.

6.9.1.4. Inspections for acceptance of the track when a dynamic track stabiliser is not used will take place as follows: Before the end of the occupation for Sc and again after a 72-hour period of train traffic for Sf.

6.9.1.5. The *Contractor* shall maintain the track on which he has serviced, between inspections for Sc and Sf, to a standard not lower than Sc.

6.9.1.6. Inspections for acceptance of the track when a dynamic track stabiliser is used, will take place as follows:

- Before the end of the occupation and again after a 72-hour period of train traffic for Sa.
- The Contractor shall maintain the track on which he has worked, between inspections for Sc and Sf, to a standard not lower than Sc.

6.9.1.7. All track service shall be completed to comply with the A-standard. Should the Contractor observe conditions which may prohibit him from completing a project to the A-standard then he shall bring this timeously to the attention of the Service Manager prior to starting service on a specific project, unless the Project Manager is prepared to make a concession the A-standard shall still apply and the Contractor may then refuse to continue with the specific project if he deems it impossible to achieve the A-standard on final quality

6.9.2. Vertical Alignment

6.9.2.1. The final elevation of the track shall not exceed the existing by more than 10mm except if otherwise directed by the Service Manager.

6.9.2.2. The rate of deviation of the running top of any rail from a straight line between any two points not more than 10 metres apart shall not exceed 1:1000 for Sf or Sa, and 1:250 for Sc.

6.9.2.3. The cant shall be the design cant to within a tolerance of $\pm 3\text{mm}$ for Sf (or Sa) and $+ 12\text{mm}$ for Sc.

6.9.2.4. The rate of change of cant on tangent track and on circular curves shall not exceed 1:1000 for Sf (or Sa), and 1:400 for Sc.

6.9.2.5. The rate of change of cant on transition curves shall not exceed: 1:500 for Sf (or Sa), and 1:400 for Sc.

6.9.3. Horizontal Alignment

6.9.3.1. The *Contractor* shall determine the horizontal alignment (position) of the track by taking reference measurements at all mast foundations. Where electrification masts do not exist, reference pegs at 50m centres shall be installed by the *Contractor*. The Project Manager will prescribe and supply all the necessary pegs, concrete or paint.

6.9.3.2. The position of the track centre line shall remain within 10mm of the existing position for Sf (or Sa), and 40mm for Sc.

6.9.3.3. The standards for structural gauge shall be adhered to. The *Contractor* shall verify the structural gauge parameters himself and adhere to the specified standards.

6.9.3.4. On straight track, the rate of deviation of the running edge of each rail from a straight line between two points not more than 10m apart, shall not exceed 1:2000 for Sf (or Sa), and 1:500 for Sc.

6.9.3.5. On curves, including transitions, the offset midway between any 2 points 10m apart shall not differ from the design offset by more than 2.5mm plus 5% of the design offset for Sf and 2.5mm plus 20% of the design offset for Sc.

6.9.4. Standards of Workmanship and Accuracy for Ballast Screening

6.9.4.1. The actual depth of cut shall not be greater than the depth of cut specified by the Project Manager. Furthermore, the actual depth of cut shall not be less than 90% of the depth of cut specified by the Project Manager. In tunnels, ballast shall be screened to the level of the tunnel invert.

6.9.4.2. The actual width of cut shall be determined by the width of ballast profile or the distance between the concrete drains in tunnels, and between concrete ballast walls on the viaducts.

6.9.4.3. 100% by mass of the screened ballast shall pass a 75mm sieve and not more than 5% shall pass a 26,5mm sieve.

6.9.4.4. Material disposed of by the machine shall not contain more than 5% by weight of acceptable ballast.

6.9.4.5. If the above-mentioned standards cannot be met because of wet conditions and/ or high clay content, the Project Manager will determine if screening shall proceed as Tww. Wet conditions (Tww) shall only apply when screening conditions have deteriorated to such an extent that screening capacity has reduced to more than 20% less than the rate of screening tendered to ensure the quality and standard screening as specified. Tww may only be worked under the following conditions:

- The quality standards can still and shall be met.
- The Project Manager and the Contractor are to agree on measures to be taken such as pre-lifting and loosening of track so as to assist with the screening.
- The Project Manager and the Contractor are to agree on a rate of progress (metre/hour).
- Payment will be made for the final metres produced

Where the Project Manager is not available on Site to agree to the working of Tw, the representative of the Project Manager may make the decision to work Tw if so authorised by the Project Manager.

Should the Contractor dispute the Project Manager's visual inspection decision, the matter will be resolved by the Contractor, taking a sample of not less than 20kg in front of the screener and under a sleeper end to determine clay content. A ballast sample will be deemed wet if clay particles (i.e. size less than 75µm) are present, and moisture content is greater than or equal to 10%. The Contractor shall pay for these tests.

6.9.5. Ballast Profile

6.9.5.1. The ballast profile shall be within a tolerance of 25mm for ballast height, and within 65 mm of ballast width, specified in Annexure 4 Sheet 1 of 4 of the Manual for Track Maintenance

6.9.5.2. Should the Project Manager permit, any excess ballast should be placed on the shoulders of the cross sectional profile. The ballast profile shall be formed to provide maximum protection against kick-outs. All available ballast shall be utilised to form part of the ballast profile. For curved track, excess ballast shall be placed and formed on the shoulder of the high leg. Where there is a shortage of ballast and the *Contractor* was required by *TFR* to continue screening any lift of track shall be restricted so as to ensure sufficient ballast both under the track and to the sides to ensure safe and proper compaction and safeguard against kick-out of track.

6.9.5.3. No material or ballast distributed by the *Contractor's* screening operations shall be left in the drains and no ballast shall remain beyond the toe of the ballast profile such that the depth of ballast stones remaining is more than 60mm, except where there is ballast in-fill between multiple tracks.

6.9.5.4. Additional ballast placed in the ballast profile as a result of any lowering of the track shall be shaped on to the shoulder of the ballast profile.

6.9.6. Measurement of Ballast Screening

6.9.6.1. Before ballast screening

The required depth of cut "d" (measured from the underside of the sleeper, before any work is done) will be advised in writing to the Contractor by the Project Manager at the weekly or daily Site meeting.

Where insufficient ballast is available and the track is lifted before the screening operation, "d" will be equal to *the minimum cutting depth specified in the schedule of machines*.

6.9.6.2. After ballast screening

The Project Manager will take measurements to check the width and depth of cut and the length screened.

During each working day, one random sample of ballast and one random sample of disposed material per 500m shall be taken by the Project Manager for grading analysis. The weight of the samples shall not be less than 20kg each. The *Contractor* shall also arrange to take samples, as directed by the Project Manager on *Site*; at a rate of one sample per 200 metres. The results of these tests are to be recorded so that screen sizes and rates of screening can be adjusted on an ongoing basis.

If one of the results of the tests carried out on each of the two samples taken fails to meet the requirements, then a third random sample will be taken and tested. If the result of these or both of the first two results fail to meet the requirements, the following shall apply: Payment for the relevant 500m will be reduced with the factor K.

Where: $K = 2 \times$ the average percentage deviation from the given tolerance of the samples taken.

6.9.7. Measurement of Track Geometry

6.9.7.1. Track geometry after screening shall be finalised to the *TFR A-Standard*.

6.9.7.2. The *Contractor* shall, over the total length of screened track, take and record all measurements required to determine the standard in both phases (that is for *Sc* and *Sf*) and hand it to the Project Manager for checking. Measurements may be taken manually and/or by electronic means.

6.9.7.3. Measurements taken manually for the vertical alignment shall be made with a level similar to the Geismar type. Or other approved means of ensuring quality.

6.9.7.4. Deviation from a straight line (slack): Determine positions by visual means and quantifies by Geismar type level. Measurements shall be taken along the top of the rail before and after the points of deviation

6.9.7.5. Cant and rate of change of cant: Measure cross level every five metres.

6.9.7.6. Measurement for the horizontal alignment shall be made with a nylon line on the running side of the reference rail at two points 10 metres apart and a feeler gauge calibrated in 1mm intervals.

6.9.7.7. Each deviation between the two points on straight track, 10 metres apart, shall be measured by inserting a feeler gauge between the nylon line and the rail at the centre of the deviation. The number of sleepers between the beginning and end of the deviation shall be recorded as instructed by the Project Manager. All unacceptable measurements caused by permanent defects in the rail, that are impossible to eliminate subsequent to screening, and as notified to the Project Manager, shall be excluded. These measurements shall be recorded in the *Site* diary.

6.9.7.8. Curved track shall be marked out at 5-metre intervals and each mark shall become a measuring station. Track standard shall be determined by measuring and recording the offset at each station from the 10-metre chord strung between adjacent measuring stations. All unacceptable measurements caused by permanent defects in the rail, that are impossible to eliminate subsequent to screening, and as notified to the Service Manager, shall be excluded. These measurements shall be recorded in the *Site* diary.

6.9.7.9. Compliance with the standards of workmanship and accuracy will be calculated from these measurements.

6.9.8. Measurement of Contact Wire Height and Stagger

- 6.9.8.1. The standards for structural gauge shall be adhered to. The *Contractor* shall verify the structural gauge parameters himself and adhere to the specified standards.
- 6.9.8.2. The height of the contact wire shall be measured after the final tamp at both sides of all overhead bridges, as well as level crossings. Heights below or above the allowable limit quoted will not be acceptable.
- 6.9.8.3. The stagger of the contact wire, (offset from the perpendicular on the track centre line) shall be measured after the final tamp at all support structures, pull-off and knuckle points, as well as at mid-span on all curves. Where more than one contact wire exists, the stagger of the innermost wire shall be measured. The stagger on both the through and turnout lines of sets of points shall be checked, when turnouts are tamped.
- 6.9.8.4. Contact wire height and stagger measurements shall be reported to the Project Manager in writing (or computer printout) at the end of each shift. Measurements exceeding the allowable limits specified shall be immediately reported to *Transnet Freight Rail* for rectification. Each measurement shall indicate the mast location number as well as the relevant track section number.
- 6.9.8.5. Alignment and height of OHTE shall be continuously measured. The accuracy of contact wire height measurements shall be $\pm 10\text{mm}$ and the contact wire stagger measurements shall be $\pm 20\text{mm}$.
- 6.9.8.6. All overhead clearance and stagger measurements are to be done electronically with a Rail rod. The rail rod should be calibrated once every 12 months unless found to be inaccurate. A calibration certificate shall be available on *Site* at all times. Random checks by *TFR* electrical measuring staff will be carried out by *TFR* to ensure the accuracy of measurements

7. Health and Safety

- 7.1. The *Contractor* shall comply with all applicable legislation as well as Transnet Safety requirements. The cost for such compliance shall be borne by the *Contractor* and shall be deemed to have been allowed for in the rates and prices of the Contract. Specifically important in this regard is compliance with:
- TFR Safety Guidelines for Infrastructure (Latest Edition).
 - The Compensation for Occupational Injuries and Diseases Act (Act 130 of 1993).
 - The Occupational Health and Safety Act (Act 85 of 1993).
 - TFR Specification E.4E, SHE Specification for Contractors
 - Basic Conditions of Employment Act as well as all other relevant labour legislation.
 - TFR Specification for Work on, under or adjacent to Railway Lines and near high Voltage Equipment – E7/1.
- 7.2. The *Contractor* shall also comply with all other safety requirements, regulations and guidelines of Transnet applicable to the nature of work carried out under the Contract and shall obtain the particulars thereof from the Service Manager.
- 7.3. A formal risk assessment on the screening machine process has been conducted by *TFR* and the under mentioned safety critical risks have been identified. The *Contractor* shall conduct his own formal risk assessment on the screening machine offered by him and add any additional risks identified by him, to this list.
- 7.4. The *Contractor* is required to prepare and submit with his tender a comprehensive safety case in accordance with the requirements of Act 85 and the Construction Regulations.
- 7.5. The *Contractor* shall specify in his safety case the list of all risks identified by *TFR* together with any additional risks identified by his own risk assessment and indicated specific rules, processes, methods and designs of how he intend to mitigate these risks should he be awarded the contract.

Transnet Freight Rail

Tender Number: SIC24023CIDB (HOAC VAR 52802)

Description of the Service: For the Maintenance of Railway Track with an on-track High Production Screening machine on all lines owned and maintained by Transnet.

7.6. Safety Critical Risks identified by *TFR* for the screening machine are:

- Occupation - double line occupation
- Executing work on one line while a normal train service is running on adjacent line/s
- Excessive Working hours
- Working at night
- Emergency procedure – to stop process due to wagon or equipment failure
- Material handling and working near or under live OHTE equipment: 50kV, 25 kV and 3.3kV
- Staging the accommodation units of workers in yards in proximity of live OHTE and lines on which rail traffic runs continuously.
- Danger area
- Competent operators
- Train driver/operator/ interaction/competency
- Site conditions
- Infrastructure equipment damage
- Machine working on sharp curves and steep gradients
- Machine working on embankments and in cuttings
- Machine working on fouled ballast
- Clearances
- Maximum and minimum temperatures
- Precipitation
- Integrity, i.e. Rolling stock structure, drawgear, brakes, wheels; and screening machine structural integrity
- Unauthorised access
- Use of various petrol and electrically driven small plant within team context i.e. disk cutters, MP12 and MC2 rail grinders, rail drills, hand held tampers, generators and associated electric equipment, joggle plates and joggle clamps etc.
- Environmental pollution/damage

7.7. Safety Compliance

- 7.7.1 The *Contractor* shall prepare and implement a comprehensive health and safety plan covering all relevant legal safety aspects for their service teams. It shall include details of the *Site* management structures, all safety legal appointments as well as the written safe working procedures for all equipment used on *Site* taking into account the above risk assessments.
- 7.7.2 The *Contractor* shall be responsible to ensure the use of only technically competent trained staff on all types of service.
- 7.7.3 The Health and Safety plan together with all supporting documentation shall at all times be available in a health and safety file on site for compliance audit.
- 7.7.4 The *Contractor* shall ensure that all *Site* staff are trained and inducted in the written safe working procedures for all equipment used on *Site*.
- 7.7.5 The *Contractor* shall ensure that all workers are appropriately equipped and wearing Personal Protective Equipment (PPE) and that Safety Talks are conducted and noted in the *Site* Diary before the start of every shift.
- 7.7.6 The *Contractor* shall be responsible to ensure that *Site* staff is always competently trained with regards to Electrical Awareness Training and such training material should be acknowledged and approved by the Employer's School of Rail.
- 7.7.7 The *Contractor* shall be responsible to ensure that workers working on machines (high risk areas), operators, machine fitters, area Service Managers and contract Service Manager's *Site* staff are always competently trained with regards to PWC Electrical Educational Training.
- 7.7.8 The *Contractor* shall also be responsible to ensure that contract managers in charge of *Sites* are always competently trained with regards to COM Competency Electrical Training (to follow onto PWC Training).
- 7.7.9 Non-compliance with safety requirements will result in an immediate suspension of service without payment.
- 7.7.10 Non-compliance with environmental requirements such as oil spillages, waste, will result in penalties being levied against the *Contractor*. The *Employer* will appoint a private company to make the situation good and claim compensation from the *Contractor*.

8. TRAINING

- 8.1. The *Contractor* shall ensure that all staff working on or with the contract is adequately trained, so as to comply with any relevant safety and quality requirements.
- 8.2. It is the *Contractor's* responsibility to ensure that his staff is trained. At the commencement of the contract, *Transnet Freight Rail (TFR)* shall assist the *Contractor* with the initial on-the-job training for the staff as specified below, so as to assist the *Contractor* to qualify the worker's / staff. The *Contractor* shall ensure that he has a core group of workers with sufficient previous experience to take the lead in undertaking maintenance tasks.
- 8.3. Where training is required by the *Contractor* and *Transnet Freight Rail (TFR)* is committed to provide training, the *Contractor* shall qualify his tender as to what and how many staff, training will be required for and will be offered at the *Contractor's* cost. After award of the contract, the *Contractor* shall then arrange with the appropriate *Transnet Freight Rail (TFR)* Perway Production manager, through the *Project Manager*, for this training / testing.
- 8.4. Training of Track Workers: At the commencement of the contract, assistance with the training, to qualify the *Contractors* workers to perform the following tasks shall be given:

Transnet Freight Rail

Tender Number: SIC24023CIDB (HOAC VAR 52802)

Description of the Service: For the Maintenance of Railway Track with an on-track High Production Screening machine on all lines owned and maintained by Transnet.

- Track service (Level crossing blocks, cattle guards, sleeper & clip replacement / fastening, lubricators, flagmen, ballast boxing etc.).
- Quality measurements as required for track service.

8.5. Training of Track Inspectors, Track Masters and or Trade hands (Perway): This training shall be solely the responsibility of the *Contractor*. Only fully qualified people shall be used by the *Contractor* for these positions. The *Contractor* shall ensure that staff used, do comply with requirements for the industry.

8.6. Training of Flagmen

8.6.1. The appropriate training for the flagmen provided by the *Contractor* can be provided by *Transnet Freight Rail (TFR)* at the start of the contract at the *Contractor's* cost.

8.6.2. Where *Transnet Freight Rail (TFR)* requires flagmen to be trained, the pre-requisites for such persons to qualify to be trained, shall be basic literacy skills and Basic English language ability.

8.6.3. *Flagmen* shall be officially trained, evaluated and certified competent, (*Transnet Freight Rail (TFR)* 407 – Item Number 37/270451 - "Certificate of Competency") by a designated competent person, before being used on protection duties. This certificate of competency shall remain valid for one (1) year only after, which re-testing and re-certification of competency will be required.

8.6.4. In cases where a person was not performing flagmen duties for a period of 6 months or longer, he shall be re-tested and again be re-certified competent, before he may be re-used for Protection Duties.

8.6.5. The *Transnet Freight Rail (TFR)* Depot Engineering Manager remains ultimately responsible in terms of the requirements of Act 85 for the safe working environment of his own personnel as well as *Contractor's* personnel within the track maintenance environment on his depot.

8.6.6. The Depot Engineering Manager is therefore also responsible for ensuring that any changes in the Protection Procedures that may occur over time are effectively communicated to any flagmen prior to them being used for Protection Duties

8.7. Electrical Awareness, Educational and Competency Training

8.7.1. The electrical awareness training shall be arranged for before any service commences.

8.7.2. The electrical educational and competency training may be arranged for at either a depot's lecture room (*Transnet Freight Rail (TFR)* property), or at a venue of the *Contractors* choice at the *Contractors* cost.

8.7.3. The Accredited Electrical trainer from *Transnet Freight Rail (TFR)* will be provided by *Transnet Freight Rail (TFR)* at *Contractors* cost, an arrangement for the training session required, is done beforehand and will fit in with the trainers training program for the year.

8.8. The following training shall be arranged for the following Contractors staff at the Contractors cost:

Type of Training	Staff required to undergo training	Estimated duration of training	Location of training	Trainer to conduct training at start of contract	Alternative trainer to conduct training at contract start	Future Refreshment training
Induction	All contract staff including new entrants. Start of work at any new depot	+/- 2 hours	Depot where work starts	<i>Employer's Service Manager or Track inspector</i>	New recruits: <i>Contractors</i> accredited representative	<i>Contractors</i> accredited representative.
Electrical awareness	All contract staff including new entrants	+/- 2 hours	Depot where work starts	<i>Employer's Depot's electrical officer or accredited trainer</i>	New recruits: <i>Contractors</i> accredited representative	<i>Contractors</i> accredited representative.
PWC (Electrical)	<i>Service Managers, Operators, fitters, Technicians & Workers supporting fitters, working in risky OHTE areas.</i>	2 days	Depot where work starts	<i>Employer's, Esselen Park or Depot accredited trainer, or Employer's hired accredited trainer : By appointment at depot*</i>	Replacement/ new staff: <i>Contractors</i> accredited representative	<i>Contractors</i> accredited representative.
Competency (Electrical)	<i>Service Managers (Follow up training in PWC)</i>	1 day	Depot where work starts	<i>Employer's accredited trainer, or Employer's hired accredited trainer : By appointment at depot*</i>	Replacement/ new staff: <i>Contractors</i> accredited representative	<i>Contractors</i> accredited representative.
Flagmen Training	Flagmen and standby flagmen	5 days		<i>Employer's accredited trainer, or Employer's hired accredited trainer : By appointment at depot</i>	Replacement/ new staff: <i>Contractors</i> accredited representative	<i>Contractors</i> accredited representative.
Bonder Training	Bonder	5 days		<i>Employer's accredited trainer, or Employer's hired accredited trainer : by appointment at depot*</i>	Replacement/ new staff: <i>Contractors</i> accredited representative	<i>Contractors</i> accredited representative.

The crew time, transport and accommodation cost related to training will be for the *Contractor's* account. The crew members proposed to for this training shall as minimum requirement be literate in terms of reading, writing and speaking of Basic English.



Transnet Freight Rail

Tender Number: SIC24023CIDB (HOAC VAR 52802)

Description of the Service: For the Maintenance of Railway Track with an on-track High Production Screening machine on all lines owned and maintained by Transnet.

PART 4: AFFECTED PROPERTY

Core clause 11.2(2) states

"Affected Property is property which

- Is affected by the work of the *Contractor* or used by the *Contractor* in Providing the Service
- is in the documents which the Contract Data states it is in."

In Contract Data, reference has been made to this Part 4 of the contract for the location of the Affected Property.

1. Description of the Site and its surroundings

1.1. General description

The contract area will be all track owned, or maintained, by Transnet Rail Infrastructure Manager country wide, in addition to neighbouring countries. The Contractor may be required to work in areas where varying degrees and types of security situations are prevailing such as may occur in remote rural areas through to densely populated metropolitan areas. The railway tracks are located in areas of varying horizontal and vertical dimensions of the land surface. In some areas, tracks fall in deep cuttings as well as in high embankments

1.2. Existing buildings, structures, and plant & machinery on the Site

There are fixed assets that are situated alongside the linear state of the railway infrastructure. These structures are but not limited to; bridges, platforms, culverts and track side components. The Contractor shall ensure that all the works being carried out does not deform the existing structures.

1.3. Subsoil information

The project at hand does not interfere with the formation or earthworks. Should there be a need to work on the formation; the employer shall supply the contractor with relevant information.

1.4. Hidden services

There are underground services that were previously erected and the as-built data to locate such services will be utilised. There are situations where the as-built data cannot be traced and in such situations, activities must be carried out with caution. During the execution phases of the project, there is a possibility of disruption of such hidden services. These services include conduits (oil, water and sewage), electrical cables and any other structure that may be present. The employer shall inform the contractor through a baseline risk assessment of any possibilities in anticipation.

1.5. Other reports and publicly available information

The Employer will also provide maps and locations as and when required