


PART NO.	LUG SIZE	LENGTH (MM)
XREB2L	12-12	XXX
	12-16	
	16-16	
EG: XREB2L 12-16 1.5M IS SUPPLIED WITH M12 & M16 CLEARANCE HOLE LUGS FITTED EITHER END OF A 1.5m LENGTH OF BOND		

NOTES:

- EARTH BOND MATERIAL : ANNEALED AAC 37/2.03
- COMPRESSION LUG MATERIAL : 1350 ALUMINIUM
- MAXIMUM SHORT CIRCUIT CURRENT RATING 16.5 kA/S.
- FOR HIGHER FAULT LEVELS TWO EARTHBONDS MUST BE APPLIED
- MINIMUM LENGTH: 1m

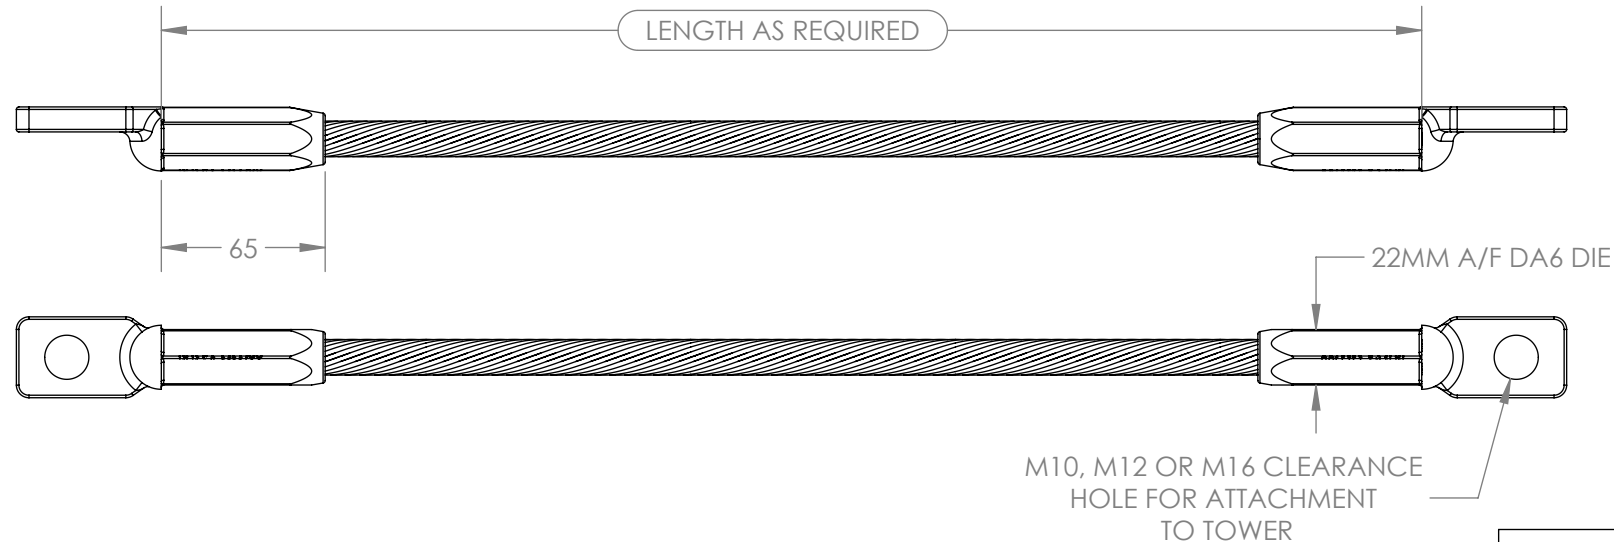

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	AAC37-2.03ANN	AAC CONDUCTOR	LENGTH AS REQUIRED
2	XREB-LUGMXX	ALUMINIUM EARTH BOND LUG	2

B	04/07/2023	R.B	RB		UPDATED LUG DESIGN
A	2020/10/15	KC	RB		MINIMUM LENGTH TO 1M
REV.	REV DATE	DRWN	APVD	APVD	DESCRIPTION



PREFORMED LINE PRODUCTS

P.O. BOX 4015 | PIETERMARITZBURG 3200 | SOUTH AFRICA
T: +27(0)33 397 5800 | F: +27(0)33 397 7094
www.preformedsa.co.za

CONFIDENTIAL

The data and information contained in this document are proprietary to PREFORMED Line Products (S.A.) (Pty) Ltd. (PLP). Such data and information are provided solely for use with PLP's products and shall not be disclosed, duplicated, or otherwise used without the express written approval of PLP.

EARTH BOND ASSEMBLIES AND COMPONENTS

UNITS IN mm UNLESS OTHERWISE NOTED.

DRAWING NO:	DWN BY:	DATE:	APPROVED:	REV:	SHEET No.:
XREB	P.B.	28/03/2012	RB 4/7/23	B	1 of 1

CONTRACTOR TO COMPLETE:	
CONTRACTOR NAME	
PROJECT NAME	
OPGW SIZE	
PART REFERENCE	XREB2L - - - - -

SEE TABLE