

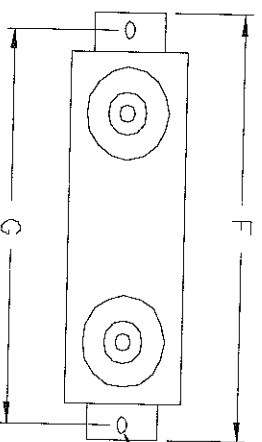


| | | | | | |
|---------------|--------------|-----------------|----------------------|----------|---------|
| WORKS ORDER | 05AL | CAPACITANCE | 15.8 uF | TEMP CAT | -25/+50 |
| CUSTOMER | ABB SA | RATED VOLTAGE | 9293 V | A = | 590 |
| ORDER NUMBER | FACTS-S-0411 | RATED OUTPUT | 430 kVA ^r | B = | 343 |
| ORDER DATE | 21-Jan-05 | UNIT WEIGHT | 50 KG | C = | 330 |
| DELIVERY DATE | 10-Jun-05 | INSULATION | 50/150 KV | D = | 530 |
| QUANTITY | 576 | PHASES | 1 | E = | 178 |
| SPARES | 12 | BUSHINGS | 2 | F = | 433 |
| STYLE NUMBER | EMA592R | INTERNAL CONN. | 1 (1 PHASE) | G = | 397 |
| TOLERANCE | -2.5/+2.5 % | DISCHARGE RES. | 2.5 MOHM | H = | 860 |
| IMPREGNANT | NON PCB | SERIES GROUPS | 5 | I = | 440 |
| DIELECTRIC | ALL FILM | PARALLEL GROUPS | 5 | J = | 220 |
| FUSES | NONE | SPECIFICATION | IEC 60143-1 | K = | - / - |

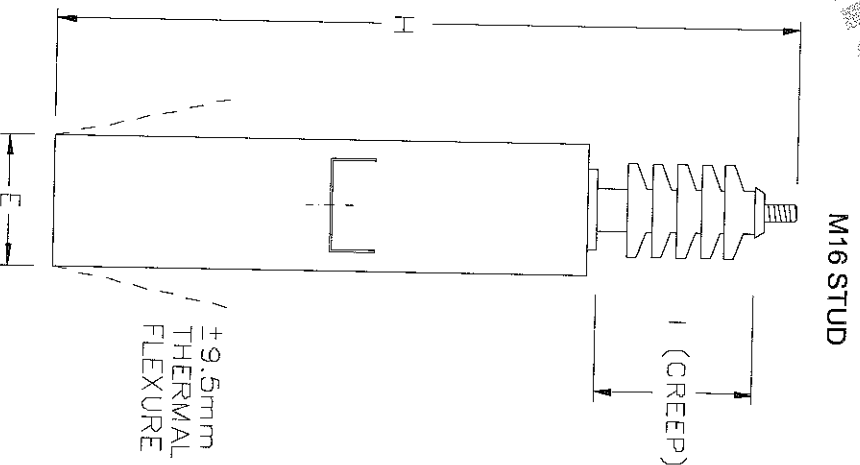

12 x 18 SLOT FOR
M10 MOUNTING BOLTS

ORIGINAL

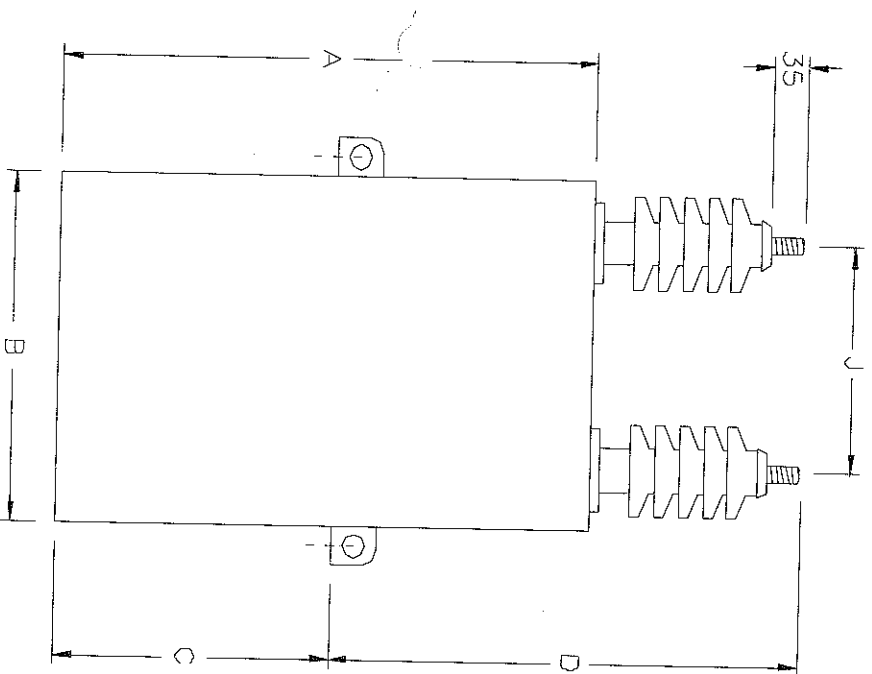

CAN CUTTING SIZE : 590 x 1028 mm
COVER CUTTING SIZE : 352 x 187 mm
CAN BENDING SIZE : 87 x 339 mm

CAPACITOR DATA SHEET AND OUTLINE DRAWING No: 05AL